AAGAM Web (Next.js) UI Verification Guide

How to run the Next.js web app and verify its role surfaces through the browser — with worked, UI-driven reproductions of BUG-028 (merged partial due) and BUG-029 (one row per live contract).

Repository	Saikumar-bali/AAGAM_E-commerce
App	`apps/admin-dashboard` (Next.js 15 App Router) — serves Shop, Store, Rider and Admin surfaces
Date	2026-10-11
Database	Sandbox Postgres, `DATABASE_URL=$AAGAAM_DATABASE`
Method	Headless Chromium (Playwright) driving the real UI — no direct API calls

1. What runs where

The web app is one Next.js build (`apps/admin-dashboard`) that serves every browser role by route group. The API gateway is a separate NestJS service; the dashboard proxies `/api/*` to it, so the browser stays same-origin.

Surface	Route group	Example route
Shop (customer)	`(shop)/shop`	`/shop/subscriptions`
Store portal	`(store)/store`	`/store/subscriptions`
Rider portal	`(rider)/rider`	`/rider/runs`
Admin dashboard	`(admin)/admin`	`/admin/riders`
Auth	`(auth)`	`/login`

2. Running it locally

Build the shared packages first, then start the gateway and the dashboard:

```
# 1. shared packages (types, utils, database) — the dashboard imports them
npm run build --workspace=packages/types
npm run build --workspace=packages/utils
npm run build --workspace=packages/database   # also runs prisma generate

# 2. api-gateway on :3005 against the sandbox database
cd apps/api-gateway
set -a && source .env && set +a
export DATABASE_URL="$AAGAAM_DATABASE"
node dist/src/main.js            # after `npm run build --workspace=apps/api-gateway`

# 3. Next.js dashboard on :12000
cd apps/admin-dashboard
npm run build && npx next start -p 12000
```

> **Proxy:** `next.config.js` rewrites `/api/:path*` → `API_BACKEND_URL` (default `http://127.0.0.1:3005`). Keep the gateway on :3005 or set `API_BACKEND_URL` to match.

3. Verifying through the UI

Every check below was performed by loading the real pages in a browser and reading the rendered DOM — never by calling the API directly. Every screenshot in this guide is redacted before commit: customer phone numbers, street addresses and rider names are blurred, per the

`aagam-testing` skill rule “never write a password, cookie, token or phone number into a screenshot”. The work-host URLs used were:

Link	Purpose
`https://work-1-lkhufuuxeteqzqdl.prod-runtime.all-hands.dev/` (port 12000)	Next.js web app — Shop, Store, Rider, Admin
`https://work-2-lkhufuuxeteqzqdl.prod-runtime.all-hands.dev/` (port 12001)	Mobile react-native-web previews (partners + customer) and the same-origin API proxy

3.1 Login

Open `/login`. The form takes a phone or email and a password (password mode is the default; phone OTP is disabled in this build). A store owner lands on `/store`.

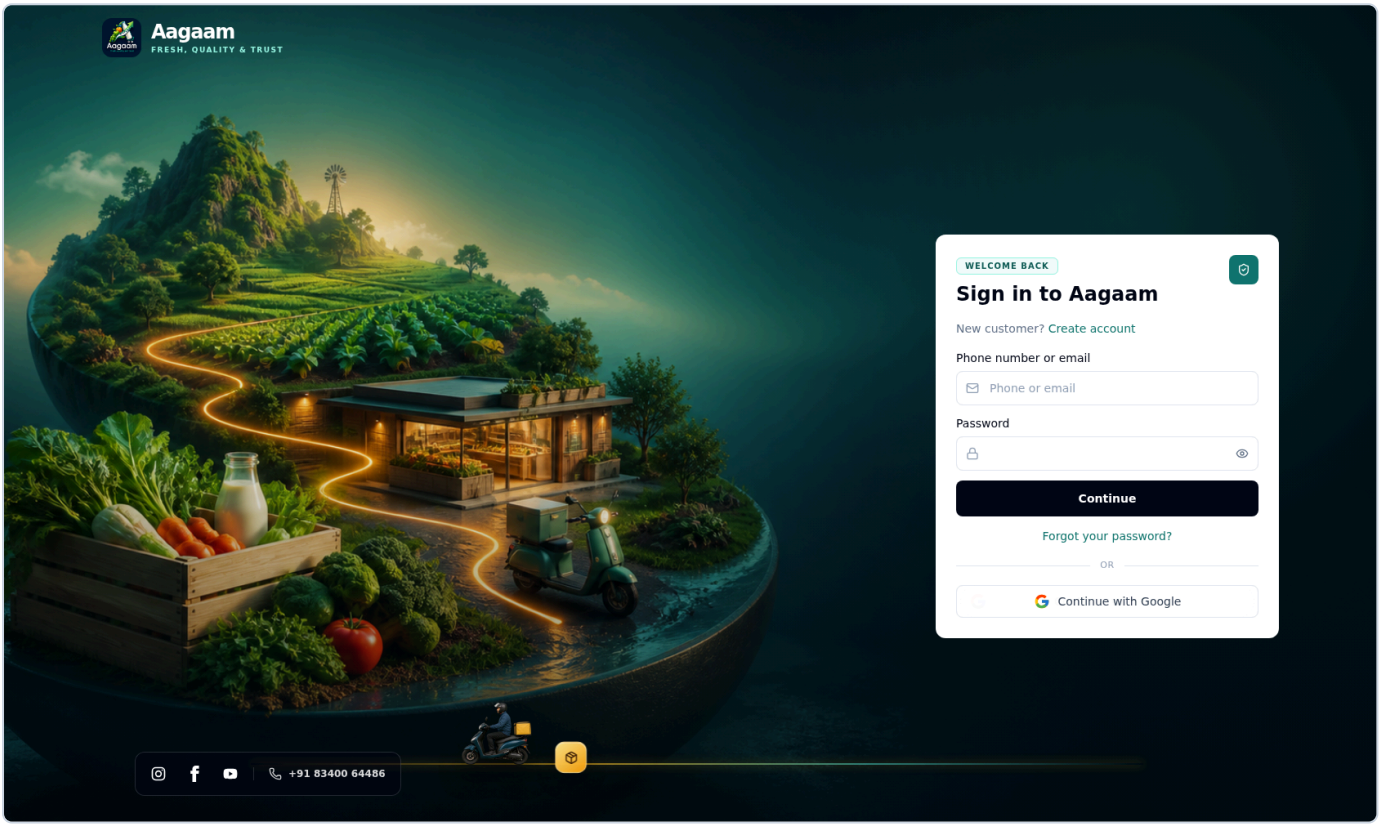


Figure 1 — `/login`: single “Phone or email” field plus password, then *Continue*.

3.2 Store dashboard

After signing in, `/store` renders the store workspace: four summary cards (My stores, Products, Orders, Revenue) plus the store list. The catalogue cards read `0` for this freshly seeded workspace; the live subscription counters (Subscribers, Active plans, Routes today, Cash to count) are on the Subscriptions page shown next.

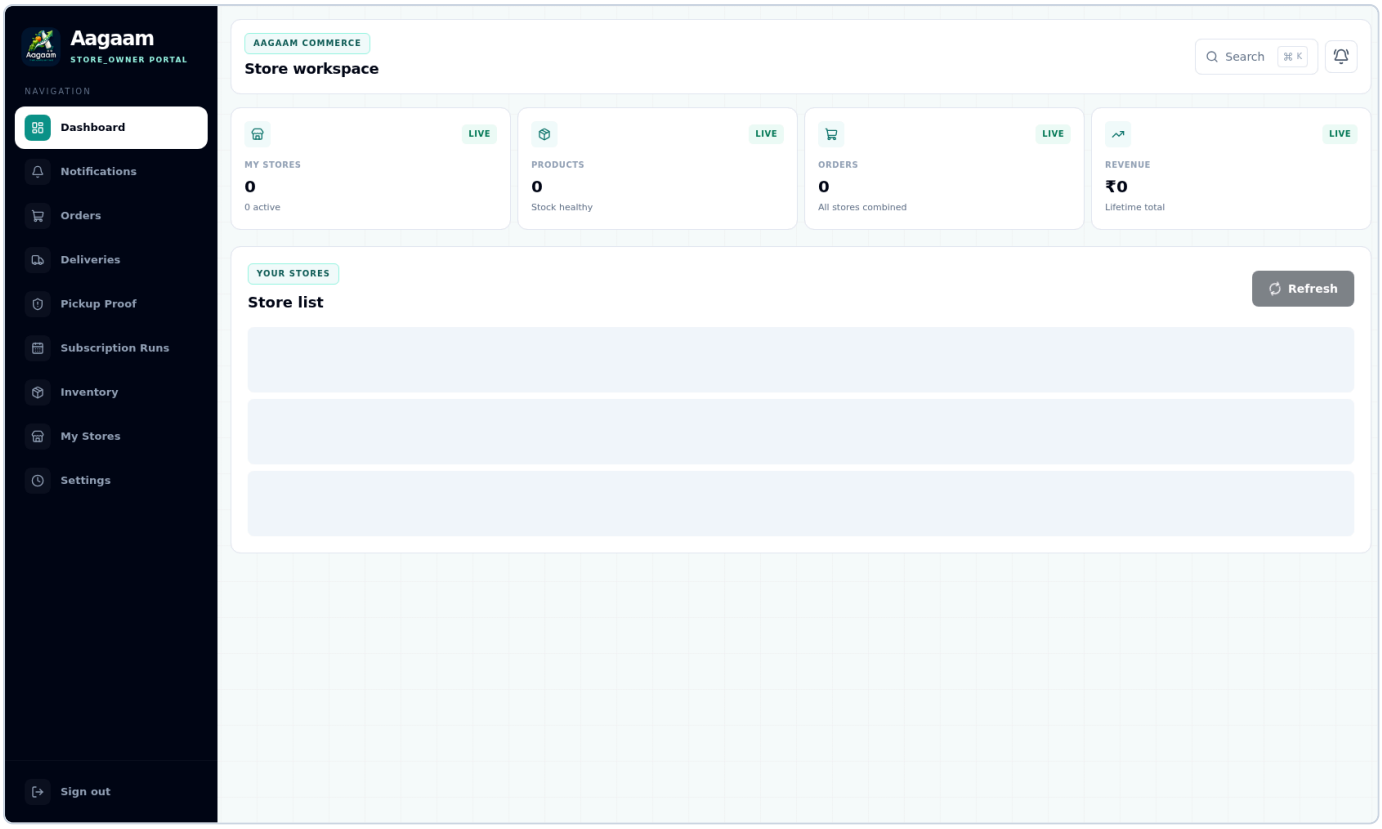


Figure 2 — `/store` : workspace summary and store list as captured.

3.3 Subscriptions → Milk Grid (Sheet View)

`/store/subscriptions` opens on the **Milk Grid** tab: one row per live contract (a single-plan customer keeps one row, a customer with two live plans gets two), one cell per day of the month, with **Total L**, **Paid**, **Due** and a **Bill** action. The search box filters by customer, phone or locality.

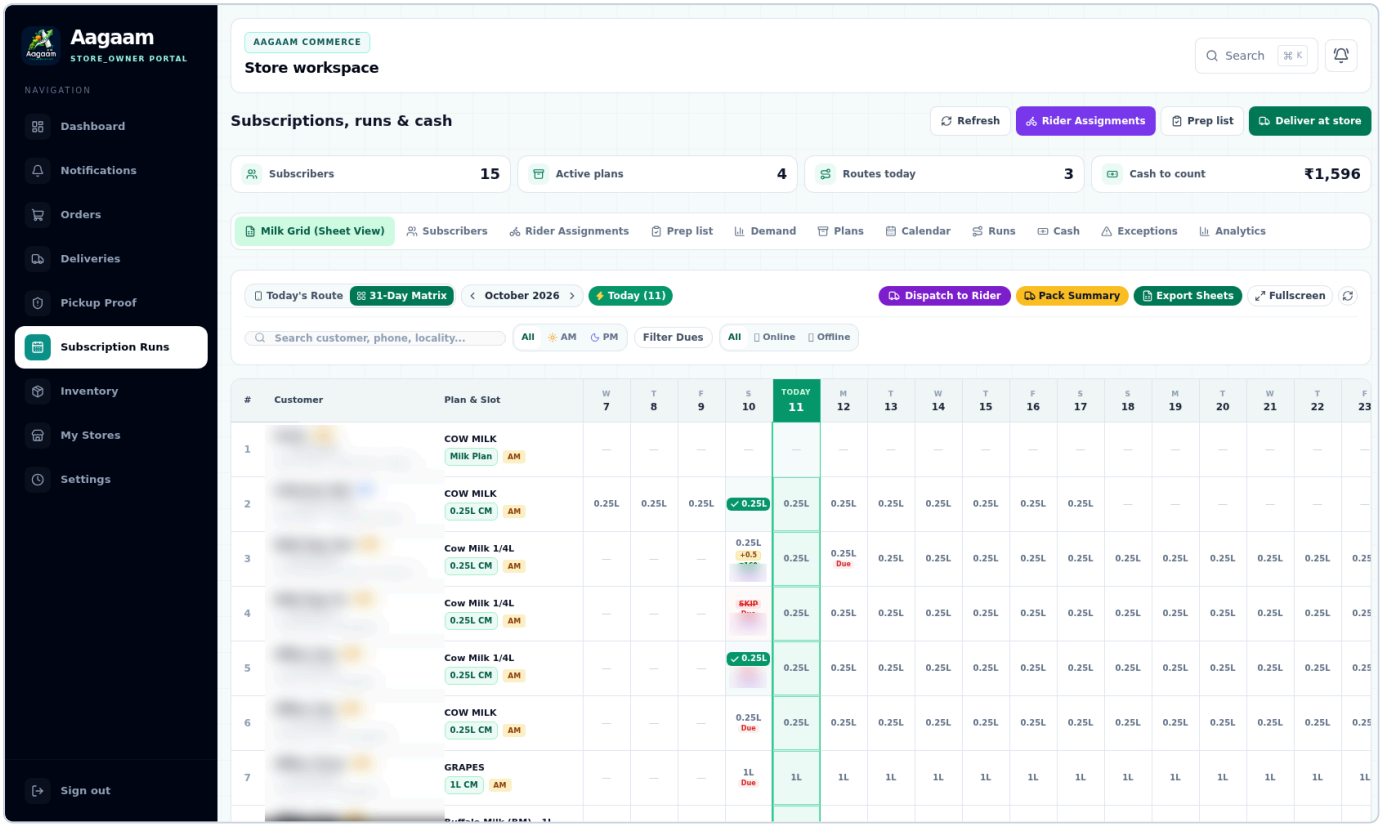


Figure 3 — Milk Grid (Sheet View): contract rows and their day cells. The Total L / Paid / Due / Bill columns follow the day grid to the right (visible in Figure 4).

3.4 Opening the customer statement

Clicking **Bill** on a row opens the *Monthly Bill Statement* modal; it renders the row's reconciled money and the customer's WhatsApp message once the itemised bill finishes generating. The capture below catches it mid-load — the grid behind it already shows the row's **Paid ₹1,796.00 / Due ₹9,781.00** columns.

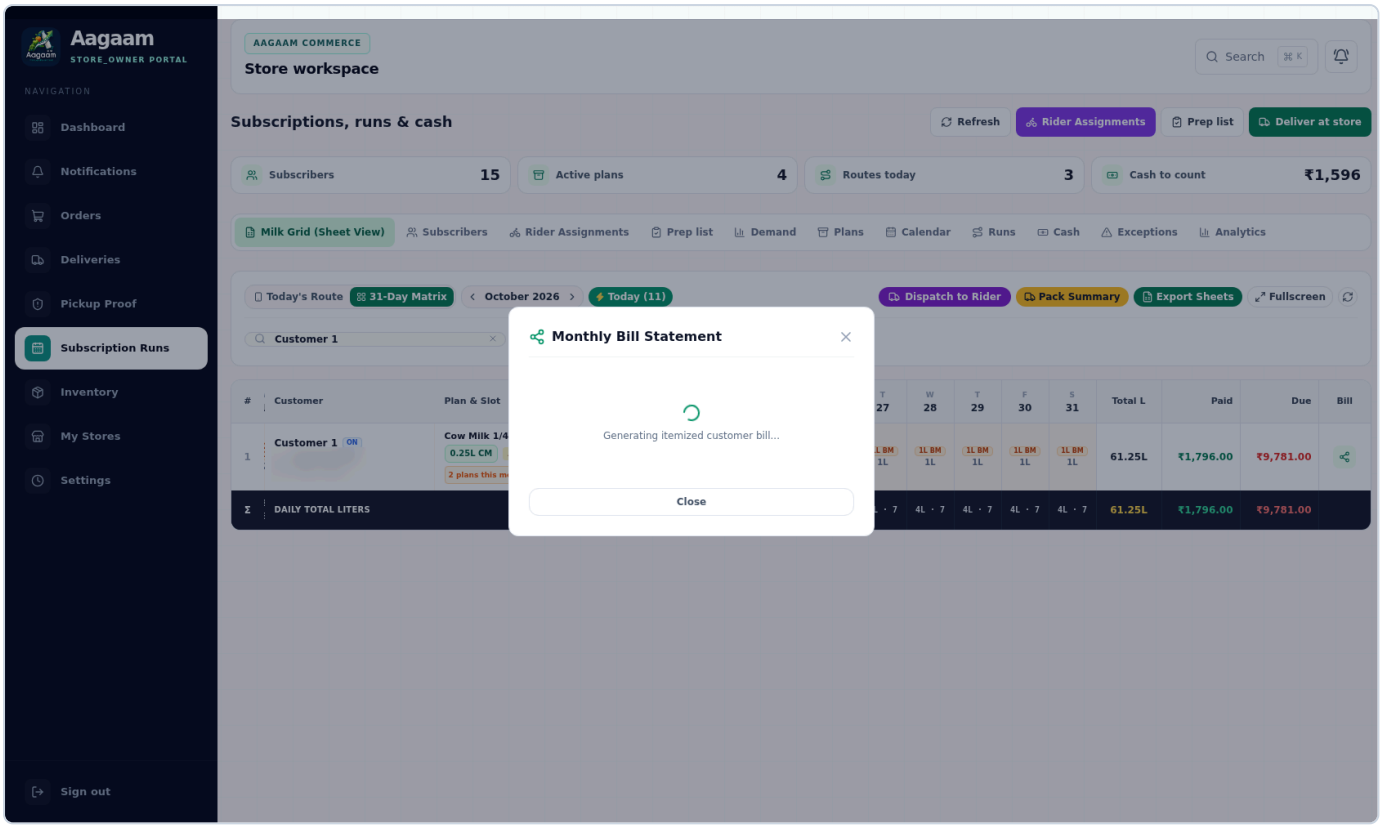


Figure 4 — Monthly Bill Statement modal generating the itemised bill; the grid behind shows the row's Paid / Due columns.

4. Worked example — the milk-grid money defects, reproduced through the UI

Two defects were found and fixed in this area. **BUG-028**: a merged row under-reported money — a delivered day cell that collected only part of its due was clamped out of the row's Due column. **BUG-029**: the merged-row model itself — when one customer held two live plans, the grid drew a single row, and a day both plans delivered kept only one plan's cell. This branch ships **one row per live contract** and keeps BUG-028's per-contract reconciliation.

4.1 BUG-028 repro steps (UI only)

1. Give a customer two overlapping subscriptions, one of them with a delivered day cell that collected part of its due (a `₹399` cell showing `₹200`).
2. Open Store → Subscriptions → Milk Grid and search the customer.

> **Before the fix.** The day-10 cell renders `₹200`, but the row read **Paid ₹1,796.00 / Due ₹0.00**. The ₹199 the customer still owes for that day is invisible, so the store stops chasing the balance.

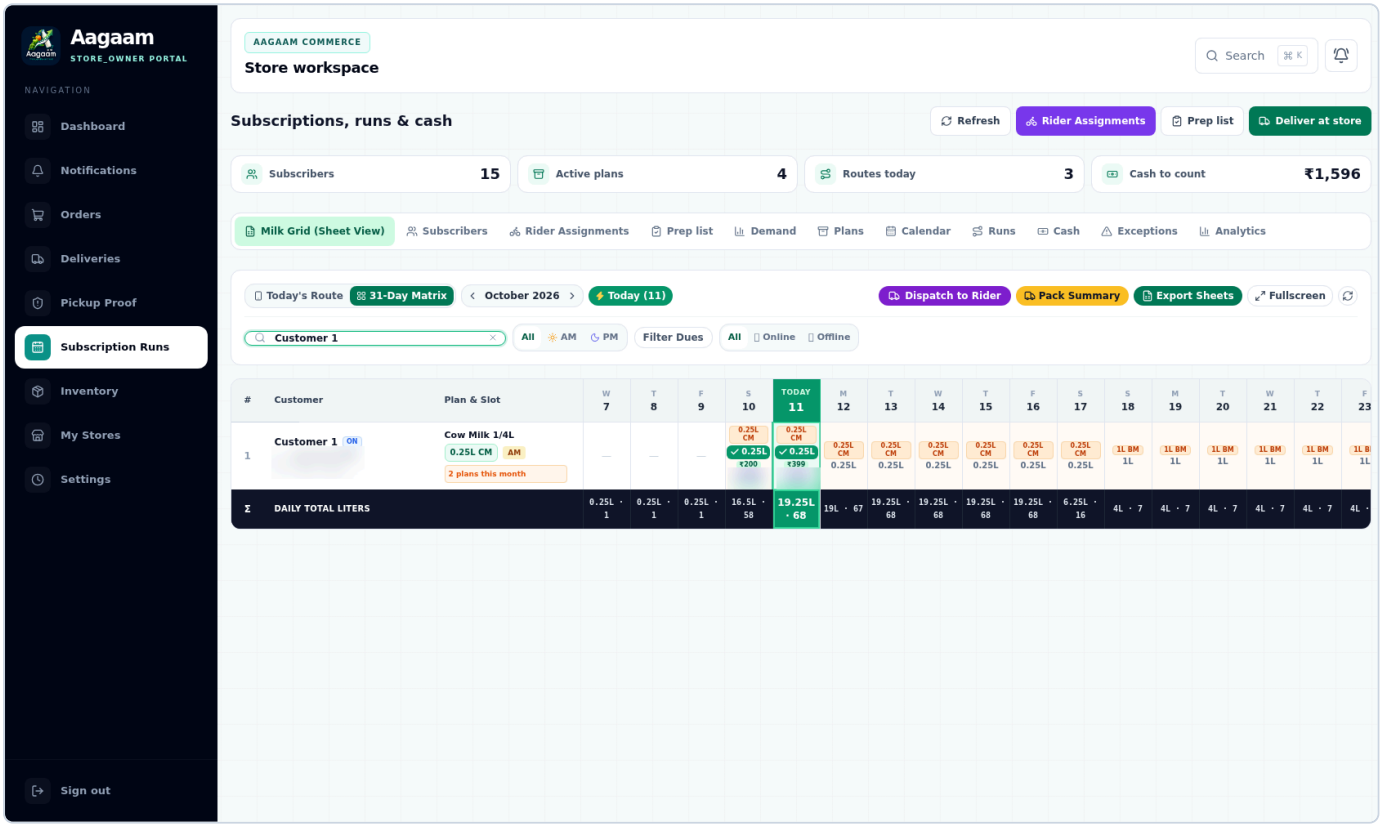


Figure 5 — the merged row used for the BUG-028 repro: the day-10 cell collected ₹200 of its ₹399 due. The row's Due column read ₹0.00 pre-fix; the money columns sit past the right edge of this capture (Figure 4 shows them after the fix).

> **After the fix.** The same row reads **Paid ₹1,796.00 / Due ₹9,781.00** — the under-collected day's ₹199, and every other unsettled day, is surfaced.

4.2 Root cause (BUG-028)

`StoreMilkGridService.getGrid()` reconciled the *active* contract's ledger against *every* merged contract's deliveries:

```
reconcileSubscriptionBalance(activeSub, custSubs.flatMap((sub) => sub.deliveries))
```

A sibling contract whose ledger was already fully paid pushed `deliveryCash` above the active ledger, so the helper's `Math.max(0, storedDue - drift)` clamped the under-collected contract's residual to zero.

4.3 Fix shipped

Money is reconciled **per contract** — every grid row reconciles its own contract against its own deliveries:

```
const reconciled = reconcileSubscriptionBalance(activeSub, activeSub.deliveries);
```

BUG-029 then removed the merging itself, so BUG-028's cross-contract clamping is moot: the grid emits one row per live contract, each with its own day cells, litres, riders and reconciled money. A customer whose plans are all terminal keeps a single (most recent completed) row and still counts once in `totalSubscribers`.

4.4 Regression tests

`store-milk-grid.service.spec.ts` pins both defects:

- “does not let a sibling contract absorb an under-collected day cell” — the partially collected day-10 cell and the sibling's fully-paid day-11 cell each stay visible in their own row, and the under-collected row keeps `totalDuePaise = 19900`.
- “renders one row per live contract so a same-day second plan is not dropped” — a customer with two live plans gets two rows with independent day cells.

4.5 BUG-029 — a merged row dropped the second plan's cell

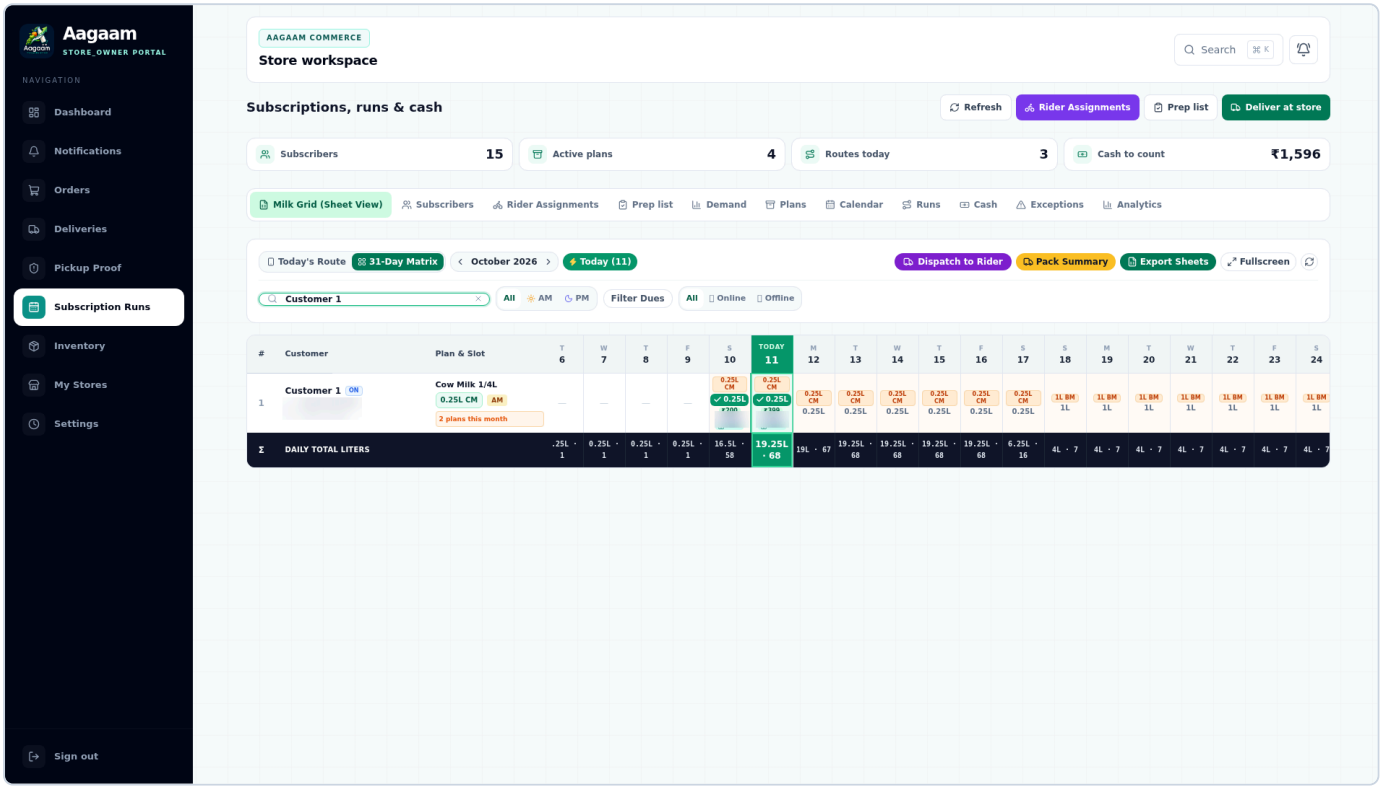


Figure 6 — before: one merged row (badge `2 plans this month`), labelled with the Cow plan. Cow 0.25L cells run days 10–16, but the Buffalo 1L plan (`Days 11–31` in Figure 7) is missing from days 11–16 — its same-day cell was overwritten. Buffalo cells only appear from day 17, where the Cow plan ends.

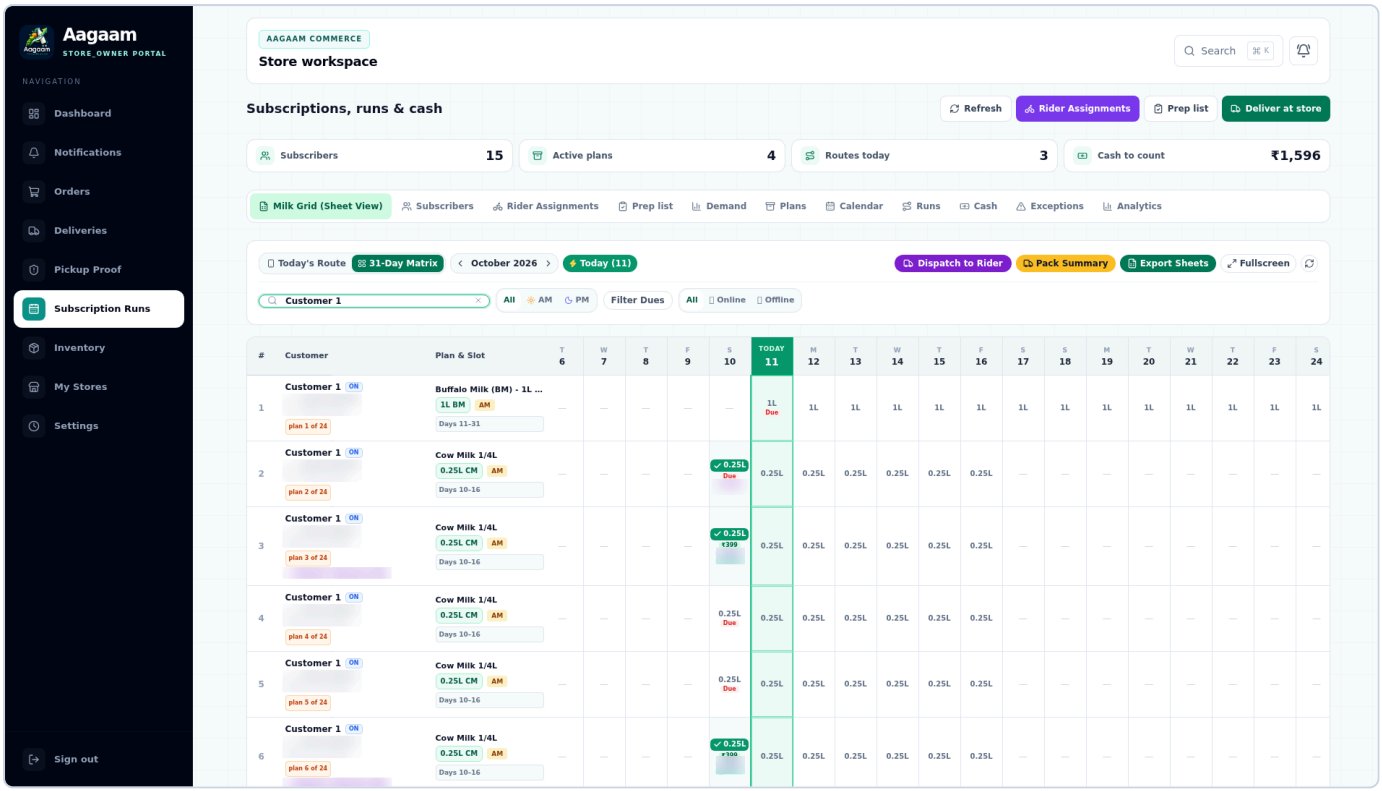


Figure 7 — after: one row per live contract (`plan 1 of 24` …). Buffalo `Days 11–31` and Cow `Days 10–16` each keep their own day cells, litres and paid/due state.

5. Verification checklist

Check	How (UI)	Result
Web app serves	Load `/`, `/login`, `/store/subscriptions`, `/admin`	**200**
Store login	Submit `store@aagam.com` on `/login`	**lands on /store**
Milk grid loads	Read rendered contract rows, day cells + Paid/Due columns	**live data**
Statement modal	Click **Bill** on a row	**opens** (itemised bill resolves asynchronously)
Console errors	Collect page + console errors during the session	**none** (only the optional Google sign-in 403)
BUG-028	Compare row Due before/after fix	**₹0.00 → ₹9,781.00**
BUG-029	Two live plans for one customer → one row per contract	**independent rows**

> **Note.** The Google sign-in button logs a harmless `403` / `GSI_LOGGER` console entry when the page origin is not an allowed OAuth origin; it does not affect email/password login.

6. Related material

- **PR #465** — fix(store): keep each merged contract's partial due in the milk grid (now one row per live contract).
- `skills/aagam-testing/references/bug-register.md` — BUG-028 and BUG-029 entries.
- `skills/aagam-testing/references/store-grid.md` — grid litre/money assertions.
- `apps/api-gateway/src/subscriptions/subscription-balances.ts` — the reconciliation helper.