




Console X

VirtualKey [Java Application] /Users/saperam/.p2/pool/plugins/org.eclipse.justj.openjdk.hotspot.jre.full.macosx.x86\_64\_16.0.2.v20210721-1149/jre/bin/java (04-Oct-2021, 3:41:01 pm)

Application name: ProtoType  
Developer name: Sailaja peram  
Developer email: saperam@cisco.com

==== Select Option ====

1. openFile
2. addFile
3. deleteFile
4. searchFile
5. Exit

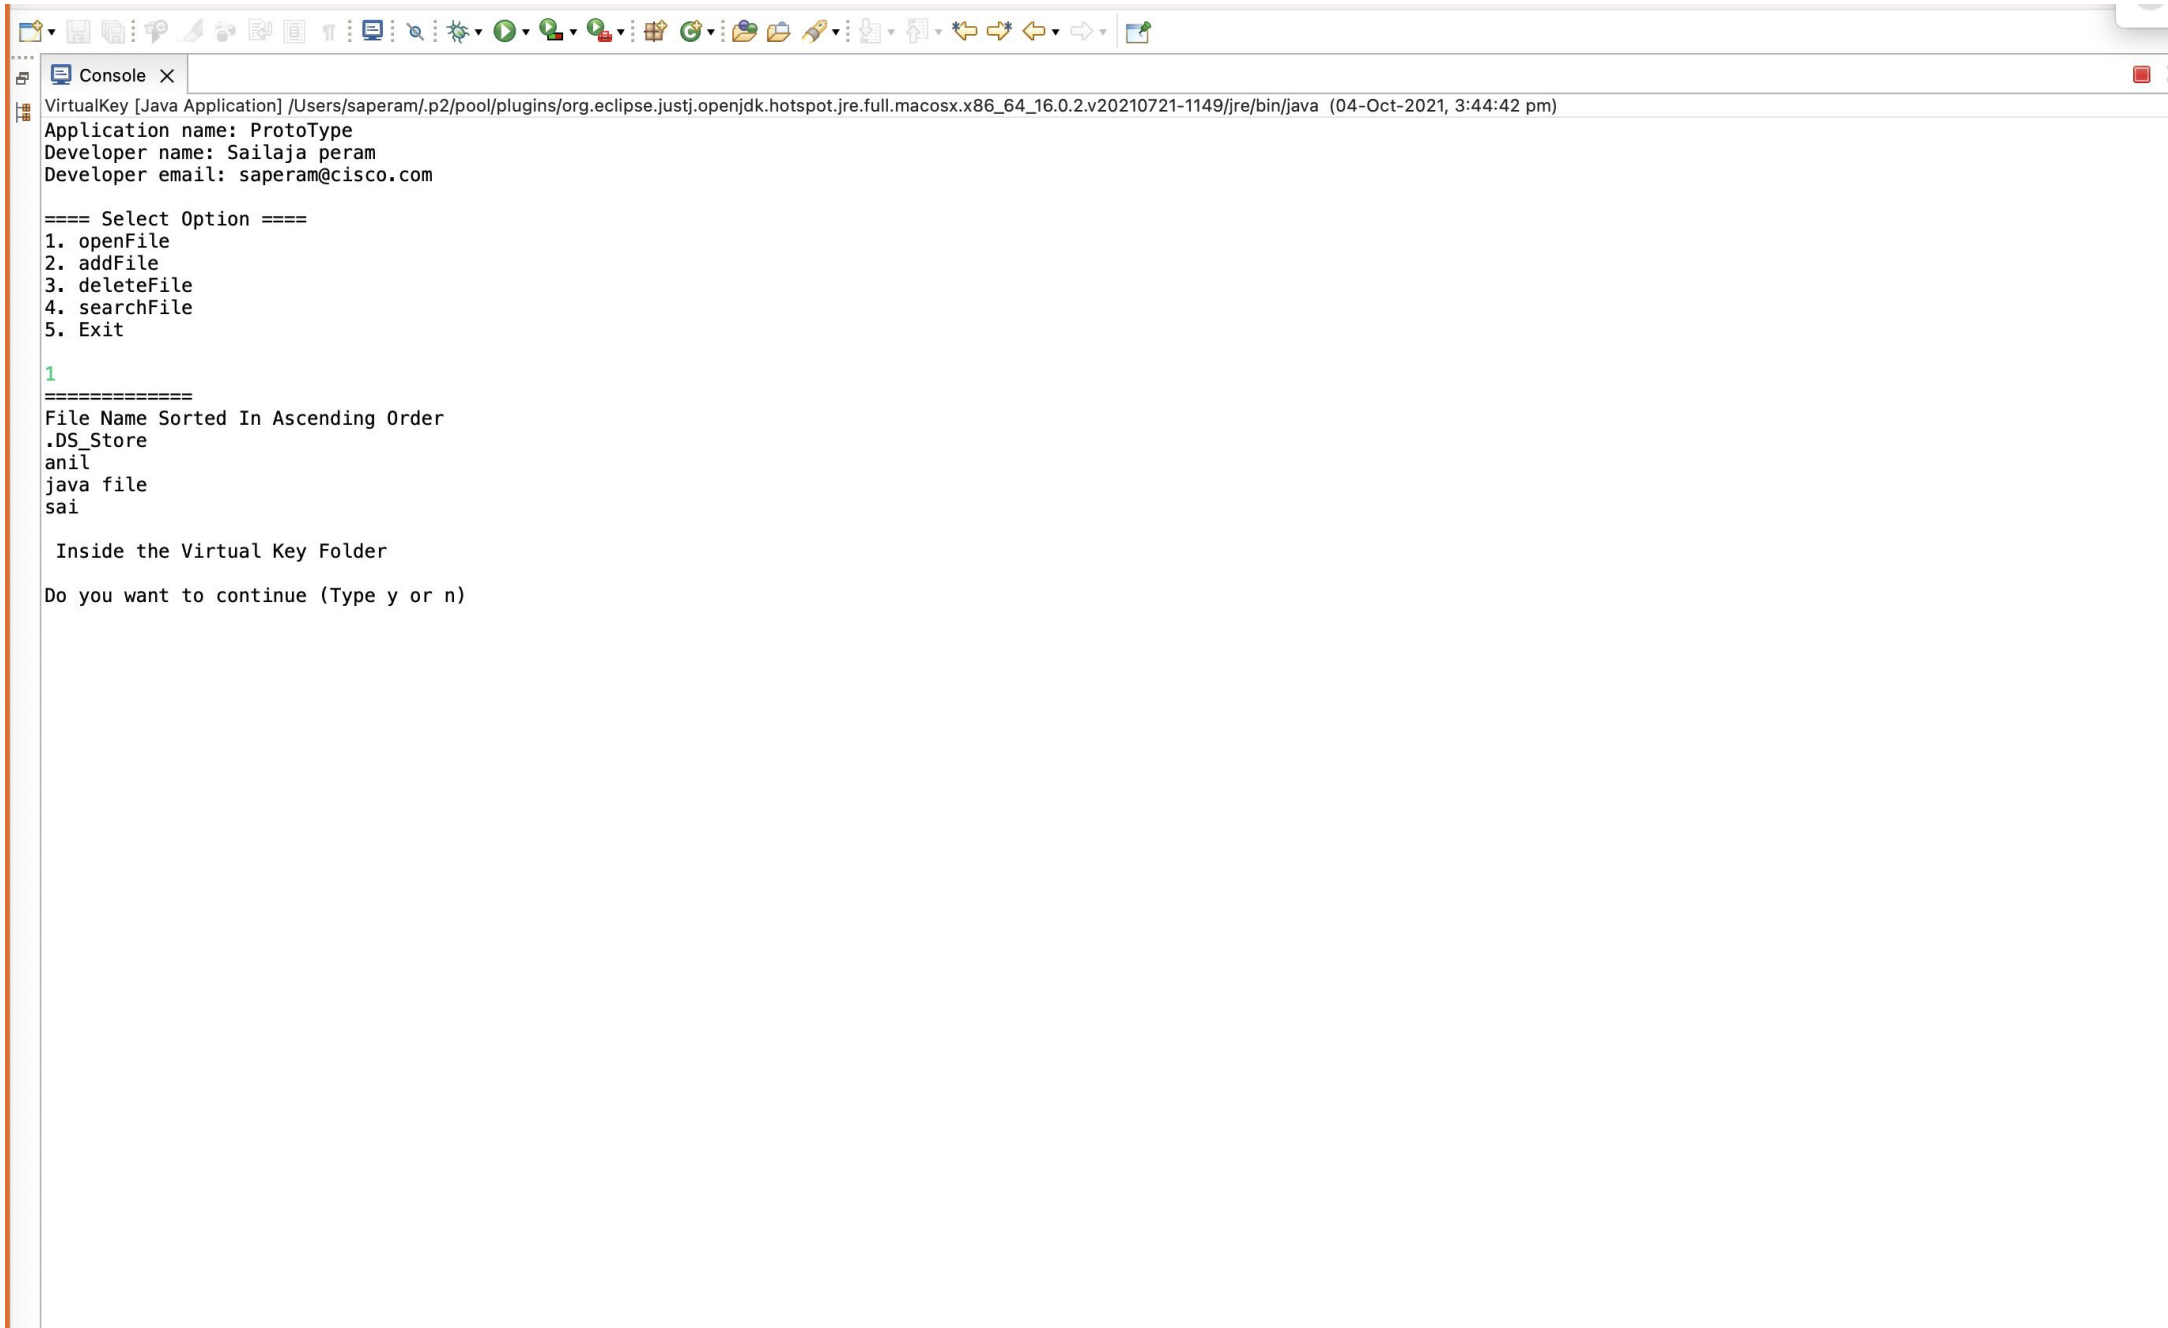


```
VirtualKey [Java Application] /Users/saperam/.p2/pool/plugins/org.eclipse.justj.openjdk.hotspot.jre.full.macosx.x86_64_16.0.2.v20210721-1149/jre/bin/java (04-Oct-2021, 3:44:42 pm)
Application name: ProtoType
Developer name: Sailaja peram
Developer email: saperam@cisco.com


==== Select Option ====
1. openFile
2. addFile
3. deleteFile
4. searchFile
5. Exit


1
=====
File Name Sorted In Ascending Order
.DS_Store
anil
java file
sai

    Inside the Virtual Key Folder

Do you want to continue (Type y or n)
```

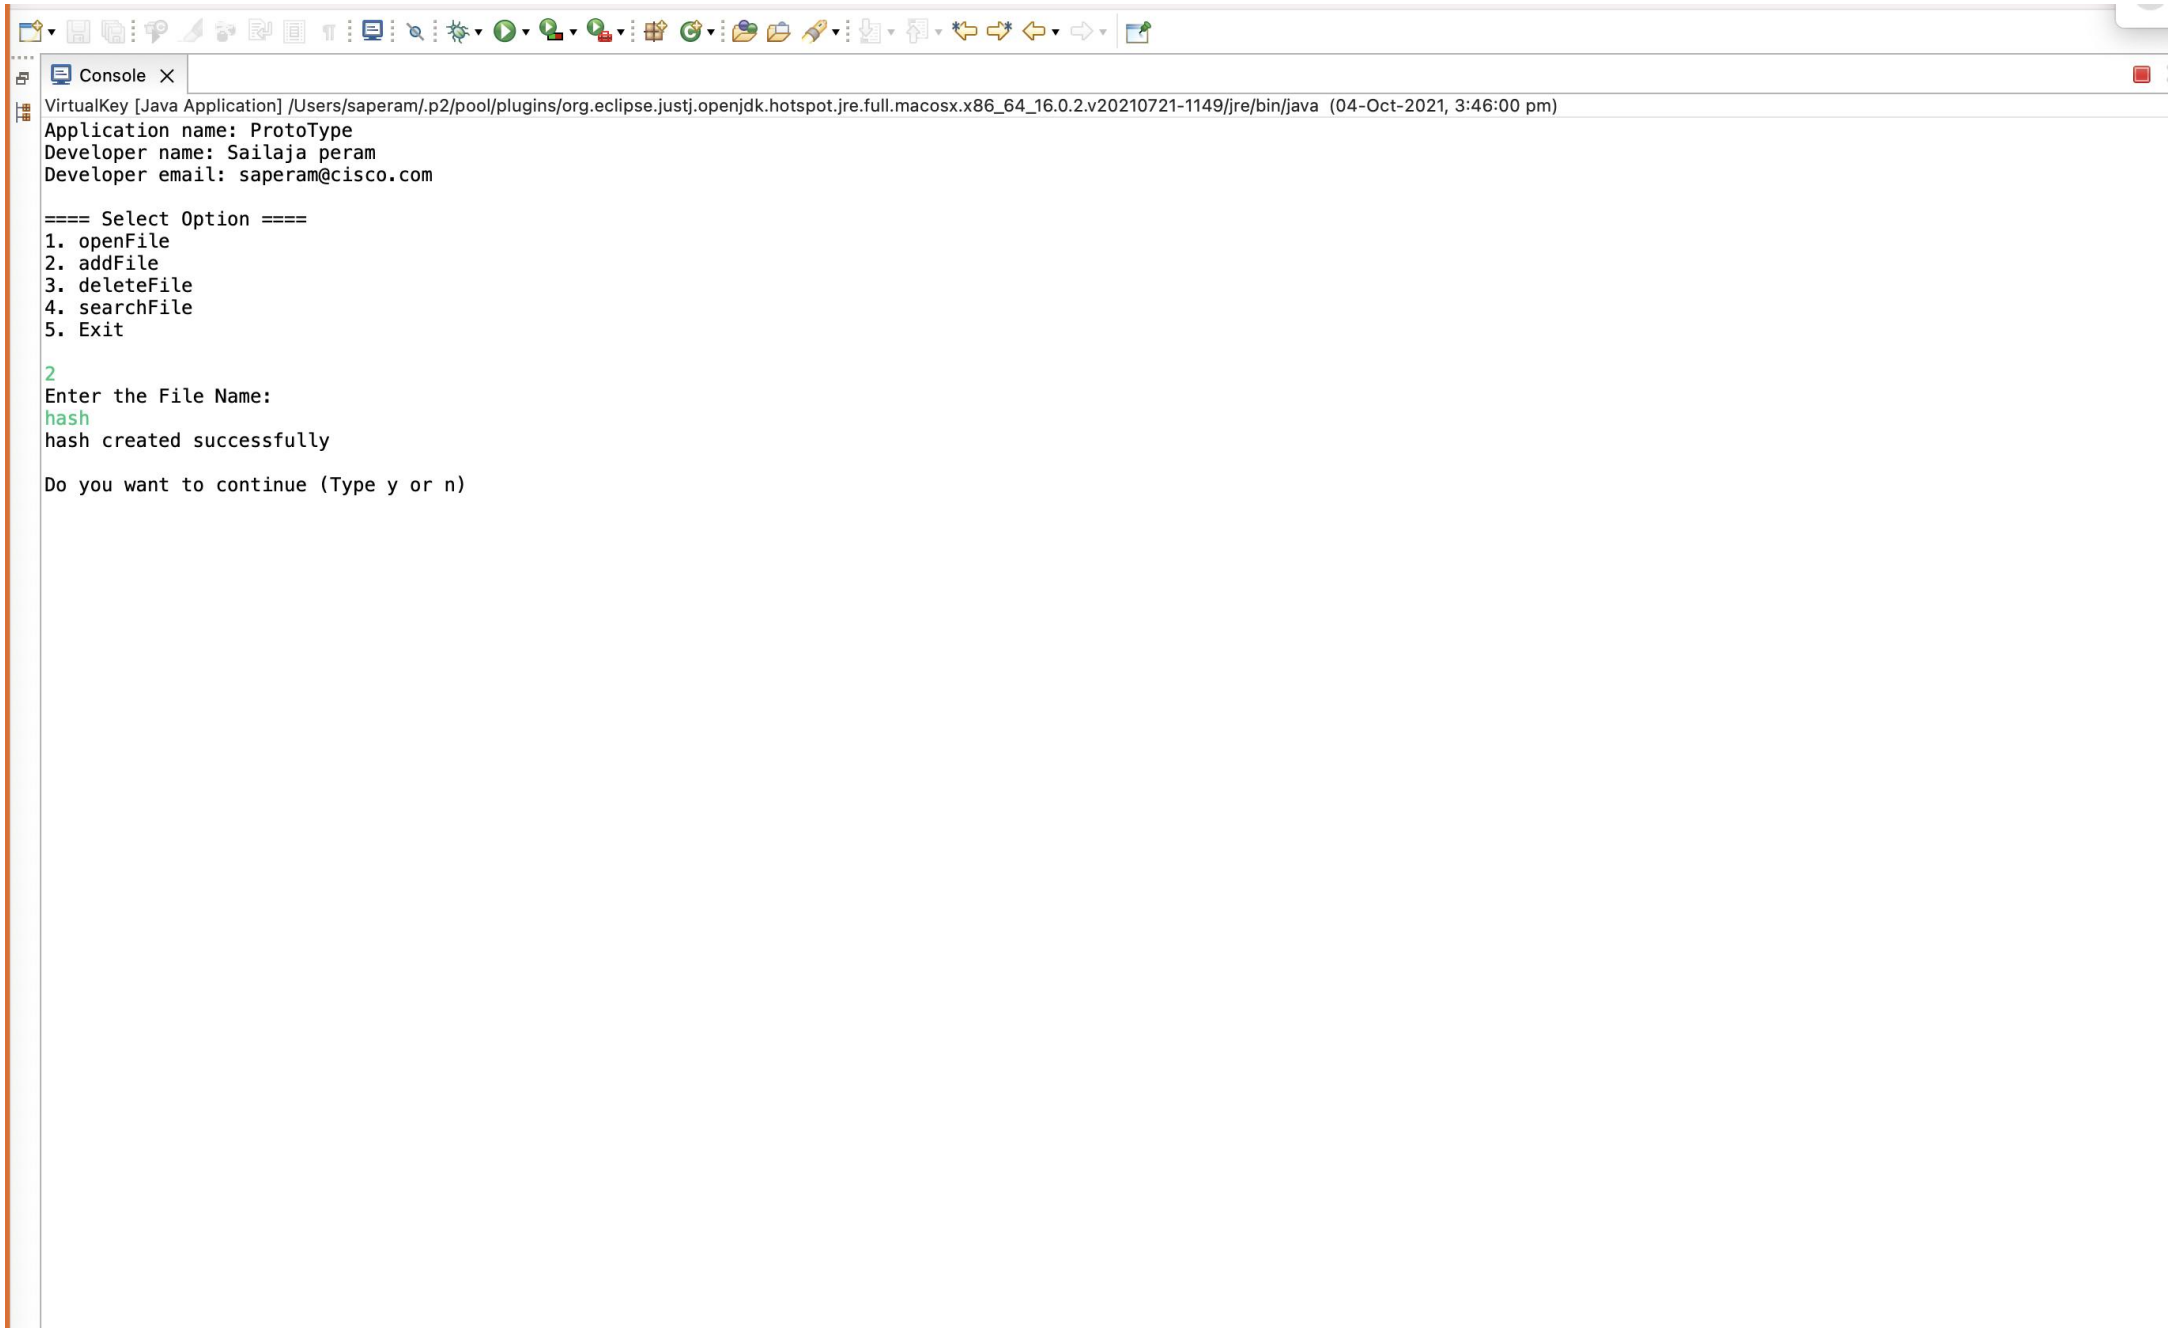

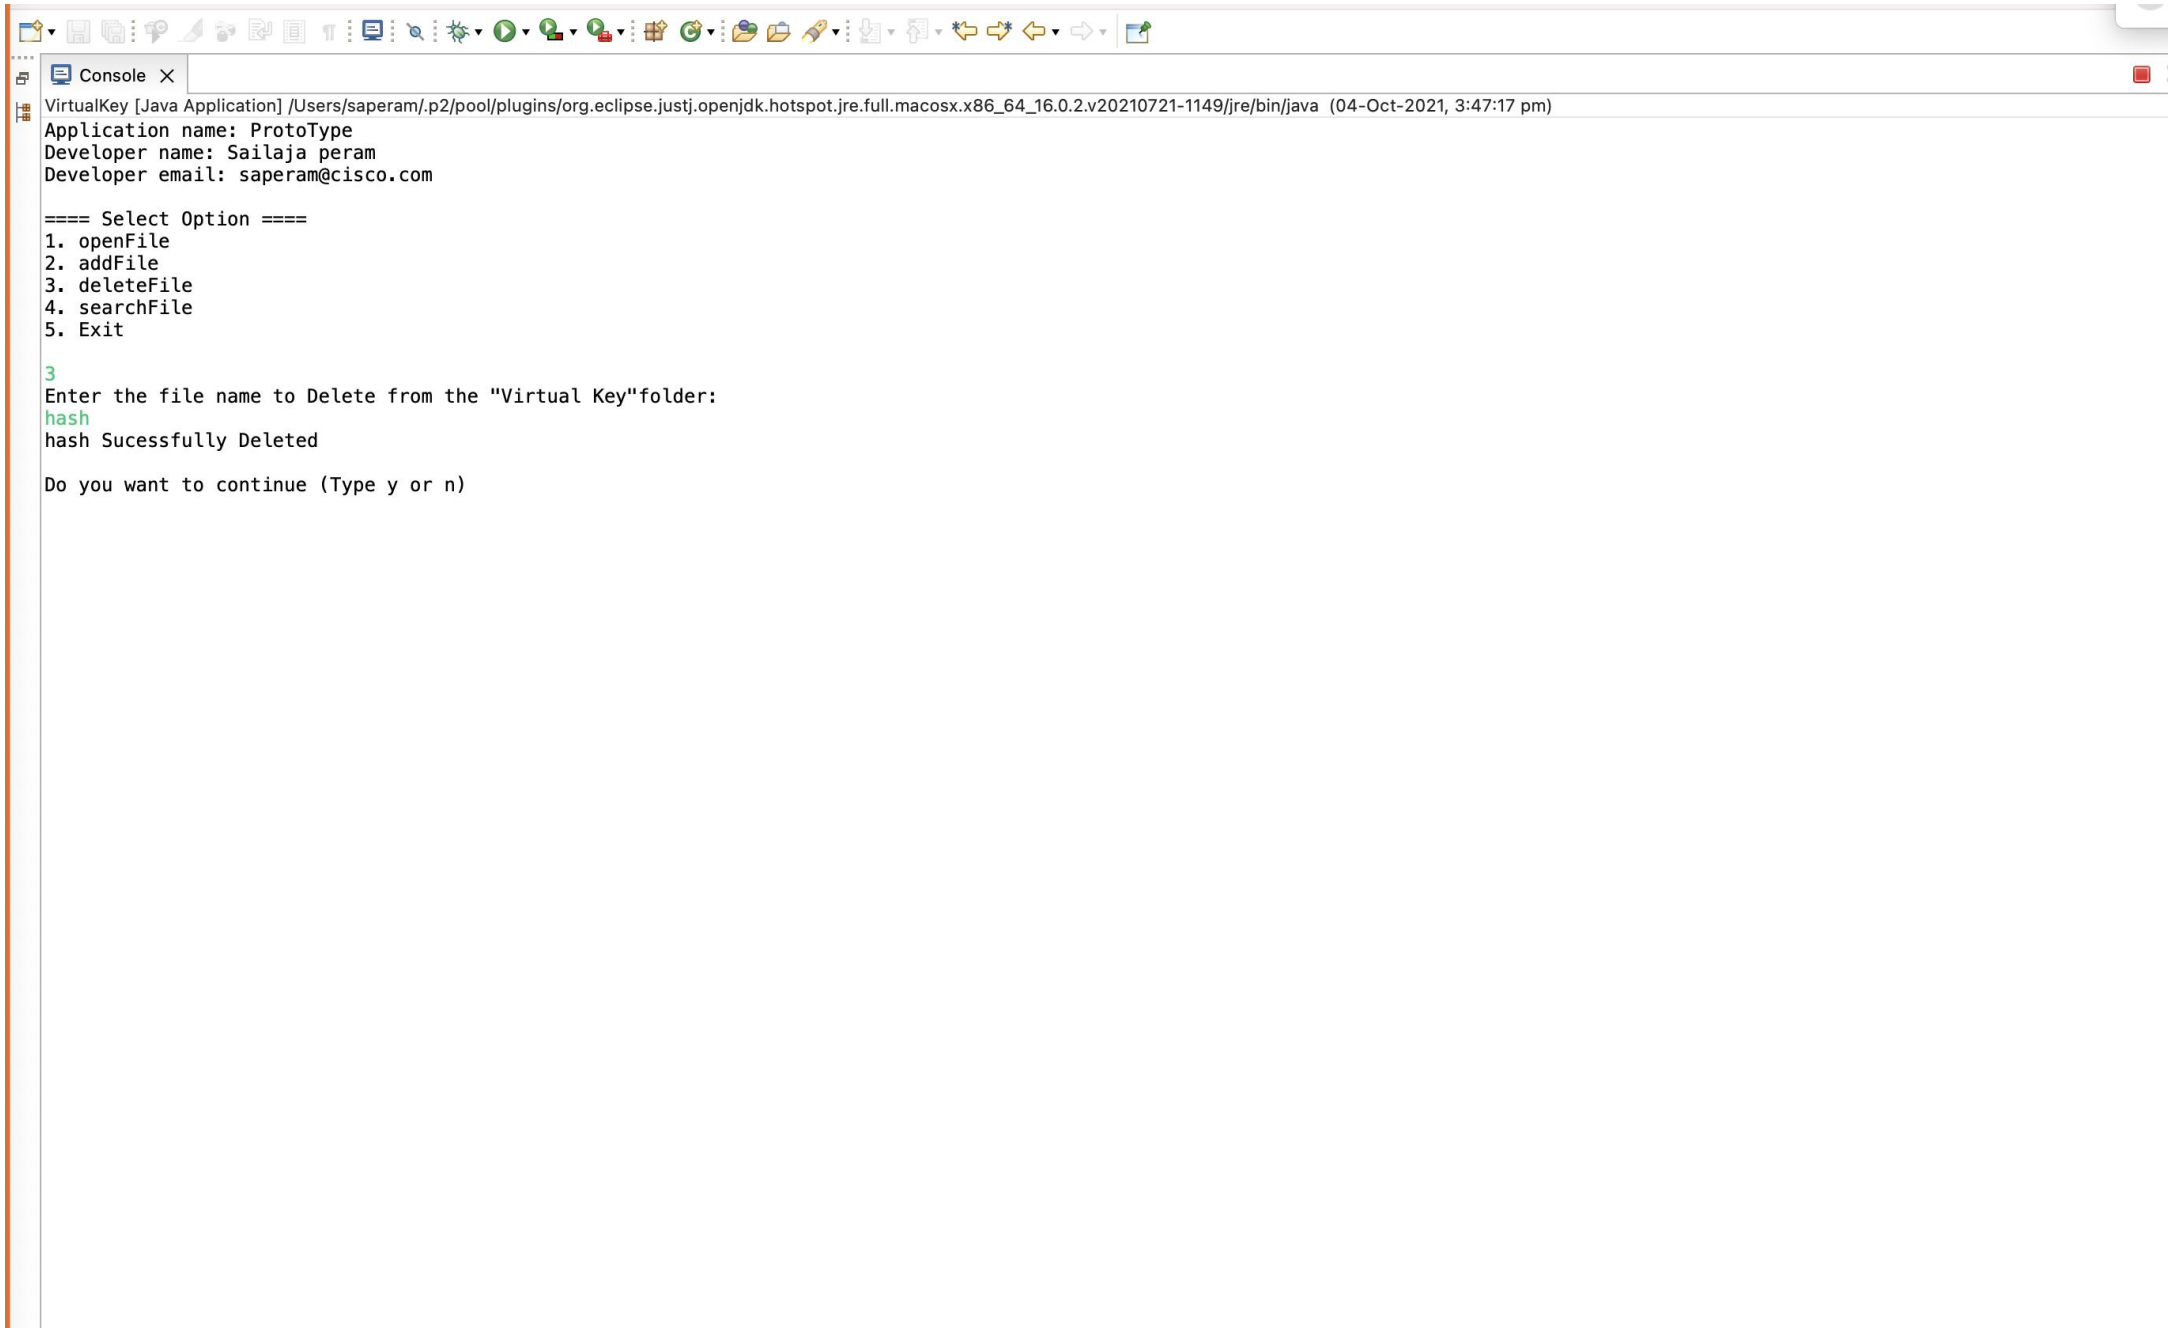

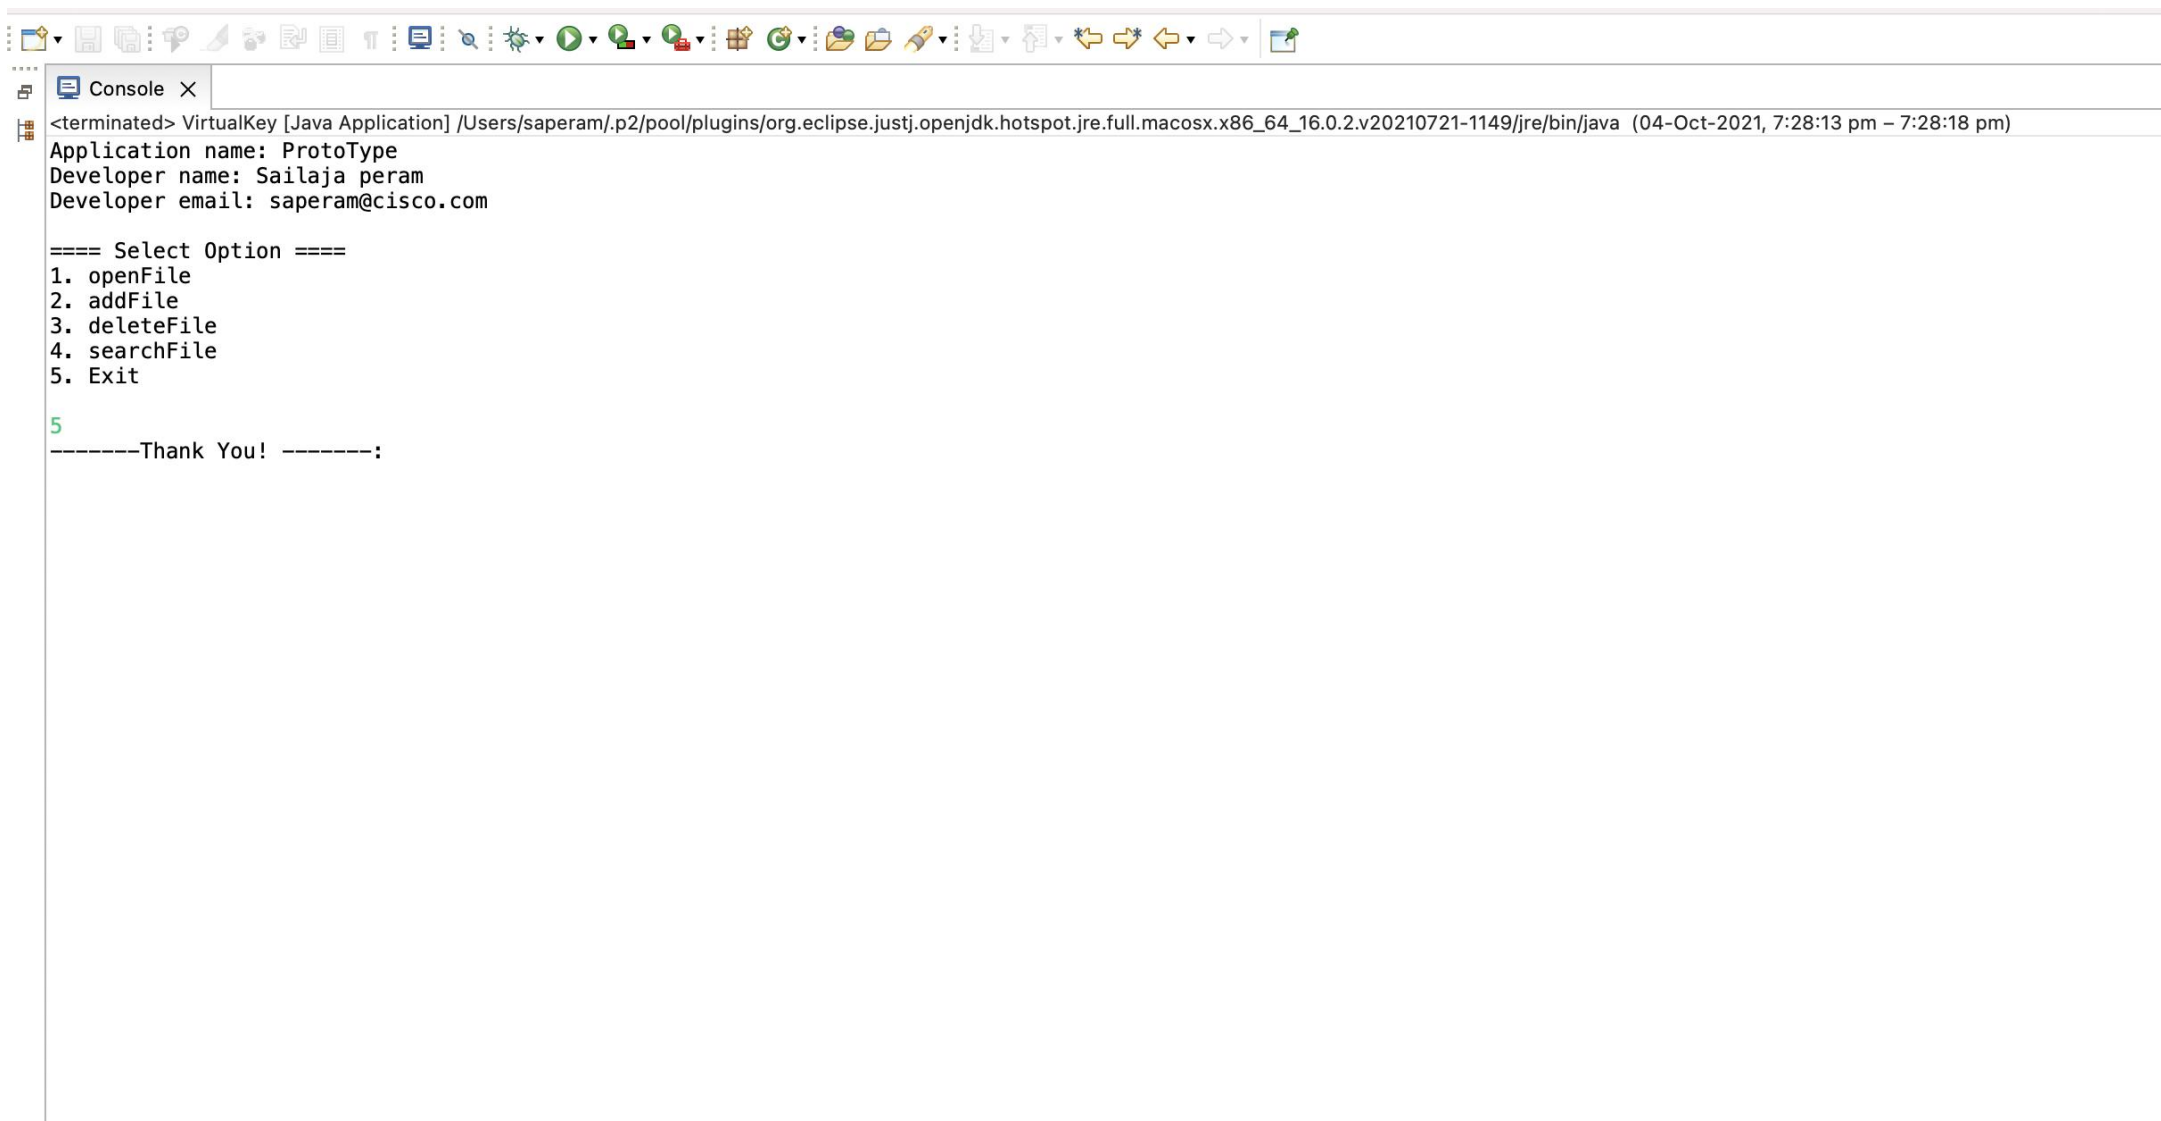

The screenshot shows the Eclipse IDE's console window. The title bar indicates the application is 'VirtualKey [Java Application]' running in the IDE's JRE. The console output shows the application's name, developer information, a menu of options, and a final thank you message.

```
<terminated> VirtualKey [Java Application] /Users/saperam/.p2/pool/plugins/org.eclipse.justj.openjdk.hotspot.jre.full.macosx.x86_64.0.2.v20210721-1149/jre/bin/java (04-Oct-2021, 7:28:13 pm – 7:28:18 pm)
Application name: ProtoType
Developer name: Sailaja peram
Developer email: saperam@cisco.com

==== Select Option ====
1. openFile
2. addFile
3. deleteFile
4. searchFile
5. Exit

5
-----Thank You! -----:
```