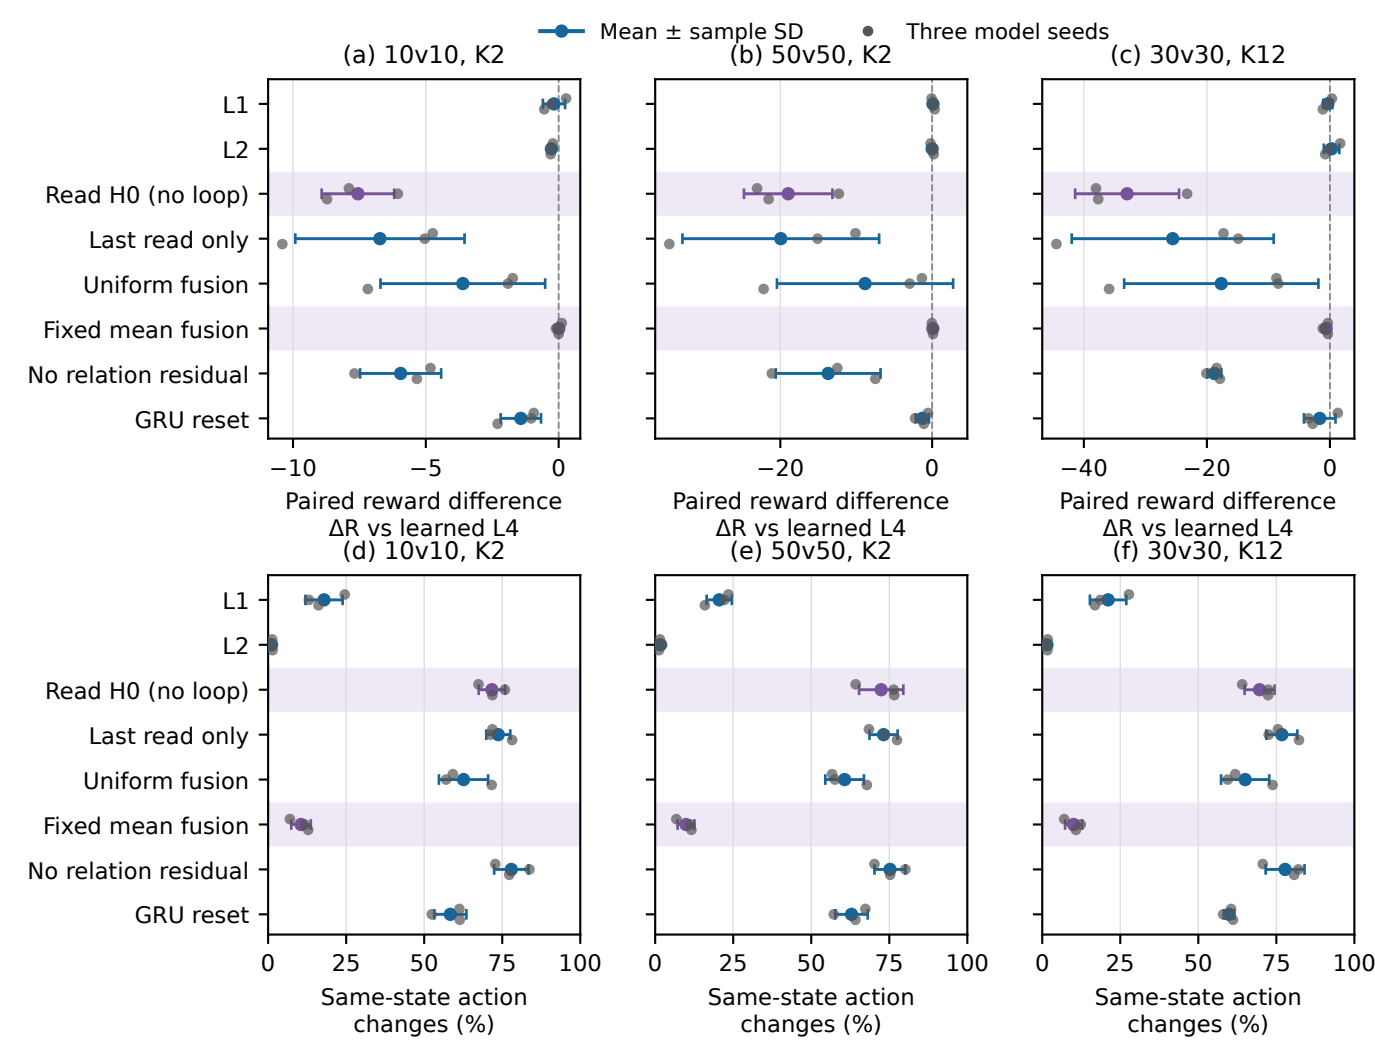
Mean ± sample SD
Three model seeds
(a) 10v10, K2
(b) 50v50, K2
(c) 30v30, K12
L1
L2
Read H0 (no loop)
Last read only
Uniform fusion
Fixed mean fusion
No relation residual
GRU reset
−10
−5
0
−20
0
−40
−20
0
Paired reward difference
ΔR vs learned L4
(d) 10v10, K2
(e) 50v50, K2
(f) 30v30, K12
0
25
50
75
100
Same-state action
changes (%)