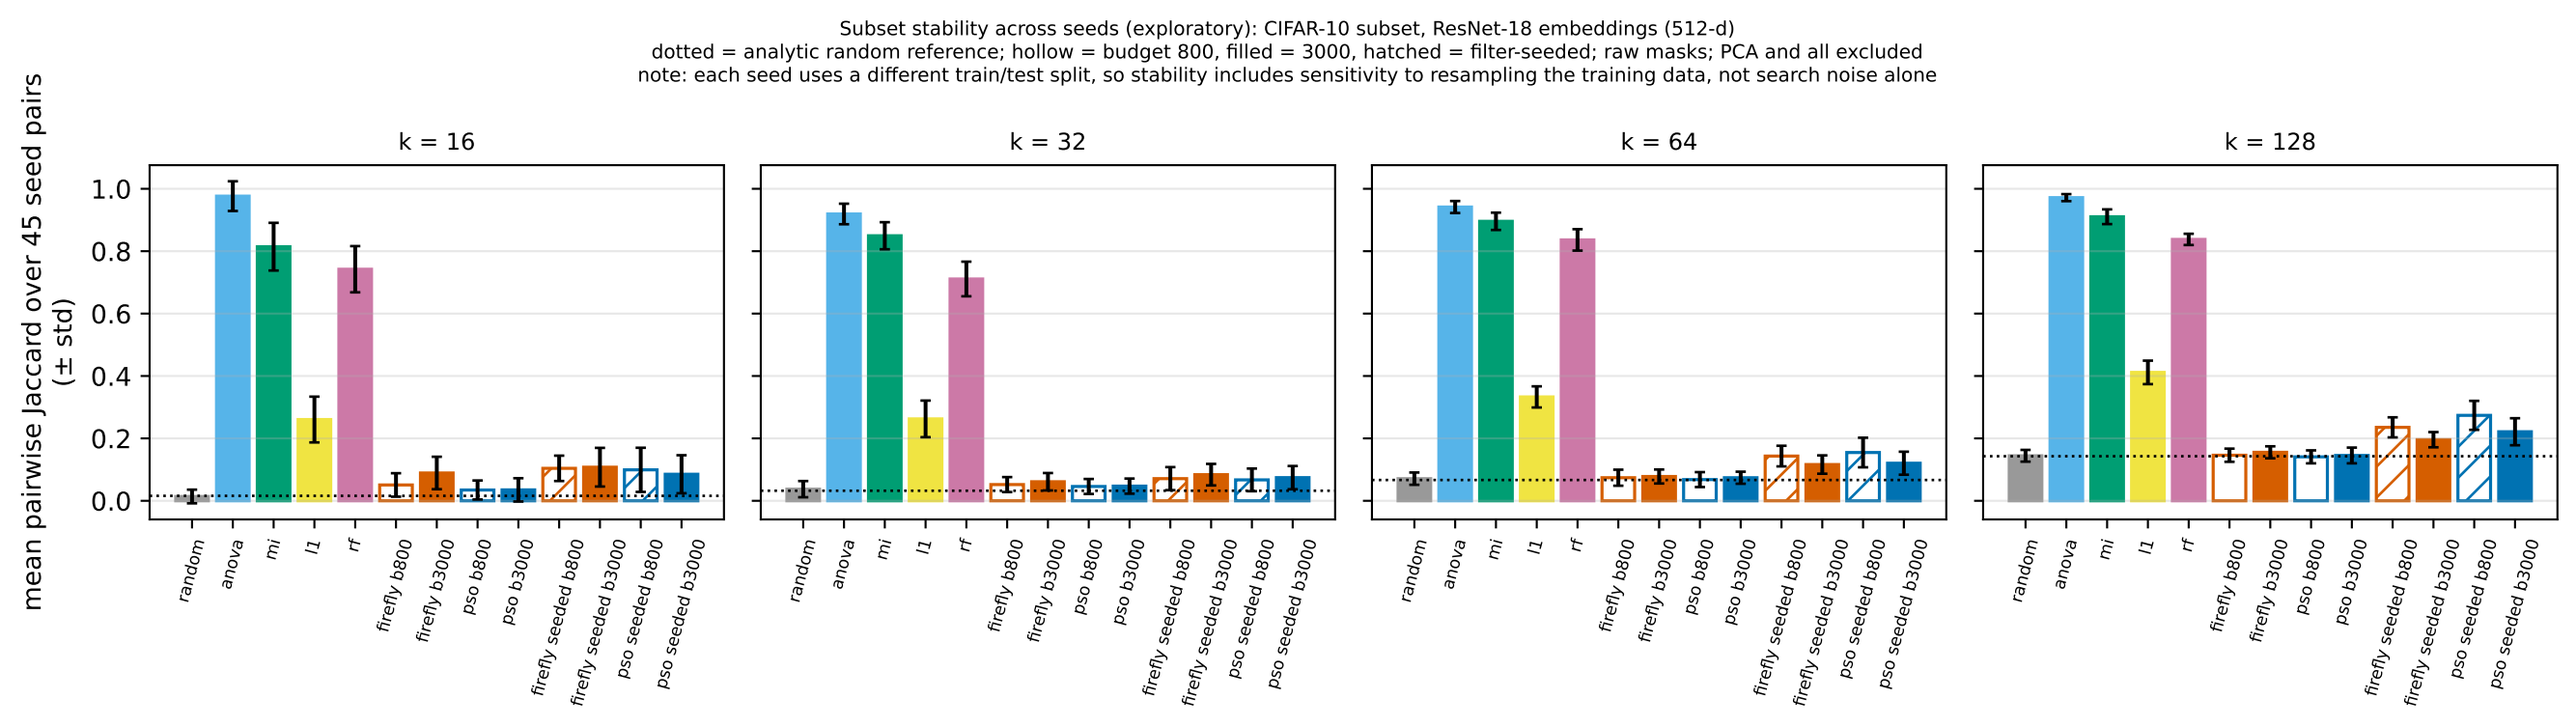
Subset stability across seeds (exploratory): CIFAR-10 subset, ResNet-18 embeddings (512-d)
dotted = analytic random reference; hollow = budget 800, filled = 3000, hatched = filter-seeded; raw masks; PCA and all excluded
note: each seed uses a different train/test split, so stability includes sensitivity to resampling the training data, not search noise alone
mean pairwise Jaccard over 45 seed pairs (± std)
k = 16
k = 32
k = 64
k = 128
0.0
0.2
0.4
0.6
0.8
1.0
random
anova
mi
l1
rf
firefly b800
firefly b3000
pso b800
pso b3000
firefly seeded b800
firefly seeded b3000
pso seeded b800
pso seeded b3000