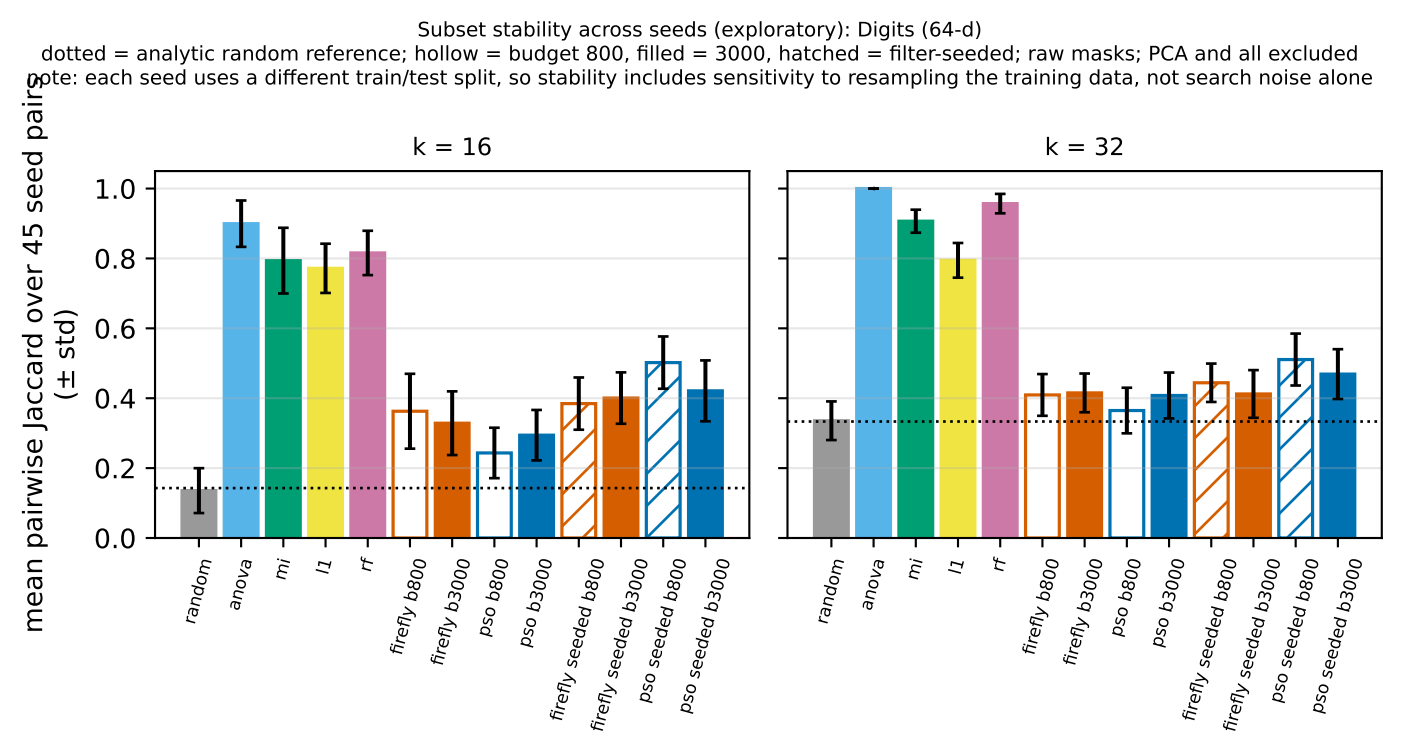
Subset stability across seeds (exploratory): Digits (64-d)
dotted = analytic random reference; hollow = budget 800, filled = 3000, hatched = filter-seeded; raw masks; PCA and all excluded
note: each seed uses a different train/test split, so stability includes sensitivity to resampling the training data, not search noise alone
mean pairwise Jaccard over 45 seed pairs (± std)
k = 16
k = 32
0.0
0.2
0.4
0.6
0.8
1.0
random
anova
mi
l1
rf
firefly b800
firefly b3000
pso b800
pso b3000
firefly seeded b800
firefly seeded b3000
pso seeded b800
pso seeded b3000