

Jobs

Generated by Talend Data Fabric

Project Name	final_project	GENERATION DATE	Aug 10, 2017 4:35:34 PM
AUTHOR	user@talend.com	Talend Data Fabric VERSION	6.3.1.20161216_1026

Summary

Project Description
Description
Preview Picture
Settings
Context List
Component List
Components Description


Project Description

Properties	Values
Name	final_project
Language	java
Description	

Description

Properties	Values	
Name	dim_store	
Author	user@talend.com	
Version	0.1	
Purpose		
Status		
Description		
Creation	Aug 1, 2017 12:04:33 PM	
Modification	Aug 9, 2017 9:37:38 AM	

Preview Picture

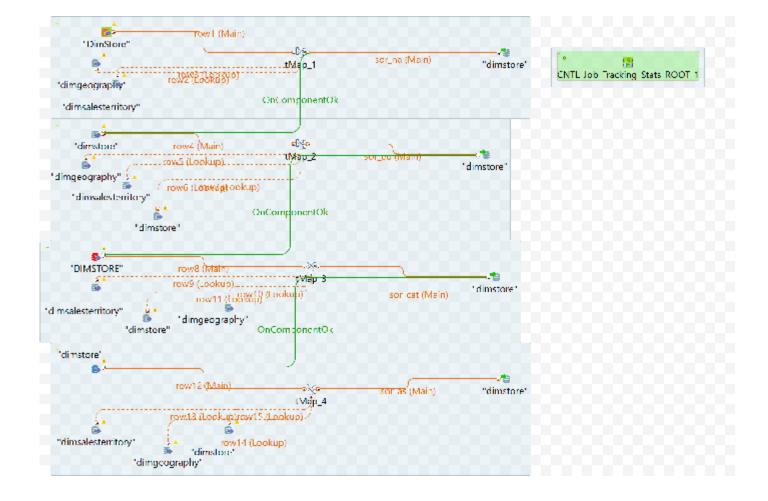

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
------	-------

Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

N	ame	Prompt	Need Prompt?	Туре	Value	Source	
---	-----	--------	--------------	------	-------	--------	--

Component List

Component Name	Component Type
----------------	----------------

CNTL_Job_Tracking_Stats_ROOT_1	CNTL_Job_Tracking_Stats_ROOT
tMSSqlInput_1	tMSSqlInput
tMap_1	tMap
tMap_2	tMap
tMap_3	tMap
tMap_4	tMap
tMysqlInput_1	tMysqlInput
tMysqlInput_10	tMysqlInput
tMysqlInput_11	tMysqlInput
tMysqlInput_12	tMysqlInput
tMysqlInput_2	tMysqlInput
tMysqlInput_3	tMysqlInput
tMysqlInput_4	tMysqlInput
tMysqlInput_5	tMysqlInput
tMysqlInput_6	tMysqlInput
tMysqlInput_7	tMysqlInput
tMysqlInput_8	tMysqlInput

tMysqlInput_9	tMysqlInput
tMysqlOutput_1	tMysqlOutput
tMysqlOutput_2	tMysqlOutput
tMysqlOutput_3	tMysqlOutput
tMysqlOutput_4	tMysqlOutput
tOracleInput_1	tOracleInput
tPostgresqlInput_1	tPostgresqlInput

Components Description

Component tMSSqlInput

UNIQUE NAME	tMSSqlInput_1	INPUT(S)	none
LABEL	TABLE	OUTPUT(S)	tMap_1

oomponent i arameters.	
Properties	Values
Unique Name	tMSSqlInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/MS_SQL_Server

Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false

Component List	
Property Type	Built-In
Host	"LAPTOP-4CDQQRE2"
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	пп
Database	"retail_sor_na"
Username	"info7290"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"DimStore"
Query Type	Built-In
Guess Schema	1111

Query	"SELECT DimStore.StoreID, DimStore.StoreKey, DimStore.StoreManager, DimStore.StoreType, DimStore.StoreName, DimStore.StoreDescription, DimStore.Status, DimStore.OpenDate, DimStore.CloseDate, DimStore.EntityKey, DimStore.ZipCode, DimStore.ZipCodeExtension, DimStore.StorePhone, DimStore.StoreFax, DimStore.AddressLine1, DimStore.AddressLine2, DimStore.CloseReason, DimStore.EmployeeCount, DimStore.SellingAreaSize, DimStore.LastRemodelDate, DimStore.LastRemodelDate, DimStore.LoadDate, DimStore.LoadDate, DimStore.LoadDate, DimStore.UpdateDate FROM DimStore"
Specify a data source alias	false
Data source alias	ш
Mapping	id_MSSQL
Additional JDBC Parameters	пн
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false

Trim column	[{TRIM=false, SCHEMA_COLUMN=StoreID}, {TRIM=false, SCHEMA_COLUMN=StoreKey}, {TRIM=false, SCHEMA_COLUMN=StoreManager}, {TRIM=false, SCHEMA_COLUMN=StoreType}, {TRIM=false, SCHEMA_COLUMN=StoreName}, {TRIM=false, SCHEMA_COLUMN=Status}, {TRIM=false, SCHEMA_COLUMN=OpenDate}, {TRIM=false, SCHEMA_COLUMN=OpenDate}, {TRIM=false, SCHEMA_COLUMN=CloseDate}, {TRIM=false, SCHEMA_COLUMN=EntityKey}, {TRIM=false, SCHEMA_COLUMN=ZipCode}, {TRIM=false, SCHEMA_COLUMN=StorePhone}, {TRIM=false, SCHEMA_COLUMN=StorePhone}, {TRIM=false, SCHEMA_COLUMN=StoreFax}, {TRIM=false, SCHEMA_COLUMN=AddressLine1}, {TRIM=false, SCHEMA_COLUMN=CloseReason}, {TRIM=false, SCHEMA_COLUMN=CloseReason}, {TRIM=false, SCHEMA_COLUMN=CloseReason}, {TRIM=false, SCHEMA_COLUMN=CloseReason}, {TRIM=false, SCHEMA_COLUMN=CloseReason}, {TRIM=false, SCHEMA_COLUMN=Size}, SCHEMA_COLUMN=SellingAreaSize}, {TRIM=false, SCHEMA_COLUMN=LastRemodelDate}, {TRIM=false, SCHEMA_COLUMN=LastRemodelDate}, {TRIM=false, SCHEMA_COLUMN=GeographyKey}]
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DimStore :

Scrienia for Diffis	10.0.					
Column	Key	Туре	Length	Precision	Nullable	Comment
StoreID	true	int	10		false	
StoreKey	false	int	10		false	
StoreManager	false	Integer	10		true	
StoreType	false	String	15		true	
StoreName	false	String	100		false	
StoreDescription	false	String	300		false	
Status	false	String	20		false	
OpenDate	false	java.util.Date	10		false	
CloseDate	false	java.util.Date	10		true	
EntityKey	false	Integer	10		true	
ZipCode	false	String	20		true	
ZipCodeExtension	false	String	10		true	
StorePhone	false	String	15		true	
StoreFax	false	String	14		true	
AddressLine1	false	String	100		true	
AddressLine2	false	String	100		true	

CloseReason	false	String	20	true	
EmployeeCount	false	Integer	10	true	
SellingAreaSize	false	Double	53	true	
LastRemodelDate	false	java.util.Date	10	true	
GeographyKey	false	int	10	false	

Original Function Parameters: Component tMysqlInput

UNIQUE NAME	tMysqlInput_1	INPUT(S)	none
LABEL	TABLE	OUTPUT(S)	tMap_1

Component Farameters.		
Properties	Values	
Unique Name	tMysqlInput_1	
Component Name	tMysqlInput	
Version	0.102 (ALPHA)	
Family	Databases/MySQL	
Start	false	
Startable	true	
SUBTREE_START	false	

END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMysqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
DB Version	MYSQL_5
Use an existing connection	false
Component List	

Host	"localhost"
Port	"3306"
Database	"retail_dw"
Database Driver	MYSQL
Username	"info7290"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"dimsalesterritory"
Query Type	Built-In
Guess Schema	пп

Query	"SELECT `dimsalesterritory`.` SalesTerritorySK`, `dimsalesterritory`.` SalesTerritoryKey`, `dimsalesterritory`.` GeographySK`, `dimsalesterritory`.` SalesTerritoryLabel`, `dimsalesterritory`.` SalesTerritoryName`, `dimsalesterritory`.` SalesTerritoryRegion`, `dimsalesterritory`.` SalesTerritoryCountry`, `dimsalesterritory`.` SalesTerritoryGroup`, `dimsalesterritory`.` SalesTerritoryLevel`, `dimsalesterritory`.` SalesTerritoryManager`, `dimsalesterritory`.` StartDate`, `dimsalesterritory`.` Status`, `dimsalesterritory`.` SOR_ID`, `dimsalesterritory`.` SOR_LoadDate`, `dimsalesterritory`.` SOR_UpdateDate`, `dimsalesterritory`.` DI_Job_ID`, `dimsalesterritory`.` DI_Job_ID`, `dimsalesterritory`.` DI_Create_Date`, `dimsalesterritory`.` DI_Modified_Date` FROM `dimsalesterritory`."
Specify a data source alias	false
Data source alias	""
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Enable stream	false
Trim all the String/Char columns	false
Trim column	[{TRIM=false, SCHEMA_COLUMN=SalesTerritorySK}, {TRIM=false, SCHEMA_COLUMN=SalesTerritoryKey}, {TRIM=false, SCHEMA_COLUMN=GeographySK}]

Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for dimsalesterritory:

OUTIONIA TOT ANTIC	<u> </u>	· <u>y</u> ·				
Column	Key	Туре	Length	Precision	Nullable	Comment
SalesTerritorySK	true	int	10		false	
SalesTerritoryKey	false	int	10		false	
GeographySK	false	int	10		false	

Original Function Parameters: Component tMysqlInput

The second second	UNIQUE NAME	tMysqlInput_10	INPUT(S)	none
	LABEL	TABLE	OUTPUT(S)	tMap_4

Properties	Values
------------	--------

Unique Name	tMysqlInput_10
Component Name	tMysqlInput
Version	0.102 (ALPHA)
Family	Databases/MySQL
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMysqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
DB Version	MYSQL_5
Use an existing connection	false
Component List	
Host	"localhost"
Port	"3306"
Database	"retail_dw"
Database Driver	MYSQL
Username	"info7290"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"dimsalesterritory"
Query Type	Built-In

Guess Schema	нн
Query	"SELECT `dimsalesterritory`.` SalesTerritorySK`, `dimsalesterritory`.` SalesTerritoryKey`, `dimsalesterritory`.` GeographySK`, `dimsalesterritory`.` SalesTerritoryLabel`, `dimsalesterritory`.` SalesTerritoryName`, `dimsalesterritory`.` SalesTerritoryRegion`, `dimsalesterritory`.` SalesTerritoryCountry`, `dimsalesterritory`.` SalesTerritoryGroup`, `dimsalesterritory`.` SalesTerritoryLevel`, `dimsalesterritory`.` SalesTerritoryManager`, `dimsalesterritory`.` StartDate`, `dimsalesterritory`.` Status`, `dimsalesterritory`.` Status`, `dimsalesterritory`.` SOR_ID`, `dimsalesterritory`.` SOR_UpdateDate`, `dimsalesterritory`.` SOR_UpdateDate`, `dimsalesterritory`.` DI_Job_ID`, `dimsalesterritory`.` DI_Job_ID`, `dimsalesterritory`.` DI_Modified_Date` FROM `dimsalesterritory`.` DI_Modified_Date` FROM `dimsalesterritory`."
Specify a data source alias	false
Data source alias	пп
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Enable stream	false
Trim all the String/Char columns	false

Trim column	[{TRIM=false, SCHEMA_COLUMN=SalesTerritorySK}, {TRIM=false, SCHEMA_COLUMN=SalesTerritoryKey}, {TRIM=false, SCHEMA_COLUMN=GeographySK}, {TRIM=false, SCHEMA_COLUMN=SalesTerritoryLabel}, {TRIM=false, SCHEMA_COLUMN=SalesTerritoryName}, {TRIM=false, SCHEMA_COLUMN=SalesTerritoryRegion}, {TRIM=false, SCHEMA_COLUMN=SalesTerritoryCountry}, {TRIM=false, SCHEMA_COLUMN=SalesTerritoryGroup}, {TRIM=false, SCHEMA_COLUMN=SalesTerritoryLevel}, {TRIM=false, SCHEMA_COLUMN=SalesTerritoryManager}]
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for dimsalesterritory:

Column	Key	Туре	Length	Precision	Nullable	Comment
SalesTerritorySK	true	int	10		false	

SalesTerritoryKey	false	int	10	false	
GeographySK	false	int	10	false	
SalesTerritoryLabel	false	String	100	true	
SalesTerritoryName	false	String	50	false	
SalesTerritoryRegion	false	String	50	false	
SalesTerritoryCountry	false	String	50	false	
SalesTerritoryGroup	false	String	50	true	
SalesTerritoryLevel	false	String	10	true	
SalesTerritoryManage	false	Integer	10	true	

Original Function Parameters: Component tMysqlInput

The second second	UNIQUE NAME	tMysqlInput_11	INPUT(S)	none
	LABEL	TABLE	OUTPUT(S)	tMap_4

Properties	Values
Unique Name	tMysqlInput_11
Component Name	tMysqlInput
Version	0.102 (ALPHA)

Family	Databases/MySQL
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMysqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

	1
Property Type	Built-In
DB Version	MYSQL_5
Use an existing connection	false
Component List	
Host	"localhost"
Port	"3306"
Database	"retail_dw"
Database Driver	MYSQL
Username	"info7290"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"dimgeography"
Query Type	Built-In
Guess Schema	1111

Query	"SELECT `dimgeography`.`GeographySK`, `dimgeography`.`GeographyKey`, `dimgeography`.`ContinentName`, `dimgeography`.`ContinentCode`, `dimgeography`.`Country`, `dimgeography`.`Country_name`, `dimgeography`.`RegionCountryName`, `dimgeography`.`ISO_3166_numeric`, `dimgeography`.`ISO_3166_alpha_2`, `dimgeography`.`ISO_3166_alpha_3`, `dimgeography`.`Subdiv_name`, `dimgeography`.`Subdiv_name`, `dimgeography`.`Subdiv_code`, `dimgeography`.`StateProvinceName`, `dimgeography`.`StateProvinceCode`, `dimgeography`.`City`, `dimgeography`.`CityName`, `dimgeography`.`CityName`, `dimgeography`.`SOR_ID`, `dimgeography`.`SOR_LoadDate`, `dimgeography`.`SOR_UpdateDate`, `dimgeography`.`DI_Job_ID`, `dimgeography`.`DI_Create_Date`, `dimgeography`.`DI_Modified_Date` FROM `dimgeography`."DI_Modified_Date` FROM `dimgeography`."DI_Modified_Date` FROM
Specify a data source alias	false
Data source alias	""
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Enable stream	false
Trim all the String/Char columns	false

Trim column	[{TRIM=false, SCHEMA_COLUMN=GeographySK}, {TRIM=false, SCHEMA_COLUMN=GeographyKey}]
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for dimgeography:

Column	Key	Туре	Length	Precision	Nullable	Comment
GeographySK	true	int	10		false	
GeographyKey	false	int	10		false	

Original Function Parameters: Component tMysqlInput

UNIQUE NAME	tMysqlInput_12	INPUT(S)	none
LABEL	TABLE	OUTPUT(S)	tMap_4

Properties	Values

Unique Name	tMysqlInput_12
Component Name	tMysqlInput
Version	0.102 (ALPHA)
Family	Databases/MySQL
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMysqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	

false
2
false
Built-In
MYSQL_5
false
"localhost"
"3306"
"retail_dw"
MYSQL
"info7290"

true
Built-In
"dimstore"
Built-In

Guess Schema	""
Query	"SELECT `dimstore`.`StoreSK`, `dimstore`.`StoreID`, `dimstore`.`StoreKey`, `dimstore`.`SalesTerritorySK`, `dimstore`.`StoreManager`, `dimstore`.`StoreType`, `dimstore`.`StoreName`, `dimstore`.`StoreDescription`, `dimstore`.`Status`, `dimstore`.`OpenDate`, `dimstore`.`CloseDate`, `dimstore`.`EntityKey`, `dimstore`.`ZipCode`, `dimstore`.`ZipCodeExtension`, `dimstore`.`StorePhone`, `dimstore`.`StoreFax`, `dimstore`.`AddressLine1`, `dimstore`.`AddressLine2`, `dimstore`.`GeographySK`, `dimstore`.`CloseReason`, `dimstore`.`EmployeeCount`, `dimstore`.`SellingAreaSize`, `dimstore`.`SoR_ID`, `dimstore`.`SOR_LoadDate`, `dimstore`.`SOR_UpdateDate`, `dimstore`.`SOR_UpdateDate`, `dimstore`.`DI_Job_ID`, `dimstore`.`DI_Job_ID`, `dimstore`.`DI_Create_Date`, `dimstore`.`DI_Modified_Date` FROM `dimstore`"
Specify a data source alias	false
Data source alias	1111
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Enable stream	false
Trim all the String/Char columns	false

Trim column	[{TRIM=false, SCHEMA_COLUMN=StoreSK}, {TRIM=false, SCHEMA_COLUMN=StoreID}, {TRIM=false, SCHEMA_COLUMN=StoreKey}, {TRIM=false, SCHEMA_COLUMN=SalesTerritorySK}, {TRIM=false, SCHEMA_COLUMN=StoreManager}, {TRIM=false, SCHEMA_COLUMN=StoreType}, {TRIM=false, SCHEMA_COLUMN=StoreName}]
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for dimstore :

Column	Key	Туре	Length	Precision	Nullable	Comment
StoreSK	true	int	10		false	
StoreID	false	int	10		false	
StoreKey	false	int	10		false	
SalesTerritorySK	false	Integer	10		true	
StoreManager	false	Integer	10		true	

StoreType	false	String	15	true	
StoreName	false	String	100	false	

Original Function Parameters: Component tMysqlInput

	UNIQUE NAME	tMysqlInput_2	INPUT(S)	none	
	LABEL	TABLE	OUTPUT(S)	tMap_1	

Component Parameters:				
Properties	Values			
Unique Name	tMysqlInput_2			
Component Name	tMysqlInput			
Version	0.102 (ALPHA)			
Family	Databases/MySQL			
Start	false			
Startable	true			
SUBTREE_START	false			
END_OF_FLOW	false			
Activate	true			
DUMMY	false			

tStatCatcher Statistics	false
iotatoater otatistics	laise
Help	org.talend.help.tMysqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
DB Version	MYSQL_5
Use an existing connection	false
Component List	
Host	"localhost"
Port	"3306"
Database	"retail_dw"

Database Driver	MYSQL
Username	"info7290"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"dimgeography"
Query Type	Built-In
Guess Schema	нн

Query	"SELECT `dimgeography`.`GeographySK`, `dimgeography`.`GeographyKey`, `dimgeography`.`ContinentName`, `dimgeography`.`ContinentCode`, `dimgeography`.`Country`, `dimgeography`.`Country_name`, `dimgeography`.`RegionCountryName`, `dimgeography`.`ISO_3166_numeric`, `dimgeography`.`ISO_3166_alpha_2`, `dimgeography`.`ISO_3166_alpha_3`, `dimgeography`.`Subdiv_name`, `dimgeography`.`Subdiv_name`, `dimgeography`.`Subdiv_code`, `dimgeography`.`StateProvinceName`, `dimgeography`.`StateProvinceCode`, `dimgeography`.`City`, `dimgeography`.`CityName`, `dimgeography`.`CityName`, `dimgeography`.`SOR_ID`, `dimgeography`.`SOR_LoadDate`, `dimgeography`.`SOR_UpdateDate`, `dimgeography`.`DI_Job_ID`, `dimgeography`.`DI_Create_Date`, `dimgeography`.`DI_Modified_Date` FROM `dimgeography`."DI_Modified_Date` FROM `dimgeography`."DI_Modified_Date` FROM
Specify a data source alias	false
Data source alias	""
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Enable stream	false
Trim all the String/Char columns	false

Trim column	[{TRIM=false, SCHEMA_COLUMN=GeographySK}, {TRIM=false, SCHEMA_COLUMN=GeographyKey}, {TRIM=false, SCHEMA_COLUMN=GeographyType}]
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for dimgeography:

Column	Key	Туре	Length	Precision	Nullable	Comment
GeographySK	true	int	10		false	
GeographyKey	false	int	10		false	
GeographyType	false	String	50		false	

Original Function Parameters: Component tMysqlInput

9	UNIQUE NAME	tMysqlInput_3	INPUT(S)	tMysqlOutput_1

L	ABEL	TABLE	OUTPUT(S)	tMap_2
---	------	-------	-----------	--------

Component Parameters:				
Properties	Values			
Unique Name	tMysqlInput_3			
Component Name	tMysqlInput			
Version	0.102 (ALPHA)			
Family	Databases/MySQL			
Start	false			
Startable	true			
SUBTREE_START	true			
END_OF_FLOW	false			
Activate	true			
DUMMY	false			
tStatCatcher Statistics	false			
Help	org.talend.help.tMysqlInput			
Update components	true			
IREPORT_PATH				

JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
DB Version	MYSQL_5
Use an existing connection	false
Component List	
Host	"localhost"
Port	"3306"
Database	"retail_sor_eu"
Database Driver	MYSQL
Username	"info7290"
Password	******
REPOSITORY_ALLOW_AUTO_SWITCH	true

Schema	Built-In
Table Name	"dimstore"
Query Type	Built-In
Guess Schema	пп
Query	"SELECT `dimstore`.`StoreID`, 'dimstore`.`StoreKey`, `dimstore`.`EntityKey`, 'dimstore`.`StoreManager`, `dimstore`.`StoreType`, 'dimstore`.`StoreDescription`, `dimstore`.`Status`, 'dimstore`.`OpenDate`, `dimstore`.`CloseDate`, 'dimstore`.`ZipCode`, 'dimstore`.`ZipCodeExtension`, 'dimstore`.`StorePhone`, `dimstore`.`StoreFax`, 'dimstore`.`AddressLine1`, 'dimstore`.`AddressLine2`, 'dimstore`.`GeographyKey`, 'dimstore`.`CloseReason`, 'dimstore`.`EmployeeCount`, 'dimstore`.`SellingAreaSize`, 'dimstore`.`LastRemodelDate`, 'dimstore`.`ETLLoadID`, `dimstore`.`LoadDate`, 'dimstore`.`UpdateDate` FROM `dimstore`"
Specify a data source alias	false
Data source alias	пп
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Enable stream	false

ſ

Trim all the String/Char columns	false
Trim column	[{TRIM=false, SCHEMA_COLUMN=StoreID}, {TRIM=false, SCHEMA_COLUMN=StoreKey}, {TRIM=false, SCHEMA_COLUMN=EntityKey}, {TRIM=false, SCHEMA_COLUMN=StoreManager}, {TRIM=false, SCHEMA_COLUMN=StoreType}, {TRIM=false, SCHEMA_COLUMN=StoreName}, {TRIM=false, SCHEMA_COLUMN=StoreName}, {TRIM=false, SCHEMA_COLUMN=Status}, {TRIM=false, SCHEMA_COLUMN=OpenDate}, {TRIM=false, SCHEMA_COLUMN=CloseDate}, {TRIM=false, SCHEMA_COLUMN=ZipCode}, {TRIM=false, SCHEMA_COLUMN=StorePhone}, {TRIM=false, SCHEMA_COLUMN=StoreFax}, {TRIM=false, SCHEMA_COLUMN=StoreFax}, {TRIM=false, SCHEMA_COLUMN=AddressLine1}, {TRIM=false, SCHEMA_COLUMN=AddressLine2}, {TRIM=false, SCHEMA_COLUMN=CloseReason}, {TRIM=false, SCHEMA_COLUMN=CloseReason}, {TRIM=false, SCHEMA_COLUMN=CloseReason}, {TRIM=false, SCHEMA_COLUMN=CloseReason}, {TRIM=false, SCHEMA_COLUMN=CloseReason}, {TRIM=false, SCHEMA_COLUMN=SellingAreaSize}, {TRIM=false, SCHEMA_COLUMN=LastRemodelDate}]
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	

Schema for dimstore:

Schema for diffistore :						
Column	Key	Туре	Length	Precision	Nullable	Comment
StoreID	true	int	10		false	
StoreKey	false	int	10		false	
EntityKey	false	Integer	10		true	
StoreManager	false	Integer	10		true	
StoreType	false	String	15		true	
StoreName	false	String	100		false	
StoreDescription	false	String	300		false	
Status	false	String	20		false	
OpenDate	false	java.util.Date	19		false	
CloseDate	false	java.util.Date	19		true	
ZipCode	false	String	20		true	
ZipCodeExtension	false	String	10		true	
StorePhone	false	String	15		true	
StoreFax	false	String	14		true	

AddressLine1	false	String	100	true	
AddressLine2	false	String	100	true	
GeographyKey	false	int	10	false	
CloseReason	false	String	20	true	
EmployeeCount	false	Integer	10	true	
SellingAreaSize	false	Double	22	true	
LastRemodelDate	false	java.util.Date	19	true	

Original Function Parameters: Component tMysqlInput

	UNIQUE NAME	tMysqlInput_4	INPUT(S)	none	
	LABEL	TABLE	OUTPUT(S)	tMap_2	

Component Parameters:	
Properties	Values
Unique Name	tMysqlInput_4
Component Name	tMysqlInput
Version	0.102 (ALPHA)
Family	Databases/MySQL
Start	false

Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMysqlInput
Update components	true
IREPORT_PATH	
	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
DB Version	MYSQL_5

Use an existing connection	false
Component List	
Host	"localhost"
Port	"3306"
Database	"retail_dw"
Database Driver	MYSQL
Username	"info7290"
Password	******
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"dimsalesterritory"
Query Type	Built-In
Guess Schema	1111

Query	"SELECT `dimsalesterritory`.`SalesTerritorySK`,		
Specify a data source alias	false		
Data source alias	""		
Mapping	mysql_id		
Additional JDBC Parameters	"noDatetimeStringSync=true"		
Encoding	"ISO-8859-15"		
Enable stream	false		
Trim all the String/Char columns	false		
Trim column	[{TRIM=false, SCHEMA_COLUMN=SalesTerritorySK}, {TRIM=false, SCHEMA_COLUMN=SalesTerritoryKey}, {TRIM=false, SCHEMA_COLUMN=GeographySK}]		

Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for dimsalesterritory:

OUTIONIA TOT ANTIC	<u> </u>	· <u>y</u> ·				
Column	Key	Туре	Length	Precision	Nullable	Comment
SalesTerritorySK	true	int	10		false	
SalesTerritoryKey	false	int	10		false	
GeographySK	false	int	10		false	

Original Function Parameters: Component tMysqlInput

The second secon	UNIQUE NAME	tMysqlInput_5	INPUT(S)	none
	LABEL	TABLE	OUTPUT(S)	tMap_2

Properties	Values
------------	--------

Unique Name	tMysqlInput_5
Component Name	tMysqlInput
Version	0.102 (ALPHA)
Family	Databases/MySQL
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMysqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	

false
2
false
Built-In
MYSQL_5
false
"localhost"
"3306"
"retail_dw"
MYSQL
"info7290"

true
Built-In
"dimgeography"
Built-In

Guess Schema	HH
Query	"SELECT `dimgeography`.`GeographySK`, `dimgeography`.`GeographyKey`, `dimgeography`.`ContinentName`, `dimgeography`.`ContinentCode`, `dimgeography`.`Country`, `dimgeography`.`Country_name`, `dimgeography`.`RegionCountryName`, `dimgeography`.`ISO_3166_numeric`, `dimgeography`.`ISO_3166_alpha_2`, `dimgeography`.`ISO_3166_alpha_3`, `dimgeography`.`Region`, `dimgeography`.`Subdiv_name`, `dimgeography`.`Subdiv_code`, `dimgeography`.`StateProvinceName`, `dimgeography`.`StateProvinceCode`, `dimgeography`.`City`, `dimgeography`.`CityName`, `dimgeography`.`Latitude`, `dimgeography`.`SOR_ID`, `dimgeography`.`SOR_LoadDate`, `dimgeography`.`SOR_UpdateDate`, `dimgeography`.`DI_Job_ID`, `dimgeography`.`DI_Job_ID`, `dimgeography`.`DI_Modified_Date` FROM `dimgeography`."
Specify a data source alias	false
Data source alias	пп
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Enable stream	false

Trim all the String/Char columns	false
Trim column	[{TRIM=false, SCHEMA_COLUMN=GeographySK}, {TRIM=false, SCHEMA_COLUMN=GeographyKey}]
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for dimgeography:

Column	Key	Туре	Length	Precision	Nullable	Comment
GeographySK	true	int	10		false	
GeographyKey	false	int	10		false	

Original Function Parameters: Component tMysqlInput

UNIQUE NAME	tMysqlInput_6	INPUT(S)	none
LABEL	TABLE	OUTPUT(S)	tMap_2

Component i arameters.	
Properties	Values
Unique Name	tMysqlInput_6
Component Name	tMysqlInput
Version	0.102 (ALPHA)
Family	Databases/MySQL
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMysqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
DB Version	MYSQL_5
Use an existing connection	false
Component List	
Host	"localhost"
Port	"3306"
Database	"retail_dw"
Database Driver	MYSQL
Username	"info7290"
Password	******
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In

Table Name	"dimstore"
Query Type	Built-In
Guess Schema	пп
Query	"SELECT `dimstore`.`StoreSK`,
Specify a data source alias	false
Data source alias	н
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Enable stream	false

Trim all the String/Char columns	false
Trim column	[{TRIM=false, SCHEMA_COLUMN=StoreSK}, {TRIM=false, SCHEMA_COLUMN=StoreID}, {TRIM=false, SCHEMA_COLUMN=StoreKey}, {TRIM=false, SCHEMA_COLUMN=SalesTerritorySK}, {TRIM=false, SCHEMA_COLUMN=StoreManager}, {TRIM=false, SCHEMA_COLUMN=StoreType}, {TRIM=false, SCHEMA_COLUMN=StoreName}]
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for dimstore:

ochema for dim	31010.					
Column	Key	Туре	Length	Precision	Nullable	Comment
StoreSK	true	int	10		false	
StoreID	false	int	10		false	
StoreKey	false	int	10		false	
SalesTerritorySK	false	Integer	10		true	

StoreManager	false	Integer	10	true	
StoreType	false	String	15	true	
StoreName	false	String	100	false	

Original Function Parameters: Component tMysqlInput

The second second	UNIQUE NAME	tMysqlInput_7	INPUT(S)	none	
	LABEL	TABLE	OUTPUT(S)	tMap_3	

Component Parameters:		
Properties	Values	
Unique Name	tMysqlInput_7	
Component Name	tMysqlInput	
Version	0.102 (ALPHA)	
Family	Databases/MySQL	
Start	false	
Startable	true	
SUBTREE_START	false	
END_OF_FLOW	false	
Activate	true	

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMysqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
DB Version	MYSQL_5
Use an existing connection	false
Component List	
Host	"localhost"
Port	"3306"

Database	"retail_dw"
Database Driver	MYSQL
Username	"info7290"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"dimstore"
Query Type	Built-In
Guess Schema	пп
Query	"SELECT `dimstore`.`StoreSK`,

Specify a data source alias	false
Data source alias	пп
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Enable stream	false
Trim all the String/Char columns	false
Trim column	[{TRIM=false, SCHEMA_COLUMN=StoreSK}, {TRIM=false, SCHEMA_COLUMN=StoreID}, {TRIM=false, SCHEMA_COLUMN=StoreKey}, {TRIM=false, SCHEMA_COLUMN=StoreType}, {TRIM=false, SCHEMA_COLUMN=StoreName}]
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for dimstore:

Column	Key	Туре	Length	Precision	Nullable	Comment
StoreSK	true	int	10		false	
StoreID	false	int	10		false	
StoreKey	false	int	10		false	
StoreType	false	String	15		true	
StoreName	false	String	100		false	

Original Function Parameters: Component tMysqlInput

UNIQUE NAME	tMysqlInput_8	INPUT(S)	none
LABEL	TABLE	OUTPUT(S)	tMap_3

Component Farameters.	
Properties	Values
Unique Name	tMysqlInput_8
Component Name	tMysqlInput
Version	0.102 (ALPHA)
Family	Databases/MySQL
Start	false
Startable	true

false
false
true
false
false
org.talend.help.tMysqlInput
true
C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
false
2
false
Built-In
MYSQL_5
false

Component List		
Host	"localhost"	
Port	"3306"	
Database	"retail_dw"	
Database Driver	MYSQL	
Username	"info7290"	
Password	*****	
REPOSITORY_ALLOW_AUTO_SWITCHtrue		
Schema	Built-In	
Table Name	"dimsalesterritory"	
Query Type	Built-In	
Guess Schema	пп	

Query	"SELECT `dimsalesterritory`.` SalesTerritorySK`, `dimsalesterritory`.` SalesTerritoryKey`, `dimsalesterritory`.` GeographySK`, `dimsalesterritory`.` SalesTerritoryLabel`, `dimsalesterritory`.` SalesTerritoryName`, `dimsalesterritory`.` SalesTerritoryRegion`, `dimsalesterritory`.` SalesTerritoryCountry`, `dimsalesterritory`.` SalesTerritoryGroup`, `dimsalesterritory`.` SalesTerritoryLevel`, `dimsalesterritory`.` SalesTerritoryManager`, `dimsalesterritory`.` StartDate`, `dimsalesterritory`.` Status`, `dimsalesterritory`.` SOR_ID`, `dimsalesterritory`.` SOR_LoadDate`, `dimsalesterritory`.` SOR_UpdateDate`, `dimsalesterritory`.` DI_Job_ID`, `dimsalesterritory`.` DI_Job_ID`, `dimsalesterritory`.` DI_Create_Date`, `dimsalesterritory`.` DI_Modified_Date` FROM `dimsalesterritory`."
Specify a data source alias	false
Data source alias	""
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Enable stream	false
Trim all the String/Char columns	false
Trim column	[{TRIM=false, SCHEMA_COLUMN=SalesTerritorySK}, {TRIM=false, SCHEMA_COLUMN=SalesTerritoryKey}, {TRIM=false, SCHEMA_COLUMN=GeographySK}]

Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for dimsalesterritory:

Odinoma ioi amine		<u> </u>				
Column	Key	Туре	Length	Precision	Nullable	Comment
SalesTerritorySK	true	int	10		false	
SalesTerritoryKey	false	int	10		false	
GeographySK	false	int	10		false	

Original Function Parameters: Component tMysqlInput

The second secon	UNIQUE NAME	tMysqlInput_9	INPUT(S)	none
	LABEL	TABLE	OUTPUT(S)	tMap_3

Properties	Values
------------	--------

Unique Name	tMysqlInput_9
Component Name	tMysqlInput
Version	0.102 (ALPHA)
Family	Databases/MySQL
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMysqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	

false
2
false
Built-In
MYSQL_5
false
"localhost"
"3306"
"retail_dw"
MYSQL
"info7290"

true
Built-In
"dimgeography"
Built-In

Guess Schema	HH
Query	"SELECT `dimgeography`.`GeographySK`, `dimgeography`.`GeographyKey`, `dimgeography`.`ContinentName`, `dimgeography`.`ContinentCode`, `dimgeography`.`Country`, `dimgeography`.`Country_name`, `dimgeography`.`RegionCountryName`, `dimgeography`.`ISO_3166_numeric`, `dimgeography`.`ISO_3166_alpha_2`, `dimgeography`.`ISO_3166_alpha_3`, `dimgeography`.`Region`, `dimgeography`.`Subdiv_name`, `dimgeography`.`Subdiv_code`, `dimgeography`.`StateProvinceName`, `dimgeography`.`StateProvinceCode`, `dimgeography`.`City`, `dimgeography`.`CityName`, `dimgeography`.`Latitude`, `dimgeography`.`SOR_ID`, `dimgeography`.`SOR_LoadDate`, `dimgeography`.`SOR_UpdateDate`, `dimgeography`.`DI_Job_ID`, `dimgeography`.`DI_Job_ID`, `dimgeography`.`DI_Modified_Date` FROM `dimgeography`."
Specify a data source alias	false
Data source alias	пп
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Enable stream	false

Trim all the String/Char columns	false
Trim column	[{TRIM=false, SCHEMA_COLUMN=GeographySK}, {TRIM=false, SCHEMA_COLUMN=GeographyKey}, {TRIM=false, SCHEMA_COLUMN=GeographyType}]
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for dimgeography:

Column	Key	Туре	Length	Precision	Nullable	Comment
GeographySK	true	int	10		false	
GeographyKey	false	int	10		false	
GeographyType	false	String	50		false	

Original Function Parameters: Component tMysqlOutput

	UNIQUE NAME	tMysqlOutput_1		tMap_1 , tMysqlInput_2, tMysqlInput_1	
	LABEL	TABLE	OUTPUT(S)	tMysqlInput_3	

Component Parameters:			
Properties	Values		
Unique Name	tMysqlOutput_1		
Component Name	tMysqlOutput		
Version	0.102 (ALPHA)		
Family	Databases/MySQL		
Startable	false		
SUBTREE_START	false		
END_OF_FLOW	true		
Activate	true		
DUMMY	false		
tStatCatcher Statistics	false		
Help	org.talend.help.tMysqlOutput		
Update components	true		
IREPORT_PATH			

JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
DB Version	MYSQL_5
Use an existing connection	false
Component List	
Database Driver	MYSQL
Host	"localhost"
Port	"3306"
Database	"retail_dw"
Username	"info7290"
Password	******
Table	"dimstore"

Action on table	TRUNCATE
Action on data	INSERT
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	пп
Die on error	false
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Extend Insert	true
Number of rows per insert	100
Use Batch Size	true
Batch Size	10000
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	

false
[{UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreID}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreKey}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=SalesTerritorySK}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreManager}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreType}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreName}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATE_KEY=false, DELETE_KEY=false, SCHEMA_COLUMN=StoreName}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATE_KEY=false, UPDATE_KEY=f
UPDATE_KET=laise, DELETE_KET=laise, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreDescription}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=Status},
{UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=OpenDate}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=CloseDate},
{UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=EntityKey}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=ZipCode}, {UPDATE_KEY=false, DELETE_KEY=false, }
UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=ZipCodeExtension}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StorePhone}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreFax}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATE_KEY=false, DELETE_KEY=false, }
UPDATABLE=true, INSERTABLE=true,

Use field options

Field options

SCHEMA COLUMN=AddressLine1}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=AddressLine2}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=GeographySK}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=CloseReason). {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=EmployeeCount}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true. INSERTABLE=true. SCHEMA_COLUMN=SellingAreaSize}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=LastRemodelDate). {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=SOR_ID}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=SOR LoadDate}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=SOR_UpdateDate}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=DI Job ID}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=DI Create Date \,.

	{UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=DI_Modified_Date}]
Use Hint Options	false
Hint Options	
Enable debug mode	false
Use duplicate key update mode insert	false
	П
Support null in "SQL WHERE" statement	false
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for dimstore :

Column	Key	Туре	Length	Precision	Nullable	Comment
StoreID	false	int	10		false	

		I			
StoreKey	true	int	10	false	
SalesTerritorySK	false	Integer	10	true	
StoreManager	false	Integer	10	true	
StoreType	false	String	15	true	
StoreName	false	String	100	false	
StoreDescription	false	String	300	false	
Status	false	String	20	false	
OpenDate	false	java.util.Date	10	false	
CloseDate	false	java.util.Date	10	true	
EntityKey	false	Integer	10	true	
ZipCode	false	String	20	true	
ZipCodeExtension	false	String	10	true	
StorePhone	false	String	15	true	
StoreFax	false	String	14	true	
AddressLine1	false	String	100	true	
AddressLine2	false	String	100	true	
GeographySK	false	int	10	 false	

CloseReason	false	String	20	true	
EmployeeCount	false	Integer	10	true	
SellingAreaSize	false	Double	22	true	
LastRemodelDate	false	java.util.Date	19	true	
SOR_ID	false	int	10	false	
SOR_LoadDate	false	java.util.Date	19	true	
SOR_UpdateDate	false	java.util.Date	19	true	
DI_Job_ID	false	String	20	false	
DI_Create_Date	false	java.util.Date	19	false	
DI_Modified_Date	false	java.util.Date	19	false	

Original Function Parameters: Component tMysqlOutput

4 111	UNIQUE NAME	tMysqlOutput_2	INPUT(S)	tMap_2 , tMysqlInput_5, tMysqlInput_4, tMysqlInput_6
	LABEL	TABLE	OUTPUT(S)	tOracleInput_1

Component i arameters.	
Properties	Values
Unique Name	tMysqlOutput_2

tMysqlOutput
0.102 (ALPHA)
Databases/MySQL
false
false
true
true
false
false
org.talend.help.tMysqlOutput
true
C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
false
2

	false
Property Type	Built-In
DB Version	MYSQL_5
Use an existing connection	false
Component List	
Database Driver	MYSQL
Host	"localhost"
Port	"3306"
Database	"retail_dw"
Username	"info7290"
Password	*****
Table	"dimstore"
Action on table	NONE
Action on data	INSERT
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In

Specify a data source alias	false
Data source alias	1111
Die on error	false
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Extend Insert	true
Number of rows per insert	100
Use Batch Size	true
Batch Size	10000
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	O
Use field options	false
	[{UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreID}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreKey}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=SalesTerritorySK}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreManager},

{UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=StoreType}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=StoreName}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=StoreDescription), {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=Status}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=OpenDate \. {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=CloseDate). **YUPDATE** KEY=false. DELETE KEY=false. UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=EntityKey}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true. INSERTABLE=true. SCHEMA_COLUMN=ZipCode}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=ZipCodeExtension}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StorePhone}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=StoreFax}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=AddressLine1). {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=AddressLine2}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=GeographySK). {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=CloseReason}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=EmployeeCount \}. {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=SellingAreaSize},

Field options

{UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=LastRemodelDate}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=SOR_ID}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=SOR LoadDate}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=SOR_UpdateDate}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=DI Job ID}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=DI_Create_Date},

	{UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=DI_Modified_Date}]
Use Hint Options	false
Hint Options	
Enable debug mode	false
Use duplicate key update mode insert	false
	П
Support null in "SQL WHERE" statement	false
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for dimstore :

Column	Key	Туре	Length	Precision	Nullable	Comment
StoreID	false	int	10		false	

		I			
StoreKey	true	int	10	false	
SalesTerritorySK	false	Integer	10	true	
StoreManager	false	Integer	10	true	
StoreType	false	String	15	true	
StoreName	false	String	100	false	
StoreDescription	false	String	300	false	
Status	false	String	20	false	
OpenDate	false	java.util.Date	10	false	
CloseDate	false	java.util.Date	10	true	
EntityKey	false	Integer	10	true	
ZipCode	false	String	20	true	
ZipCodeExtension	false	String	10	true	
StorePhone	false	String	15	true	
StoreFax	false	String	14	true	
AddressLine1	false	String	100	true	
AddressLine2	false	String	100	true	
GeographySK	false	int	10	 false	

CloseReason	false	String	20	true	
EmployeeCount	false	Integer	10	true	
SellingAreaSize	false	Double	22	true	
LastRemodelDate	false	java.util.Date	19	true	
SOR_ID	false	int	10	false	
SOR_LoadDate	false	java.util.Date	19	true	
SOR_UpdateDate	false	java.util.Date	19	true	
DI_Job_ID	false	String	20	false	
DI_Create_Date	false	java.util.Date	19	false	
DI_Modified_Date	false	java.util.Date	19	false	

Original Function Parameters: Component tMysqlOutput

	UNIQUE NAME	tMysqlOutput_3	INPUT(S)	tMap_3 , tMysqlInput_8, tMysqlInput_9, tMysqlInput_7
	LABEL	TABLE	OUTPUT(S)	tPostgresqlInput_1

Component i arameters.	
Properties	Values
Unique Name	tMysqlOutput_3

tMysqlOutput
0.102 (ALPHA)
Databases/MySQL
false
false
true
true
false
false
org.talend.help.tMysqlOutput
true
C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
false
2

	false
Property Type	Built-In
DB Version	MYSQL_5
Use an existing connection	false
Component List	
Database Driver	MYSQL
Host	"localhost"
Port	"3306"
Database	"retail_dw"
Username	"info7290"
Password	*****
Table	"dimstore"
Action on table	NONE
Action on data	INSERT_OR_UPDATE
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In

Specify a data source alias	false
Data source alias	1111
Die on error	false
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Extend Insert	true
Number of rows per insert	100
Use Batch Size	true
Batch Size	10000
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	O
Use field options	false
	[{UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreID}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreKey}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=SalesTerritorySK}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreManager},

{UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=StoreType}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=StoreName}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=StoreDescription), {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=Status}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=OpenDate \. {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=CloseDate). **YUPDATE** KEY=false. DELETE KEY=false. UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=EntityKey}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true. INSERTABLE=true. SCHEMA_COLUMN=ZipCode}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=ZipCodeExtension}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StorePhone}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=StoreFax}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=AddressLine1). {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=AddressLine2}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=GeographySK). {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=CloseReason}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=EmployeeCount \}. {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=SellingAreaSize},

Field options

{UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=LastRemodelDate}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=SOR_ID}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=SOR LoadDate}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=SOR_UpdateDate}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=DI Job ID}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=DI_Create_Date},

	{UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=DI_Modified_Date}]
Use Hint Options	false
Hint Options	
Enable debug mode	false
Use duplicate key update mode insert	false
	П
Support null in "SQL WHERE" statement	false
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for dimstore :

Column	Key	Туре	Length	Precision	Nullable	Comment
StoreID	false	int	10		false	

		I			
StoreKey	true	int	10	false	
SalesTerritorySK	false	Integer	10	true	
StoreManager	false	Integer	10	true	
StoreType	false	String	15	true	
StoreName	false	String	100	false	
StoreDescription	false	String	300	false	
Status	false	String	20	false	
OpenDate	false	java.util.Date	10	false	
CloseDate	false	java.util.Date	10	true	
EntityKey	false	Integer	10	true	
ZipCode	false	String	20	true	
ZipCodeExtension	false	String	10	true	
StorePhone	false	String	15	true	
StoreFax	false	String	14	true	
AddressLine1	false	String	100	true	
AddressLine2	false	String	100	true	
GeographySK	false	int	10	 false	

CloseReason	false	String	20	true	
EmployeeCount	false	Integer	10	true	
SellingAreaSize	false	Double	22	true	
LastRemodelDate	false	java.util.Date	19	true	
SOR_ID	false	int	10	false	
SOR_LoadDate	false	java.util.Date	19	true	
SOR_UpdateDate	false	java.util.Date	19	true	
DI_Job_ID	false	String	20	false	
DI_Create_Date	false	java.util.Date	19	false	
DI_Modified_Date	false	java.util.Date	19	false	

Original Function Parameters: Component tMysqlOutput

4 111	UNIQUE NAME	tMysqlOutput_4	INPUT(S)	tMap_4 , tMysqlInput_10, tMysqlInput_11, tMysqlInput_12
	LABEL	TABLE	OUTPUT(S)	none

Component i arameters.	
Properties	Values
Unique Name	tMysqlOutput_4

tMysqlOutput
0.102 (ALPHA)
Databases/MySQL
false
false
true
true
false
false
org.talend.help.tMysqlOutput
true
C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
false
2

	false
Property Type	Built-In
DB Version	MYSQL_5
Use an existing connection	false
Component List	
Database Driver	MYSQL
Host	"localhost"
Port	"3306"
Database	"retail_dw"
Username	"info7290"
Password	*****
Table	"dimstore"
Action on table	NONE
Action on data	INSERT
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In

Specify a data source alias	false
Data source alias	1111
Die on error	false
Mapping	mysql_id
Additional JDBC Parameters	"noDatetimeStringSync=true"
Extend Insert	true
Number of rows per insert	100
Use Batch Size	true
Batch Size	10000
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	O
Use field options	false
	[{UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreID}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreKey}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=SalesTerritorySK}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StoreManager},

{UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=StoreType}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=StoreName}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=StoreDescription), {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=Status}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=OpenDate \. {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=CloseDate). **YUPDATE** KEY=false. DELETE KEY=false. UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=EntityKey}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true. INSERTABLE=true. SCHEMA_COLUMN=ZipCode}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=ZipCodeExtension}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=StorePhone}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=StoreFax}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=AddressLine1). {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=AddressLine2}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=GeographySK). {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=CloseReason}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=EmployeeCount \}. {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=SellingAreaSize},

Field options

{UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=LastRemodelDate}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=SOR_ID}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=SOR LoadDate}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=SOR_UpdateDate}, {UPDATE KEY=false, DELETE KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA COLUMN=DI Job ID}, {UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=DI_Create_Date},

	{UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true, SCHEMA_COLUMN=DI_Modified_Date}]
Use Hint Options	false
Hint Options	
Enable debug mode	false
Use duplicate key update mode insert	false
	П
Support null in "SQL WHERE" statement	false
Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for dimstore:

Column	Key	Туре	Length	Precision	Nullable	Comment
StoreID	true	int	10		false	

	1	I			
StoreKey	false	int	10	false	
SalesTerritorySK	false	Integer	10	true	
StoreManager	false	Integer	10	true	
StoreType	false	String	15	true	
StoreName	false	String	100	false	
StoreDescription	false	String	300	false	
Status	false	String	20	false	
OpenDate	false	java.util.Date	10	false	
CloseDate	false	java.util.Date	10	true	
EntityKey	false	Integer	10	true	
ZipCode	false	String	20	true	
ZipCodeExtension	false	String	10	true	
StorePhone	false	String	15	true	
StoreFax	false	String	14	true	
AddressLine1	false	String	100	true	
AddressLine2	false	String	100	true	
GeographySK	false	int	10	false	

CloseReason	false	String	20	true	
EmployeeCount	false	Integer	10	true	
SellingAreaSize	false	Double	22	true	
LastRemodelDate	false	java.util.Date	19	true	
SOR_ID	false	int	10	false	
SOR_LoadDate	false	java.util.Date	19	true	
SOR_UpdateDate	false	java.util.Date	19	true	
DI_Job_ID	false	String	20	false	
DI_Create_Date	false	java.util.Date	19	false	
DI_Modified_Date	false	java.util.Date	19	false	

Original Function Parameters: Component tOracleInput

-	UNIQUE NAME	tOracleInput_1	INPUT(S)	tMysqlOutput_2
	LABEL	TABLE	OUTPUT(S)	tMap_3

Component Parameters:	
Properties	Values
Unique Name	tOracleInput_1
Component Name	tOracleInput

Version	0.102 (ALPHA)
Family	Databases/Oracle
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tOracleInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
Property Type	Built-In
Use an existing connection	false
Component List	
Connection Type	ORACLE_SID
DB Version	ORACLE_12
URL	"localhost"
Host	"localhost"
Database Driver	ORACLE_SID
Port	"1521"
Database	пп
Local Service Name	пп
Oracle schema	пп
Username	"info7290"
Password	******
URL	"jdbc:oracle:oci:/@talend"
REPOSITORY_ALLOW_AUTO_SWITCH	true

Schema	Built-In
Table Name	"DIMSTORE"
Query Type	Built-In
Guess Schema	пп
Query	"SELECT RETAIL_SOR_CAT.DIMSTORE.STOREKEY, RETAIL_SOR_CAT.DIMSTORE.STOREMANAGER, RETAIL_SOR_CAT.DIMSTORE.STORETYPE, RETAIL_SOR_CAT.DIMSTORE.STORENAME, RETAIL_SOR_CAT.DIMSTORE.STOREDESCRIPTION, RETAIL_SOR_CAT.DIMSTORE.STATUS, RETAIL_SOR_CAT.DIMSTORE.OPENDATE, RETAIL_SOR_CAT.DIMSTORE.OPENDATE, RETAIL_SOR_CAT.DIMSTORE.ENTITYKEY, RETAIL_SOR_CAT.DIMSTORE.ENTITYKEY, RETAIL_SOR_CAT.DIMSTORE.ZIPCODE, RETAIL_SOR_CAT.DIMSTORE.ZIPCODEEXTENSION, RETAIL_SOR_CAT.DIMSTORE.STOREPHONE, RETAIL_SOR_CAT.DIMSTORE.STOREPHONE, RETAIL_SOR_CAT.DIMSTORE.ADDRESSLINE1, RETAIL_SOR_CAT.DIMSTORE.ADDRESSLINE2, RETAIL_SOR_CAT.DIMSTORE.CLOSEREASON, RETAIL_SOR_CAT.DIMSTORE.EMPLOYEECOUNT, RETAIL_SOR_CAT.DIMSTORE.SELLINGAREASIZE, RETAIL_SOR_CAT.DIMSTORE.LASTREMODELDATE, RETAIL_SOR_CAT.DIMSTORE.LASTREMODELDATE, RETAIL_SOR_CAT.DIMSTORE.ETLLOADID, RETAIL_SOR_CAT.DIMSTORE.ETLLOADID, RETAIL_SOR_CAT.DIMSTORE.LOADDATE, RETAIL_SOR_CAT.DIMSTORE.LOADDATE, RETAIL_SOR_CAT.DIMSTORE.UPDATEDATE FROM RETAIL_SOR_CAT.DIMSTORE.UPDATEDATE FROM RETAIL_SOR_CAT.DIMSTORE.
Specify a data source alias	false
Data source alias	пп
Mapping	oracle_id
Additional JDBC Parameters	нн

Convert XMLType To Java Type.(just when use extract() return a NODE)	false
Encoding	"ISO-8859-15"
Use cursor	false
Cursor size	1000
Trim all the String/Char columns	false
Trim column	[{TRIM=false, SCHEMA_COLUMN=STOREKEY}, {TRIM=false, SCHEMA_COLUMN=STOREMANAGER}, {TRIM=false, SCHEMA_COLUMN=STORETYPE}, {TRIM=false, SCHEMA_COLUMN=STORENAME}, {TRIM=false, SCHEMA_COLUMN=STOREDESCRIPTION}, {TRIM=false, SCHEMA_COLUMN=STATUS}, {TRIM=false, SCHEMA_COLUMN=OPENDATE}, {TRIM=false, SCHEMA_COLUMN=CLOSEDATE}, {TRIM=false, SCHEMA_COLUMN=ENTITYKEY}, {TRIM=false, SCHEMA_COLUMN=ZIPCODE}, {TRIM=false, SCHEMA_COLUMN=STOREPHONE}, {TRIM=false, SCHEMA_COLUMN=STOREPHONE}, {TRIM=false, SCHEMA_COLUMN=ADDRESSLINE1}, {TRIM=false, SCHEMA_COLUMN=ADDRESSLINE2}, {TRIM=false, SCHEMA_COLUMN=CLOSEREASON}, {TRIM=false,
No null values	false

Label format	TABLE
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for DIMSTORE :

Column	Key	Туре	Length	Precision	Nullable	Comment
STOREKEY	true	int	38		false	
STOREMANAGER	false	Integer	38		true	
STORETYPE	false	String	15		true	
STORENAME	false	String	100		false	
STOREDESCRIPTION	false	String	300		false	
STATUS	false	String	20		false	
OPENDATE	false	java.util.Date	7		false	
CLOSEDATE	false	java.util.Date	7		true	

ENTITYKEY	false	Integer	38	true	
ZIPCODE	false	String	20	true	
ZIPCODEEXTENSION	false	String	10	true	
STOREPHONE	false	String	15	true	
STOREFAX	false	String	14	true	
ADDRESSLINE1	false	String	100	true	
ADDRESSLINE2	false	String	100	true	
CLOSEREASON	false	String	20	true	
EMPLOYEECOUNT	false	Integer	38	true	
SELLINGAREASIZE	false	Double	126	true	
LASTREMODELDATE	false	java.util.Date	7	true	
GEOGRAPHYKEY	false	int	38	false	

Original Function Parameters: Component tPostgresqlInput

UNIQUE NAME	tPostgresqlInput_1	INPUT(S)	tMysqlOutput_3
LABEL	TABLE	OUTPUT(S)	tMap_4

Properties	Values
------------	--------

Unique Name	tPostgresqlInput_1
Component Name	tPostgresqlInput
Version	0.102 (ALPHA)
Family	Databases/PostgreSQL
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPostgresqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Program Files (x86)\Talend-Studio\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
Use an existing connection	false
Component List	
DB Version	PRIOR_TO_V9
Host	"localhost"
Database Driver	POSTGRESQL
Port	"5432"
Database	"retail_sor_as"
Schema	"public"
Username	"info7290"
Password	*****
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"dimstore"

Query Type	Built-In
Guess Schema	1111
Query	"SELECT \"retail_sor_as\".\"public\".\"dimstore\".\"storeid\", \"retail_sor_as\".\"public\".\"dimstore\".\"storekey\", \"retail_sor_as\".\"public\".\"dimstore\".\"storemanager\", \"retail_sor_as\".\"public\".\"dimstore\".\"storetype\", \"retail_sor_as\".\"public\".\"dimstore\".\"storetype\", \"retail_sor_as\".\"public\".\"dimstore\".\"storedescription\", \"retail_sor_as\".\"public\".\"dimstore\".\"storedescription\", \"retail_sor_as\".\"public\".\"dimstore\".\"opendate\", \"retail_sor_as\".\"public\".\"dimstore\".\"closedate\", \"retail_sor_as\".\"public\".\"dimstore\".\"zipcode\", \"retail_sor_as\".\"public\".\"dimstore\".\"zipcodeextension\", \"retail_sor_as\".\"public\".\"dimstore\".\"zipcodeextension\", \"retail_sor_as\".\"public\".\"dimstore\".\"storefax\", \"retail_sor_as\".\"public\".\"dimstore\".\"addressline2\", \"retail_sor_as\".\"public\".\"dimstore\".\"addressline2\", \"retail_sor_as\".\"public\".\"dimstore\".\"addressline2\", \"retail_sor_as\".\"public\".\"dimstore\".\"addressline2\", \"retail_sor_as\".\"public\".\"dimstore\".\"lastremodeldate\", \"retail_sor_as\".\"public\".\"dimstore\".\"lastremodeldate\", \"retail_sor_as\".\"public\".\"dimstore\".\"lastremodeldate\", \"retail_sor_as\".\"public\".\"dimstore\".\"lastremodeldate\", \"retail_sor_as\".\"public\".\"dimstore\".\"lastremodeldate\", \"retail_sor_as\".\"public\".\"dimstore\".\"laddres\", \"r
Specify a data source alias	false
Data source alias	1111
Mapping	postgres_id
Encoding	"ISO-8859-15"
Use cursor	false
Cursor size	1000

Trim all the String/Char columns	false				
Trim column	[{TRIM=false, SCHEMA_COLUMN=storeid}, {TRIM=false, SCHEMA_COLUMN=storekey}, {TRIM=false, SCHEMA_COLUMN=storemanager}, {TRIM=false, SCHEMA_COLUMN=storetype}, {TRIM=false, SCHEMA_COLUMN=storename}, {TRIM=false, SCHEMA_COLUMN=storedescription}, {TRIM=false, SCHEMA_COLUMN=status}, {TRIM=false, SCHEMA_COLUMN=opendate}, {TRIM=false, SCHEMA_COLUMN=closedate}, {TRIM=false, SCHEMA_COLUMN=entitykey}, {TRIM=false, SCHEMA_COLUMN=zipcode}, {TRIM=false, SCHEMA_COLUMN=zipcodeextension}, {TRIM=false, SCHEMA_COLUMN=storephone}, {TRIM=false, SCHEMA_COLUMN=storefax}, {TRIM=false, SCHEMA_COLUMN=addressline1}, {TRIM=false, SCHEMA_COLUMN=addressline2}, {TRIM=false, SCHEMA_COLUMN=closereason}, {TRIM=false, SCHEMA_COLUMN=employeecount}, {TRIM=false, SCHEMA_COLUMN=employeecount}, {TRIM=false, SCHEMA_COLUMN=sellingareasize}, {TRIM=false, SCHEMA_COLUMN=sellingareasize}, {TRIM=false, SCHEMA_COLUMN=lastremodeldate}, {TRIM=false, SCHEMA_COLUMN=lastremodeldate}, {TRIM=false, SCHEMA_COLUMN=geographykey}]				
Label format	TABLE				
Hint format	UNIQUE_NAME COMMENT				
Connection format	row				
Show Information	false				
Comment					
Use an existing validation rule	false				
Validation Rule Type					

Schema for dimstore :

Column	Key	Туре	Length	Precision	Nullable	Comment	

	T				
storeid	true	int	10	false	
storekey	false	int	10	false	
storemanager	false	Integer	10	true	
storetype	false	String	15	true	
storename	false	String	100	false	
storedescription	false	String	300	false	
status	false	String	20	false	
opendate	false	java.util.Date	13	false	
closedate	false	java.util.Date	13	true	
entitykey	false	Integer	10	true	
zipcode	false	String	20	true	
zipcodeextension	false	String	10	true	
storephone	false	String	15	true	
storefax	false	String	14	true	
addressline1	false	String	100	true	
addressline2	false	String	100	true	
closereason	false	String	20	true	

employeecount	false	Integer	10		true	
sellingareasize	false	Double	17	17	true	
lastremodeldate	false	java.util.Date	13		true	
geographykey	false	int	10		false	

Original Function Parameters: Component CNTL_Job_Tracking_Stats_ROOT


7	UNIQUE NAME	CNTL_Job_Tracking_Stats_ROOT_1	INPUT(S)	none
	LABEL	UNIQUE_NAME	OUTPUT(S)	none

Component Parameters:

Properties	Values	
Version	Latest	
Show Information	false	
Comment		

Component tMap

 UNIQUE NAME	tMap_1	INPUT(S)	tMap_1 , tMysqlInput_2, tMysqlInput_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tMysqlOutput_1

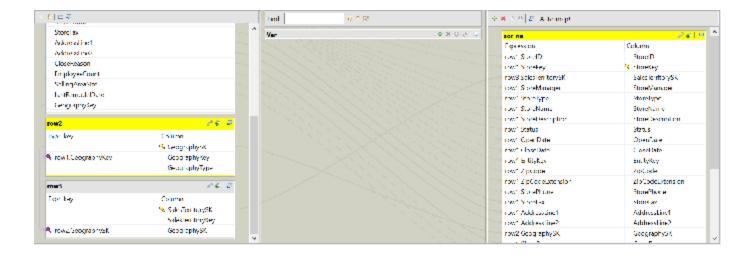

Component Parameters:

oomponent i arameters.	
Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	200000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):

Mapper table Properties (row1):

mapper table i reperties (i sur).				
Properties	Values			
Name	row1			
Matching-mode	UNIQUE_MATCH			
isMinimized	false			
isReject	false			
isRejectInnerJoin	false			
isInnerJoin	false			
expressionFilter	null			

Metadata Table Entries(row1):

Metadata Table Lift	1100(10111).		
Name	Туре	Expression	isNullable
StoreID	int		false
StoreKey	int		false
StoreManager	Integer		true
StoreType	String		true
StoreName	String		false
StoreDescription	String		false
Status	String		false

OpenDate	java.util.Date	false
CloseDate	java.util.Date	true
EntityKey	Integer	true
ZipCode	String	true
ZipCodeExtension	String	true
StorePhone	String	true
StoreFax	String	true
AddressLine1	String	true
AddressLine2	String	true
CloseReason	String	true
EmployeeCount	Integer	true
SellingAreaSize	Double	true
LastRemodelDate	java.util.Date	true
GeographyKey	int	 false

Constraint Table Entries(row1):

Name	Туре	Expression	isNullable	

Mapper table Properties(row2):

Properties	Values
Name	row2
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row2):

Name	Туре	Expression	isNullable
GeographySK	int		false
GeographyKey	int	row1.GeographyKey	false
GeographyType	String		false

Constraint Table Entries(row2):

			<i>J</i> -	
Name	•	Туре	Expression	isNullable

Mapper table Properties (row3):

mapper table i repertie	
Properties	Values
Name	row3
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row3):

Name	Туре	Expression	isNullable
SalesTerritorySK	int		false
SalesTerritoryKey	int		false
GeographySK	int	row2.GeographySK	false

Constraint Table Entries(row3):

Name	Туре	Expression	isNullable	

Mapper table for tMap_1 (output):
Mapper table Properties(sor_na):

Properties	Values
Name	sor_na
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(sor_na):

	motadata Table Entrico (601_11a).			
Name	Туре	Expression	isNullable	
StoreID	int	row1.StoreID	false	
StoreKey	int	row1.StoreKey	false	
SalesTerritorySK	Integer	row3.SalesTerritorySK	true	
StoreManager	Integer	row1.StoreManager	true	
StoreType	String	row1.StoreType	true	
StoreName	String	row1.StoreName	false	
StoreDescription	String	row1.StoreDescription	false	

	1		
Status	String	row1.Status	false
OpenDate	java.util.Date	row1.OpenDate	false
CloseDate	java.util.Date	row1.CloseDate	true
EntityKey	Integer	row1.EntityKey	true
ZipCode	String	row1.ZipCode	true
ZipCodeExtension	String	row1.ZipCodeExtension	true
StorePhone	String	row1.StorePhone	true
StoreFax	String	row1.StoreFax	true
AddressLine1	String	row1.AddressLine1	true
AddressLine2	String	row1.AddressLine2	true
GeographySK	int	row2.GeographySK	false
CloseReason	String	row1.CloseReason	true
EmployeeCount	Integer	row1.EmployeeCount	true
SellingAreaSize	Double	row1.SellingAreaSize	true
LastRemodelDate	java.util.Date	row1.LastRemodelDate	true
SOR_ID	int	1	false
SOR_LoadDate	java.util.Date	TalendDate.getCurrentDate()	true

SOR_UpdateDate	java.util.Date	TalendDate.getCurrentDate()	true
DI_Job_ID	String	context.getProperty("vRootPID")	false
DI_Create_Date	java.util.Date	TalendDate.getCurrentDate()	false
DI_Modified_Date	java.util.Date	TalendDate.getCurrentDate()	false

Constraint Table Entries(sor_na):

Name T	Гуре	Expression	isNullable
--------	------	------------	------------

Mapper table for tMap_1 (var):

Mapper table Properties (Var):

5(vai).
Values
Var
true
false
false
false
null

Metadata Table Entries(Var):


me	Туре	Expression	isNullable
----	------	------------	------------

Constraint Table Entries(Var):

Name	Туре	Expression	isNullable

Component tMap

 UNIQUE NAME	tMap_2	INPUT(S)	tMap_2 , tMysqlInput_5, tMysqlInput_4, tMysqlInput_6
LABEL	UNIQUE_NAME	OUTPUT(S)	tMysqlOutput_2

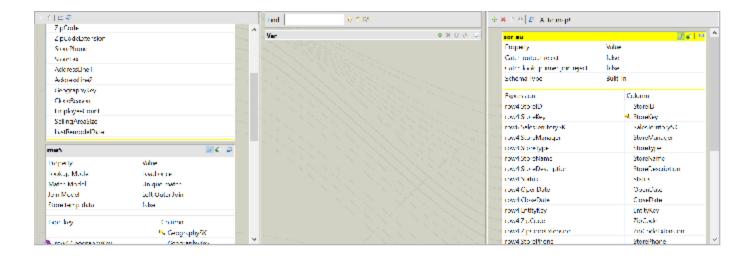

Component Parameters:

Component a arameterer	Component Farameters.		
Properties	Values		
tStatCatcher Statistics	false		
Enable parallel execution	false		
Mapping links display as:	AUTO		
Temp data directory path:			
Max buffer size (nb of rows):	2000000		
Ignore trailing zeros for BigDecimal	false		
Show Information	false		
Comment			
Use an existing validation rule	false		

Mapper table Properties (row4):

mapper table Properties (10W4).		
Properties	Values	
Name	row4	
Matching-mode	UNIQUE_MATCH	
isMinimized	false	
isReject	false	
isRejectInnerJoin	false	
isInnerJoin	false	
expressionFilter	null	

Metadata Table Entries(row4):

MICIAUAIA TADIC LIII	1100(1011+).		
Name	Туре	Expression	isNullable
StoreID	int		false
StoreKey	int		false
EntityKey	Integer		true
StoreManager	Integer		true
StoreType	String		true
StoreName	String		false
StoreDescription	String		false

Status	String	false
OpenDate	java.util.Date	false
CloseDate	java.util.Date	true
ZipCode	String	true
ZipCodeExtension	String	true
StorePhone	String	true
StoreFax	String	true
AddressLine1	String	true
AddressLine2	String	true
GeographyKey	int	false
CloseReason	String	true
EmployeeCount	Integer	true
SellingAreaSize	Double	true
LastRemodelDate	java.util.Date	true

Constraint Table Entries(row4):

Name	Туре	Expression	isNullable	

Mapper table Properties (row5):

mapper table i reperties (rewe):		
Properties	Values	
Name	row5	
Matching-mode	UNIQUE_MATCH	
isMinimized	false	
isReject	false	
isRejectInnerJoin	false	
isInnerJoin	false	
expressionFilter	null	

Metadata Table Entries(row5):

Name	Туре	Expression	isNullable
GeographySK	int		false
GeographyKey	int	row4.GeographyKey	false

Constraint Table Entries(row5):

Name	Туре	Expression	isNullable

Mapper table Properties (row6):

mapper table i roperties (rowo).		
Properties	Values	
Name	row6	
Matching-mode	UNIQUE_MATCH	
isMinimized	false	
isReject	false	
isRejectInnerJoin	false	
isInnerJoin	false	
expressionFilter	null	

Metadata Table Entries(row6):

Name	Туре	Expression	isNullable
SalesTerritorySK	int		false
SalesTerritoryKey	int		false
GeographySK	int	row5.GeographySK	false

Constraint Table Entries(row6):

Name	Туре	Expression	isNullable

Mapper table Properties (row7):

Properties	Values
Name	row7
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row7):

Motadata Table Elit	100(10111 /1		
Name	Туре	Expression	isNullable
StoreSK	int		false
StoreID	int		false
StoreKey	int		false
SalesTerritorySK	Integer		true
StoreManager	Integer		true
StoreType	String	row4.StoreType	true
StoreName	String		false

Constraint Table Entries(row7):

Туре	Expression	isNullable	
------	------------	------------	--

Mapper table for tMap_2 (output):
Mapper table Properties(sor eu):

Mapper table Properties(sor_eu):		
Properties	Values	
Name	sor_eu	
Matching-mode		
isMinimized	false	
isReject	false	
isRejectInnerJoin	false	
isInnerJoin	false	
expressionFilter	null	

Metadata Table Entries(sor_eu):

motadata rabio =			
Name	Туре	Expression	isNullable
StoreID	int	row4.StoreID	false
StoreKey	int	row4.StoreKey	false
SalesTerritorySK	Integer	row6.SalesTerritorySK	true
StoreManager	Integer	row4.StoreManager	true
StoreType	String	row4.StoreType	true
StoreName	String	row4.StoreName	false

StoreDescription	String	row4.StoreDescription	false
Status	String	row4.Status	false
OpenDate	java.util.Date	row4.OpenDate	false
CloseDate	java.util.Date	row4.CloseDate	true
EntityKey	Integer	row4.EntityKey	true
ZipCode	String	row4.ZipCode	true
ZipCodeExtension	String	row4.ZipCodeExtension	true
StorePhone	String	row4.StorePhone	true
StoreFax	String	row4.StoreFax	true
AddressLine1	String	row4.AddressLine1	true
AddressLine2	String	row4.AddressLine2	true
GeographySK	int	row5.GeographySK	false
CloseReason	String	row4.CloseReason	true
EmployeeCount	Integer	row4.EmployeeCount	true
SellingAreaSize	Double	row4.SellingAreaSize	true
LastRemodelDate	java.util.Date	row4.LastRemodelDate	true
SOR_ID	int	32	false

SOR_LoadDate	java.util.Date	TalendDate.getCurrentDate()	true
SOR_UpdateDate	java.util.Date	TalendDate.getCurrentDate()	true
DI_Job_ID	String	context.getProperty("vRootPID")	false
DI_Create_Date	java.util.Date	TalendDate.getCurrentDate()	false
DI_Modified_Date	java.util.Date	TalendDate.getCurrentDate()	false

Constraint Table Entries(sor_eu):

Name Type Expression isNullable

Mapper table for tMap_2 (var):

Mapper table Properties (Var):

mapper table i Toperties (vai).		
Values		
Var		
true		
false		
false		
false		
null		

Metadata Table Entries(Var):


me	Туре	Expression	isNullable
----	------	------------	------------

Constraint Table Entries(Var):

Name Type Expre	ssion isNullable
-----------------	------------------

Component tMap

	UNIQUE NAME	tMap_3	INPUT(S)	tMap_3 , tMysqlInput_8, tMysqlInput_9, tMysqlInput_7
	LABEL	UNIQUE_NAME	OUTPUT(S)	tMysqlOutput_3

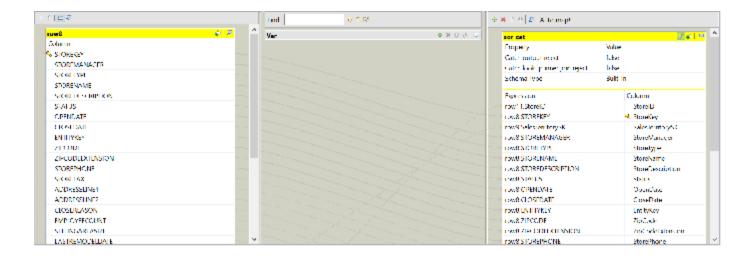

Component Parameters:

Component a arameterer	Component Farameters.		
Properties	Values		
tStatCatcher Statistics	false		
Enable parallel execution	false		
Mapping links display as:	AUTO		
Temp data directory path:			
Max buffer size (nb of rows):	2000000		
Ignore trailing zeros for BigDecimal	false		
Show Information	false		
Comment			
Use an existing validation rule	false		

Mapper table Properties (row8):

ppor tanoro i roportir	mapper table reperties (reme).			
Properties	Values			
Name	row8			
Matching-mode	UNIQUE_MATCH			
isMinimized	false			
isReject	false			
isRejectInnerJoin	false			
isInnerJoin	false			
expressionFilter	null			

Metadata Table Entries(row8):

Mictadata Table Entire	wetauata Table Entries (Towo).			
Name	Туре	Expression	isNullable	
STOREKEY	int		false	
STOREMANAGER	Integer		true	
STORETYPE	String		true	
STORENAME	String		false	
STOREDESCRIPTION	String		false	
STATUS	String		false	
OPENDATE	java.util.Date		false	

CLOSEDATE	java.util.Date	true
ENTITYKEY	Integer	true
ZIPCODE	String	true
ZIPCODEEXTENSION	String	true
STOREPHONE	String	true
STOREFAX	String	true
ADDRESSLINE1	String	true
ADDRESSLINE2	String	true
CLOSEREASON	String	true
EMPLOYEECOUNT	Integer	true
SELLINGAREASIZE	Double	true
LASTREMODELDATE	java.util.Date	true
GEOGRAPHYKEY	int	false

Constraint Table Entries(row8):

Name	Туре	E	Expression	isNullable

Mapper table Properties (row9):

mapper table i reperties (i e ii e).			
Properties	Values		
Name	row9		
Matching-mode	ALL_ROWS		
isMinimized	true		
isReject	false		
isRejectInnerJoin	false		
isInnerJoin	false		
expressionFilter	null		

Metadata Table Entries(row9):

Name	Туре	Expression	isNullable
SalesTerritorySK	int		false
SalesTerritoryKey	int		false
GeographySK	int		false

Constraint Table Entries(row9):

Name	Туре	Expression	isNullable

Mapper table Properties (row10):

ppor tanoro i repertus	mapper table i repetite of tentre it			
Properties	Values			
Name	row10			
Matching-mode	UNIQUE_MATCH			
isMinimized	true			
isReject	false			
isRejectInnerJoin	false			
isInnerJoin	false			
expressionFilter	null			

Metadata Table Entries(row10):

Name	Туре	Expression	isNullable
GeographySK	int	row9.GeographySK	false
GeographyKey	int	row8.GEOGRAPHYKEY	false
GeographyType	String		false

Constraint Table Entries(row10):

Name	Туре	Expression	isNullable

Mapper table Properties(row11):

mapper table i topertie	mapper table i roperties (row i i).			
Properties	Values			
Name	row11			
Matching-mode	UNIQUE_MATCH			
isMinimized	false			
isReject	false			
isRejectInnerJoin	false			
isInnerJoin	false			
expressionFilter	null			

Metadata Table Entries(row11):

Name	Туре	Expression	isNullable
StoreSK	int		false
StoreID	int		false
StoreKey	int	row8.STOREKEY	false
StoreType	String		true
StoreName	String		false

Constraint Table Entries (row11):

Name

Mapper table for tMap_3 (output):
Mapper table Properties(sor_cat):

Properties	Values
Name	sor_cat
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(sor_cat):

Name	Туре	Expression	isNullable
StoreID	int	row11.StoreID	false
StoreKey	int	row8.STOREKEY	false
SalesTerritorySK	Integer	row9.SalesTerritorySK	true
StoreManager	Integer	row8.STOREMANAGER	true
StoreType	String	row8.STORETYPE	true
StoreName	String	row8.STORENAME	false
StoreDescription	String	row8.STOREDESCRIPTION	false

1	T		
Status	String	row8.STATUS	false
OpenDate	java.util.Date	row8.OPENDATE	false
CloseDate	java.util.Date	row8.CLOSEDATE	true
EntityKey	Integer	row8.ENTITYKEY	true
ZipCode	String	row8.ZIPCODE	true
ZipCodeExtension	String	row8.ZIPCODEEXTENSION	true
StorePhone	String	row8.STOREPHONE	true
StoreFax	String	row8.STOREFAX	true
AddressLine1	String	row8.ADDRESSLINE1	true
AddressLine2	String	row8.ADDRESSLINE2	true
GeographySK	int	row9.GeographySK	false
CloseReason	String	row8.CLOSEREASON	true
EmployeeCount	Integer	row8.EMPLOYEECOUNT	true
SellingAreaSize	Double	row8.SELLINGAREASIZE	true
LastRemodelDate	java.util.Date	row8.LASTREMODELDATE	true
SOR_ID	int	71	false
SOR_LoadDate	java.util.Date	TalendDate.getCurrentDate()	true

SOR_UpdateDate	java.util.Date	TalendDate.getCurrentDate()	true
DI_Job_ID	String	context.getProperty("vRootPID")	false
DI_Create_Date	java.util.Date	TalendDate.getCurrentDate()	false
DI_Modified_Date	java.util.Date	TalendDate.getCurrentDate()	false

Constraint Table Entries(sor_cat):

Name		Туре	Expression	isNullable
------	--	------	------------	------------

Mapper table for tMap_3 (var):

Mapper table Properties(Var):

mapper table i repetties	5(· · · ·).
Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

me	Туре	Expression	isNullable
----	------	------------	------------

Constraint Table Entries(Var):

Name	Туре	Expression	isNullable

Component tMap

UNIQUE NAME	tMap_4	INPUT(S)	tMap_4 , tMysqlInput_10, tMysqlInput_11, tMysqlInput_12
LABEL	UNIQUE_NAME	OUTPUT(S)	tMysqlOutput_4

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_4 (input):
Mapper table Properties(row12):

Properties	Values
Name	row12
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row12):

Wictadata Table Elit	100(10111111111111111111111111111111111		
Name	Туре	Expression	isNullable
storeid	int		false
storekey	int		false
storemanager	Integer		true
storetype	String		true
storename	String		false
storedescription	String		false
status	String		false

opendate	java.util.Date	false
closedate	java.util.Date	true
entitykey	Integer	true
zipcode	String	true
zipcodeextension	String	true
storephone	String	true
storefax	String	true
addressline1	String	true
addressline2	String	true
closereason	String	true
employeecount	Integer	true
sellingareasize	Double	true
lastremodeldate	java.util.Date	true
geographykey	int	false

Constraint Table Entries(row12):

Name	Туре	Expression	isNullable	

Mapper table Properties(row13):

Properties	Values
Name	row13
Matching-mode	ALL_ROWS
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(row13):

Name	Туре	Expression	isNullable
SalesTerritorySK	int		false
SalesTerritoryKey	int		false
GeographySK	int		false
SalesTerritoryLabel	String		true
SalesTerritoryName	String		false
SalesTerritoryRegion	String		false
SalesTerritoryCountry	String		false
SalesTerritoryGroup	String		true
SalesTerritoryLevel	String		true
SalesTerritoryManager	Integer		true

Constraint Table Entries(row13):

Name	Туре	Expression	isNullable	

Mapper table Properties (row14):

mappor table i reporti	
Properties	Values
Name	row14
Matching-mode	UNIQUE_MATCH
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(row14):

Name	Туре	Expression	isNullable
GeographySK	int	row13.GeographySK	false
GeographyKey	int	row12.geographykey	false

Constraint Table Entries(row14):

Mapper table Properties (row15):

Properties	Values
Name	row15
Matching-mode	UNIQUE_MATCH
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row15):

Motadata Table Ent			
Name	Туре	Expression	isNullable
StoreSK	int		false
StoreID	int		false
StoreKey	int		false
SalesTerritorySK	Integer		true
StoreManager	Integer		true
StoreType	String	row12.storetype	true
StoreName	String		false

Constraint Table Entries(row15):

Туре	Expression	isNullable	
------	------------	------------	--

Mapper table for tMap_4 (output):
Mapper table Properties(sor_as):

mapper table Froperties 501_as).				
Properties	Values			
Name	sor_as			
Matching-mode				
isMinimized	false			
isReject	false			
isRejectInnerJoin	false			
isInnerJoin	false			
expressionFilter	null			

Metadata Table Entries(sor as):

metadata Table Entries 301_a3 j.				
Name	Туре	Expression	isNullable	
StoreID	int	row12.storeid	false	
StoreKey	int	row12.storekey	false	
SalesTerritorySK	Integer	row13.SalesTerritorySK	true	
StoreManager	Integer	row12.storemanager	true	
StoreType	String	row12.storetype	true	
StoreName	String	row12.storename	false	

StoreDescription	String	row12.storedescription	false
Status	String	row12.status	false
OpenDate	java.util.Date	row12.opendate	false
CloseDate	java.util.Date	row12.closedate	true
EntityKey	Integer	row12.entitykey	true
ZipCode	String	row12.zipcode	true
ZipCodeExtension	String	row12.zipcodeextension	true
StorePhone	String	row12.storephone	true
StoreFax	String	row12.storefax	true
AddressLine1	String	row12.addressline1	true
AddressLine2	String	row12.addressline2	true
GeographySK	int	row13.GeographySK	false
CloseReason	String	row12.closereason	true
EmployeeCount	Integer	row12.employeecount	true
SellingAreaSize	Double	row12.sellingareasize	true
LastRemodelDate	java.util.Date	row12.lastremodeldate	true
SOR_ID	int	52	false

SOR_LoadDate	java.util.Date	TalendDate.getCurrentDate()	true
SOR_UpdateDate	java.util.Date	TalendDate.getCurrentDate()	true
DI_Job_ID	String	context.getProperty("vRootPID")	false
DI_Create_Date	java.util.Date	TalendDate.getCurrentDate()	false
DI_Modified_Date	java.util.Date	TalendDate.getCurrentDate()	false

Constraint Table Entries(sor_as):

|--|

Mapper table for tMap_4 (var):

Mapper table Properties(Var):

inapper table i repetites (vai).			
Properties	Values		
Name	Var		
Matching-mode			
isMinimized	true		
isReject	false		
isRejectInnerJoin	false		
isInnerJoin	false		
expressionFilter	null		

Metadata Table Entries(Var):

me	Туре	Expression	isNullable	
----	------	------------	------------	--

Constraint Table Entries(Var):

Name	Туре	Expression	isNullable