

```
import pandas as pd
import numpy as np


import matplotlib.pyplot as plt

from sklearn.tree import DecisionTreeRegressor

#create a random dataset
rng = np.random.RandomState(1)
X = np.sort(5 * rng.rand(80,1), axis=0)
y = np.sin(X).ravel()
y[::5] += 3* (0.5 - rng.rand(16))


#plot the results
plt.figure(num = None, figsize=(7,7), dpi=80, facecolor = '
plt.scatter(X,y, s=20, edgecolor = "red", c= "black", label
plt.xlabel("data")
plt.ylabel("target")
plt.title("Data")
plt.legend()
plt.show()
```



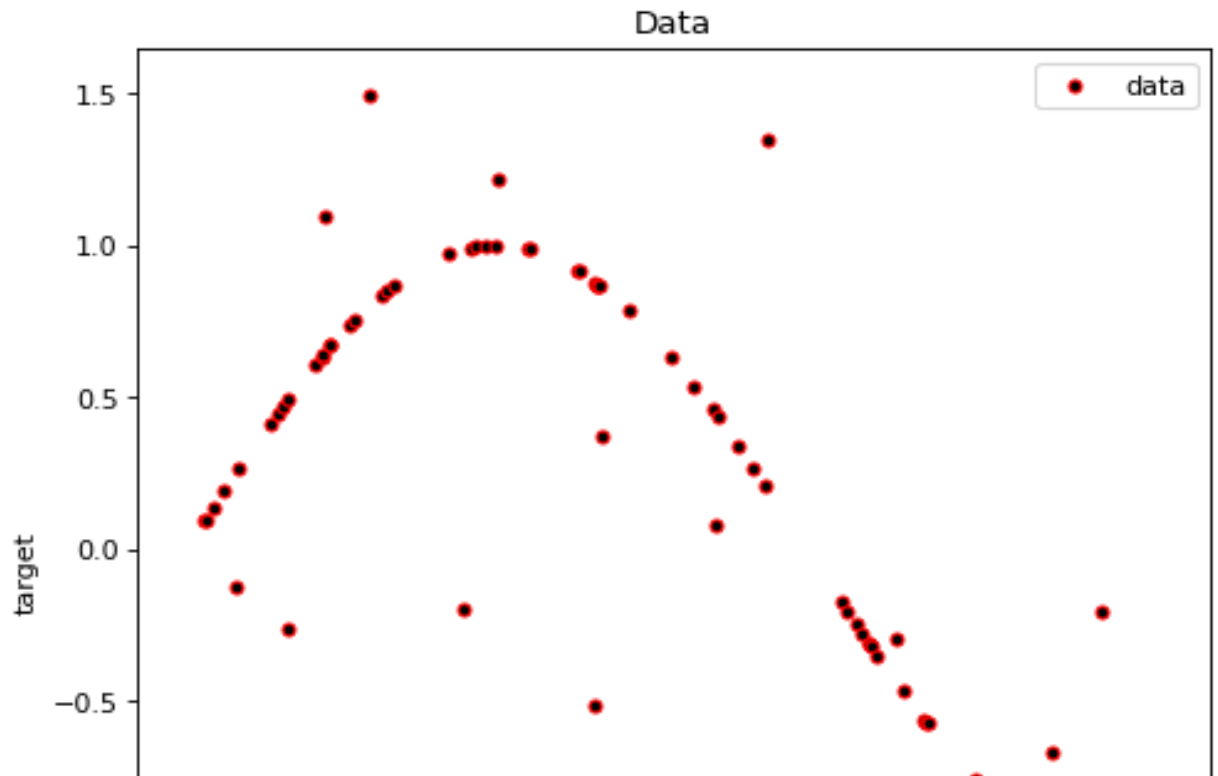

```
from sklearn.model_selection import train_test_split
x_train, x_test, y_train, y_test = train_test_split(X, y)
x_train, x_test, y_train, y_test = train_test_split(X, y, t


#plot the results
plt.figure(num = None, figsize=(7,7), dpi=80, facecolor = '
plt.scatter(X,y, s=20, edgecolor = "red", c= "black", label
plt.plot(x_train, y_train, color = "cornflowerblue", label
plt.xlabel("data")
plt.ylabel("target")
plt.title("Overfitting")
plt.legend()
plt.show()
```

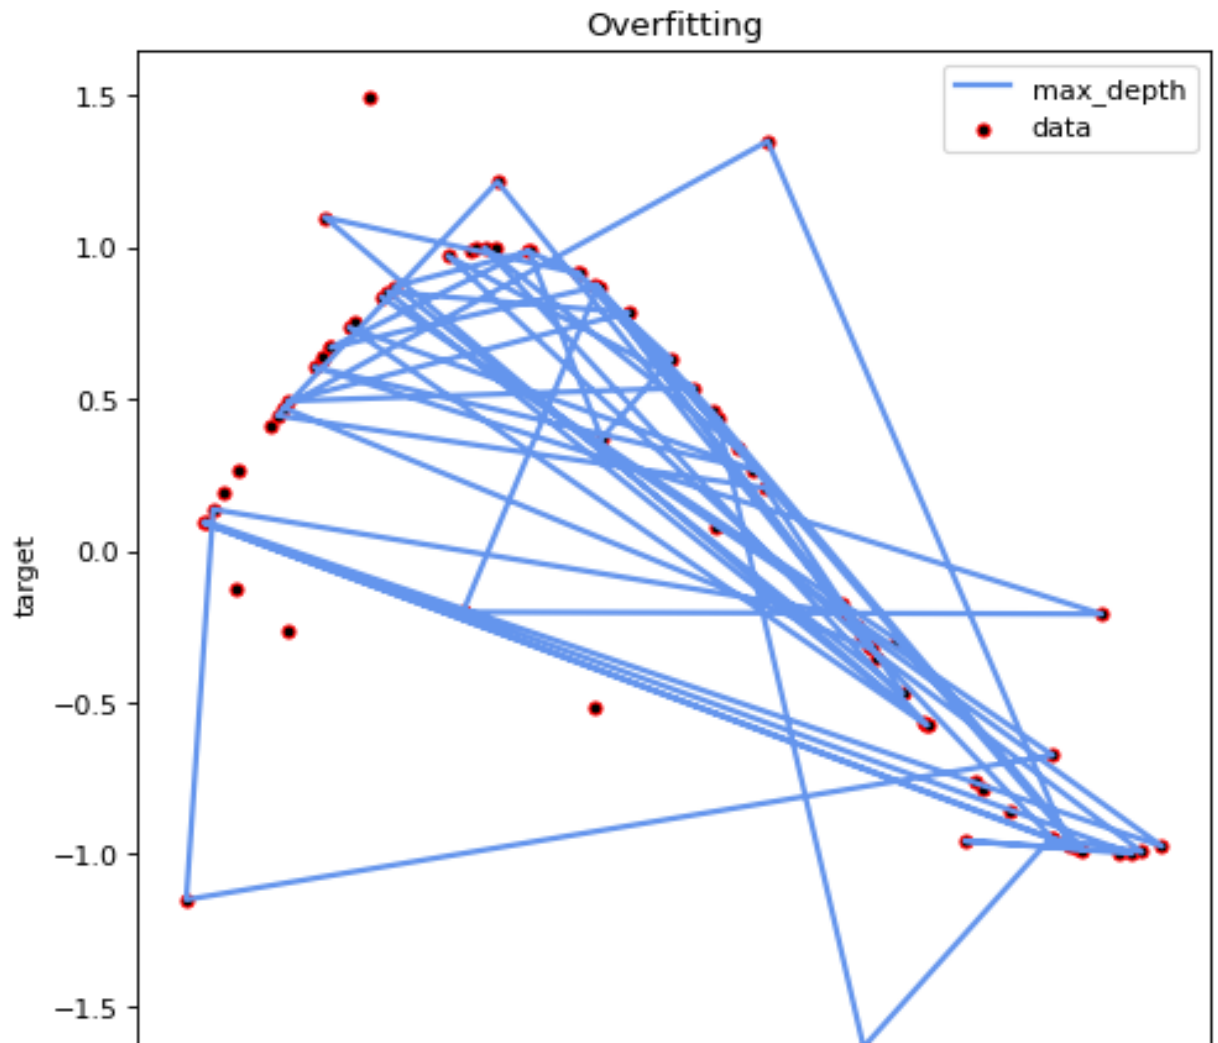

```
clf = DecisionTreeRegressor(max_depth=15)
clf.fit(X,y)
```

```
#predict
y_1 = clf.predict(X)
```

```
#plot the results
plt.figure(num = None, figsize=(7,7), dpi=80, facecolor = '
plt.scatter(X,y, s=20, edgecolor = "red", c= "black", label
plt.plot(X,y_1, color = "cornflowerblue", label = "max_dept
plt.xlabel("data")
plt.ylabel("target")
plt.title("Semi_Rectified_Overfitting_model")
plt.legend()
plt.show()
```

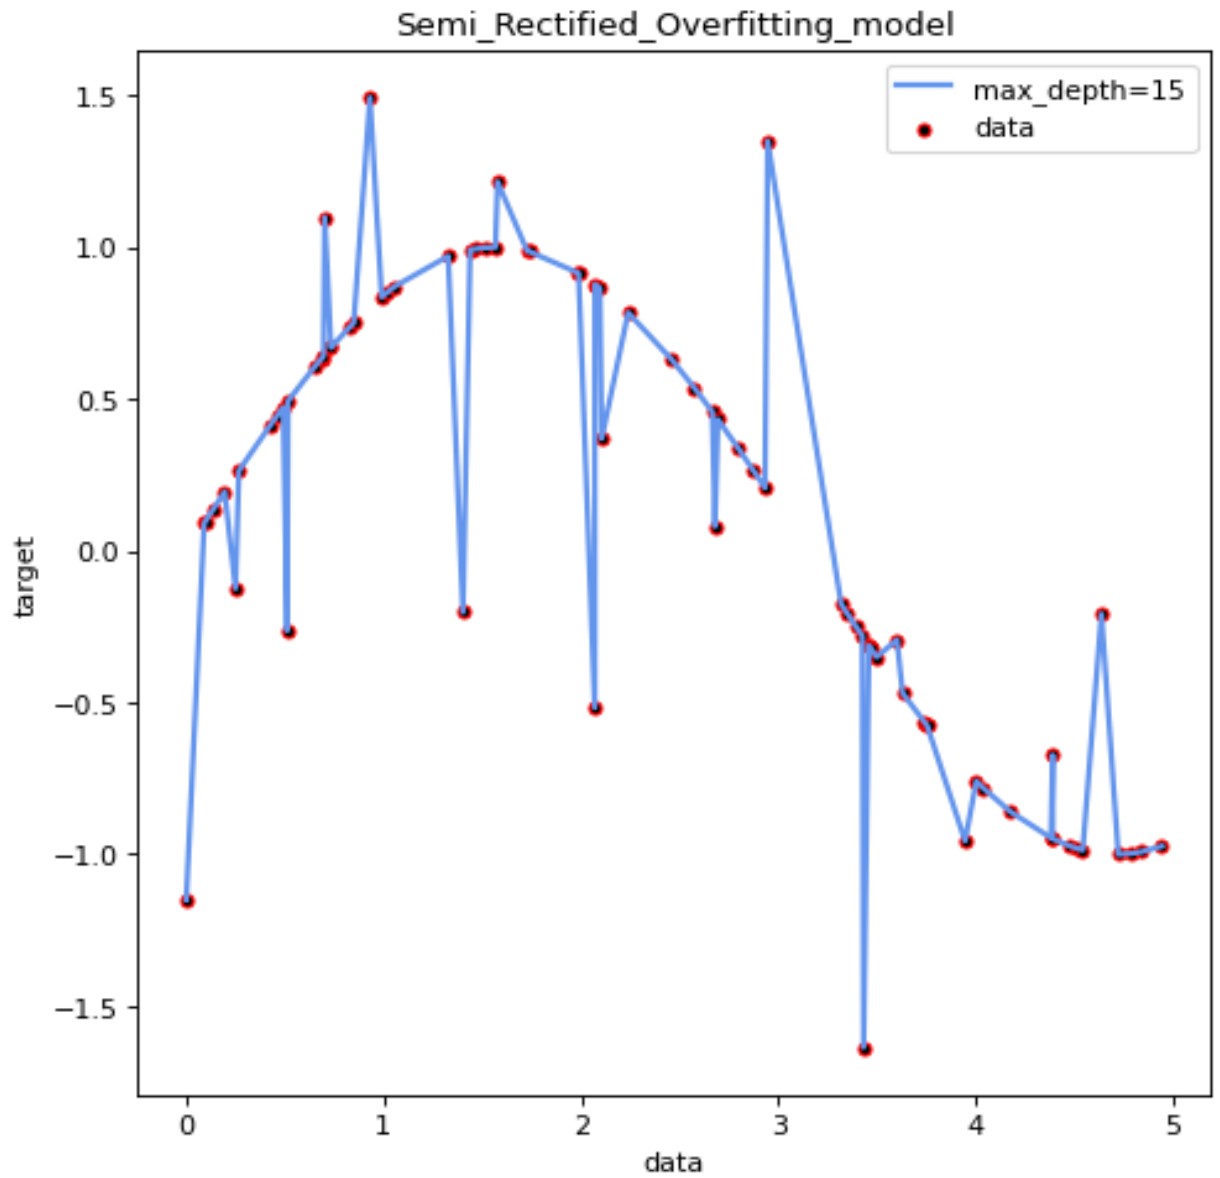

## ▼ K-Fold

```
import numpy as np
from sklearn.model_selection import KFold
```

```
X = ["S", "D", "A", "I"]
kf = KFold(n_splits=2)
```

```

for train, test in kf.split(X):
    print("%s %s" % (train, test))

[2 3] [0 1]
[0 1] [2 3]

from numpy import mean
from numpy import std
from sklearn.datasets import make_classification
from sklearn.model_selection import RepeatedKFold
from sklearn.model_selection import cross_val_score
from sklearn.linear_model import LogisticRegression
# create dataset
X, y = make_classification(n_samples=1000, n_features=20, n
# prepare the cross-validation procedure
kf = RepeatedKFold(n_splits=2, n_repeats=2, random_state=0)
# create model
model = LogisticRegression()
# evaluate model
scores = cross_val_score(model, X, y, scoring='accuracy', c
# report performance
print('Accuracy: %.3f (%.3f)' % (mean(scores), std(scores))

```

Accuracy: 0.862 (0.014)

## ▼ Repeated K-Fold

```

import numpy as np
from sklearn.model_selection import RepeatedKFold
X = np.array([[1, 2], [3, 4], [1, 2], [3, 4]])
random_state = 12883823
rkf = RepeatedKFold(n_splits=2, n_repeats=2, random_state=r
for train, test in rkf.split(X):
    print("%s %s" % (train, test))

```

```
[2 3] [0 1]
[0 1] [2 3]
[0 2] [1 3]
[1 3] [0 2]
```

```
from numpy import mean
from numpy import std
from sklearn.datasets import make_classification
from sklearn.model_selection import RepeatedKFold
from sklearn.model_selection import cross_val_score
from sklearn.linear_model import LogisticRegression
# create dataset
X, y = make_classification(n_samples=1000, n_features=20, n
# prepare the cross-validation procedure
rkf = RepeatedKFold(n_splits=2, n_repeats=2, random_state=r
# create model
model = LogisticRegression()
# evaluate model
scores = cross_val_score(model, X, y, scoring='accuracy', c
# report performance
print('Accuracy: %.3f (%.3f)' % (mean(scores), std(scores)))
```

Accuracy: 0.867 (0.009)

## ▼ LEAVE ONE OUT

```
from sklearn.datasets import make_blobs
from sklearn.model_selection import LeaveOneOut
from sklearn.ensemble import RandomForestClassifier
from sklearn.metrics import accuracy_score
# create dataset
X, y = make_blobs(n_samples=100, random_state=0)
# create loocv procedure
```

```
cv = LeaveOneOut()
# enumerate splits
y_true, y_pred = list(), list()
for train_ix, test_ix in cv.split(X):
    # split data
    X_train, X_test = X[train_ix, :], X[test_ix, :]
    y_train, y_test = y[train_ix], y[test_ix]
    # fit model
    model = RandomForestClassifier(random_state=1)
    model.fit(X_train, y_train)
    # evaluate model
    yhat = model.predict(X_test)
    # store
    y_true.append(y_test[0])
    y_pred.append(yhat[0])
# calculate accuracy
acc = accuracy_score(y_true, y_pred)
print('Accuracy: %.3f' % acc)
```

Accuracy: 0.930

## Calculate the Validation score by any two

- ▼ or three given techniques and Validation iterators.

```
import numpy as np
from sklearn.model_selection import train_test_split
from sklearn import datasets
from sklearn import svm
```

```
X, y = datasets.load_iris(return_X_y=True)
X.shape, y.shape
```

```
((150, 4), (150,))
```

```
X_train, X_test, y_train, y_test = train_test_split(
    X, y, test_size=0.4, random_state=0)
```

```
X_train.shape, y_train.shape
```

```
X_test.shape, y_test.shape
```

```
clf = svm.SVC(kernel='linear', C=1).fit(X_train, y_train)
clf.score(X_test, y_test)
```

```
0.9666666666666667
```

```
from sklearn.model_selection import cross_val_score
clf = svm.SVC(kernel='linear', C=1, random_state=42)
scores = cross_val_score(clf, X, y, cv=5)
scores
```

```
array([0.96666667, 1.          , 0.96666667,
       0.96666667, 1.          ])
```

```
from sklearn import metrics
```

```
scores = cross_val_score(
    clf, X, y, cv=5, scoring = 'f1_macro')
```



scores

```
array([0.96658312, 1.          , 0.96658312,  
       0.96658312, 1.          ])
```


## ▼ ROC

```
import pandas as pd  
import numpy as np  
from sklearn.model_selection import train_test_split  
from sklearn.linear_model import LogisticRegression  
from sklearn import metrics  
import matplotlib.pyplot as plt  
  
#import dataset from CSV file on Github  
#url = "https://raw.githubusercontent.com/Statology/Python-  
data = pd.read_csv("model.csv")  
  
#define the predictor variables and the response variable  
X = data[['Temp_C', 'Wind Speed_km/h', 'Rel Hum_%']]  
y = data['Weather']  
  
#split the dataset into training (70%) and testing (30%) se  
X_train,X_test,y_train,y_test = train_test_split(X,y,test_s  
  
#instantiate the model  
log_regression = LogisticRegression()
```

```
#fit the model using the training data
log_regression.fit(X_train,y_train)
```

```
/usr/local/lib/python3.7/dist-packages/sklearn/linear_
STOP: TOTAL NO. of ITERATIONS REACHED LIMIT.
```

Increase the number of iterations (max\_iter) or scale  
<https://scikit-learn.org/stable/modules/preprocess>  
Please also refer to the documentation for alternative  
[https://scikit-learn.org/stable/modules/linear\\_model](https://scikit-learn.org/stable/modules/linear_model)  
extra\_warning\_msg=\_LOGISTIC\_SOLVER\_CONVERGENCE\_MSG,  
LogisticRegression()



```
X_train.shape
```

```
(4303, 3)
```

```
y_pred_proba.shape
```

```
-----
-----
```

```
NameError                                Traceback
(most recent call last)
<ipython-input-17-572c8da5a7c4> in <module>
----> 1 y_pred_proba.shape
```

```
NameError: name 'y_pred_proba' is not defined
```

Colab paid products - Cancel contracts here

