


NAME: CH.SAI VIHAMSH

ROLL: 2520090090


Skill - 6

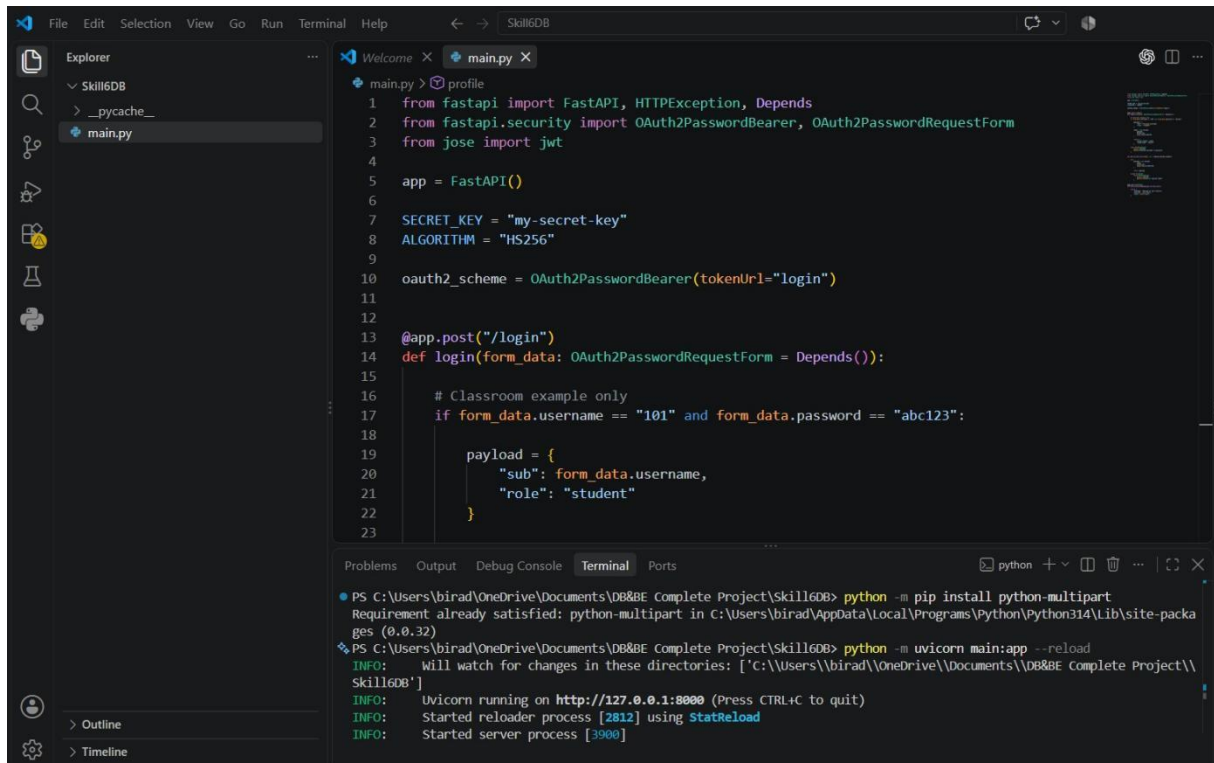

```
1 from fastapi import FastAPI, HTTPException, Depends
2 from fastapi.security import OAuth2PasswordBearer, OAuth2PasswordRequestForm
3 from jose import jwt
4
5 app = FastAPI()
6
7 SECRET_KEY = "my-secret-key"
8 ALGORITHM = "HS256"
9
10 oauth2_scheme = OAuth2PasswordBearer(tokenUrl="login")
11
12
13 @app.post("/login")
14 def login(form_data: OAuth2PasswordRequestForm = Depends()):
15     # Classroom example only
16     if form_data.username == "101" and form_data.password == "abc123":
17
18         payload = {
19             "sub": form_data.username,
20             "role": "student"
21         }
22
23
```

```
PS C:\Users\birad\OneDrive\Documents\DB&BE Complete Project\Skill6DB> python -m pip install python-multipart
Requirement already satisfied: python-multipart in C:\Users\birad\AppData\Local\Programs\Python\Python314\Lib\site-packages (0.0.32)
PS C:\Users\birad\OneDrive\Documents\DB&BE Complete Project\Skill6DB> python -m uvicorn main:app --reload
INFO: Will watch for changes in these directories: ['C:\Users\birad\OneDrive\Documents\DB&BE Complete Project\Skill6DB']
INFO: Uvicorn running on http://127.0.0.1:8000 (Press CTRL+C to quit)
INFO: Started reloader process [2812] using StatReload
INFO: Started server process [3900]
```

Swagger:

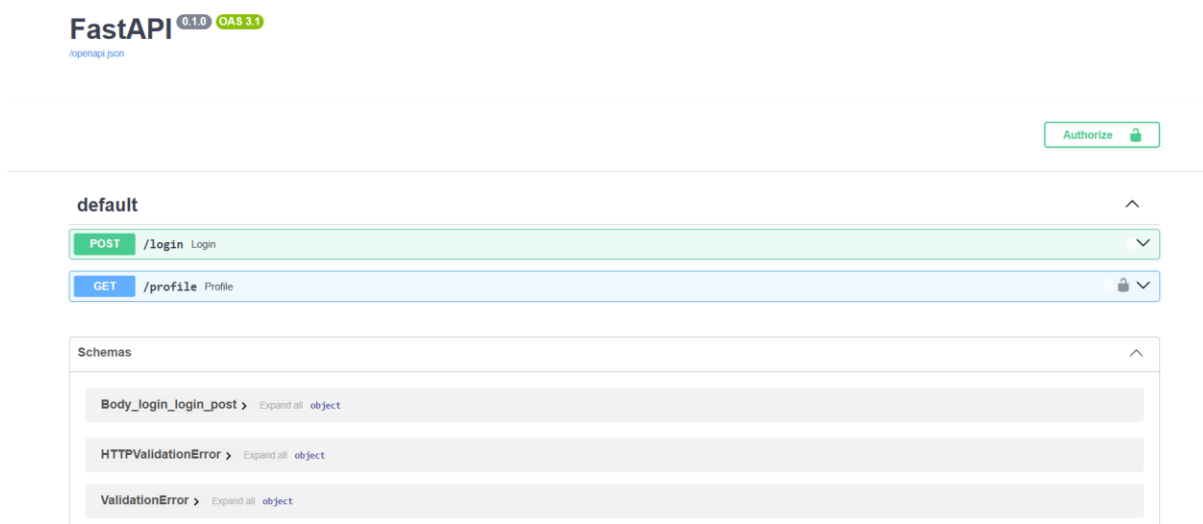

POST /Login:

default

POST /login Login

Parameters

No parameters

Request body required

application/x-www-form-urlencoded

```
grant_type
string | (string |
null)
pattern: "password$"

username * required
string

password * required
string($password)

scope
string

client_id
string | (string |
null)

client_secret
string | (string |
null)($password)
```

Authorize in Swagger:

astAPI 0.1.0 OAS 3.1

default

POST /login Login

Parameters

No parameters

Request body required

grant_type string | (string | null) pattern: "password\$" password Send empty value

username * required string 101

password * required string(\$password) *****

scope string scope

☒ Send empty values

Available authorizations

Scopes are used to grant an application different levels of access to data on behalf of the end user. Each API may declare one or more scopes. API requires the following scopes. Select which ones you want to grant to Swagger UI.

OAuth2PasswordBearer (OAuth2, password)

Token URL: login

Flow: password

username:

password:

Client credentials location: **Authorization header**

client_id:


client_secret:

Authorize Close


Authorize

Cancel Reset

application/x-www-form-urlencoded

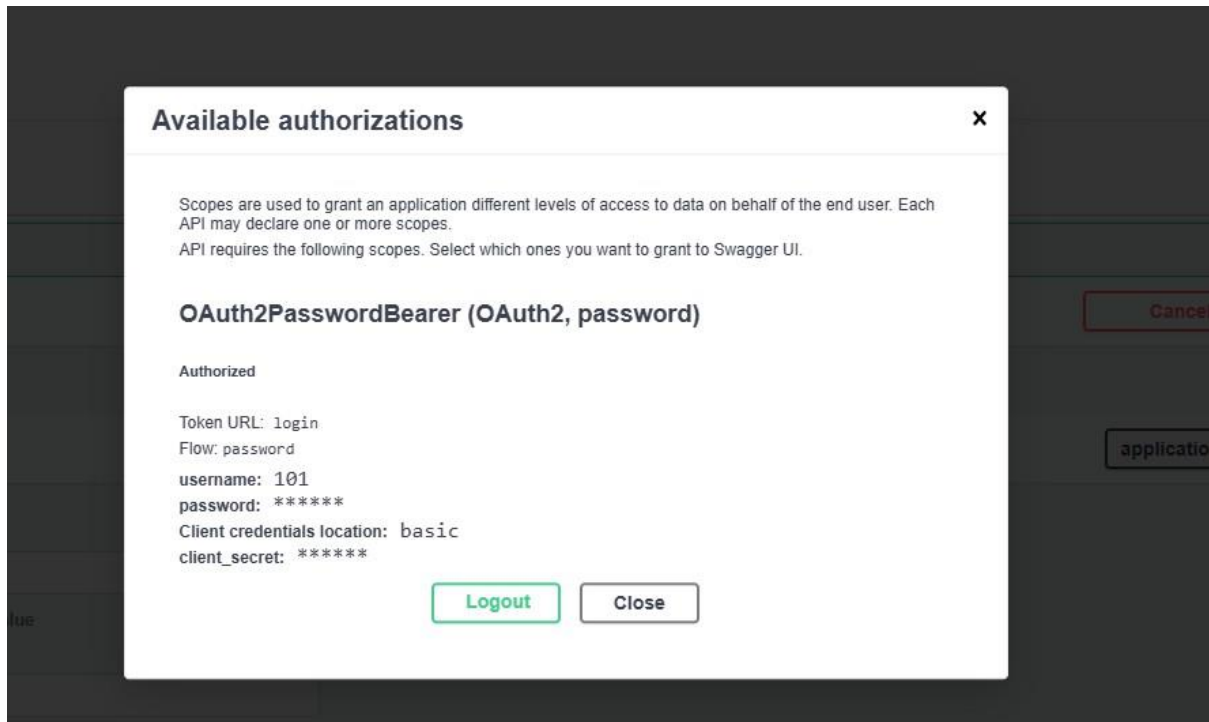

GET/Profile:

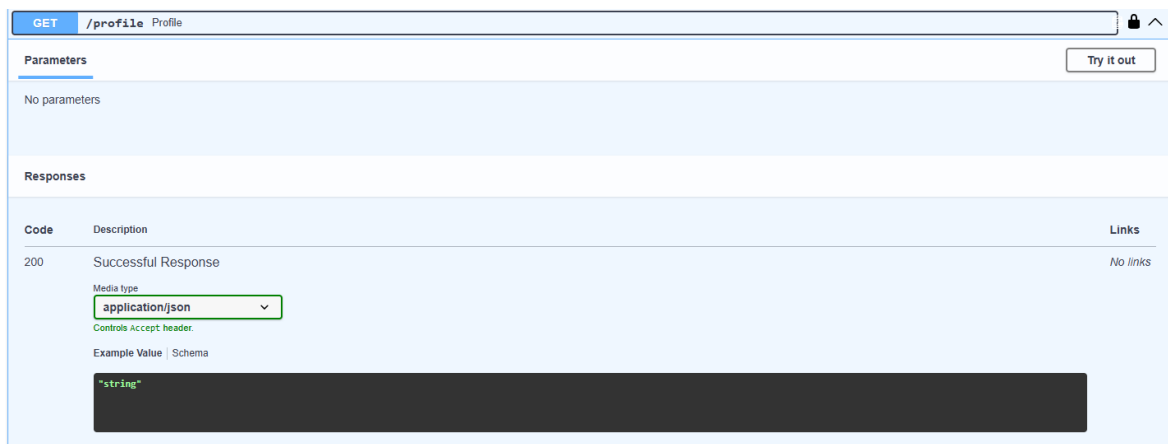

GET

/profile

Profile

Parameters

Cancel

No parameters

Execute

Clear

Responses

Curl

```
curl -X 'GET' \
  'http://127.0.0.1:8000/profile' \
  -H 'accept: application/json' \
  -H 'Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IWRXVj9.eyJzdWIiOiIxMDE1IiwiaWF0Ij0iMj02VudCJ9.NHqWdLpBiQ5BFQ1iKadoWVLOjblUPM8m4aRQ6MK1zI'
```

Request URL

http://127.0.0.1:8000/profile

Server response

Code

Details

200

Response body

```
{
  "message": "Welcome to your profile",
  "user_id": "101",
  "role": "student"
}
```

Response headers

```
content-length: 70
content-type: application/json
date: Fri, 18 Sep 2025 04:07:00 GMT
server: unicorn
```

Responses

Code

Description

Links