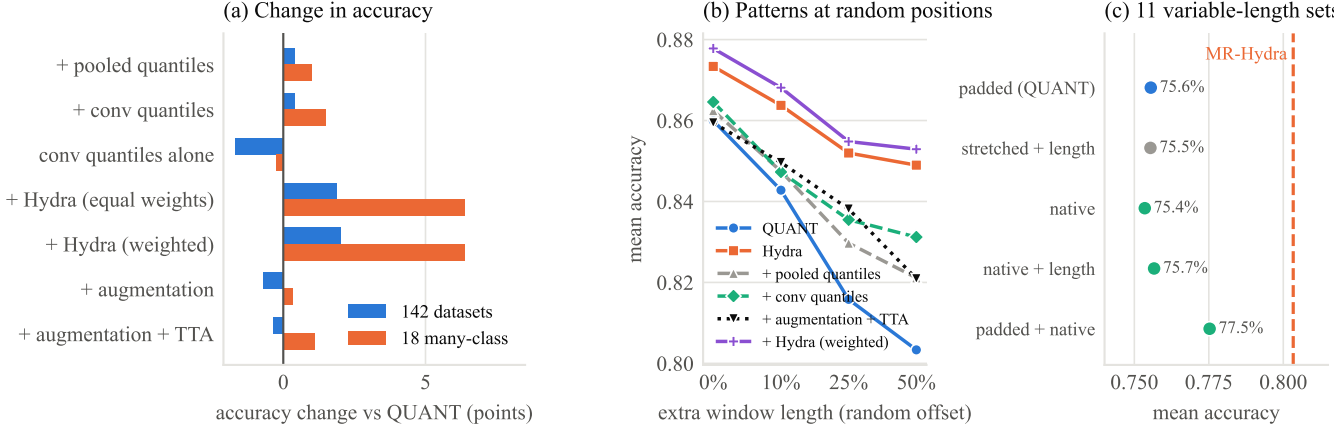
(a) Change in accuracy
+ pooled quantiles
+ conv quantiles
conv quantiles alone
+ Hydra (equal weights)
+ Hydra (weighted)
+ augmentation
+ augmentation + TTA
142 datasets
18 many-class
0
5
accuracy change vs QUANT (points)
(b) Patterns at random positions
0.88
0.86
0.84
0.82
0.80
mean accuracy
QUANT
Hydra
+ pooled quantiles
+ conv quantiles
+ augmentation + TTA
+ Hydra (weighted)
0%
10%
25%
50%
extra window length (random offset)
(c) 11 variable-length sets
MR-Hydra
padded (QUANT)
75.6%
stretched + length
75.5%
native
75.4%
native + length
75.7%
padded + native
77.5%
0.750
0.775
0.800
mean accuracy