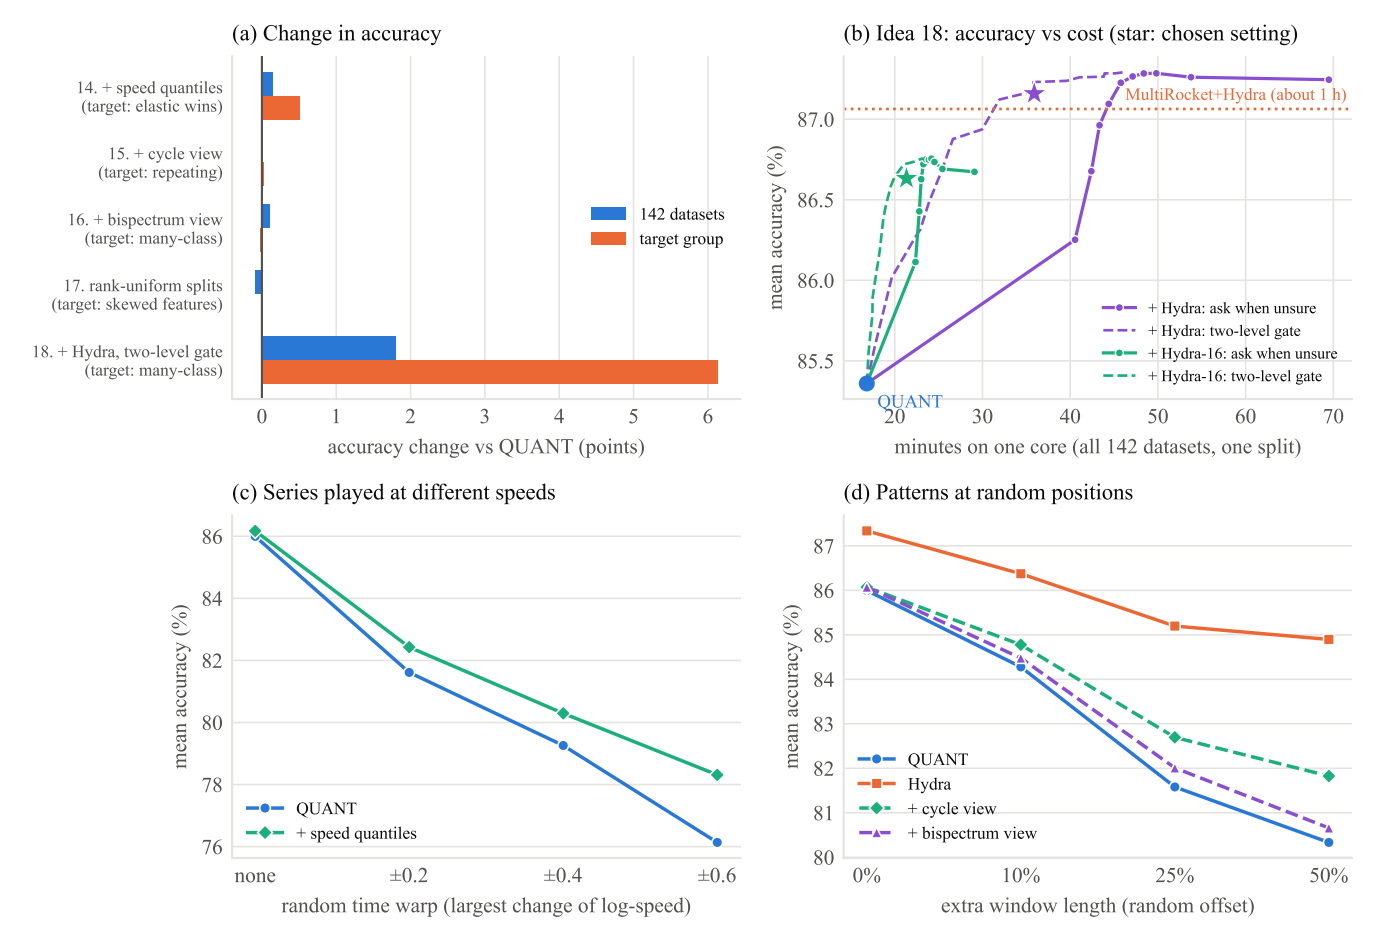
(a) Change in accuracy
14. + speed quantiles
(target: elastic wins)
15. + cycle view
(target: repeating)
16. + bispectrum view
(target: many-class)
17. rank-uniform splits
(target: skewed features)
18. + Hydra, two-level gate
(target: many-class)
142 datasets
target group
0
1
2
3
4
5
6
accuracy change vs QUANT (points)
(b) Idea 18: accuracy vs cost (star: chosen setting)
MultiRocket+Hydra (about 1 h)
mean accuracy (%)
87.0
86.5
86.0
85.5
+ Hydra: ask when unsure
+ Hydra: two-level gate
+ Hydra-16: ask when unsure
+ Hydra-16: two-level gate
QUANT
20
30
40
50
60
70
minutes on one core (all 142 datasets, one split)
(c) Series played at different speeds
mean accuracy (%)
86
84
82
80
78
76
QUANT
+ speed quantiles
none
±0.2
±0.4
±0.6
random time warp (largest change of log-speed)
(d) Patterns at random positions
mean accuracy (%)
87
86
85
84
83
82
81
80
QUANT
Hydra
+ cycle view
+ bispectrum view
0%
10%
25%
50%
extra window length (random offset)