

HCL AppScan Report

Report Type: Security Report

Scan Name: DAST 2026-08-20 <https://aaca.ntua.edu.tw/>

Technology: DAST

Report created at: Thursday, August 20, 2026

This report was generated by HCL AppScan v2.1

Summary of security issues

Medium severity issues:	3
Low severity issues:	5
Informational severity issues:	10
Total security issues:	18

Scan Information

Scan started: Thursday, August 20, 2026 7:25:26 AM (UTC)

Test policy: Default

Test Optimization: Fast

Hosts

Host: aaca.ntua.edu.tw

Port: 443

Operating system: Unknown

Web server: Unknown

Application Server: Any

Login Settings

Login method: None

Table of Contents

Summary

- Issues

Issue Types

- Missing or insecure Cross-Origin-Embedder-Policy (COEP) header
- Missing or insecure Cross-Origin-Opener-Policy (COOP) header
- Missing or insecure Cross-Origin-Resource-Policy (CORP) header
- Missing "Content-Security-Policy" header
- Missing or insecure "frame-ancestors" directive in CSP
- Trusted types in scripts not enforced in CSP
- Application Error
- Client-Side (JavaScript) Cookie References
- Missing "Referrer policy" Security Header

How to Fix

- Application Error
- Client-Side (JavaScript) Cookie References
- Missing "Content-Security-Policy" header
- Missing "Referrer policy" Security Header
- Missing or insecure "frame-ancestors" directive in CSP
- Missing or insecure Cross-Origin-Embedder-Policy (COEP) header
- Missing or insecure Cross-Origin-Opener-Policy (COOP) header
- Missing or insecure Cross-Origin-Resource-Policy (CORP) header
- Trusted types in scripts not enforced in CSP


Coverage

- Visited URLs
- Parameters
- Failed Requests
- Filtered URLs
- Comments
- Components
- JavaScripts
- Cookies

Summary

Total security issues: **18**

Issue Types: **9**

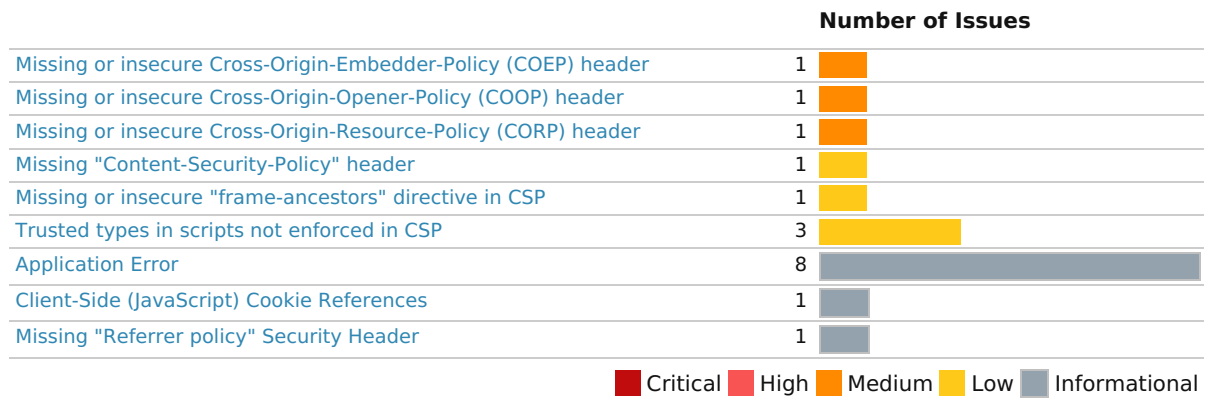

Issues - By Issue Types:

M DAST: Missing or insecure Cross-Origin-Embedder-Policy (COEP) header 1

How to Fix: [Missing or insecure Cross-Origin-Embedder-Policy \(COEP\) header](#)

Issue 1 of 1

Issue ID:	6faa433e-f36b-1410-89cd-00f37f576f24
Severity:	Medium
Status	Open
Location	https://aaca.ntua.edu.tw/
Domain	aaca.ntua.edu.tw
Element	aaca.ntua.edu.tw (Page)
Path	/
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	4.2
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	200

Issue 1 of 1 - Details

Reasoning: AppScan detected that the "Cross-Origin-Embedder-Policy" (COEP) header is either missing or set to an insecure value

Test Requests and Responses:

```
GET /assets/LoadFeaturesJs_Client-DzGVX_B4.js HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
Origin: https://aaca.ntua.edu.tw
sec-ch-ua-platform: "Linux"
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
sec-ch-ua-mobile: ?0
Accept: */*
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: cors
Sec-Fetch-Dest: script
Referer: https://aaca.ntua.edu.tw/assets/index-BpBZgyG6.js
Accept-Encoding: gzip
Accept-Language: en-US
Cookie: wcms.lang=en
Content-Length: 0

HTTP/1.1 200 OK
Cache-Control: public, max-age=31536000, immutable
Keep-Alive: timeout=5
Content-Type: text/javascript; charset=utf-8
Last-Modified: Thu, 20 Aug 2026 02:01:26 GMT
Accept-Ranges: bytes
ETag: W/"2cb-1a01ce6d8f0"
Vary: Accept-Encoding
X-Content-Type-Options: nosniff
X-Frame-Options: SAMEORIGIN
Referrer-Policy: strict-origin-when-cross-origin
Permissions-Policy: geolocation=(), microphone=(), camera=(), fullscreen=(self)
Cross-Origin-Opener-Policy: same-origin
X-Permitted-Cross-Domain-Policies: none
Strict-Transport-Security: max-age=16070400; includeSubDomains
X-Powered-By:
Date: Thu, 20 Aug 2026 07:27:16 GMT
Content-Length: 715

import{s as r}from"./index-BpBZgyG6.js";const a="/assets/bootstrap.bundle.min-D5O7Ww_3.js",i="/assets/ekko-lightbox-BmiW2n5W.js",l="/assets/owl.carousel_v2.3.4-bK-Owla8.js",c="/assets/swiper-bundle.min-DbP_0zCD.js",d="/assets/venobox.min-DBL3ZjsO.js",u="/assets/jquery-3.7.1.min-Bmb_Kel.js",e=s=>typeof document>"u"?Promise.resolve():new Promise((t,n)=>{const o=document.createElement("script");r(o,s),o.async=!1,o.onload=()=>>t(),o.onerror=()=>>n(new Error('Failed to load script: ${s}`))},document.head.appendChild(o)),m=async()=>>{await Promise.all([e(a),e(c)])},w=async()=>>{await e(u);const s=window.sjQuery&&(s.$=s.jQuery),await Promise.all([e(l),e(i),e(d)])};(async()=>>typeof document>"u"||((await m(),w())))();
```

Issue 1 of 1 - Audit Trail

08/20/2026 08:19:01	Issue type: MissingorinsecureCross-Origin-Embedder-Policy(COEP)header Location: https://aaca.ntua.edu.tw/ Severity: Medium CVSS: 4.2 Scanner: AppScan Dynamic Analyzer
---------------------	--

[Go to Table of Contents](#)

M DAST: Missing or insecure Cross-Origin-Opener-Policy (COOP) header 1

How to Fix: [Missing or insecure Cross-Origin-Opener-Policy \(COOP\) header](#)

Issue 1 of 1

Issue ID:	98aa433e-f36b-1410-89cd-00f37f576f24
Severity:	Medium
Status	Open
Location	https://aaca.ntua.edu.tw/
Domain	aaca.ntua.edu.tw
Element	aaca.ntua.edu.tw (Page)
Path	/
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	4.8
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	200

Issue 1 of 1 - Details

Reasoning: AppScan detected that the "Cross-Origin-Opener-Policy" (COOP) header is either missing or set to an insecure value

Test Requests and Responses:

```
POST /Service/SiteViewCount/TryCountSiteView HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
Content-Length: 16
sec-ch-ua-platform: "Linux"
Accept-Language: en-US
Accept: application/json, text/plain, */*
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
Content-Type: application/json
sec-ch-ua-mobile: ?0
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
Origin: https://aaca.ntua.edu.tw
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: cors
Sec-Fetch-Dest: empty
Referer: https://aaca.ntua.edu.tw/en
Accept-Encoding: gzip
Cookie: wcms.lang=en

{
  "SiteIndex": ""
}

HTTP/1.1 200 OK
Cache-Control: no-store, no-cache, must-revalidate, proxy-revalidate
Pragma: no-cache
Content-Type: application/json; charset=utf-8
Expires: 0
Vary: Origin, Accept-Encoding
access-control-allow-credentials: true
access-control-allow-origin: https://aaca.ntua.edu.tw
x-content-type-options: nosniff
x-frame-options: SAMEORIGIN
referrer-policy: no-referrer
permissions-policy: geolocation=(), microphone=(), camera=(), fullscreen=(self)
x-permitted-cross-domain-policies: none
content-security-policy: default-src 'none'; object-src 'none'; base-uri 'none'; frame-ancestors 'self'; form-action 'self'
X-Powered-By:
Date: Thu, 20 Aug 2026 07:25:36 GMT
Content-Length: 81
Strict-Transport-Security: max-age=16070400; includeSubDomains
Set-Cookie: wcms.visitor=f3e11fef9516414c996bd354b3cce0bd; expires=Fri, 20 Aug 2027 07:25:37 GMT; path=/; secure; samesite=strict; httponly
```

Issue 1 of 1 - Audit Trail

08/20/2026 08:19:01	Issue type: MissingorinsecureCross-Origin-Opener-Policy(COOP)header Location: https://aaca.ntua.edu.tw/ Severity: Medium CVSS: 4.8 Scanner: AppScan Dynamic Analyzer
---------------------	--

[Go to Table of Contents](#)

M **DAST: Missing or insecure Cross-Origin-Resource-Policy (CORP) header** 1

How to Fix: [Missing or insecure Cross-Origin-Resource-Policy \(CORP\) header](#)

Issue 1 of 1

Issue ID:	83aa433e-f36b-1410-89cd-00f37f576f24
Severity:	Medium
Status	Open
Location	https://aaca.ntua.edu.tw/
Domain	aaca.ntua.edu.tw
Element	aaca.ntua.edu.tw (Page)
Path	/
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	4.8
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	200

Issue 1 of 1 - Details

Reasoning: AppScan detected that the "Cross-Origin-Resource-Policy" (CORP) header is either missing or set to an insecure value

Test Requests and Responses:

```
GET /assets/LoadFeaturesJs_Client-DzGVX_B4.js HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
Origin: https://aaca.ntua.edu.tw
sec-ch-ua-platform: "Linux"
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
sec-ch-ua-mobile: ?0
Accept: */*
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: cors
Sec-Fetch-Dest: script
Referer: https://aaca.ntua.edu.tw/assets/index-BpBZgyG6.js
Accept-Encoding: gzip
Accept-Language: en-US
Cookie: wcms.lang=en
Content-Length: 0

HTTP/1.1 200 OK
Cache-Control: public, max-age=31536000, immutable
Keep-Alive: timeout=5
Content-Type: text/javascript; charset=utf-8
Last-Modified: Thu, 20 Aug 2026 02:01:26 GMT
Accept-Ranges: bytes
ETag: W/"2cb-1a01ce6d8f0"
Vary: Accept-Encoding
X-Content-Type-Options: nosniff
X-Frame-Options: SAMEORIGIN
Referrer-Policy: strict-origin-when-cross-origin
Permissions-Policy: geolocation=(), microphone=(), camera=(), fullscreen=(self)
Cross-Origin-Opener-Policy: same-origin
X-Permitted-Cross-Domain-Policies: none
Strict-Transport-Security: max-age=16070400; includeSubDomains
X-Powered-By:
Date: Thu, 20 Aug 2026 07:27:16 GMT
Content-Length: 715

import{s as r}from"./index-BpBZgyG6.js";const a="/assets/bootstrap.bundle.min-D5O7Ww_3.js",i="/assets/ekko-lightbox-BmiW2n5W.js",l="/assets/owl.carousel_v2.3.4-bK-Owla8.js",c="/assets/swiper-bundle.min-DbP_0zCD.js",d="/assets/venobox.min-DBL3ZjsO.js",u="/assets/jquery-3.7.1.min-Bmb_Keji.js",e=s=>typeof document>"u"?Promise.resolve():new Promise((t,n)=>{const o=document.createElement("script");r(o,s),o.async=!1,o.onload=()=>>t(),o.onerror=()=>>n(new Error(`Failed to load script:
```

```
$(s)`)),document.head.appendChild(o)),m=async()=>=>{await Promise.all([e(a),e(c)]),w=async()=>=>{await e(u);const s=window;s.jQuery&&(s.$=s.jQuery),await Promise.all([e(l),e(i),e(d)]);(async()=>=>typeof document>"u"||[await m(),w()])()};
```

Issue 1 of 1 - Audit Trail

08/20/2026 08:19:01

Issue type: MissingorinsecureCross-Origin-Resource-Policy(CORP)header
Location: https://aaca.ntua.edu.tw/
Severity: Medium
CVSS: 4.8
Scanner: AppScan Dynamic Analyzer

[Go to Table of Contents](#)

L DAST: Missing "Content-Security-Policy" header 1

How to Fix: [Missing "Content-Security-Policy" header](#)

Issue 1 of 1

Issue ID:	c2aa433e-f36b-1410-89cd-00f37f576f24
Severity:	Low
Status	Open
Location	https://aaca.ntua.edu.tw/
Domain	aaca.ntua.edu.tw
Element	aaca.ntua.edu.tw (Page)
Path	/
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	3.7
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	1032

Issue 1 of 1 - Details

Reasoning: AppScan detected that the Content-Security-Policy response header is missing or with an insecure policy, which increases exposure to various cross-site injection attacks

Test Requests and Responses:

```
GET /assets/LoadFeaturesCss_Client-BKnKf1bm.js HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
Origin: https://aaca.ntua.edu.tw
sec-ch-ua-platform: "Linux"
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
sec-ch-ua-mobile: ?0
Accept: */*
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: cors
Sec-Fetch-Dest: script
Accept-Encoding: gzip
Accept-Language: en-US
Content-Length: 0
```

```
HTTP/1.1 200 OK
Cache-Control: public, max-age=31536000, immutable
Keep-Alive: timeout=5
Content-Type: text/javascript; charset=utf-8
Last-Modified: Thu, 20 Aug 2026 02:01:26 GMT
Accept-Ranges: bytes
ETag: W/"46-1a01ce6d8f0"
Vary: Accept-Encoding
X-Content-Type-Options: nosniff
X-Frame-Options: SAMEORIGIN
Referrer-Policy: strict-origin-when-cross-origin
Permissions-Policy: geolocation=(), microphone=(), camera=(), fullscreen=(self)
Cross-Origin-Opener-Policy: same-origin
X-Permitted-Cross-Domain-Policies: none
Strict-Transport-Security: max-age=16070400; includeSubDomains
X-Powered-By:
Date: Thu, 20 Aug 2026 08:05:19 GMT
Content-Length: 70
```

```
/* empty css */import"/index-BpBZgyG6.js";
```

Issue 1 of 1 - Audit Trail

08/20/2026 08:19:01	Issue type: Missing"Content-Security-Policy"header Location: https://aaca.ntua.edu.tw/ Severity: Low CVSS: 3.7 Scanner: AppScan Dynamic Analyzer
---------------------	--

[Go to Table of Contents](#)

L DAST: Missing or insecure "frame-ancestors" directive in CSP 1

How to Fix: [Missing or insecure "frame-ancestors" directive in CSP](#)

Issue 1 of 1

Issue ID:	d7aa433e-f36b-1410-89cd-00f37f576f24
Severity:	Low
Status	Open
Location	https://aaca.ntua.edu.tw/
Domain	aaca.ntua.edu.tw
Element	aaca.ntua.edu.tw (Page)
Path	/
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	3.7
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	1032

Issue 1 of 1 - Details

Reasoning: AppScan detected that the Content-Security-Policy response header is missing or with an insecure policy, which increases exposure to various cross-site injection attacks

Test Requests and Responses:

```
POST /Service/SiteViewCount/TryCountSiteView HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
Content-Length: 16
sec-ch-ua-platform: "Linux"
Accept-Language: en-US
Accept: application/json, text/plain, */*
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
Content-Type: application/json
sec-ch-ua-mobile: ?0
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
Origin: https://aaca.ntua.edu.tw
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: cors
Sec-Fetch-Dest: empty
Referer: https://aaca.ntua.edu.tw/en
Accept-Encoding: gzip
Cookie: wcms.lang=en

{
  "SiteIndex": ""
}

HTTP/1.1 200 OK
Cache-Control: no-store, no-cache, must-revalidate, proxy-revalidate
Pragma: no-cache
Content-Type: application/json; charset=utf-8
Expires: 0
Vary: Origin, Accept-Encoding
access-control-allow-credentials: true
access-control-allow-origin: https://aaca.ntua.edu.tw
x-content-type-options: nosniff
x-frame-options: SAMEORIGIN
referrer-policy: no-referrer
permissions-policy: geolocation=(), microphone=(), camera=(), fullscreen=(self)
x-permitted-cross-domain-policies: none
content-security-policy: default-src 'none'; object-src 'none'; base-uri 'none'; frame-ancestors 'self'; form-action 'self'
X-Powered-By:
Date: Thu, 20 Aug 2026 07:25:36 GMT
Content-Length: 81
Strict-Transport-Security: max-age=16070400; includeSubDomains
Set-Cookie: wcms.visitor=f3e11fef9516414c996bd354b3cce0bd; expires=Fri, 20 Aug 2027 07:25:37 GMT; path=/; secure; samesite=strict; httponly

{"Data":[{"IsCounted":true,"CurrentCount":860}], "IsSuccess":true, "SysMessage":[]}
```

Issue 1 of 1 - Audit Trail

08/20/2026 08:19:01	Issue type: Missingorinsecure"frame-ancestors"directiveinCSP Location: https://aaca.ntua.edu.tw/ Severity: Low CVSS: 3.7 Scanner: AppScan Dynamic Analyzer
---------------------	--

[Go to Table of Contents](#)

L DAST: Trusted types in scripts not enforced in CSP 3

How to Fix: Trusted types in scripts not enforced in CSP

Issue 1 of 3

Issue ID:	ecaa433e-f36b-1410-89cd-00f37f576f24
Severity:	Low
Status	Open
Location	https://aaca.ntua.edu.tw/en
Domain	aaca.ntua.edu.tw
Element	en (Page)
Path	/en
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	3.7
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	1032

Issue 1 of 3 - Details

Reasoning: Missing require-trusted-types-for 'script'
Test Requests and Responses:

```
GET /en HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
Upgrade-Insecure-Requests: 1
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/*;q=0.8,application/signed-exchange;v=b3;q=0.7
Sec-Fetch-Site: none
Sec-Fetch-Mode: navigate
Sec-Fetch-User: ?1
Sec-Fetch-Dest: document
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
sec-ch-ua-mobile: ?0
sec-ch-ua-platform: "Linux"
Accept-Encoding: gzip
Accept-Language: en-US
Content-Length: 0

HTTP/1.1 200 OK
Cache-Control: no-store, no-cache, must-revalidate, proxy-revalidate
Keep-Alive: timeout=5
Pragma: no-cache
Content-Type: text/html; charset=utf-8
Expires: 0
Vary: Accept-Encoding
X-Content-Type-Options: nosniff
X-Frame-Options: SAMEORIGIN
Referrer-Policy: strict-origin-when-cross-origin
Permissions-Policy: geolocation=(), microphone=(), camera=(), fullscreen=(self "https://www.youtube.com" "https://www.youtube-nocookie.com")
Cross-Origin-Opener-Policy: same-origin
X-Permitted-Cross-Domain-Policies: none
Strict-Transport-Security: max-age=16070400; includeSubDomains
Content-Security-Policy: default-src 'none'; script-src 'nonce-hDCe0FAWks4UmsCCFG1Bw==' 'strict-dynamic'; script-src-attr 'none'; style-src 'self' https://fonts.googleapis.com https://www.gstatic.com https://calendar.google.com https://accounts.google.com https://maps.gstatic.com; style-src-elem 'self' https://fonts.googleapis.com https://www.gstatic.com https://calendar.google.com https://accounts.google.com https://maps.gstatic.com; style-src-attr 'unsafe-inline'; img-src 'self' data: blob: https://www.google.com https://www.gstatic.com https://apis.google.com https://i.ytimg.com https://img.youtube.com https://calendar.google.com https://accounts.google.com https://maps.googleapis.com https://mapsresources-pa.googleapis.com https://maps.gstatic.com https://maps.google.com https://www.googletagmanager.com https://www.google-analytics.com https://region1.google-analytics.com; font-src 'self' data: https://fonts.gstatic.com https://calendar.google.com; connect-src 'self' https://translate.google.com https://translate.googleapis.com https://translate-pa.googleapis.com https://calendar.google.com https://accounts.google.com https://www.google.com https://www.gstatic.com https://apis.google.com https://maps.googleapis.com https://mapsresources-pa.googleapis.com https://region1.google-analytics.com https://www.googletagmanager.com https://www.google-analytics.com https://region1.google-analytics.com; frame-ancestors 'self'; frame-src 'self' https://translate.google.com https://www.youtube.com https://www.youtube-nocookie.com https://w.soundcloud.com https://720yun.com https://www.720yun.com https://calendar.google.com https://accounts.google.com https://www.google.com https://maps.google.com https://docs.google.com https://drive.google.com https://lookerstudio.google.com https://datastudio.google.com https://www.googletagmanager.com https://challenges.cloudflare.com; media-src 'self' data: blob;; worker-src 'self' blob;; manifest-src 'self'; object-src 'none'; base-uri 'self'; form-action 'self'; upgrade-insecure-requests
```

X-Powered-By:
Date: Thu, 20 Aug 2026 07:29:03 GMT
Content-Length: 153159

```
<!doctype html>
<html lang="zh-Hant">
  <head>
    <title data-rh="true">國立臺灣藝術大學招生資訊服務網站</title><meta data-rh="true" name="description" content="國立臺灣藝術大學招生資訊服務網站"/><meta data-rh="true" property="og:title" content="國立臺灣藝術大學招生資訊服務網站"/><meta data-rh="true" property="og:description" content="國立臺灣藝術大學招生資訊服務網站"/><meta data-rh="true" name="twitter:title" content="國立臺灣藝術大學招生資訊服務網站"/><meta data-rh="true" name="twitter:description" content="國立臺灣藝術大學招生資訊服務網站"/><meta data-rh="true" property="og:type" content="website"/><meta data-rh="true" name="twitter:card" content="summary"/>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <script nonce="hDCe0FAWKs4UmsCCFG1Bw==" type="module" crossorigin src="/assets/index-BpBZgyG6.js"></script>
    <link rel="stylesheet" crossorigin href="/assets/index-DGfyLKdM.css">
    <link rel="stylesheet" href="/assets/LoadFeaturesCss_Client-Cz6VI-KF.css"><link rel="stylesheet" href="/assets/cms_content_format-NvYllcok.css">
    <link rel="stylesheet" href="/assets/LoadSpecCss-DvpspM99.css"></head>

    <body>
      <div id="root"><div id="Customsize" class="subpage_body_bg"><noscript><div style="color:red">您的瀏覽器不支援 JavaScript，請開啟 Javascript 功能。</div></noscript><a href="#AC" id="gotocenter" title="跳到頁面主要內容區" aria-label="跳到頁面主要內容區" tabindex="1" class="visually-hidden-focusable">跳到頁面主要內容區</a><div id="Site-Header" class="ALL_Header_DivBar main-header"><section class="header_section"><header class="header_Box py-lg-2 py-md-0 py-sm-0 py-0 bg-custom-white"><div class="navsB
      ...
      ...
      ...
```

Issue 1 of 3 - Audit Trail

08/20/2026 08:19:01	Issue type: TrustedtypesinscriptsnotenforcedinCSP Location: https://aaca.ntua.edu.tw/en Severity: Low CVSS: 3.7 Scanner: AppScan Dynamic Analyzer
---------------------	---

Issue 2 of 3

Issue ID:	8eab433e-f36b-1410-89cd-00f37f576f24
Severity:	Low
Status	Open
Location	https://aaca.ntua.edu.tw/en/graduate-admissions/master-screening
Domain	aaca.ntua.edu.tw
Element	master-screening (Page)
Path	/en/graduate-admissions/master-screening
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	3.7
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	1032

Issue 2 of 3 - Details

Reasoning: Missing require-trusted-types-for 'script'

Test Requests and Responses:

```
GET /en/graduate-admissions/master-screening HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
Cache-Control: max-age=0
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
sec-ch-ua-mobile: ?0
sec-ch-ua-platform: "Linux"
Upgrade-Insecure-Requests: 1
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/*;q=0.8,application/signed-exchange;v=b3;q=0.7
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: navigate
Sec-Fetch-User: ?1
Sec-Fetch-Dest: document
Accept-Encoding: gzip
Accept-Language: en-US
Cookie: wcms.lang=en; wcms.visitor=f3e11fef9516414c996bd354b3cce0bd
Content-Length: 0

HTTP/1.1 200 OK
Cache-Control: no-store, no-cache, must-revalidate, proxy-revalidate
Keep-Alive: timeout=5
Pragma: no-cache
Content-Type: text/html; charset=utf-8
Expires: 0
Vary: Accept-Encoding
X-Content-Type-Options: nosniff
X-Frame-Options: SAMEORIGIN
Referrer-Policy: strict-origin-when-cross-origin
Permissions-Policy: geolocation=(), microphone=(), camera=(), fullscreen=(self "https://www.youtube.com" "https://www.youtube-nocookie.com")
```

Cross-Origin-Opener-Policy: same-origin
X-Permitted-Cross-Domain-Policies: none
Strict-Transport-Security: max-age=16070400; includeSubDomains
Content-Security-Policy: default-src 'none'; script-src 'nonce-0OuLLP8EdBLPi6JVVRyB2A==' 'strict-dynamic'; script-src-attr 'none'; style-src 'self' https://fonts.googleapis.com https://www.gstatic.com https://calendar.google.com https://accounts.google.com https://maps.gstatic.com; style-src-elem 'self' https://fonts.googleapis.com https://www.gstatic.com https://calendar.google.com https://accounts.google.com https://maps.gstatic.com; style-src-attr 'unsafe-inline'; img-src 'self' data: blob: https://www.google.com https://www.gstatic.com https://apis.google.com https://i.ytimg.com https://img.youtube.com https://calendar.google.com https://accounts.google.com https://maps.googleapis.com https://mapsresources-pa.googleapis.com https://maps.gstatic.com https://maps.google.com https://www.googletagmanager.com https://www.google-analytics.com https://region1.google-analytics.com; font-src 'self' data: https://fonts.gstatic.com https://calendar.google.com; connect-src 'self' https://translate.google.com https://translate.googleapis.com https://translate-pa.googleapis.com https://calendar.google.com https://accounts.google.com https://www.google.com https://www.gstatic.com https://apis.google.com https://maps.googleapis.com https://mapsresources-pa.googleapis.com https://maps.gstatic.com https://maps.google.com https://www.googletagmanager.com https://www.google-analytics.com https://region1.google-analytics.com; frame-ancestors 'self'; frame-src 'self' https://translate.google.com https://www.youtube.com https://www.youtube-nocookie.com https://w.soundcloud.com https://720yun.com https://www.720yun.com https://calendar.google.com https://accounts.google.com https://www.google.com https://maps.google.com https://docs.google.com https://drive.google.com https://lookerstudio.google.com https://datastudio.google.com https://www.googletagmanager.com https://challenges.cloudflare.com; media-src 'self' data: blob;; worker-src 'self' blob;; manifest-src 'self'; object-src 'none'; base-uri 'self'; form-action 'self'; upgrade-insecure-requests

X-Powered-By:
Date: Thu, 20 Aug 2026 07:30:43 GMT
Content-Length: 416750

```
<!doctype html>
<html lang="zh-Hant">
  <head>
    <title data-rh="true">國立臺灣藝術大學招生資訊服務網站</title><meta data-rh="true" name="description" content="國立臺灣藝術大學招生資訊服務網站"/><meta data-rh="true" property="og:title" content="國立臺灣藝術大學招生資訊服務網站"/><meta data-rh="true" property="og:description" content="國立臺灣藝術大學招生資訊服務網站"/><meta data-rh="true" name="twitter:title" content="國立臺灣藝術大學招生資訊服務網站"/><meta data-rh="true" name="twitter:description" content="國立臺灣藝術大學招生資訊服務網站"/><meta data-rh="true" property="og:url" content="https://aaca.ntua.edu.tw/en/graduate-admissions/master-screening"/><meta data-rh="true" property="og:type" content="website"/><meta data-rh="true" name="twitter:card" content="summary"/>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <script nonce="0OuLLP8EdBLPi6JVVRyB2A==" type="module" crossorigin src="/assets/index-BpBZgyG6.js"></script>
    <link rel="stylesheet" crossorigin href="/assets/index-DGfyLKdM.css">
    <link rel="stylesheet" href="/assets/LoadFeaturesCss_Client-Cz6VI-KF.css"><link rel="stylesheet" href="/assets/cms_content_format-NvYllcok.css">
    <link rel="stylesheet" href="/assets/LoadSpecCss-DvpSPM99.css"></head>

    <body>
      <div id="root"><div id="Customsize" class="subpage_body_bg"><noscript><div style="color:red">您的瀏覽器不支援 JavaScript, 請開啟 Javascript 功能。</div></noscript><a href="#AC" id="gotocenter" title="跳到頁面主要內容區" aria-label="跳到頁面主要內容區" tabindex="1" class="visually-hidden-focusable">跳到頁面主要內容區</a><div
      ...
      ...
      ...
    </div>
  </body>
</html>
```

Issue 2 of 3 - Audit Trail

08/20/2026 08:19:01	Issue type: TrustedtypesinscriptsnotenforcedinCSP Location: https://aaca.ntua.edu.tw/en/graduate-admissions/master-screening Severity: Low CVSS: 3.7 Scanner: AppScan Dynamic Analyzer
---------------------	--

Issue 3 of 3

Issue ID:	a6ab433e-f36b-1410-89cd-00f37f576f24
Severity:	Low
Status	Open
Location	https://aaca.ntua.edu.tw/en/sitemap
Domain	aaca.ntua.edu.tw
Element	Sitemap (Page)
Path	/en/sitemap
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	3.7
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	1032

Issue 3 of 3 - Details

Reasoning: Missing require-trusted-types-for 'script'
Test Requests and Responses:

```
GET /en/Sitemap HTTP/1.1
Accept-Language: en-US
Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
Referer: https://aaca.ntua.edu.tw/en
Host: aaca.ntua.edu.tw
User-Agent: Mozilla/5.0 (Windows NT 6.2; WOW64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/100.0.4896.127 Safari/537.36
Content-Length: 0

HTTP/1.1 200 OK
Cache-Control: no-store, no-cache, must-revalidate, proxy-revalidate
Keep-Alive: timeout=5
```

```
Pragma: no-cache
Content-Type: text/html; charset=utf-8
Expires: 0
Vary: Accept-Encoding
X-Content-Type-Options: nosniff
X-Frame-Options: SAMEORIGIN
Referrer-Policy: strict-origin-when-cross-origin
Permissions-Policy: geolocation=(), microphone=(), camera=(), fullscreen=(self "https://www.youtube.com" "https://www.youtube-nocookie.com")
Cross-Origin-Opener-Policy: same-origin
X-Permitted-Cross-Domain-Policies: none
Strict-Transport-Security: max-age=16070400; includeSubDomains
Content-Security-Policy: default-src 'none'; script-src 'nonce-Ow4sh0bElqs5mT8OWEMm3g==' 'strict-dynamic'; script-src-attr 'none'; style-src 'self'
https://fonts.googleapis.com https://www.gstatic.com https://calendar.google.com https://accounts.google.com https://maps.gstatic.com; style-src-elem
'self' https://fonts.googleapis.com https://www.gstatic.com https://calendar.google.com https://accounts.google.com https://maps.gstatic.com; style-src-
attr 'unsafe-inline'; img-src 'self' data: blob: https://www.google.com https://www.gstatic.com https://apis.google.com https://i.ytimg.com
https://img.youtube.com https://calendar.google.com https://accounts.google.com https://maps.googleapis.com https://mapsresources-
pa.googleapis.com https://maps.gstatic.com https://maps.google.com https://www.googletagmanager.com https://www.google-analytics.com
https://region1.google-analytics.com; font-src 'self' data: https://fonts.gstatic.com https://calendar.google.com; connect-src 'self'
https://translate.google.com https://translate.googleapis.com https://translate-pa.googleapis.com https://calendar.google.com
https://accounts.google.com https://www.google.com https://www.gstatic.com https://apis.google.com https://maps.googleapis.com
https://mapsresources-pa.googleapis.com https://maps.gstatic.com https://maps.google.com https://www.googletagmanager.com https://www.google-
analytics.com https://region1.google-analytics.com; frame-ancestors 'self'; frame-src 'self' https://translate.google.com https://www.youtube.com
https://www.youtube-nocookie.com https://w.soundcloud.com https://720yun.com https://www.720yun.com https://calendar.google.com
https://accounts.google.com https://www.google.com https://maps.google.com https://docs.google.com https://drive.google.com
https://lookerstudio.google.com https://datastudio.google.com https://www.googletagmanager.com https://challenges.cloudflare.com; media-src 'self'
data: blob; worker-src 'self' blob; manifest-src 'self'; object-src 'none'; base-uri 'self'; form-action 'self'; upgrade-insecure-requests
X-Powered-By:
Date: Thu, 20 Aug 2026 07:29:25 GMT
Content-Length: 61088

<!doctype html>
<html lang="zh-Hant">
  <head>
    <title data-rh="true">國立臺灣藝術大學招生資訊服務網站</title><meta data-rh="true" name="description" content="國立臺灣藝術大學招生資訊服務網
站"/><meta data-rh="true" property="og:title" content="國立臺灣藝術大學招生資訊服務網站"/><meta data-rh="true" property="og:description"
content="國立臺灣藝術大學招生資訊服務網站"/><meta data-rh="true" name="twitter:title" content="國立臺灣藝術大學招生資訊服務網站"/><meta data-
rh="true" name="twitter:description" content="國立臺灣藝術大學招生資訊服務網站"/><meta data-rh="true" property="og:url" content="/en/Sitemap"/>
<meta data-rh="true" property="og:type" content="website"/><meta data-rh="true" name="twitter:card" content="summary"/>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <script nonce="Ow4sh0bElqs5mT8OWEMm3g==" type="module" crossorigin src="/assets/index-BpBZgyG6.js"></script>
    <link rel="stylesheet" crossorigin href="/assets/index-DGfyLKdM.css">
    <link rel="stylesheet" href="/assets/LoadFeaturesCss_Client-Cz6VI-KF.css"><link rel="stylesheet" href="/assets/cms_content_format-NvYllcok.css">
    <link rel="stylesheet" href="/assets/LoadSpecCss-DvpSpM99.css"></head>

    <body>
      <div id="root"><div id="Customsize" class="subpage_body bg"><noscript><div style="color:red">您的瀏覽器不支援 JavaScript，請開啟 Javascript 功
能.</div></noscript><a href="#AC" id="gotocenter" title="跳到頁面主要內容區" aria-label="跳到頁面主要內容區" tabindex="1" class="visually-hidden-
focusable">跳到頁面主要內容區</a><div id="Site-Header" class="ALL_Header_DivBar main-header"><section class="header_section"><header
class="header_Box py-lg-2 py-md-0 py-sm-0 py-0 bg-custom-white"><div class="navsBox"><div class="container-customize0"><div class="topbox d-
flex justify-content-lg-between justify-content-md-center justify-content-sm-center justify-content-align-items-center"><h1 class="logo d-lg-
block d-md-none d-sm-none d-none"><a tabindex="0" class="navbar-brand" title="National
...
...
...

```

Issue 3 of 3 - Audit Trail

08/20/2026 08:19:01	Issue type: TrustedtypesinscriptsnotenforcedinCSP Location: https://aaca.ntua.edu.tw/en/sitemap Severity: Low CVSS: 3.7 Scanner: AppScan Dynamic Analyzer
---------------------	---

[Go to Table of Contents](#)

I	DAST: Application Error 8
How to Fix: Application Error	

Issue 1 of 8

Issue ID:	16ab433e-f36b-1410-89cd-00f37f576f24
Severity:	Informational
Status	Open
Location	https://aaca.ntua.edu.tw/service/filearchive/querylist
Domain	aaca.ntua.edu.tw
Element	->"RankGroups"[0]->"Condition" (Parameter)
Path	/service/filearchive/querylist
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	0.0
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	550

Difference: **Parameter** `->"RankGroups"[0]->"Condition"` manipulated from: `ContentStatus & 1` to: `###backslash_place_holder###`

Reasoning: The application has responded with an error message, indicating an undefined state that may expose sensitive information.

Test Requests and Responses:

```
POST /Service/FileArchive/QueryList HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
sec-ch-ua-platform: "Linux"
Accept-Language: en-US
Accept: application/json, text/plain, */*
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
Content-Type: application/json
sec-ch-ua-mobile: ?0
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
Origin: https://aaca.ntua.edu.tw
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: cors
Sec-Fetch-Dest: empty
Referer: https://aaca.ntua.edu.tw/en
Accept-Encoding: gzip
Cookie: wcms.lang=en; wcms.visitor=f3e11fef9516414c996bd354b3cce0bd
Content-Length: 1357

{
  "Fields": [
    "InternalId",
    "FileArchiveld",
    "CategoriesId",
    "TagsId",
    "ContentStatus",
    "CreateTime",
    "FileArchiveInfo.FileArchiveld",
    "FileArchiveInfo.RowId",
    "FileArchiveInfo.RowNo",
    "FileArchiveInfo.Lang",
    "FileArchiveInfo.Title",
    "FileArchiveInfo._FileArchiveDetail.FileArchiveld",
    "FileArchiveInfo._FileArchiveDetail.RowId",
    "FileArchiveInfo._FileArchiveDetail.RowNo",
    "FileArchiveInfo._FileArchiveDetail.ParentRowId",
    "FileArchiveInfo._FileArchiveDetail.FileSrcId",
    "FileArchiveInfo._FileArchiveDetail.FileName",
    "FileArchiveInfo._FileArchiveDetail.FileSrc.InternalId",
    "FileArchiveInfo._FileArchiveDetail.FileSrc.FileExtension",
    "FileArchiveInfo._FileArchiveDetail.FileSrc.PublicDownloadCount",
    "FileArchiveInfo._FileArchiveUrlDetail.FileArchiveld",
    "FileArchiveInfo._FileArchiveUrlDetail.RowId",
    "FileArchiveInfo._FileArchiveUrlDetail.RowNo",
    "FileArchiveInfo._FileArchiveUrlDetail.ParentRowId",
    "FileArchiveInfo._FileArchiveUrlDetail.Url",
    "FileArchiveInfo._FileArchiveUrlDetail.UrlDescription",
    "FileArchiveInfo._FileArchiveUrlDetail.WindowTarget"
  ],
  "Condition": "ContentStatus != 4 And _FileArchiveInfo.Lang = '\\en\\' And _FileArchiveInfo.Title != '\\\\' And CategoriesId HasAny '\\Category20260626004\\'",
  "RankGroups": [
    {
      "Condition": "\\\"
    }
  ],
  "OrderBy": [
    {
      "Col": "Validate_Start",
      "Desc": true
    },
    {
      "Col": "CreateTime",
      "Desc": true
    }
  ],
  "PageNumber": 1,
  "PageSize": 5
}

HTTP/1.1 500 Internal Server Error
Content-Type: text/html
Vary: Origin, Accept-Encoding
access-control-allow-credentials: true
access-control-allow-origin: https://aaca.ntua.edu.tw
X-Powered-By:
Date: Thu, 20 Aug 2026 08:04:50 GMT
Content-Length: 1196
Strict-Transport-Security: max-age=16070400; includeSubDomains

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<meta http-equiv="Content-Type" content="text/html; charset=big5"/>
<title>500 - 內部伺服器錯誤。 </title>
<style type="text/css">
<!--
body{margin:0;font-size:.7em;font-family:Verdana, Arial, Helvetica, sans-serif;background:#EEEEEE;}
fieldset{padding:0 15px 10px 15px;}
h1{font-size:2.4em;margin:0;color:#FFF;}
h2{font-size:1.7em;margin:0;color:#CC0000;}
h3{font-size:1.2em;margin:10px 0 0 0;color:#000000;}
#header{width:96%;margin:0 0 0 0;padding:6px 2% 6px 2%;font-family:"trebuchet MS", Verdana, sans-serif;color:#FFF;
background-color:#555555;}
#content{margin:0 0 0 2%;position:relative;}
.content-container{background:#FFF;width:96%;margin-top:9px;padding:10px;position:relative;}
-->
</style>
</head>
<body>
<div id="header"><h1>Server Error</h1></div>
<div id="content">
<div class="content-container"><fieldset>
<h2>500 - Internal server error.</h2>
<h3>There is a problem with the resource you are looking for, and it cannot be displayed.</h3>
</fieldset></div>
</div>
```

```
</body>
</html>
```

Issue 1 of 8 - Audit Trail

08/20/2026 08:19:01

Issue type: ApplicationError
Location: <https://aaca.ntua.edu.tw/service/filearchive/querylist>
Severity: Informational
CVSS: 0.0
Scanner: AppScan Dynamic Analyzer

Issue 2 of 8

Issue ID:	40ab433e-f36b-1410-89cd-00f37f576f24
Severity:	Informational
Status	Open
Location	https://aaca.ntua.edu.tw/service/siteviewcount/trycountsiteview
Domain	aaca.ntua.edu.tw
Element	->"SiteIndex" (Parameter)
Path	/service/siteviewcount/trycountsiteview
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	0.0
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	550

Issue 2 of 8 - Details

Difference: Parameter `->"SiteIndex"` manipulated from: `—` to: `###comma_place_holder###`

Reasoning: The application has responded with an error message, indicating an undefined state that may expose sensitive information.

Test Requests and Responses:

```
POST /Service/SiteViewCount/TryCountSiteView HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
sec-ch-ua-platform: "Linux"
Accept-Language: en-US
Accept: application/json, text/plain, */*
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
Content-Type: application/json
sec-ch-ua-mobile: ?0
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
Origin: https://aaca.ntua.edu.tw
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: cors
Sec-Fetch-Dest: empty
Referer: https://aaca.ntua.edu.tw/en
Accept-Encoding: gzip
Cookie: wcms.lang=en
Content-Length: 18

{
  "SiteIndex": ""
}

HTTP/1.1 500 Internal Server Error
Content-Type: text/html
Vary: Origin, Accept-Encoding
access-control-allow-credentials: true
access-control-allow-origin: https://aaca.ntua.edu.tw
X-Powered-By:
Date: Thu, 20 Aug 2026 08:04:50 GMT
Content-Length: 1196
Strict-Transport-Security: max-age=16070400; includeSubDomains

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<meta http-equiv="Content-Type" content="text/html; charset=big5"/>
<title>500 - 內部伺服器錯誤。</title>
<style type="text/css">
<!--
body{margin:0;font-size:.7em;font-family:Verdana, Arial, Helvetica, sans-serif;background:#EEEEEE;}
fieldset{padding:0 15px 10px 15px;}
h1{font-size:2.4em;margin:0;color:#FFF;}
h2{font-size:1.7em;margin:0;color:#CC0000;}
h3{font-size:1.2em;margin:10px 0 0 0;color:#000000;}
#header{width:96%;margin:0 0 0 0;padding:6px 2% 6px 2%;font-family:"trebuchet MS", Verdana, sans-serif;color:#FFF;
background-color:#555555;}
#content{margin:0 0 2%;position:relative;}
.content-container{background:#FFF;width:96%;margin-top:9px;padding:10px;position:relative;}
-->
</style>
</head>
<body>
```

```
<div id="header"><h1>Server Error</h1></div>
<div id="content">
<div class="content-container"><fieldset>
<h2>500 - Internal server error.</h2>
<h3>There is a problem with the resource you are looking for, and it cannot be displayed.</h3>
</fieldset></div>
</div>
</body>
</html>
```

Issue 2 of 8 - Audit Trail

08/20/2026 08:19:01	Issue type: ApplicationError Location: https://aaca.ntua.edu.tw/service/siteviewcount/trycountsiteview Severity: Informational CVSS: 0.0 Scanner: AppScan Dynamic Analyzer
---------------------	--

Issue 3 of 8

Issue ID:	55ab433e-f36b-1410-89cd-00f37f576f24
Severity:	Informational
Status	Open
Location	https://aaca.ntua.edu.tw/service/announcement/querylist
Domain	aaca.ntua.edu.tw
Element	->"RankGroups"[0]->"Condition" (Parameter)
Path	/service/announcement/querylist
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	0.0
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	550

Issue 3 of 8 - Details

Difference: **Parameter** ->"RankGroups"[0]->"Condition" manipulated from: ContentStatus & 1 to: %00

Reasoning: The application has responded with an error message, indicating an undefined state that may expose sensitive information.

Test Requests and Responses:

```
POST /Service/Announcement/QueryList HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
sec-ch-ua-platform: "Linux"
Accept-Language: en-US
Accept: application/json, text/plain, */*
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
Content-Type: application/json
sec-ch-ua-mobile: ?0
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
Origin: https://aaca.ntua.edu.tw
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: cors
Sec-Fetch-Dest: empty
Referer: https://aaca.ntua.edu.tw/en
Accept-Encoding: gzip
Cookie: wcms.lang=en; wcms.visitor=f3e11fef9516414c996bd354b3cce0bd
Content-Length: 643

{
  "Fields": [
    "AnnouncementId",
    "InternalId",
    "ContentStatus",
    "PictureId",
    "PicDescription",
    "Categories",
    "Tags",
    "Validate_Start",
    "_AnnouncementDetail.Lang",
    "_AnnouncementDetail.Title",
    "_AnnouncementDetail.SubTitle",
    "_AnnouncementDetail.Content"
  ],
  "Condition": "Validate_Start <= 2026-08-20T23:59:59 And (Validate_End >= 2026-08-20T00:00:00 Or Validate_End is null) And ContentStatus != 4 And _AnnouncementDetail.Lang = en And _AnnouncementDetail.Title != '' And Categories HasAny [Category20260626005]",
  "RankGroups": [
    {
      "Condition": "\u0000"
    }
  ],
  "OrderBy": [
```

```
{
  "Col": "Validate_Start",
  "Desc": true
},
{
  "Col": "CreateTime",
  "Desc": true
}
},
"PageNumber": 1,
"PageSize": 6
}

HTTP/1.1 500 Internal Server Error
Content-Type: text/html
Vary: Origin, Accept-Encoding
access-control-allow-credentials: true
access-control-allow-origin: https://aaca.ntua.edu.tw
X-Powered-By:
Date: Thu, 20 Aug 2026 08:04:50 GMT
Content-Length: 1196
Strict-Transport-Security: max-age=16070400; includeSubDomains

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<meta http-equiv="Content-Type" content="text/html; charset=big5"/>
<title>500 - 內部伺服器錯誤。</title>
<style type="text/css">
<!--
body{margin:0;font-size:.7em;font-family:Verdana, Arial, Helvetica, sans-serif;background:#EEEEEE;}
fieldset{padding:0 15px 10px 15px;}
h1{font-size:2.4em;margin:0;color:#FFF;}
h2{font-size:1.7em;margin:0;color:#CC0000;}
h3{font-size:1.2em;margin:10px 0 0 0;color:#000000;}
#header{width:96%;margin:0 0 0 0;padding:6px 2% 6px 2%;font-family:"trebuchet MS", Verdana, sans-serif;color:#FFF;
background-color:#555555;}
#content{margin:0 0 2%;position:relative;}
.content-container{background:#FFF;width:96%;margin-top:9px;padding:10px;position:relative;}
-->
</style>
</head>
<body>
<div id="header"><h1>Server Error</h1></div>
<div id="content">
<div class="content-container"><fieldset>
<h2>500 - Internal server error.</h2>
<h3>There is a problem with the resource you are looking for, and it cannot be displayed.</h3>
</fieldset></div>
</div>
</body>
</html>
```

Issue 3 of 8 - Audit Trail

08/20/2026 08:19:01	Issue type: ApplicationError Location: https://aaca.ntua.edu.tw/service/announcement/querylist Severity: Informational CVSS: 0.0 Scanner: AppScan Dynamic Analyzer
---------------------	--

Issue 4 of 8

Issue ID:	2bab433e-f36b-1410-89cd-00f37f576f24
Severity:	Informational
Status	Open
Location	https://aaca.ntua.edu.tw/service/filearchive/querylist
Domain	aaca.ntua.edu.tw
Element	->"Condition" (Parameter)
Path	/service/filearchive/querylist
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	0.0
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	550

Issue 4 of 8 - Details

Difference: **Parameter** ->"Condition" manipulated from:
ContentStatus != 4 And _FileArchiveInfo.Lang = ""en"" And _FileArchiveInfo.Title != """" And CategoriesId HasAny ""Category20260626004\" to: ###backslash_place_holder###'

Reasoning: The application has responded with an error message, indicating an undefined state that may expose sensitive information.

Test Requests and Responses:

```

POST /Service/FileArchive/QueryList HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
sec-ch-ua-platform: "Linux"
Accept-Language: en-US
Accept: application/json, text/plain, */*
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
Content-Type: application/json
sec-ch-ua-mobile: ?0
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
Origin: https://aaca.ntua.edu.tw
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: cors
Sec-Fetch-Dest: empty
Referer: https://aaca.ntua.edu.tw/en
Accept-Encoding: gzip
Cookie: wcms.lang=en; wcms.visitor=f3e11fef9516414c996bd354b3cce0bd
Content-Length: 1228

```

```

{
  "Fields": [
    "InternalId",
    "FileArchiveld",
    "CategoriesId",
    "TagsId",
    "ContentStatus",
    "CreateTime",
    "FileArchiveInfo.FileArchiveld",
    "FileArchiveInfo.RowId",
    "FileArchiveInfo.RowNo",
    "FileArchiveInfo.Lang",
    "FileArchiveInfo.Title",
    "FileArchiveInfo._FileArchiveDetail.FileArchiveld",
    "FileArchiveInfo._FileArchiveDetail.RowId",
    "FileArchiveInfo._FileArchiveDetail.RowNo",
    "FileArchiveInfo._FileArchiveDetail.ParentRowId",
    "FileArchiveInfo._FileArchiveDetail.FileSrcId",
    "FileArchiveInfo._FileArchiveDetail.FileName",
    "FileArchiveInfo._FileArchiveDetail.FileSrc.InternalId",
    "FileArchiveInfo._FileArchiveDetail.FileSrc.FileExtension",
    "FileArchiveInfo._FileArchiveDetail.FileSrc.PublicDownloadCount",
    "FileArchiveInfo._FileArchiveUrlDetail.FileArchiveld",
    "FileArchiveInfo._FileArchiveUrlDetail.RowId",
    "FileArchiveInfo._FileArchiveUrlDetail.RowNo",
    "FileArchiveInfo._FileArchiveUrlDetail.ParentRowId",
    "FileArchiveInfo._FileArchiveUrlDetail.Url",
    "FileArchiveInfo._FileArchiveUrlDetail.UrlDescription",
    "FileArchiveInfo._FileArchiveUrlDetail.WindowTarget"
  ],
  "Condition": "\\\"",
  "RankGroups": [
    {
      "Condition": "ContentStatus & 1"
    }
  ],
  "OrderBy": [
    {
      "Col": "Validate_Start",
      "Desc": true
    },
    {
      "Col": "CreateTime",
      "Desc": true
    }
  ],
  "PageNumber": 1,
  "PageSize": 5
}

```

```

HTTP/1.1 500 Internal Server Error
Content-Type: text/html
Vary: Origin, Accept-Encoding
access-control-allow-credentials: true
access-control-allow-origin: https://aaca.ntua.edu.tw
X-Powered-By:
Date: Thu, 20 Aug 2026 08:04:50 GMT
Content-Length: 1196
Strict-Transport-Security: max-age=16070400; includeSubDomains

```

```

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<meta http-equiv="Content-Type" content="text/html; charset=big5"/>
<title>500 - 內部伺服器錯誤。</title>
<style type="text/css">
<!--
body{margin:0;font-size:.7em;font-family:Verdana, Arial, Helvetica, sans-serif;background:#EEEEEE;}
fieldset{padding:0 15px 10px 15px;}
h1{font-size:2.4em;margin:0;color:#FFF;}
h2{font-size:1.7em;margin:0;color:#CC0000;}
h3{font-size:1.2em;margin:10px 0 0 0;color:#000000;}
#header{width:96%;margin:0 0 0 0;padding:6px 2% 6px 2%;font-family:"trebuchet MS", Verdana, sans-serif;color:#FFF;
background-color:#555555;}
#content{margin:0 0 2%;position:relative;}
.content-container{background:#FFF;width:96%;margin-top:9px;padding:10px;position:relative;}
-->
</style>
</head>
<body>
<div id="header"><h1>Server Error</h1></div>
<div id="content">
<div class="content-container"><fieldset>
<h2>500 - Internal server error.</h2>
<h3>There is a problem with the resource you are looking for, and it cannot be displayed.</h3>
</fieldset></div>
</div>
</body>
</html>

```

Issue 5 of 8

Issue ID:	6aab433e-f36b-1410-89cd-00f37f576f24
Severity:	Informational
Status	Open
Location	https://aaca.ntua.edu.tw/service/announcement/querylist
Domain	aaca.ntua.edu.tw
Element	->"Condition" (Parameter)
Path	/service/announcement/querylist
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	0.0
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	550

Issue 5 of 8 - Details

Difference: Parameter `->"Condition"` manipulated from:

```
Validate_Start <= 2026-08-20T23:59:59 And (Validate_End >= 2026-08-20T00:00:00 Or Validate_End is null) And ContentStatus != 4 And _  
AnnouncementDetail.Lang = en And _AnnouncementDetail.Title != " And Categories HasAny [Category20260626005]  
to: ###backslash_place_holder#####comma_place_holder###
```

Reasoning: The application has responded with an error message, indicating an undefined state that may expose sensitive information.

Test Requests and Responses:

```
POST /Service/Announcement/QueryList HTTP/1.1  
Host: aaca.ntua.edu.tw  
Connection: keep-alive  
sec-ch-ua-platform: "Linux"  
Accept-Language: en-US  
Accept: application/json, text/plain, */*  
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"  
Content-Type: application/json  
sec-ch-ua-mobile: ?0  
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36  
Origin: https://aaca.ntua.edu.tw  
Sec-Fetch-Site: same-origin  
Sec-Fetch-Mode: cors  
Sec-Fetch-Dest: empty  
Referer: https://aaca.ntua.edu.tw/en  
Accept-Encoding: gzip  
Cookie: wcms.lang=en; wcms.visitor=f3e11fef9516414c996bd354b3cce0bd  
Content-Length: 418
```

```
{  
  "Fields": [  
    "AnnouncementId",  
    "InternalId",  
    "ContentStatus",  
    "PictureId",  
    "PicDescription",  
    "Categories",  
    "Tags",  
    "Validate_Start",  
    "_AnnouncementDetail.Lang",  
    "_AnnouncementDetail.Title",  
    "_AnnouncementDetail.SubTitle",  
    "_AnnouncementDetail.Content"  
  ],  
  "Condition": "\"\\\"\"",  
  "RankGroups": [  
    {  
      "Condition": "ContentStatus & 1"  
    }  
  ],  
  "OrderBy": [  
    {  
      "Col": "Validate_Start",  
      "Desc": true  
    },  
    {  
      "Col": "CreateTime",  
      "Desc": true  
    }  
  ],  
  "PageNumber": 1,  
  "PageSize": 6  
}
```

```
HTTP/1.1 500 Internal Server Error  
Content-Type: text/html  
Vary: Origin, Accept-Encoding  
access-control-allow-credentials: true
```

```
access-control-allow-origin: https://aaca.ntua.edu.tw
X-Powered-By:
Date: Thu, 20 Aug 2026 08:04:50 GMT
Content-Length: 1196
Strict-Transport-Security: max-age=16070400; includeSubDomains

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<meta http-equiv="Content-Type" content="text/html; charset=big5"/>
<title>500 - 內部伺服器錯誤。</title>
<style type="text/css">
<!--
body{margin:0;font-size:.7em;font-family:Verdana, Arial, Helvetica, sans-serif;background:#EEEEEE;}
fieldset{padding:0 15px 10px 15px;}
h1{font-size:2.4em;margin:0;color:#FFF;}
h2{font-size:1.7em;margin:0;color:#CC0000;}
h3{font-size:1.2em;margin:10px 0 0 0;color:#000000;}
#header{width:96%;margin:0 0 0 0;padding:6px 2% 6px 2%;font-family:"trebuchet MS", Verdana, sans-serif;color:#FFF;
background-color:#555555;}
#content{margin:0 0 2%;position:relative;}
.content-container{background:#FFF;width:96%;margin-top:9px;padding:10px;position:relative;}
-->
</style>
</head>
<body>
<div id="header"><h1>Server Error</h1></div>
<div id="content">
<div class="content-container"><fieldset>
<h2>500 - Internal server error.</h2>
<h3>There is a problem with the resource you are looking for, and it cannot be displayed.</h3>
</fieldset></div>
</div>
</body>
</html>
```

Issue 5 of 8 - Audit Trail

08/20/2026 08:19:01

Issue type: ApplicationError
Location: https://aaca.ntua.edu.tw/service/announcement/querylist
Severity: Informational
CVSS: 0.0
Scanner: AppScan Dynamic Analyzer

Issue 6 of 8

Issue ID:	76ab433e-f36b-1410-89cd-00f37f576f24
Severity:	Informational
Status	Open
Location	https://aaca.ntua.edu.tw/service/webresource/querylist
Domain	aaca.ntua.edu.tw
Element	->"Condition" (Parameter)
Path	/service/webresource/querylist
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	0.0
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	550

Issue 6 of 8 - Details

Difference: Parameter ->"Condition" manipulated from:

```
ContentStatus != 4 And _WebResourceInfo.Lang = \\\\"en\\\\" And _WebResourceInfo.Title != \\\\"\\\\" And Categories HasAny \\\\"Category20260626003\\\\"
to: %00
```

Reasoning: The application has responded with an error message, indicating an undefined state that may expose sensitive information.

Test Requests and Responses:

```
POST /Service/WebResource/QueryList HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
sec-ch-ua-platform: "Linux"
Accept-Language: en-US
Accept: application/json, text/plain, */*
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
Content-Type: application/json
sec-ch-ua-mobile: ?0
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
Origin: https://aaca.ntua.edu.tw
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: cors
Sec-Fetch-Dest: empty
Referer: https://aaca.ntua.edu.tw/en
Accept-Encoding: gzip
```

```
Cookie: wcms.lang=en; wcms.visitor=f3e11fef9516414c996bd354b3cce0bd
Content-Length: 392

{
  "Fields": [
    "InternalId",
    "WebResourceId",
    "PicId",
    "PicDescription",
    "Categories",
    "Tags",
    "ContentStatus",
    "CreateTime",
    "_WebResourceInfo.Lang",
    "_WebResourceInfo.Title",
    "_WebResourceInfo.Content",
    "_WebResourceInfo.ResUrl",
    "_WebResourceInfo.Url_OpenType"
  ],
  "Condition": "\u0000",
  "RankGroups": [
    {
      "Condition": "ContentStatus & 1"
    }
  ],
  "OrderBy": [
    {
      "Col": "CreateTime",
      "Desc": true
    }
  ],
  "PageNumber": 0,
  "PageSize": 0
}

HTTP/1.1 500 Internal Server Error
Content-Type: text/html
Vary: Origin, Accept-Encoding
access-control-allow-credentials: true
access-control-allow-origin: https://aaca.ntua.edu.tw
X-Powered-By:
Date: Thu, 20 Aug 2026 08:04:50 GMT
Content-Length: 1196
Strict-Transport-Security: max-age=16070400; includeSubDomains

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<meta http-equiv="Content-Type" content="text/html; charset=big5"/>
<title>500 - 內部伺服器錯誤。</title>
<style type="text/css">
<!--
body{margin:0;font-size:.7em;font-family:Verdana, Arial, Helvetica, sans-serif;background:#EEEEEE;}
fieldset{padding:0 15px 10px 15px;}
h1{font-size:2.4em;margin:0;color:#FFF;}
h2{font-size:1.7em;margin:0;color:#CC0000;}
h3{font-size:1.2em;margin:10px 0 0 0;color:#000000;}
#header{width:96%;margin:0 0 0 0;padding:6px 2% 6px 2%;font-family:"trebuchet MS", Verdana, sans-serif;color:#FFF;
background-color:#555555;}
#content{margin:0 0 2%;position:relative;}
.content-container{background:#FFF;width:96%;margin-top:9px;padding:10px;position:relative;}
-->
</style>
</head>
<body>
<div id="header"><h1>Server Error</h1></div>
<div id="content">
<div class="content-container"><fieldset>
<h2>500 - Internal server error.</h2>
<h3>There is a problem with the resource you are looking for, and it cannot be displayed.</h3>
</fieldset></div>
</div>
</body>
</html>
```

Issue 6 of 8 - Audit Trail

08/20/2026 08:19:01	Issue type: ApplicationError Location: https://aaca.ntua.edu.tw/service/webresource/querylist Severity: Informational CVSS: 0.0 Scanner: AppScan Dynamic Analyzer
---------------------	---

Issue 7 of 8

Issue ID:	82ab433e-f36b-1410-89cd-00f37f576f24
Severity:	Informational
Status	Open
Location	https://aaca.ntua.edu.tw/service/webresource/querylist
Domain	aaca.ntua.edu.tw
Element	->"RankGroups"[0]->"Condition" (Parameter)
Path	/service/webresource/querylist
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	0.0
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	550

Issue 7 of 8 - Details

Difference: Parameter `->"RankGroups"[0]->"Condition"` manipulated from: `ContentStatus & 1` to: `###backslash_place_holder###'`

Reasoning: The application has responded with an error message, indicating an undefined state that may expose sensitive information.

Test Requests and Responses:

```
POST /Service/WebResource/QueryList HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
sec-ch-ua-platform: "Linux"
Accept-Language: en-US
Accept: application/json, text/plain, */*
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
Content-Type: application/json
sec-ch-ua-mobile: ?0
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
Origin: https://aaca.ntua.edu.tw
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: cors
Sec-Fetch-Dest: empty
Referer: https://aaca.ntua.edu.tw/en
Accept-Encoding: gzip
Cookie: wcms.lang=en; wcms.visitor=f3e11fef9516414c996bd354b3cce0bd
Content-Length: 516

{
  "Fields": [
    "InternalId",
    "WebResourceId",
    "PicId",
    "PicDescription",
    "Categories",
    "Tags",
    "ContentStatus",
    "CreateTime",
    "_WebResourceInfo.Lang",
    "_WebResourceInfo.Title",
    "_WebResourceInfo.Content",
    "_WebResourceInfo.ResUrl",
    "_WebResourceInfo.Url_OpenType"
  ],
  "Condition": "ContentStatus != 4 And _WebResourceInfo.Lang = '\\en\\' And _WebResourceInfo.Title != '\\\\'\\' And Categories HasAny \\\"Category20260626003\\\"",
  "RankGroups": [
    {
      "Condition": "\\\"
    }
  ],
  "OrderBy": [
    {
      "Col": "CreateTime",
      "Desc": true
    }
  ],
  "PageNumber": 0,
  "PageSize": 0
}

HTTP/1.1 500 Internal Server Error
Content-Type: text/html
Vary: Origin, Accept-Encoding
access-control-allow-credentials: true
access-control-allow-origin: https://aaca.ntua.edu.tw
X-Powered-By:
Date: Thu, 20 Aug 2026 08:04:50 GMT
Content-Length: 1196
Strict-Transport-Security: max-age=16070400; includeSubDomains

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<meta http-equiv="Content-Type" content="text/html; charset=big5"/>
<title>500 - 內部伺服器錯誤。 </title>
<style type="text/css">
<!--
body{margin:0;font-size:.7em;font-family:Verdana, Arial, Helvetica, sans-serif;background:#EEEEEE;}
fieldset{padding:0 15px 10px 15px;}
h1{font-size:2.4em;margin:0;color:#FFF;}
h2{font-size:1.7em;margin:0;color:#CC0000;}
h3{font-size:1.2em;margin:10px 0 0 0;color:#000000;}
#header{width:96%;margin:0 0 0 0;padding:6px 2% 6px 2%;font-family:"trebuchet MS", Verdana, sans-serif;color:#FFF;
background-color:#555555;}
```

```
#content{margin:0 0 2%;position:relative;}
.content-container{background:#FFF;width:96%;margin-top:9px;padding:10px;position:relative;}
-->
</style>
</head>
<body>
<div id="header"><h1>Server Error</h1></div>
<div id="content">
<div class="content-container"><fieldset>
<h2>500 - Internal server error.</h2>
<h3>There is a problem with the resource you are looking for, and it cannot be displayed.</h3>
</fieldset></div>
</div>
</body>
</html>
```

Issue 7 of 8 - Audit Trail

08/20/2026 08:19:01	Issue type: ApplicationError Location: https://aaca.ntua.edu.tw/service/webresource/querylist Severity: Informational CVSS: 0.0 Scanner: AppScan Dynamic Analyzer
---------------------	---

Issue 8 of 8

Issue ID:	9aab433e-f36b-1410-89cd-00f37f576f24
Severity:	Informational
Status	Open
Location	https://aaca.ntua.edu.tw/service/siteviewcount/trycountpageview
Domain	aaca.ntua.edu.tw
Element	->"SiteIndex" (Parameter)
Path	/service/siteviewcount/trycountpageview
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	0.0
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	550

Issue 8 of 8 - Details

Difference: Parameter ->"SiteIndex" manipulated from: — to: ###backslash_place_holder###'

Reasoning: The application has responded with an error message, indicating an undefined state that may expose sensitive information.

Test Requests and Responses:

```
POST /Service/SiteViewCount/TryCountPageView HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
sec-ch-ua-platform: "Linux"
Accept-Language: en-US
Accept: application/json, text/plain, */*
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
Content-Type: application/json
sec-ch-ua-mobile: ?0
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
Origin: https://aaca.ntua.edu.tw
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: cors
Sec-Fetch-Dest: empty
Referer: https://aaca.ntua.edu.tw/en/AdmissionsProfessionalizationDevelopment/AbouttheProject/BackgroundoftheProject
Accept-Encoding: gzip
Cookie: wcms.lang=en; wcms.visitor=f3e11fef9516414c996bd354b3cce0bd
Content-Length: 97

{
  "SiteIndex": "\\",
  "ProgId": "PageManagement",
  "InternalId": "84a61d41-94eb-472d-b699-fe8ee4dd6cf4"
}

HTTP/1.1 500 Internal Server Error
Content-Type: text/html
Vary: Origin, Accept-Encoding
access-control-allow-credentials: true
access-control-allow-origin: https://aaca.ntua.edu.tw
X-Powered-By:
Date: Thu, 20 Aug 2026 08:04:50 GMT
Content-Length: 1196
Strict-Transport-Security: max-age=16070400; includeSubDomains

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<meta http-equiv="Content-Type" content="text/html; charset=big5"/>
<title>500 - 內部伺服器錯誤。 </title>
```

```
<style type="text/css">
<!--
body {margin:0;font-size:.7em;font-family:Verdana, Arial, Helvetica, sans-serif;background:#EEEEEE;}
fieldset {padding:0 15px 10px 15px;}
h1 {font-size:2.4em;margin:0;color:#FFF;}
h2 {font-size:1.7em;margin:0;color:#CC0000;}
h3 {font-size:1.2em;margin:10px 0 0 0;color:#000000;}
#header {width:96%;margin:0 0 0 0;padding:6px 2% 6px 2%;font-family:"trebuchet MS", Verdana, sans-serif;color:#FFF;
background-color:#555555;}
#content {margin:0 0 2%;position:relative;}
.content-container {background:#FFF;width:96%;margin-top:9px;padding:10px;position:relative;}
-->
</style>
</head>
<body>
<div id="header"><h1>Server Error</h1></div>
<div id="content">
<div class="content-container"><fieldset>
<h2>500 - Internal server error.</h2>
<h3>There is a problem with the resource you are looking for, and it cannot be displayed.</h3>
</fieldset></div>
</div>
</body>
</html>
```

Issue 8 of 8 - Audit Trail

08/20/2026 08:19:01	Issue type: ApplicationError Location: https://aaca.ntua.edu.tw/service/siteviewcount/trycountpageview Severity: Informational CVSS: 0.0 Scanner: AppScan Dynamic Analyzer
---------------------	--

[Go to Table of Contents](#)

I DAST: Client-Side (JavaScript) Cookie References 1

How to Fix: [Client-Side \(JavaScript\) Cookie References](#)

Issue 1 of 1

Issue ID:	01ab433e-f36b-1410-89cd-00f37f576f24
Severity:	Informational
Status	Open
Location	https://aaca.ntua.edu.tw/assets/index-bpbzgyg6.js
Domain	aaca.ntua.edu.tw
Element	const __vite__mapDeps=(i,m=__vite__mapDeps,d=(m.f (m.f=["assets/LoadSpecCss-DvpspM99.css","assets/L... (Page)
Path	/assets/index-bpbzgyg6.js
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	0.0
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	602

Issue 1 of 1 - Details

Reasoning: AppScan found a reference to cookies in the JavaScript.
Test Requests and Responses:

```
GET /assets/index-BpBZgyG6.js HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
Origin: https://aaca.ntua.edu.tw
sec-ch-ua-platform: "Linux"
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
sec-ch-ua-mobile: ?0
Accept: */*
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: cors
Sec-Fetch-Dest: script
Referer: https://aaca.ntua.edu.tw/en
Accept-Encoding: gzip
Accept-Language: en-US
Content-Length: 0
```

HTTP/1.1 200 OK
Cache-Control: public, max-age=31536000, immutable
Keep-Alive: timeout=5
Transfer-Encoding: chunked
Content-Type: text/javascript; charset=utf-8
Last-Modified: Thu, 20 Aug 2026 02:01:26 GMT
Accept-Ranges: bytes
ETag: W/"17ab21-1a01ce6d8f0"
Vary: Accept-Encoding
X-Content-Type-Options: nosniff
X-Frame-Options: SAMEORIGIN
Referrer-Policy: strict-origin-when-cross-origin
Permissions-Policy: geolocation=(), microphone=(), camera=(), fullscreen=(self)
Cross-Origin-Opener-Policy: same-origin
X-Permitted-Cross-Domain-Policies: none
Strict-Transport-Security: max-age=16070400; includeSubDomains
X-Powered-By:
Date: Thu, 20 Aug 2026 08:02:51 GMT
Content-Length: 1551137

```
const __vite_mapDeps=(i,m=__vite_mapDeps,d=(m.f?["assets/LoadSpecCss-DvpspM99.css","assets/LoadSpecCss_Server-CvGY3VMI.css","assets/LoadFeaturesCss-B-N1djgj.js","assets/LoadFeaturesCss-BYG_fPge.css","assets/cms_content_format-NvYllcok.css","assets/LoadFeaturesCss_Client-BKnKf1bm.js","assets/LoadFeaturesCss_Client-Cz6VI-KF.css"]):>i.map(i=>d[i]);function J(e,t){for(var n=0;n<t.length;n++){const r=t[n];if(typeof r!="string"&&Array.isArray(r)){for(const a in r){if(a!="default"&&!(a in e)){const s=Object.getOwnPropertyDescriptor(r,a);s&&Object.defineProperty(e,a,s.get?s:{enumerable:!0,get:()=>r[a]})}}return Object.freeze(Object.defineProperty(e,Symbol.toStringTag,{value:"Module"}))}(function(){const t=document.createElement("link").relList;if(t&&t.supports&&t.supports("modulepreload"))return;for(const a of document.querySelectorAll("link[rel=modulepreload]"))r(a);new MutationObserver(a=>{for(const s of a){if(s.type==="childList")for(const o of s.addedNodes)o.tagName==="LINK"&&o.rel==="modulepreload"&&r(o)}.observe(document,{childList:!0,subtree:!0});function n(a){const s={};return a.integrity&&(s.integrity=a.integrity),a.referrerPolicy&&(s.referrerPolicy=a.referrerPolicy),a.crossOrigin==="use-credentials"?s.credentials="include":a.crossOrigin==="anonymous"?s.credentials="omit":s.credentials="same-origin",s}function r(a){if(a.ep)return;a.ep=!0;const s=n(a);fetch(a.href,s)})(const A8="modulepreload",k8=function(e){return"/"+e,h_={},al=function(t,n,r){let a=Promise.resolve();if(n&&n.length>0){let o=function(f){return Promise.all(f.map(g=>Promise.resolve(g)).then(y=>({status:"fulfilled",value:y})),y=>({status:"rejected",reason:y})))};document.getElementsByTagName("link");const c=document.querySelector("meta[property=csp-nonce]"),d=c?c.getAttribute("nonce"):"";a=o(n.map(f=>{if(f=k8(f),f in h_)return;h_[f]=!0;const g=f.endsWith(".css");y=g?[rel="stylesheet"]:"";if(document.querySelector("link[href="+f+"]$ {f}")$ {y}`))return;const p=document.createElement("link");if(p.rel=g?"stylesheet":A8,g||p.as="script",p.crossOrigin="",p.href=f,d&&p.setAttribute("nonce",d),document.head.appendChild(p),g)return new Promise((w,b)=>{p.addEventListener("load",w),p.addEventListener("error",b)}))>b(new Error("Unable to preload CSS for "+f))})))function s(o){const c=new Event("vite:preloadError",{cancelable:!0});if(c.payload=o,window.dispatchEvent(c),!c.defaultPrevented)throw o}return a.then(o=>{for(const c of o){[c.status==="rejected"&&s(c.reason);return t].catch(s)});function Sc(e){return e&&e.__esModule&&Object.prototype.hasOwnProperty.call(e,"default"?e.default:e}var xv={exports:{}},jd={},Sv={exports:{}},kt={};/**  
 * @license React  
 * react.production.min.js  
 *  
 * Copyright (c) Facebook, Inc. and its affiliates.  
 *  
 * This source code is licensed under the MIT license found in the  
 * LICENSE file in the root directory of this source tree.  
 */var y_ ;function j8(){if(y_)return kt;y_ =1;var e=Symbol.for("react.element"),t=Symbol.for("react.portal"),n=Symbol.for("react.fragment"),r=Symbol.for("react.strict_mode"),a=Symbol.for("react.profiler"),s=Symbol.for("react.provider"),o=Symbol.for("react.context"),c=Symbol.for("react.forward_ref"),d=Symbol.for("react.suspense"),f=Symbol.for("react.memo"),g=Symbol.for("react.lazy"),y=Symbol.iterator;function p(A){return A===null||typeof A!="object"?null:(A=y&&A[y]||A["@@iterator"],typeof A=="function"?A:null)}var w={isMounted:function(){return!1},enqueueForceUpdate:function(){},enqueueReplaceState:function(){},enqueueSetState:function(){}},b=Object.assign,x={};function S(A,G,Z){this.props=A,this.context=G,this.refs=x,this.updater=Z||w}S.prototype.isReactComponent={},S.prototype.setState=function(A,G){if(typeof A!="object"&&typeof A!="function"&&A!=""
```

Issue 1 of 1 - Audit Trail

08/20/2026 08:19:01	Issue type: Client-Side(JavaScript)CookieReferences Location: https://aaca.ntua.edu.tw/assets/index-bpbzgyg6.js Severity: Informational CVSS: 0.0 Scanner: AppScan Dynamic Analyzer
---------------------	---

[Go to Table of Contents](#)

I	DAST: Missing "Referrer policy" Security Header	1
How to Fix: Missing "Referrer policy" Security Header		

Issue 1 of 1

Issue ID:	adaa433e-f36b-1410-89cd-00f37f576f24
Severity:	Informational
Status	Open
Location	https://aaca.ntua.edu.tw/
Domain	aaca.ntua.edu.tw
Element	aaca.ntua.edu.tw (Page)
Path	/
Scheme	https
Domain	aaca.ntua.edu.tw
CVSS	0.0
Date Created	Thursday, August 20, 2026
Last Updated	Thursday, August 20, 2026
CWE:	200

Issue 1 of 1 - Details

Reasoning: AppScan detected that the Referrer Policy Response header is missing or with an insecure policy, which increases exposure to various cross-site injection attacks

Test Requests and Responses:

```
GET /Service/SystemAPI/GetXsrfToken HTTP/1.1
Host: aaca.ntua.edu.tw
Connection: keep-alive
sec-ch-ua-platform: "Linux"
Accept-Language: en-US
Accept: application/json, text/plain, */*
sec-ch-ua: "Chromium";v="145", "Not:A-Brand";v="99"
User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) HeadlessChrome/145.0.0.0 Safari/537.36
sec-ch-ua-mobile: ?0
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: cors
Sec-Fetch-Dest: empty
Referer: https://aaca.ntua.edu.tw/en
Accept-Encoding: gzip
Content-Length: 0

HTTP/1.1 500 Internal Server Error
Content-Type: text/html
Vary: Accept-Encoding
X-Powered-By:
Date: Thu, 20 Aug 2026 07:26:52 GMT
Content-Length: 1196
Strict-Transport-Security: max-age=16070400; includeSubDomains

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<meta http-equiv="Content-Type" content="text/html; charset=big5"/>
<title>500 - 500 Internal Server Error</title>
<style type="text/css">
<!--
body{margin:0;font-size:.7em;font-family:Verdana, Arial, Helvetica, sans-serif;background:#EEEEEE;}
fieldset{padding:0 15px 10px 15px;}
h1{font-size:2.4em;margin:0;color:#FFF;}
h2{font-size:1.7em;margin:0;color:#CC0000;}
h3{font-size:1.2em;margin:10px 0 0 0;color:#000000;}
#header{width:96%;margin:0 0 0;padding:6px 2% 6px 2%;font-family:"trebuchet MS", Verdana, sans-serif;color:#FFF;
background-color:#555555;}
#content{margin:0 0 2%;position:relative;}
.content-container{background:#FFF;width:96%;margin-top:9px;padding:10px;position:relative;}
-->
</style>
</head>
<body>
<div id="header"><h1>Server Error</h1></div>
<div id="content">
<div class="content-container"><fieldset>
<h2>500 - Internal server error.</h2>
<h3>There is a problem with the resource you are looking for, and it cannot be displayed.</h3>
</fieldset></div>
</div>
</body>
</html>
```

Issue 1 of 1 - Audit Trail

08/20/2026 08:19:01	Issue type: Missing"Referrerpolicy"SecurityHeader Location: https://aaca.ntua.edu.tw/ Severity: Informational CVSS: 0.0 Scanner: AppScan Dynamic Analyzer
---------------------	---

[Go to Table of Contents](#)

How to Fix

I Application Error

Cause

Proper bounds checking were not performed on incoming parameter values
No validation was done in order to make sure that user input matches the data type expected

Risk

It is possible to gather sensitive debugging information

If an attacker probes the application by forging a request that contains parameters or parameter values other than the ones expected by the application (examples are listed below), the application may enter an undefined state that makes it vulnerable to attack. The attacker can gain useful information from the application's response to this request, which information may be exploited to locate application weaknesses.

For example, if the parameter field should be an apostrophe-quoted string (e.g. in an ASP script or SQL query), the injected apostrophe symbol will prematurely terminate the string stream, thus changing the normal flow/syntax of the script.

Another cause of vital information being revealed in error messages, is when the scripting engine, web server, or database are misconfigured.

Here are some different variants:

- [1] Remove parameter
- [2] Remove parameter value
- [3] Set parameter value to null
- [4] Set parameter value to a numeric overflow (+/- 99999999)
- [5] Set parameter value to hazardous characters, such as ' " \' \ ") ;
- [6] Append some string to a numeric parameter value
- [7] Append "." (dot) or "[]" (angle brackets) to the parameter name

Fix recommendation

[1] Check incoming requests for the presence of all expected parameters and values. When a parameter is missing, issue a proper error message or use default values.

[2] The application should verify that its input consists of valid characters (after decoding). For example, an input value containing the null byte (encoded as %00), apostrophe, quotes, etc. should be rejected.

[3] Enforce values in their expected ranges and types. If your application expects a certain parameter to have a value from a certain set, then the application should ensure that the value it receives indeed belongs to the set. For example, if your application expects a value in the range 10..99, then it should make sure that the value is indeed numeric, and that its value is in 10..99.

[4] Verify that the data belongs to the set offered to the client.

[5] Do not output debugging error messages and exceptions in a production environment.

In order to disable debugging in ASP.NET, edit your web.config file to contain the following:

```
<compilation
debug="false"
/>
```

For more information, see "HOW TO: Disable Debugging for ASP.NET Applications" in:

<http://support.microsoft.com/default.aspx?scid=kb;en-us;815157>
■ <http://support.microsoft.com/default.aspx?scid=kb;en-us;815157>
external

You can add input validation to Web Forms pages by using validation controls. Validation controls provide an easy-to-use mechanism for all common types of standard validation (for example, testing for valid dates or values within a range), plus ways to provide custom-written validation. In addition, validation controls allow you to completely customize how error information is displayed to the user. Validation controls can be used with any controls that are processed in a Web Forms page's class file, including both HTML and Web server controls.

To make sure that all the required parameters exist in a request, use the "RequiredFieldValidator" validation control. This control ensures that the user does not skip an entry in the web form.

To make sure user input contains only valid values, you can use one of the following validation controls:

[1] "RangeValidator": checks that a user's entry (value) is between specified lower and upper boundaries. You can check ranges within pairs of numbers, alphabetic characters, and dates.

[2] "RegularExpressionValidator": checks that the entry matches a pattern defined by a regular expression. This type of validation allows you to check for predictable sequences of characters, such as those in social security numbers, e-mail addresses, telephone numbers, postal codes, and so on.

Important note: validation controls do not block user input or change the flow of page processing; they only set an error state, and produce error messages. It is the programmer's responsibility to test the state of the controls in the code before performing further application-specific actions.

There are two ways to check for user input validity:

1. Test for a general error state:

In your code, test the page's IsValid property. This property rolls up the values of the IsValid properties of all the validation controls on the page (using a logical AND). If one of the validation controls is set to invalid, the page's property will return false.

2. Test for the error state of individual controls:

Loop through the page's Validators collection, which contains references to all the validation controls. You can then examine the IsValid property of each validation control.

**** Input Data Validation:**

While data validations may be provided as a user convenience on the client-tier, data validation must be performed on the server-tier using Servlets. Client-side validations are inherently insecure because they can be easily bypassed, e.g. by disabling Javascript.

A good design usually requires the web application framework to provide server-side utility routines to validate the following:

[1] Required field

[2] Field data type (all HTTP request parameters are Strings by default)

[3] Field length

[4] Field range

[5] Field options

[6] Field pattern

[7] Cookie values

[8] HTTP Response

A good practice is to implement the above routine as static methods in a "Validator" utility class. The following sections describe an example validator class.

[1] Required field

Always check that the field is not null and its length is greater than zero, excluding leading and trailing white spaces.

Example of how to validate required fields:

```
// Java example to validate required fields public Class Validator { ... public static boolean validateRequired(String value)
{ boolean isValid = false; if (value != null && value.trim().length() > 0) { isValid = true; } return isValid; }
... } ... String fieldValue = request.getParameter("fieldName"); if (Validator.validateRequired(fieldValue)) { // fieldValue is
valid, continue processing request ... }
```

[2] Field data type

In web applications, input parameters are poorly typed. For example, all HTTP request parameters or cookie values are of type String. The developer is responsible for verifying the input is of the correct data type. Use the Java primitive wrapper classes to check if the field value can be safely converted to the desired primitive data type.

Example of how to validate a numeric field (type int):

```
// Java example to validate that a field is an int number public Class Validator { ... public static boolean validateInt(String
value) { boolean isValid = false; try { Integer.parseInt(value); isValid = true; } catch (Exception e) { isValid
```

```
= false; } return isFieldValid; } ... } ... // check if the HTTP request parameter is of type int String fieldValue =
request.getParameter("fieldName"); if (Validator.validateInt(fieldValue)) { // fieldValue is valid, continue processing
request ... }
```

A good practice is to convert all HTTP request parameters to their respective data types. For example, store the "integerValue" of a request parameter in a request attribute and use it as shown in the following example:

```
// Example to convert the HTTP request parameter to a primitive wrapper data type // and store this value in a request
attribute for further processing String fieldValue = request.getParameter("fieldName"); if
(Validator.validateInt(fieldValue)) { // convert fieldValue to an Integer Integer integerValue =
Integer.getInteger(fieldValue); // store integerValue in a request attribute request.setAttribute("fieldName",
integerValue); } ... // Use the request attribute for further processing Integer integerValue =
(Integer)request.getAttribute("fieldName"); ...
```

The primary Java data types that the application should handle:

- Byte
- Short
- Integer
- Long
- Float
- Double
- Date

[3] Field length

Always ensure that the input parameter (whether HTTP request parameter or cookie value) is bounded by a minimum length and/or a maximum length.

Example to validate that the length of the userName field is between 8 and 20 characters:

```
// Example to validate the field length public Class Validator { ... public static boolean validateLength(String value, int
minLength, int maxLength) { String validatedValue = value; if (!validateRequired(value)) { validatedValue = ""; } return
(validatedValue.length() >= minLength && validatedValue.length() <= maxLength); } ... } ... String userName =
request.getParameter("userName"); if (Validator.validateRequired(userName)) { if (Validator.validateLength(userName,
8, 20)) { // userName is valid, continue further processing ... } }
```

[4] Field range

Always ensure that the input parameter is within a range as defined by the functional requirements.

Example to validate that the input numberOfChoices is between 10 and 20:

```
// Example to validate the field range public Class Validator { ... public static boolean validateRange(int value, int min, int
max) { return (value >= min && value <= max); } ... } ... String fieldValue = request.getParameter("numberOfChoices");
if (Validator.validateRequired(fieldValue)) { if (Validator.validateInt(fieldValue)) { int numberOfChoices =
Integer.parseInt(fieldValue); if (Validator.validateRange(numberOfChoices, 10, 20)) { // numberOfChoices is valid,
continue processing request ... } } }
```

[5] Field options

Often, the web application presents the user with a set of options to choose from, e.g. using the SELECT HTML tag, but fails to perform server-side validation to ensure that the selected value is one of the allowed options. Remember that a malicious user can easily modify any option value. Always validate the selected user value against the allowed options as defined by the functional requirements.

Example to validate the user selection against a list of allowed options:

```
// Example to validate user selection against a list of options public Class Validator { ... public static boolean
validateOption(Object[] options, Object value) { boolean isValidValue = false; try { List list = Arrays.asList(options); if (list
!= null) { isValidValue = list.contains(value); } } catch (Exception e) { } return isValidValue; } ... } ... // Allowed options
String[] options = {"option1", "option2", "option3"}; // Verify that the user selection is one of the allowed options String
userSelection = request.getParameter("userSelection"); if (Validator.validateOption(options, userSelection)) { // valid
user selection, continue processing request ... }
```

[6] Field pattern

Always check that the user input matches a pattern as defined by the functionality requirements. For example, if the userName field should only allow alpha-numeric characters, case insensitive, then use the following regular expression:

```
^[a-zA-Z0-9]*$
```

Java 1.3 or earlier versions do not include any regular expression packages. Apache Regular Expression Package (see Resources below) is recommended for use with Java 1.3 to resolve this lack of support.

Example to perform regular expression validation:

```
// Example to validate that a given value matches a specified pattern // using the Apache regular expression package
import org.apache.regexp.RE; import org.apache.regexp.RESyntaxException; public Class Validator { ... public static
boolean matchPattern(String value, String expression) { boolean match = false; if (validateRequired(expression)) { RE r
= new RE(expression); match = r.match(value); } return match; } ... } ... // Verify that the userName request parameter
is alpha-numeric String userName = request.getParameter("userName"); if (Validator.matchPattern(userName, "^[a-zA-Z0-9]*$")) { // userName is valid, continue processing request ... }
```

Java 1.4 introduced a new regular expression package (java.util.regex). Here is a modified version of Validator.matchPattern using the new Java 1.4 regular expression package:

```
// Example to validate that a given value matches a specified pattern // using the Java 1.4 regular expression package
import java.util.regex.Pattern; import java.util.regex.Matcher; public Class Validator { ... public static boolean
matchPattern(String value, String expression) { boolean match = false; if (validateRequired(expression)) { match =
Pattern.matches(expression, value); } return match; } ... }
```

[7] Cookie value

Use the javax.servlet.http.Cookie object to validate the cookie value. The same validation rules (described above) apply to cookie values depending on the application requirements, e.g. validate a required value, validate length, etc.

Example to validate a required cookie value:

```
// Example to validate a required cookie value // First retrieve all available cookies submitted in the HTTP request Cookie[]
cookies = request.getCookies(); if (cookies != null) { // find the "user" cookie for (int i=0; i<cookies.length; ++i) { if
(cookies[i].getName().equals("user")) { // validate the cookie value if (Validator.validateRequired(cookies[i].getValue())) {
// valid cookie value, continue processing request ... } } }
```

[8] HTTP Response

[8-1] Filter user input

To guard the application against cross-site scripting, sanitize HTML by converting sensitive characters to their corresponding character entities. These are the HTML sensitive characters:

< > " ' % ;) (& +

Example to filter a specified string by converting sensitive characters to their corresponding character entities:

```
// Example to filter sensitive data to prevent cross-site scripting public Class Validator { ... public static String filter(String
value) { if (value == null) { return null; } StringBuffer result = new StringBuffer(value.length()); for (int i=0;
i<value.length(); ++i) { switch (value.charAt(i)) { case '<': result.append("<"); break; case '>': result.append(">");
break; case '\"': result.append("\""); break; case '\\'': result.append("\\'"); break; case '%': result.append("%"); break; case ';':
result.append(";"); break; case '(': result.append("("); break; case ')': result.append(")"); break; case '&':
result.append("&"); break; case '+': result.append("+"); break; default: result.append(value.charAt(i)); break; } return
result; } ... } ... // Filter the HTTP response using Validator.filter PrintWriter out = response.getWriter(); // set output
response out.write(Validator.filter(response)); out.close();
```

The Java Servlet API 2.3 introduced Filters, which supports the interception and transformation of HTTP requests or responses.

Example of using a Servlet Filter to sanitize the response using Validator.filter:

```
// Example to filter all sensitive characters in the HTTP response using a Java Filter. // This example is for illustration
purposes since it will filter all content in the response, including HTML tags! public class SensitiveCharsFilter implements
Filter { ... public void doFilter(ServletRequest request, ServletResponse response, FilterChain chain) throws IOException,
ServletException { PrintWriter out = response.getWriter(); ResponseWrapper wrapper = new
ResponseWrapper((HttpServletResponse)response); chain.doFilter(request, wrapper); CharArrayWriter caw = new
CharArrayWriter(); caw.write(Validator.filter(wrapper.toString())); response.setContentType("text/html");
response.setContentLength(caw.toString().length()); out.write(caw.toString()); out.close(); } ... public class
CharResponseWrapper extends HttpServletResponseWrapper { private CharArrayWriter output; public String toString() {
return output.toString(); } public CharResponseWrapper(HttpServletResponse response){ super(response); output = new
CharArrayWriter(); } public PrintWriter getWriter(){ return new PrintWriter(output); } } }
```

[8-2] Secure the cookie

When storing sensitive data in a cookie, make sure to set the secure flag of the cookie in the HTTP response, using Cookie.setSecure(boolean flag) to instruct the browser to send the cookie using a secure protocol, such as HTTPS or SSL.

Example to secure the "user" cookie:

```
// Example to secure a cookie, i.e. instruct the browser to // send the cookie using a secure protocol Cookie cookie = new
Cookie("user", "sensitive"); cookie.setSecure(true); response.addCookie(cookie);
```

RECOMMENDED JAVA TOOLS

The two main Java frameworks for server-side validation are:

[1] Jakarta Commons Validator (integrated with Struts 1.1)

The Jakarta Commons Validator is a powerful framework that implements all the above data validation requirements. These rules are configured in an XML file that defines input validation rules for form fields. Struts supports output filtering of dangerous characters in the [8] HTTP Response by default on all data written using the Struts 'bean:write' tag. This filtering may be disabled by setting the 'filter=false' flag.

Struts defines the following basic input validators, but custom validators may also be defined:

required: succeeds if the field contains any characters other than white space.

mask: succeeds if the value matches the regular expression given by the mask attribute.

range: succeeds if the value is within the values given by the min and max attributes ((value >= min) & (value <= max)).

maxLength: succeeds if the field is length is less than or equal to the max attribute.

minLength: succeeds if the field is length is greater than or equal to the min attribute.

byte, short, integer, long, float, double: succeeds if the value can be converted to the corresponding primitive.

date: succeeds if the value represents a valid date. A date pattern may be provided.

creditCard: succeeds if the value could be a valid credit card number.

e-mail: succeeds if the value could be a valid e-mail address.

Example to validate the userName field of a loginForm using Struts Validator:

```
<form-validation> <global> ... <validator name="required" classname="org.apache.struts.validator.FieldChecks"
method="validateRequired" msg="errors.required"> </validator> <validator name="mask"
classname="org.apache.struts.validator.FieldChecks" method="validateMask" msg="errors.invalid"> </validator> ...
</global> <formset> <form name="loginForm"> <!-- userName is required and is alpha-numeric case insensitive -->
<field property="userName" depends="required,mask"> <!-- message resource key to display if validation fails -->
<msg name="mask" key="login.userName.maskmsg"/> <arg0 key="login.userName.displayName"/> <var> <var-
name>mask</var-name> <var-value>^[a-zA-Z0-9]*$</var-value> </var> </field> ... </form> ... </formset> </form-
validation>
```

[2] JavaServer Faces Technology

JavaServer Faces Technology is a set of Java APIs (JSR 127) to represent UI components, manage their state, handle events and input validation.

The JavaServer Faces API implements the following basic validators, but custom validators may be defined:

validate_doublerange: registers a DoubleRangeValidator on a component

validate_length: registers a LengthValidator on a component

validate_longrange: registers a LongRangeValidator on a component

validate_required: registers a RequiredValidator on a component

validate_stringrange: registers a StringRangeValidator on a component

validator: registers a custom Validator on a component

The JavaServer Faces API defines the following UIInput and UIOutput Renderers (Tags):

input_date: accepts a java.util.Date formatted with a java.text.Date instance

output_date: displays a java.util.Date formatted with a java.text.Date instance

input_datetime: accepts a java.util.Date formatted with a java.text.DateTime instance

output_datetime: displays a java.util.Date formatted with a java.text.DateTime instance

input_number: displays a numeric data type (java.lang.Number or primitive), formatted with a java.text.NumberFormat

output_number: displays a numeric data type (java.lang.Number or primitive), formatted with a java.text.NumberFormat

input_text: accepts a text string of one line.

output_text: displays a text string of one line.

input_time: accepts a java.util.Date, formatted with a java.text.DateFormat time instance

output_time: displays a java.util.Date, formatted with a java.text.DateFormat time instance

input_hidden: allows a page author to include a hidden variable in a page

input_secret: accepts one line of text with no spaces and displays it as a set of asterisks as it is typed

input_textarea: accepts multiple lines of text

output_errors: displays error messages for an entire page or error messages associated with a specified client identifier

output_label: displays a nested component as a label for a specified input field

output_message: displays a localized message

Example to validate the userName field of a loginForm using JavaServer Faces:

```
<%@ taglib uri="https://docs.oracle.com/javaee/6/tutorial/doc/glxce.html" prefix="h" %> <%@ taglib
uri="http://mrbool.com/how-to-create-a-login-validation-with-jsf-java-server-faces/27046" prefix="f" %> ... <jsp:useBean
id="UserBean" class="myApplication.UserBean" scope="session" /> <f:use_faces> <h:form formName="loginForm" >
<h:input_text id="userName" size="20" modelReference="UserBean.userName"> <f:validate_required/>
<f:validate_length minimum="8" maximum="20"/> </h:input_text> <!-- display errors if present --> <h:output_errors
id="loginErrors" clientId="userName"/> <h:command_button id="submit" label="Submit" commandName="submit" />
<p> </h:form> </f:use_faces>
```

REFERENCES

Java API 1.3 -

<https://www.oracle.com/java/technologies/java-archive-13docs-downloads.html>

■ <https://www.oracle.com/java/technologies/java-archive-13docs-downloads.html>
external

Java API 1.4 -

<https://www.oracle.com/java/technologies/java-archive-142docs-downloads.html>
■ <https://www.oracle.com/java/technologies/java-archive-142docs-downloads.html>
external

Java Servlet API 2.3 -

<https://mvnrepository.com/artifact/javax.servlet/javax.servlet-api>
■ <https://mvnrepository.com/artifact/javax.servlet/javax.servlet-api>
external

Java Regular Expression Package -

<http://jakarta.apache.org/regexp/>
■ <http://jakarta.apache.org/regexp/>
external

Jakarta Validator -

<http://jakarta.apache.org/commons/validator/>
■ <http://jakarta.apache.org/commons/validator/>
external

JavaServer Faces Technology -

<http://www.javaserverfaces.org/>
■ <http://www.javaserverfaces.org/>
external

**** Error Handling:**

Many J2EE web application architectures follow the Model View Controller (MVC) pattern. In this pattern a Servlet acts as a Controller. A Servlet delegates the application processing to a JavaBean such as an EJB Session Bean (the Model). The Servlet then forwards the request to a JSP (View) to render the processing results. Servlets should check all input, output, return codes, error codes and known exceptions to ensure that the expected processing actually occurred.

While data validation protects applications against malicious data tampering, a sound error handling strategy is necessary to prevent the application from inadvertently disclosing internal error messages such as exception stack traces. A good error handling strategy addresses the following items:

[1] Defining Errors

[2] Reporting Errors

[3] Rendering Errors

[4] Error Mapping

[1] Defining Errors

Hard-coded error messages in the application layer (e.g. Servlets) should be avoided. Instead, the application should use error keys that map to known application failures. A good practice is to define error keys that map to validation rules for HTML form fields or other bean properties. For example, if the "user_name" field is required, is alphanumeric, and must be unique in the database, then the following error keys should be defined:

(a) ERROR_USERNAME_REQUIRED: this error key is used to display a message notifying the user that the "user_name" field is required;

(b) ERROR_USERNAME_ALPHANUMERIC: this error key is used to display a message notifying the user that the "user_name" field should be alphanumeric;

(c) ERROR_USERNAME_DUPLICATE: this error key is used to display a message notifying the user that the "user_name" value is a duplicate in the database;

(d) ERROR_USERNAME_INVALID: this error key is used to display a generic message notifying the user that the "user_name" value is invalid;

A good practice is to define the following framework Java classes which are used to store and report application errors:

- ErrorKeys: defines all error keys

```
// Example: ErrorKeys defining the following error keys: // - ERROR_USERNAME_REQUIRED // -  
ERROR_USERNAME_ALPHANUMERIC // - ERROR_USERNAME_DUPLICATE // - ERROR_USERNAME_INVALID // ... public Class  
ErrorKeys { public static final String ERROR_USERNAME_REQUIRED = "error.username.required"; public static final String  
ERROR_USERNAME_ALPHANUMERIC = "error.username.alphanumeric"; public static final String  
ERROR_USERNAME_DUPLICATE = "error.username.duplicate"; public static final String ERROR_USERNAME_INVALID =  
"error.username.invalid"; ... }
```

- Error: encapsulates an individual error

```
// Example: Error encapsulates an error key. // Error is serializable to support code executing in multiple JVMs. public  
Class Error implements Serializable { // Constructor given a specified error key public Error(String key) { this(key, null); }  
// Constructor given a specified error key and array of placeholder objects public Error(String key, Object[] values) {  
this.key = key; this.values = values; } // Returns the error key public String getKey() { return this.key; } // Returns the  
placeholder values public Object[] getValues() { return this.values; } private String key = null; private Object[] values =  
null; }
```

- Errors: encapsulates a Collection of errors

```
// Example: Errors encapsulates the Error objects being reported to the presentation layer. // Errors are stored in a
HashMap where the key is the bean property name and value is an // ArrayList of Error objects. public Class Errors
implements Serializable { // Adds an Error object to the Collection of errors for the specified bean property. public void
addError(String property, Error error) { ArrayList propertyErrors = (ArrayList)errors.get(property); if (propertyErrors ==
null) { propertyErrors = new ArrayList(); errors.put(property, propertyErrors); } propertyErrors.put(error); } // Returns
true if there are any errors public boolean hasErrors() { return (errors.size > 0); } // Returns the Errors for the specified
property public ArrayList getErrors(String property) { return (ArrayList)errors.get(property); } private HashMap errors =
new HashMap(); }
```

Using the above framework classes, here is an example to process validation errors of the "user_name" field:

```
// Example to process validation errors of the "user_name" field. Errors errors = new Errors(); String userName =
request.getParameter("user_name"); // (a) Required validation rule if (!Validator.validateRequired(userName)) {
errors.addError("user_name", new Error(ErrorKeys.ERROR_USERNAME_REQUIRED)); } // (b) Alpha-numeric validation rule
else if (!Validator.matchPattern(userName, "[a-zA-Z0-9]*")) { errors.addError("user_name", new
Error(ErrorKeys.ERROR_USERNAME_ALPHANUMERIC)); } else { // (c) Duplicate check validation rule // We assume that
there is an existing UserValidationEJB session bean that implements // a checkIfDuplicate() method to verify if the user
already exists in the database. try { ... if (UserValidationEJB.checkIfDuplicate(userName)) { errors.addError("user_name",
new Error(ErrorKeys.ERROR_USERNAME_DUPLICATE)); } } catch (RemoteException e) { // log the error
logger.error("Could not validate user for specified userName: " + userName); errors.addError("user_name", new
Error(ErrorKeys.ERROR_USERNAME_DUPLICATE)); } } // set the errors object in a request attribute called "errors"
request.setAttribute("errors", errors); ...
```

[2] Reporting Errors

There are two ways to report web-tier application errors:

(a) Servlet Error Mechanism

(b) JSP Error Mechanism

[2-a] Servlet Error Mechanism

A Servlet may report errors by:

- forwarding to the input JSP (having already stored the errors in a request attribute), OR
- calling response.sendError with an HTTP error code argument, OR
- throwing an exception

It is good practice to process all known application errors (as described in section [1]), store them in a request attribute, and forward to the input JSP. The input JSP should display the error messages and prompt the user to re-enter the data. The following example illustrates how to forward to an input JSP (userInput.jsp):

```
// Example to forward to the userInput.jsp following user validation errors RequestDispatcher rd =
getServletContext().getRequestDispatcher("/user/userInput.jsp"); if (rd != null) { rd.forward(request, response); }
```

If the Servlet cannot forward to a known JSP page, the second option is to report an error using the response.sendError method with HttpServletResponse.SC_INTERNAL_SERVER_ERROR (status code 500) as argument. Refer to the javadoc of javax.servlet.http.HttpServletResponse for more details on the various HTTP status codes.

Example to return a HTTP error:

```
// Example to return a HTTP error code RequestDispatcher rd =
getServletContext().getRequestDispatcher("/user/userInput.jsp"); if (rd == null) { // messages is a resource bundle with
all message keys and values response.sendError(HttpServletResponse.SC_INTERNAL_SERVER_ERROR,
messages.getMessage(ErrorKeys.ERROR_USERNAME_INVALID)); }
```

As a last resort, Servlets can throw an exception, which must be a subclass of one of the following classes:

- RuntimeException
- ServletException
- IOException

[2-b] JSP Error Mechanism

JSP pages provide a mechanism to handle runtime exceptions by defining an errorPage directive as shown in the following example:

```
<%@ page errorPage="/errors/userValidation.jsp" %>
```

Uncaught JSP exceptions are forwarded to the specified errorPage, and the original exception is set in a request parameter called javax.servlet.jsp.jspException. The error page must include a isErrorPage directive as shown below:

```
<%@ page isErrorPage="true" %>
```

The isErrorPage directive causes the "exception" variable to be initialized to the exception object being thrown.

[3] Rendering Errors

The J2SE Internationalization APIs provide utility classes for externalizing application resources and formatting messages including:

- (a) Resource Bundles
- (b) Message Formatting

[3-a] Resource Bundles

Resource bundles support internationalization by separating localized data from the source code that uses it. Each resource bundle stores a map of key/value pairs for a specific locale.

It is common to use or extend `java.util.PropertyResourceBundle`, which stores the content in an external properties file as shown in the following example:

```
##### # ErrorMessages.properties
##### # required user name error message
error.username.required=User name field is required # invalid user name format error.username.alphanumeric=User
name must be alphanumeric # duplicate user name error message error.username.duplicate=User name {0} already
exists, please choose another one ...
```

Multiple resources can be defined to support different locales (hence the name resource bundle). For example, `ErrorMessages_fr.properties` can be defined to support the French member of the bundle family. If the resource member of the requested locale does not exist, the default member is used. In the above example, the default resource is `ErrorMessages.properties`. Depending on the user's locale, the application (JSP or Servlet) retrieves content from the appropriate resource.

[3-b] Message Formatting

The J2SE standard class `java.util.MessageFormat` provides a generic way to create messages with replacement placeholders. A `MessageFormat` object contains a pattern string with embedded format specifiers as shown below:

```
// Example to show how to format a message using placeholder parameters String pattern = "User name {0} already
exists, please choose another one"; String userName = request.getParameter("user_name"); Object[] args = new
Object[1]; args[0] = userName; String message = MessageFormat.format(pattern, args);
```

Here is a more comprehensive example to render error messages using `ResourceBundle` and `MessageFormat`:

```
// Example to render an error message from a localized ErrorMessages resource (properties file) // Utility class to retrieve
locale-specific error messages public Class ErrorMessageResource { // Returns the error message for the specified error
key in the environment locale public String getErrorMessage(String errorKey) { return getErrorMessage(errorKey,
defaultLocale); } // Returns the error message for the specified error key in the specified locale public String
getErrorMessage(String errorKey, Locale locale) { return getErrorMessage(errorKey, null, locale); } // Returns a formatted
error message for the specified error key in the specified locale public String getErrorMessage(String errorKey, Object[]
args, Locale locale) { // Get localized ErrorMessageResource ResourceBundle errorMessageResource =
ResourceBundle.getBundle("ErrorMessages", locale); // Get localized error message String errorMessage =
errorMessageResource.getString(errorKey); if (args != null) { // Format the message using the specified placeholders
args return MessageFormat.format(errorMessage, args); } else { return errorMessage; } } // default environment locale
private Locale defaultLocale = Locale.getDefaultLocale(); } ... // Get the user's locale Locale userLocale =
request.getLocale(); // Check if there were any validation errors Errors errors = (Errors)request.getAttribute("errors"); if
(errors != null && errors.hasErrors()) { // iterate through errors and output error messages corresponding to the
"user_name" property ArrayList userNameErrors = errors.getErrors("user_name"); ListIterator iterator =
userNameErrors.iterator(); while (iterator.hasNext()) { // Get the next error object Error error = (Error)iterator.next();
String errorMessage = ErrorMessageResource.getErrorMessage(error.getKey(), userLocale); output.write(errorMessage +
"\r\n"); } }
```

It is recommended to define a custom JSP tag, e.g. `displayErrors`, to iterate through and render error messages as shown in the above example.

[4] Error Mapping

Normally, the Servlet Container will return a default error page corresponding to either the response status code or the exception. A mapping between the status code or the exception and a web resource may be specified using custom error pages. It is a good practice to develop static error pages that do not disclose internal error states (by default, most Servlet containers will report internal error messages). This mapping is configured in the Web Deployment Descriptor (`web.xml`) as specified in the following example:

```
<!-- Mapping of HTTP error codes and application exceptions to error pages --> <error-page> <exception-
type>UserValidationException</exception-type> <location>/errors/validationError.html</error-page> </error-page>
<error-page> <error-code>500</error-code> <exception-type> <location>/errors/internalError.html</error-page> </error-page>
<error-page> ... </error-page> ...
```

RECOMMENDED JAVA TOOLS

The two main Java frameworks for server-side validation are:

[1] Jakarta Commons Validator (integrated with Struts 1.1)

The Jakarta Commons Validator is a Java framework that defines the error handling mechanism as described above. Validation rules are configured in an XML file that defines input validation rules for form fields and the corresponding validation error keys. Struts provides internationalization support to build localized applications using resource bundles and message formatting.

Example to validate the `userName` field of a loginForm using Struts Validator:

```
<form-validation> <global> ... <validator name="required" classname="org.apache.struts.validator.FieldChecks"
method="validateRequired" msg="errors.required"> </validator> <validator name="mask"
classname="org.apache.struts.validator.FieldChecks" method="validateMask" msg="errors.invalid"> </validator> ...
</global> <formset> <form name="loginForm"> <!-- userName is required and is alpha-numeric case insensitive -->
<field property="userName" depends="required,mask"> <!-- message resource key to display if validation fails -->
<msg name="mask" key="login.userName.maskmsg"/> <arg0 key="login.userName.displayName"/> <var> <var-
name>mask</var-name> <var-value>^[a-zA-Z0-9]*$</var-value> </var> </field> ... </form> ... </formset> </form-
validation>
```

The Struts JSP tag library defines the `"errors"` tag that conditionally displays a set of accumulated error messages as shown in the following example:

```
<%@ page language="java" %> <%@ taglib uri="/WEB-INF/struts-html.tld" prefix="html" %> <%@ taglib uri="/WEB-INF/struts-bean.tld" prefix="bean" %> <html:html> <head> <body> <html:form action="/login.do"> <table border="0" width="100%"> <tr> <th align="right"> <html:errors property="username"/> <bean:message key="prompt.username"/> </th> <td align="left"> <html:text property="username" size="16"/> </td> </tr> <tr> <td align="right"> <html:submit><bean:message key="button.submit"/></html:submit> </td> <td align="right"> <html:reset><bean:message key="button.reset"/></html:reset> </td> </tr> </table> </html:form> </body> </html:html>
```

[2] JavaServer Faces Technology

JavaServer Faces Technology is a set of Java APIs (JSR 127) to represent UI components, manage their state, handle events, validate input, and support internationalization.

The JavaServer Faces API defines the "output_errors" UIOutput Renderer, which displays error messages for an entire page or error messages associated with a specified client identifier.

Example to validate the userName field of a loginForm using JavaServer Faces:

```
<%@ taglib uri="https://docs.oracle.com/javaee/6/tutorial/doc/glxce.html" prefix="h" %> <%@ taglib uri="http://mrbool.com/how-to-create-a-login-validation-with-jsf-java-server-faces/27046" prefix="f" %> ... <jsp:useBean id="UserBean" class="myApplication.UserBean" scope="session" /> <f:use_faces> <h:form formName="loginForm" > <h:input_text id="userName" size="20" modelReference="UserBean.userName"> <f:validate_required/> <f:validate_length minimum="8" maximum="20"/> </h:input_text> <!-- display errors if present --> <h:output_errors id="loginErrors" clientId="userName"/> <h:command_button id="submit" label="Submit" commandName="submit" /> <p> </h:form> </f:use_faces>
```

REFERENCES

Java API 1.3 -

<https://www.oracle.com/java/technologies/java-archive-13docs-downloads.html>
 ■ <https://www.oracle.com/java/technologies/java-archive-13docs-downloads.html>
 external

Java API 1.4 -

<https://www.oracle.com/java/technologies/java-archive-142docs-downloads.html>
 ■ <https://www.oracle.com/java/technologies/java-archive-142docs-downloads.html>
 external

Java Servlet API 2.3 -

<https://mvnrepository.com/artifact/javax.servlet/javax.servlet-api>
 ■ <https://mvnrepository.com/artifact/javax.servlet/javax.servlet-api>
 external

Java Regular Expression Package -

<http://jakarta.apache.org/regexp/>
 ■ <http://jakarta.apache.org/regexp/>
 external

Jakarta Validator -

<http://jakarta.apache.org/commons/validator/>
 ■ <http://jakarta.apache.org/commons/validator/>
 external

JavaServer Faces Technology -

<http://www.javaserverfaces.org/>
 ■ <http://www.javaserverfaces.org/>
 external

** Input Data Validation:

While data validations may be provided as a user convenience on the client-tier, data validation must always be performed on the server-tier. Client-side validations are inherently insecure because they can be easily bypassed, e.g. by disabling Javascript.

A good design usually requires the web application framework to provide server-side utility routines to validate the following:

- [1] Required field
- [2] Field data type (all HTTP request parameters are Strings by default)
- [3] Field length
- [4] Field range
- [5] Field options
- [6] Field pattern
- [7] Cookie values
- [8] HTTP Response

A good practice is to implement a function or functions that validates each application parameter. The following sections

describe some example checking.

[1] Required field

Always check that the field is not null and its length is greater than zero, excluding leading and trailing white spaces.

Example of how to validate required fields:

```
// PHP example to validate required fields function validateRequired($input) { ... $pass = false; if (strlen(trim($input))>0) { $pass = true; } return $pass; ... } ... if (validateRequired($fieldName)) { // fieldName is valid, continue processing request ... }
```

[2] Field data type

In web applications, input parameters are poorly typed. For example, all HTTP request parameters or cookie values are of type String. The developer is responsible for verifying the input is of the correct data type.

[3] Field length

Always ensure that the input parameter (whether HTTP request parameter or cookie value) is bounded by a minimum length and/or a maximum length.

[4] Field range

Always ensure that the input parameter is within a range as defined by the functional requirements.

[5] Field options

Often, the web application presents the user with a set of options to choose from, e.g. using the SELECT HTML tag, but fails to perform server-side validation to ensure that the selected value is one of the allowed options. Remember that a malicious user can easily modify any option value. Always validate the selected user value against the allowed options as defined by the functional requirements.

[6] Field pattern

Always check that user input matches a pattern as defined by the functionality requirements. For example, if the userName field should only allow alpha-numeric characters, case insensitive, then use the following regular expression:

```
^[a-zA-Z0-9]+$
```

[7] Cookie value

The same validation rules (described above) apply to cookie values depending on the application requirements, e.g. validate a required value, validate length, etc.

[8] HTTP Response

[8-1] Filter user input

To guard the application against cross-site scripting, the developer should sanitize HTML by converting sensitive characters to their corresponding character entities. These are the HTML sensitive characters:

```
< > " ' % ; ) ( & +
```

PHP includes some automatic sanitization utility functions, such as htmlentities():

```
$input = htmlentities($input, ENT_QUOTES, 'UTF-8');
```

In addition, in order to avoid UTF-7 variants of Cross-site Scripting, you should explicitly define the Content-Type header of the response, for example:

```
<?php header('Content-Type: text/html; charset=UTF-8'); ?>
```

[8-2] Secure the cookie

When storing sensitive data in a cookie and transporting it over SSL, make sure that you first set the secure flag of the cookie in the HTTP response. This will instruct the browser to only use that cookie over SSL connections.

You can use the following code example, for securing the cookie:

```
<$php $value = "some_value"; $time = time()+3600; $path = "/application/"; $domain = ".example.com"; $secure = 1; setcookie("CookieName", $value, $time, $path, $domain, $secure, TRUE); ?>
```

In addition, we recommend that you use the HttpOnly flag. When the HttpOnly flag is set to TRUE the cookie will be made accessible only through the HTTP protocol. This means that the cookie won't be accessible by scripting languages, such as JavaScript. This setting can effectively help to reduce identity theft through XSS attacks (although it is not supported by all browsers).

The HttpOnly flag was Added in PHP 5.2.0.

REFERENCES

[1] Mitigating Cross-site Scripting With HTTP-only Cookies:

<http://msdn2.microsoft.com/en-us/library/ms533046.aspx>
■ <http://msdn2.microsoft.com/en-us/library/ms533046.aspx>
external

[2] PHP Security Consortium:

<http://phpsec.org/>
▪ <http://phpsec.org/>
external

[3] PHP & Web Application Security Blog (Chris Shiflett):

<http://shiflett.org/>
▪ <http://shiflett.org/>
external

CWE

550

External references

- [An example for using apostrophe to hack a site can be found in "How I hacked PacketStorm \(by Rain Forest Puppy\), RFP's site"](#)
- ["Web Application Disassembly with ODBC Error Messages" \(By David Litchfield\)](#)
- [CERT Advisory \(CA-1997-25\): Sanitizing user-supplied data in CGI scripts](#)

[Go to Table of Contents](#)

I Client-Side (JavaScript) Cookie References

Cause

Cookies are created at the client side

Risk

The worst case scenario for this attack depends on the context and role of the cookies that are created at the client side

A cookie is a piece of information usually created by the Web server and stored in the Web browser.

The cookie contains information used by web applications mainly (but not only) to identify users and maintain their state.

AppScan detected that the JavaScript code at the client side is used to manipulate (either create or modify) the site's cookies.

It is possible for an attacker to view this code, understand its logic, and use it to compose his own cookies, or modify existing ones, based on this knowledge.

The damage an attacker may cause depends on how the application uses its cookies, or what information it stores in them.

Among other things, cookie manipulation may lead to session hijacking or privilege escalation.

Other vulnerabilities caused by cookie poisoning contain SQL injection and Cross-Site scripting.

Fix recommendation

[1] Avoid placing business/security logic at the client side.

[2] Find and remove insecure client-side Javascript code which may pose a security threat to the site.

CWE

602

External references

- [WASC Threat Classification: Information Leakage](#)

[Go to Table of Contents](#)

Cause

Insecure web application programming or configuration

Risk

It is possible to gather sensitive information about the web application such as usernames, passwords, machine name and/or sensitive file locations

It is possible to persuade a naive user to supply sensitive information such as username, password, credit card number, social security number etc.

The absence or improper values of CSP can cause the web application being vulnerable to XSS, clickjacking, etc.

The "Content-Security-Policy" header is designed to modify the way browsers render pages, and thus to protect from various cross-site injections, including Cross-Site Scripting. It is important to set the header value correctly, in a way that will not prevent proper operation of the web site. For example, if the header is set to prevent execution of inline JavaScript, the web site must not use inline JavaScript in its pages.

To protect against Cross-Site Scripting, Cross-Frame Scripting and clickjacking, it is important to set the following policies with proper values:

Both of 'default-src' and 'frame-ancestors' policies, *OR* all of 'script-src', 'object-src' and 'frame-ancestors' policies.

For 'default-src', 'script-src' and 'object-src', insecure values such as '*', 'data:', 'unsafe-inline' or 'unsafe-eval' should be avoided.

For 'frame-ancestors', insecure values such as '*' or 'data:' should be avoided.

Additionally for 'script-src', and 'default-src' (fallback directive for 'script-src') 'self' is considered insecure and should be avoided.

Please refer the following links for more information.

Please note that "Content-Security-Policy" includes four different tests. A general test that verifies if the "Content-Security-Policy" header is being used and three additional tests that check if "Frame-Ancestors", "Object-Src" and "Script-Src" were configured correctly.

Fix recommendation

Configure your server to send the "Content-Security-Policy" header.

It is recommended to configure Content-Security-Policy header with secure values for its directives as below:

For 'default-src', and 'script-src' secure values such as 'none', or <https://any.example.com>.

For 'frame-ancestors', and 'object-src' secure values such as 'self', 'none' or <https://any.example.com> are expected.

"unsafe-inline" and "unsafe-eval" must not be used in any circumstance. Using nonce / hash would be only considered for short-term workaround.

For Apache, see:

http://httpd.apache.org/docs/2.2/mod/mod_headers.html

For IIS, see:

<https://technet.microsoft.com/pl-pl/library/cc753133%28v=ws.10%29.aspx>

For nginx, see:

http://nginx.org/en/docs/http/nginx_headers_module.html

CWE

1032

External references

- [List of some secure Headers](#)
- [An Introduction to Content Security Policy](#)
- [MDN web docs - Content-Security-Policy](#)

[Go to Table of Contents](#)

Cause

Insecure web application programming or configuration

Risk

It is possible to gather sensitive information about the web application such as usernames, passwords, machine name and/or sensitive file locations

It is possible to persuade a naive user to supply sensitive information such as username, password, credit card number, social security number etc.

The absence or improper values of Referrer Policy can cause URL leak itself, and even sensitive information contained in the URL will be leaked to the cross-site.

This is a part of ruleset to check if Referrer Policy is present and if so to test its configuration. The "Referer Policy" header defines what data is made available in the Referer header, and for navigation and iframes in the destination's (document.referrer). This header is designed to modify the way browsers render pages, and thus to prevent cross-domain Referer leakage. It is important to set the header value correctly, in a way that will not prevent proper operation of the web site.

Referer header is a request header that indicates the site which the traffic originated from. If there is no adequate prevention in place, the URL itself, and even sensitive information contained in the URL will be leaked to the cross-site.

"no-referrer-when-downgrade" and "unsafe-url" are the policies which leaks the Full Url for the ThirdParty Sites. The remaining policies are "no-referrer", "origin", "origin-when-cross-origin", "same-origin", "strict-origin", "strict-origin-when-cross-origin".

Please refer the following links for more information.

Fix recommendation

Configure your server to send the "Referrer Policy" header.

It is recommended to configure Referrer Policy header with secure values for its directives as below:

"strict-origin-when-cross-origin" offers more privacy. With this policy, only the origin is sent in the Referer header of cross-origin requests.

For Google Chrome, see:

<https://developers.google.com/web/updates/2020/07/referrer-policy-new-chrome-default>
■ <https://developers.google.com/web/updates/2020/07/referrer-policy-new-chrome-default>
external

For Firefox , see:

<https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/Referrer-Policy>.
■ <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/Referrer-Policy>.
external

CWE

200

External references

- [MDN web docs - Referrer-Policy](#)

[Go to Table of Contents](#)

Cause

Insecure web application programming or configuration

Risk

The Content-Security-Policy: frame-ancestors 'none' header prevents API-driven web interfaces from being embedded in frames or iframes, effectively protecting against clickjacking attacks.

Without this directive, attackers can load the API's frontend in a hidden frame on a malicious site and trick users into performing unintended actions, such as clicking buttons or submitting forms, potentially leading to data loss or privilege escalation.

This risk is especially severe for APIs that expose sensitive data or privileged operations.

Fix recommendation

To ensure that the API endpoints cannot be embedded in any frame or iframe, set the Content-Security-Policy: frame-ancestors 'none' header on all API endpoint responses.

CWE

1032

External references

- [OWASP REST Security Cheat Sheet](#)
- [Content Security Policy Overview and Best Practices](#)

[Go to Table of Contents](#)

M Missing or insecure Cross-Origin-Embedder-Policy (COEP) header

Cause

Insecure web application programming or configuration

Risk

Embedding cross-origin resources like scripts or images without restrictions makes your site vulnerable to untrusted code execution and side-channel leaks. An attacker can include opaque third-party resources that don't use proper CORS headers, creating security holes even without direct script execution. This attack vector relies on silently pulling in third-party resources that bypass validation.

Without COEP, attackers can embed untrusted resources that bypass CORS enforcement, opening the door to data leaks and breaking cross-origin isolation required for secure APIs.

Fix recommendation

Set the header "Cross-Origin-Embedder-Policy: require-corp" to enforce that only CORS-enabled or same-origin resources can be loaded.

CWE

200

External references

- [OWASP Secure Headers Project - COEP](#)

[Go to Table of Contents](#)

M Missing or insecure Cross-Origin-Opener-Policy (COOP) header

Cause

Risk

Modern browsers allow windows and tabs to interact if they open each other, even when from different origins. This behavior can expose your site to cross-origin side-channel attacks, by allowing malicious sites to share a browsing context with yours. The attack vector involves the attacker opening your site in a new tab or iframe, and using shared references like 'window.opener'.

Without COOP, a malicious site can open your page in a new tab and exploit shared browsing context to perform side-channel attacks, potentially leaking cross-origin data like session tokens or sensitive content.

Fix recommendation

Set the header "Cross-Origin-Opener-Policy: same-origin" to ensure your site runs in a separate browsing context group, isolating it from other origins.

CWE

200

External references

- [OWASP Secure Headers Project - COOP](#)

[Go to Table of Contents](#)

M Missing or insecure Cross-Origin-Resource-Policy (CORP) header

Cause

Insecure web application programming or configuration

Risk

Web applications often serve static resources like images, scripts, or APIs that aren't meant to be embedded or reused by other websites. Without protection, a malicious site can embed your resources and extract sensitive data, sometimes using timing attacks or leaking metadata via browser behavior. This happens when resources are not protected and are freely accessible cross-origin.

Without CORP, third-party sites can embed and misuse your private resources, enabling data leaks or piggybacking on authenticated sessions.

Fix recommendation

Set the "Cross-Origin-Resource-Policy" header on resources to "same-origin" or "same-site" to prevent unauthorized embedding or reuse by third parties.

CWE

200

External references

- [OWASP Secure Headers Project - CORP](#)

[Go to Table of Contents](#)

L Trusted types in scripts not enforced in CSP

Cause

Insecure web application programming or configuration

Risk

The "Content-Security-Policy" header is designed to modify the way browsers render pages, and thus to protect from various cross-site injections, including Cross-Site Scripting. It is important to set the header value correctly, in a way that will not prevent proper operation of the web site.

Not using Trusted Types can allow attackers to inject scripts, as a result, this increases the risk of XSS vulnerabilities.

Fix recommendation

Consider using 'require-trusted-types-for' directive to prevent DOM-based XSS attacks.

Add "require-trusted-types-for 'script'" directive to your CSP to enforce Trusted Types for scripts.

CWE

[1032](#)

External references

- [MDN web docs - Content-Security-Policy](#)

[Go to Table of Contents](#)

Coverage

Visited URLs 47

[Go to Table of Contents](#)

URL

https://aaca.ntua.edu.tw/en
https://aaca.ntua.edu.tw/assets/index-BpBZgyG6.js
https://aaca.ntua.edu.tw/assets/bootstrap.bundle.min-CzCngEA2.js
https://aaca.ntua.edu.tw/assets/LoadFeaturesCss_Client-BKnKf1bm.js
https://aaca.ntua.edu.tw/assets/Custompcoded-BTHXRLBR.js
https://aaca.ntua.edu.tw/assets/feather.min-LMIWJHPF.js
https://aaca.ntua.edu.tw/assets/simplebarv6.2.5.min-CuD8JoAs.js
https://aaca.ntua.edu.tw/assets/jquery-3.7.1.min-CK9_Gmfi.js
https://aaca.ntua.edu.tw/assets/LoadFeaturesJs_Client-DzGVX_B4.js
https://aaca.ntua.edu.tw/assets/bootstrap.bundle.min-D5O7Ww_3.js
https://aaca.ntua.edu.tw/Service/SiteViewCount/TryCountSiteView
https://aaca.ntua.edu.tw/assets/swiper-bundle.min-DbP_0zCD.js
https://aaca.ntua.edu.tw/assets/jquery-3.7.1.min-Bmb_Keji.js
https://aaca.ntua.edu.tw/assets/venobox.min-DBL3ZjsO.js
https://aaca.ntua.edu.tw/assets/ekko-lightbox-BmiW2n5W.js
https://aaca.ntua.edu.tw/assets/owl.carousel_v2.3.4-bK-Owla8.js
https://aaca.ntua.edu.tw/Service/SpecHomePageApi/QueryList
https://aaca.ntua.edu.tw/Service/SpecHomePageApi/QueryData?internalId=c2080823-a98b-4550-92d1-2fad373c5886
https://aaca.ntua.edu.tw/Service/FileArchive/QueryList
https://aaca.ntua.edu.tw/Service/Announcement/QueryList
https://aaca.ntua.edu.tw/Service/WebResource/QueryList
https://aaca.ntua.edu.tw/Service/Banner/QueryList
https://aaca.ntua.edu.tw/Service/Tag/QueryList
https://aaca.ntua.edu.tw/Service/FileArchive/QueryList
https://aaca.ntua.edu.tw/Service/Category/QueryList
https://aaca.ntua.edu.tw/Service/FileArchive/GetModelDisplayName
https://aaca.ntua.edu.tw/Service/FileArchive/GetTotalCounts
https://aaca.ntua.edu.tw/Service/Announcement/GetModelDisplayName
https://aaca.ntua.edu.tw/Service/SiteViewCount/GetModelDisplayName
https://aaca.ntua.edu.tw/Service/Announcement/QueryList
https://aaca.ntua.edu.tw/Service/Announcement/GetTotalCounts
https://aaca.ntua.edu.tw/Service/SiteViewCount/QueryList
https://aaca.ntua.edu.tw/Service/Announcement/QueryList
https://aaca.ntua.edu.tw/Service/Announcement/GetTotalCounts
https://aaca.ntua.edu.tw/en/graduate-admissions/master-screening
https://aaca.ntua.edu.tw/Service/PageManagement/QueryList
https://aaca.ntua.edu.tw/Service/SiteViewCount/TryCountPageView
https://aaca.ntua.edu.tw/en/Sitemap
https://aaca.ntua.edu.tw/assets/index-BpBZgyG6.js
https://aaca.ntua.edu.tw/assets/carousel-zW_kRij4.js
https://aaca.ntua.edu.tw/assets/pdf-BNUI02mH.js
https://aaca.ntua.edu.tw/assets/login-particles-CYx8AibE.js
https://aaca.ntua.edu.tw/assets/Custompcoded-BTHXRLBR.js
https://aaca.ntua.edu.tw/assets/LoadFeaturesCss-B-N1djgj.js
https://aaca.ntua.edu.tw/assets/LoadFeaturesCss_Client-BKnKf1bm.js
https://aaca.ntua.edu.tw/assets/LoadFeaturesJs_Client-DzGVX_B4.js
https://aaca.ntua.edu.tw/assets/ekko-lightbox-BmiW2n5W.js

Parameters 88

[Go to Table of Contents](#)

Name	Value	URL	Type
->"Condition"	Validate_Start <= 2026-08-20T23:59:59 And (Validate_End >= 2026-08-20T00:00:00 Or Validate_End is null) And ContentStatus != 4 And _AnnouncementDetail.Lang = en And _AnnouncementDetail.Title != "" And Categories HasAny [Category20260626005] Validate_Start <= 2026-08-20T23:59:59 And Validate_End < 2026-08-20T00:00:00 And ContentStatus != 4 And _AnnouncementDetail.Lang = en And _AnnouncementDetail.Title != "" And Categories HasAny [Category20260626005]	https://aaca.ntua.edu.tw/Service/Announcement/GetTotalCounts	ApplicationData.HttpParamType.JSON
->"RankGroups"[0]->"Condition"	ContentStatus & 1	https://aaca.ntua.edu.tw/Service/FileArchive/GetTotalCounts	ApplicationData.HttpParamType.JSON
->"Fields"[1]	InternalId	https://aaca.ntua.edu.tw/Service/Announcement/GetTotalCounts	ApplicationData.HttpParamType.JSON
->"RankGroups"[0]->"Condition"	ContentStatus & 1	https://aaca.ntua.edu.tw/Service/Announcement/GetTotalCounts	ApplicationData.HttpParamType.JSON
->"OrderBy"[0]->"Desc"	true	https://aaca.ntua.edu.tw/Service/Announcement/GetTotalCounts	ApplicationData.HttpParamType.JSON
->"PageNumber"	0	https://aaca.ntua.edu.tw/Service/Tag/QueryList	ApplicationData.HttpParamType.JSON
->"PageSize"	0	https://aaca.ntua.edu.tw/Service/WebResource/QueryList	ApplicationData.HttpParamType.JSON
->"Fields"[1]	FileArchiveId	https://aaca.ntua.edu.tw/Service/FileArchive/GetTotalCounts	ApplicationData.HttpParamType.JSON
->"Fields"[11]	_AnnouncementDetail.Content	https://aaca.ntua.edu.tw/Service/Announcement/QueryList	ApplicationData.HttpParamType.JSON
->"Condition"	ContentStatus != 4 And _FileArchiveInfo.Lang = "" And _FileArchiveInfo.Title != "" And CategoriesId HasAny ""Category20260626004\\	https://aaca.ntua.edu.tw/Service/FileArchive/QueryList	ApplicationData.HttpParamType.JSON
->"Fields"[3]	_TagDetail.TagName	https://aaca.ntua.edu.tw/Service/Tag/QueryList	ApplicationData.HttpParamType.JSON
->"OrderBy"[0]->"Desc"	true	https://aaca.ntua.edu.tw/Service/WebResource/QueryList	ApplicationData.HttpParamType.JSON
->"SiteIndex"		https://aaca.ntua.edu.tw/Service/SiteViewCount/TryCountPageView	ApplicationData.HttpParamType.JSON
->"Condition"	ContentStatus != 4 And _WebResourceInfo.Lang = "" And _WebResourceInfo.Title != "" And Categories HasAny ""Category20260626003\\	https://aaca.ntua.edu.tw/Service/WebResource/QueryList	ApplicationData.HttpParamType.JSON
->"PageNumber"	1	https://aaca.ntua.edu.tw/Service/PageManagement/QueryList	ApplicationData.HttpParamType.JSON
->"RankGroups"[0]->"Condition"	ContentStatus & 1	https://aaca.ntua.edu.tw/Service/FileArchive/QueryList	ApplicationData.HttpParamType.JSON
->"Fields"[25]	_FileArchiveInfo._FileArchiveUrlDetail.WindowTarget	https://aaca.ntua.edu.tw/Service/FileArchive/QueryList	ApplicationData.HttpParamType.JSON
->"Fields"[1]	InternalId	https://aaca.ntua.edu.tw/Service/Announcement/QueryList	ApplicationData.HttpParamType.JSON

->"RankGroup s"[0]->"Condition"	ContentStatus & 1	https://aaca.ntua.edu.tw/Service/Announcement/QueryList	ApplicationData.HttpParamType.JSON
->"Fields"[0]	_SiteViewCountDetail.ProgId	https://aaca.ntua.edu.tw/Service/SiteViewCount/QueryList	ApplicationData.HttpParamType.JSON
->"OrderBy"[0]->"Col"	Validate_Start	https://aaca.ntua.edu.tw/Service/Announcement/GetTotalCounts	ApplicationData.HttpParamType.JSON
->"OrderBy"[0]->"Col"	CreateTime	https://aaca.ntua.edu.tw/Service/WebResource/QueryList	ApplicationData.HttpParamType.JSON
->"OrderBy"[0]->"Col"	Validate_Start	https://aaca.ntua.edu.tw/Service/FileArchive/QueryList	ApplicationData.HttpParamType.JSON
->"Fields"[0]	InternalId	https://aaca.ntua.edu.tw/Service/WebResource/QueryList	ApplicationData.HttpParamType.JSON
->"OrderBy"[0]->"Desc"	true	https://aaca.ntua.edu.tw/Service/SpeHomePageApi/QueryList	ApplicationData.HttpParamType.JSON
internalId	c2080823-a98b-4550-92d1-2fad373c5886	https://aaca.ntua.edu.tw/Service/SpeHomePageApi/QueryData?internalId=c2080823-a98b-4550-92d1-2fad373c5886	ApplicationData.HttpParamType.Simple_Link
->"PageSize"	10	https://aaca.ntua.edu.tw/Service/FileArchive/GetTotalCounts	ApplicationData.HttpParamType.JSON
->"PageSize"	10	https://aaca.ntua.edu.tw/Service/Announcement/GetTotalCounts	ApplicationData.HttpParamType.JSON
->"Fields"[2]	_CategoryDetail.CategoryName	https://aaca.ntua.edu.tw/Service/Category/QueryList	ApplicationData.HttpParamType.JSON
->"RankGroup s"[0]->"Condition"	ContentStatus & 1	https://aaca.ntua.edu.tw/Service/WebResource/QueryList	ApplicationData.HttpParamType.JSON
->"Condition"	ProgId = "\\FileArchive\\" And _TagDetail.Lang = "\\en\\"	https://aaca.ntua.edu.tw/Service/Tag/QueryList	ApplicationData.HttpParamType.JSON
->"Fields"[2]	_SiteViewCountDetail.PageViewCount	https://aaca.ntua.edu.tw/Service/SiteViewCount/QueryList	ApplicationData.HttpParamType.JSON
->"SiteIndex"		https://aaca.ntua.edu.tw/Service/SiteViewCount/TryCountSiteView	ApplicationData.HttpParamType.JSON
->"Condition"	Validate_Start <= 2026-08-20T23:59:59 And (Validate_End >= 2026-08-20T00:00:00 Or (Validate_End is null) And ContentStatus != 4 And _AnnouncementDetail.Lang = en And _AnnouncementDetail.Title != "" And Categories HasAny [Category20260626005] Validate_Start <= 2026-08-20T23:59:59 And Validate_End < 2026-08-20T00:00:00 And ContentStatus != 4 And _AnnouncementDetail.Lang = en And _AnnouncementDetail.Title != "" And Categories HasAny [Category20260626005])	https://aaca.ntua.edu.tw/Service/Announcement/QueryList	ApplicationData.HttpParamType.JSON
->"PageNumber"	1	https://aaca.ntua.edu.tw/Service/FileArchive/GetTotalCounts	ApplicationData.HttpParamType.JSON
->"Fields"[0]	TagId	https://aaca.ntua.edu.tw/Service/Tag/QueryList	ApplicationData.HttpParamType.JSON
->"Fields"[0]	InternalId	https://aaca.ntua.edu.tw/Service/FileArchive/GetTotalCounts	ApplicationData.HttpParamType.JSON
->"Fields"[0]	CategoryId	https://aaca.ntua.edu.tw/Service/Category/QueryList	ApplicationData.HttpParamType.JSON

->"Fiel ds"[0]	AnnouncementId	https://aaca.ntua.ed u.tw/Service/Announ cement/QueryList	ApplicationData.HttpParamType.JSON
->"Con dition"	Progid = \\\"FileArchive\\\" And _CategoryDe tail.Lang = \\\"en\\	https://aaca.ntua.ed u.tw/Service/Catego ry/QueryList	ApplicationData.HttpParamType.JSON
->"Fiel ds"[1]	FileArchiveld	https://aaca.ntua.ed u.tw/Service/FileArc hive/QueryList	ApplicationData.HttpParamType.JSON
->"Fiel ds"[26]	_FileArchiveInfo._FileArchiveUrlDetail.Windo wTarget	https://aaca.ntua.ed u.tw/Service/FileArc hive/QueryList	ApplicationData.HttpParamType.JSON
->"Ord erBy"[0]->"C ol"	ModifyTime	https://aaca.ntua.ed u.tw/Service/SpecHo mePageApi/QueryLis t	ApplicationData.HttpParamType.JSON
->"Fiel ds"[12]	_WebResourceInfo.Url_OpenType	https://aaca.ntua.ed u.tw/Service/WebRe source/QueryList	ApplicationData.HttpParamType.JSON
->"Ord erBy"[0]->"D esc"	true	https://aaca.ntua.ed u.tw/Service/Catego ry/QueryList	ApplicationData.HttpParamType.JSON
->"Ord erBy"[0]->"D esc"	true	https://aaca.ntua.ed u.tw/Service/FileArc hive/GetTotalCounts	ApplicationData.HttpParamType.JSON
->"Pag eNumb er"	1	https://aaca.ntua.ed u.tw/Service/SpecHo mePageApi/QueryLis t	ApplicationData.HttpParamType.JSON
->"Con dition"	1=0	https://aaca.ntua.ed u.tw/Service/SiteVie wCount/QueryList	ApplicationData.HttpParamType.JSON
->"Con dition"	Lang = \\\"en\\	https://aaca.ntua.ed u.tw/Service/SpecHo mePageApi/QueryLis t	ApplicationData.HttpParamType.JSON
->"Pag eSize"	1	https://aaca.ntua.ed u.tw/Service/PageM anagement/QueryLi st	ApplicationData.HttpParamType.JSON
->"Pag eNumb er"	0	https://aaca.ntua.ed u.tw/Service/Catego ry/QueryList	ApplicationData.HttpParamType.JSON
->"Pag eNumb er"	0	https://aaca.ntua.ed u.tw/Service/WebRe source/QueryList	ApplicationData.HttpParamType.JSON
->"Pag eSize"	6 10	https://aaca.ntua.ed u.tw/Service/Announ cement/QueryList	ApplicationData.HttpParamType.JSON
->"Fiel ds"[7]	_PageManagementDetail.Content	https://aaca.ntua.ed u.tw/Service/PageM anagement/QueryLi st	ApplicationData.HttpParamType.JSON
->"Pag eNumb er"	1	https://aaca.ntua.ed u.tw/Service/Announ cement/QueryList	ApplicationData.HttpParamType.JSON
->"Ord erBy"[0]->"D esc"	true	https://aaca.ntua.ed u.tw/Service/Announ cement/QueryList	ApplicationData.HttpParamType.JSON
->"Pag eSize"	0	https://aaca.ntua.ed u.tw/Service/SiteVie wCount/QueryList	ApplicationData.HttpParamType.JSON
->"Inte rnalId"	84a61d41-94eb-472d-b699-fe8ee4dd6cf4	https://aaca.ntua.ed u.tw/Service/SiteVie wCount/TryCountPa geView	ApplicationData.HttpParamType.JSON
->"Pro gld"	PageManagement	https://aaca.ntua.ed u.tw/Service/SiteVie wCount/TryCountPa geView	ApplicationData.HttpParamType.JSON
->"Fiel ds"[11]	_AnnouncementDetail.Content	https://aaca.ntua.ed u.tw/Service/Announ cement/GetTotalCou nts	ApplicationData.HttpParamType.JSON
->"Pag eSize"	0	https://aaca.ntua.ed u.tw/Service/Tag/Qu eryList	ApplicationData.HttpParamType.JSON

->"Fiel ds"[0]	InternalId	https://aaca.ntua.edu.tw/Service/FileArchive/QueryList	ApplicationData.HttpParamType.JSON
->"Fiel ds"[1]	_SiteViewCountDetail.TargetInternalId	https://aaca.ntua.edu.tw/Service/SiteViewCount/QueryList	ApplicationData.HttpParamType.JSON
->"Ord erBy"[0]->"D esc"	false	https://aaca.ntua.edu.tw/Service/Tag/QueryList	ApplicationData.HttpParamType.JSON
->"Fiel ds"[0]	InternalId	https://aaca.ntua.edu.tw/Service/PageManagement/QueryList	ApplicationData.HttpParamType.JSON
->"Fiel ds"[1]	Lang	https://aaca.ntua.edu.tw/Service/SpecHomePageApi/QueryList	ApplicationData.HttpParamType.JSON
->"Fiel ds"[1]	_CategoryDetail.Lang	https://aaca.ntua.edu.tw/Service/Category/QueryList	ApplicationData.HttpParamType.JSON
->"Fiel ds"[1]	WebResourceId	https://aaca.ntua.edu.tw/Service/WebResource/QueryList	ApplicationData.HttpParamType.JSON
->"Fiel ds"[1]	InternalId	https://aaca.ntua.edu.tw/Service/Tag/QueryList	ApplicationData.HttpParamType.JSON
->"Fiel ds"[0]	InternalId	https://aaca.ntua.edu.tw/Service/SpecHomePageApi/QueryList	ApplicationData.HttpParamType.JSON
->"Ord erBy"[0]->"C ol"	Validate_Start	https://aaca.ntua.edu.tw/Service/Announcement/QueryList	ApplicationData.HttpParamType.JSON
->"Pag eSize"	5 10	https://aaca.ntua.edu.tw/Service/FileArchive/QueryList	ApplicationData.HttpParamType.JSON
->"Con dition"	ContentStatus != 4 And _FileArchiveInfo.Lang = "" And _FileArchiveInfo.Title != "" And CategoriesId HasAny ""Category20260626004\\	https://aaca.ntua.edu.tw/Service/FileArchive/GetTotalCounts	ApplicationData.HttpParamType.JSON
->"Fiel ds"[3]	ModifyTime	https://aaca.ntua.edu.tw/Service/SpecHomePageApi/QueryList	ApplicationData.HttpParamType.JSON
->"Ord erBy"[0]->"C ol"	Validate_Start	https://aaca.ntua.edu.tw/Service/FileArchive/GetTotalCounts	ApplicationData.HttpParamType.JSON
->"Con dition"		https://aaca.ntua.edu.tw/Service/Banner/QueryList	ApplicationData.HttpParamType.JSON
->"Ord erBy"[0]->"C ol"	ModifyTime	https://aaca.ntua.edu.tw/Service/Category/QueryList	ApplicationData.HttpParamType.JSON
->"Ord erBy"[0]->"C ol"	CreateTime	https://aaca.ntua.edu.tw/Service/Tag/QueryList	ApplicationData.HttpParamType.JSON
->"Ord erBy"[0]->"D esc"	true	https://aaca.ntua.edu.tw/Service/FileArchive/QueryList	ApplicationData.HttpParamType.JSON
->"Con dition"	InternalId = ""84a61d41-94eb-472d-b699-f8ee4dd6cf4\\	https://aaca.ntua.edu.tw/Service/PageManagement/QueryList	ApplicationData.HttpParamType.JSON
->"Fiel ds"[1]	PageId	https://aaca.ntua.edu.tw/Service/PageManagement/QueryList	ApplicationData.HttpParamType.JSON
->"Pag eSize"	0	https://aaca.ntua.edu.tw/Service/Category/QueryList	ApplicationData.HttpParamType.JSON
->"Pag eNumb er"	1	https://aaca.ntua.edu.tw/Service/FileArchive/QueryList	ApplicationData.HttpParamType.JSON

->"Fiel _FileArchiveInfo._FileArchiveUrlDetail.Windo ds"[25] wTarget	https://aaca.ntua.edu.tw/Service/FileArc hive/GetTotalCounts	ApplicationData.HttpParamType.JSON
->"Pag 1 eSize"	https://aaca.ntua.edu.tw/Service/SpecHo mePageApi/QueryLis t	ApplicationData.HttpParamType.JSON
->"Pag 0 eNumb er"	https://aaca.ntua.edu.tw/Service/SiteVie wCount/QueryList	ApplicationData.HttpParamType.JSON
->"Pag 1 eNumb er"	https://aaca.ntua.edu.tw/Service/Announ cement/GetTotalCou nts	ApplicationData.HttpParamType.JSON
->"Fiel AnnouncementId ds"[0]	https://aaca.ntua.edu.tw/Service/Announ cement/GetTotalCou nts	ApplicationData.HttpParamType.JSON

Failed Requests 3

[Go to Table of Contents](#)

URL	Reason
https://aaca.ntua.edu.tw/Service/SystemAPI/GetXsrfToken	Response Status '500' - Internal Server Error
https://aaca.ntua.edu.tw/Service/SystemAPI/GetXsrfToken	Response Status '500' - Internal Server Error
https://aaca.ntua.edu.tw/assets/assets/LoadFeaturesCss_Client-BKnKf1bm.js	Response Status '404' - Not Found

Filtered URLs 87

[Go to Table of Contents](#)

URL	Reason
https://aaca.ntua.edu.tw/assets/index-DGfyLKdM.css	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/LoadFeaturesCss_Client-Cz6VI-KF.css	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/cms_content_format-NvYllcok.css	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/LoadSpecCss-DvpspM99.css	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/LOGO_500x50-CeAKUOnn.svg	FilteredUrl.FileExtension
https://www.ntua.edu.tw/	FilteredUrl.Untrusted
https://uaap.ntua.edu.tw/enroll/	FilteredUrl.Untrusted
http://www.it-easygo.com/Main.aspx	FilteredUrl.Untrusted
https://aaca.ntua.edu.tw/	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/graduate-admissions/executive-master-program	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/AdmissionsProfessionalizationDevelopment/AbouttheProject/Back groundoftheProject	FilteredUrl.BodySimilar
https://aaca.ntua.edu.tw/assets/assets/LoadSpecCss_Server-CvGY3VMi.css	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/assets/LoadFeaturesCss-BYG_fPge.css	FilteredUrl.FileExtension
http://localhost/	FilteredUrl.Untrusted
http://www.w3.org/1999/xlink	FilteredUrl.Untrusted
http://www.w3.org/XML/1998/namespace	FilteredUrl.Untrusted
https://aaca.ntua.edu.tw/assets/GridListOperationGuide-D6RyP2n4.gif	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/favicon-D761Ybxxr.ico	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/links_01_350x135-CwjFct-W.jpg	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/links_02_350x135-DcGnMwG7.jpg	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/links_03_350x135-Dz9dC_FR.jpg	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/links_04_350x135-D7Tzymmx.jpg	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/links_05_350x135-DEP50Z73.jpg	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/links_06_350x135-DpUhcJhk.jpg	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/links_07_350x135-BjdNgzNW.jpg	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/PosterImages_1920x711-BjgVZdK7.jpg	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/images_01_1024x410-CaSTioev.jpg	FilteredUrl.FileExtension
https://aaca.ntua.edu.tw/assets/images_02_1024x410-DjKmG_xa.jpg	FilteredUrl.FileExtension
https://challenges.cloudflare.com/turnstile/v0/api.js?render=explicit	FilteredUrl.Untrusted
http://local/	FilteredUrl.Untrusted

http://www.w3.org/1998/Math/MathML	FilteredUrl.Untrusted
http://www.w3.org/2000/svg	FilteredUrl.Untrusted
http://www.w3.org/1999/xhtml	FilteredUrl.Untrusted
https://aaca.ntua.edu.tw/assets/avatar_M_480x480-C9UQslcS.jpg	FilteredUrl.FileExtension
http://example.com/	FilteredUrl.Untrusted
https://aaca.ntua.edu.tw/assets/document.pdf	FilteredUrl.FileExtension
https://example.com/	FilteredUrl.Untrusted
https://aaca.ntua.edu.tw/en	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/admission-schedule	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/graduate-admissions/doctoral-program	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/graduate-admissions/master-screening	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/graduate-admissions/master-exam	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/graduate-admissions/executive-master-program	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/graduate-admissions/new-immigrant-admission	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/graduate-admissions/admission-forms	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/undergraduate-admissions/special-selection	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/undergraduate-admissions/star-recommendation	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/undergraduate-admissions/application-admission	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/undergraduate-admissions/application-review-guide	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/undergraduate-admissions/placement-admission	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/undergraduate-admissions/four-year-and-two-year-college	FilteredUrl.PredictableUrl
https://aaca.ntua.edu.tw/en/undergraduate-admissions/disability-student-admission	FilteredUrl.PredictableUrl
https://aaca.ntua.edu.tw/en/undergraduate-admissions/elite-athlete-admission	FilteredUrl.PredictableUrl
https://aaca.ntua.edu.tw/en/undergraduate-admissions/continuing-bachelor-admission	FilteredUrl.PredictableUrl
https://aaca.ntua.edu.tw/en/undergraduate-admissions/two-year-inservice-program	FilteredUrl.PredictableUrl
https://aaca.ntua.edu.tw/en/undergraduate-admissions/transfer-admission	FilteredUrl.PredictableUrl
https://aaca.ntua.edu.tw/en/undergraduate-admissions/new-immigrant-admission	FilteredUrl.PredictableUrl
https://aaca.ntua.edu.tw/en/undergraduate-admissions/undergraduate-brochure	FilteredUrl.PredictableUrl
https://aaca.ntua.edu.tw/en/undergraduate-admissions/admission-forms	FilteredUrl.PredictableUrl
https://aaca.ntua.edu.tw/en/overseas-student-admissions/overseas-chinese-student-regulations	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/overseas-student-admissions/mainland-student-regulations	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/overseas-student-admissions/mainland-student-application-forms	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/downloads/admission-forms	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/downloads/admission-statistics	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/downloads/department-features	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/admission-regulations/Ourschool	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/graduate-admissions/master-screening	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/graduate-admissions/master-screening	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/Sitemap	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/graduate-admissions/master-screening	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/graduate-admissions/master-screening	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/graduate-admissions/master-screening	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/graduate-admissions/master-screening	FilteredUrl.PredictableUrl
https://aaca.ntua.edu.tw/en/Sitemap	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/Sitemap	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/Sitemap	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/AdmissionsProfessionalizationDevelopment/AbouttheProject/BackgroundoftheProject	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/AdmissionsProfessionalizationDevelopment/AbouttheProject/BackgroundoftheProject	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/AdmissionsProfessionalizationDevelopment/AbouttheProject/BackgroundoftheProject	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/AdmissionsProfessionalizationDevelopment/AbouttheProject/BackgroundoftheProject	FilteredUrl.DomSimilarity
https://aaca.ntua.edu.tw/en/AdmissionsProfessionalizationDevelopment/AbouttheProject/BackgroundoftheProject	FilteredUrl.PredictableUrl

Comments 1

[Go to Table of Contents](#)

URL	Comment
-----	---------

Components 4

[Go to Table of Contents](#)

Name	Version	URL
React	18.2.0	https://aaca.ntua.edu.tw/assets/index-BpBZgyG6.js
Bootstrap	5.1.1	https://aaca.ntua.edu.tw/assets/bootstrap.bundle.min-CzCngEA2.js
Bootstrap	5.3.3	https://aaca.ntua.edu.tw/assets/bootstrap.bundle.min-D507Ww_3.js
jQuery	3.7.1	https://aaca.ntua.edu.tw/en

JavaScripts 18

[Go to Table of Contents](#)

URL / Code

https://aaca.ntua.edu.tw/assets/loadfeaturescss_client-bknkf1bm.js

```
/* empty css */import './index-BpBZgyG6.js';
```

https://aaca.ntua.edu.tw/assets/bootstrap.bundle.min-czcngae2.js

```
/*!
 * Bootstrap v5.1.1 (https://getbootstrap.com/)
 * Copyright 2011-2021 The Bootstrap Authors (https://github.com/twbs/bootstrap/graphs/contributors)
 * Licensed under MIT (https://github.com/twbs/bootstrap/blob/main/LICENSE)
 */
!function(t,e){"object"===typeof exports&&"undefined"!==typeof module?module.exports=e():"function"===typeof define&&define.amd?define(e):(t="undefined"!==typeof globalThis?globalThis:t=self).bootstrap=e()}(this,function(){{"use strict";const t=t=>{let e=t.getAttribute("data-bs-target");if(!e)"#"===e?(let i=t.getAttribute("href");if(!i||!i.includes("#")&&i.startsWith("."))return null;i.includes("#")&&i.startsWith("#")&&(i="#"+"+i.split("#")[1],e=i&"#"!=="i"?i.trim():null)return e},e=>{const i=t(e);return i&&document.querySelector(i)?null:i,e=>{const i=t(e);return i?document.querySelector(i):null},n=t=>{t.dispatchEvent(new Event("transitionend"))},s=t=>{(!t["object"===typeof t&&(void 0!==t.jquery&&(t=t[0]),void 0!==t.nodeType),o=t=>s(t)?t.jquery?t[0]:t:"string"===typeof t&&t.length>0?document.querySelector(t):null,r=(t,e,i)=>{Object.keys(i).forEach(n=>{const o=[n],r=e[n],a=r&&s(r)?"element":null==(l=r)?""+l:{}.toString.call(l).match(/s(?:[a-z]+)?[1]/i).toLowerCase();var l;if(!new RegExp(o).test(a))throw new TypeError(`${t.toUpperCase()}: Option "${n}" provided type "${a}" but expected type "${o}"`)}),a=t=>{(!t)||0===t.getClientRects().length&&"visible"===getComputedStyle(t).getPropertyValue("visibility"),l=t=>{!t.nodeType===Node.ELEMENT_NODE||!t.classList.contains("disabled")||!(void 0!==t.disabled?t.disabled:t.hasAttribute("disabled")&&"false"!==t.getAttribute("disabled"))},c=t=>{if(!document.documentElement.attachShadow)return null;if("function"===typeof t.getRootNode){const e=t.getRootNode();return e instanceof ShadowRoot?e:null}return t instanceof ShadowRoot?t.parentNode?c(t.parentNode):null},h={()=>{}}},d=t=>{t.offsetHeight},u={()=>{const {jQuery:t}=window;return t&&!document.body.hasAttribute("data-bs-no-jquery")?t:null},f=[],p={()=>"html"===document.documentElement.dir,m=t=>{var e,e={()=>{const e=u();if(e){const i=t.NAME,n=e.fn[i];e.fn[i]=t.jQueryInterface,e.fn[i].Constructor=t,e.fn[i].noConflict=()=>(e.fn[i]=n,t.jQueryInterface)}},loading"===document.readyState?(f.length||document.addEventListener("DOMContentLoaded",()=>{f.forEach(t=>t()),f.push(e);e}),g=t=>{"function"===typeof t&&t(),_=t,e,i=!0)=>{if(!i)return void g(t);const s=(t=>{if(!i)return 0;let {transitionDuration:e,transitionDelay:i}=window.getComputedStyle(t);const n=Number.parseFloat(e),s=Number.parseFloat(i);return n|s?(e=e.split(",")[0],i=i.split(",")[0],1e3*(Number.parseFloat(e)+Number.parseFloat(i))):0})(e)+5;let o=!1;const r={target:t})=>{i==e&&(o=!0,e.removeEventListener("transitionend",r),g(t))};e.addEventListener("transitionend",r),setTimeout(()=>{o|n(e),s},b=(t,e,i,n)=>{let s=t.indexOf(e);if(-1==s)return t[i&&n?t.length-1:0];const o=t.length;return s+=i?1:-1,n&&(s=(s+o)%o),t[Math.max(0,Math.min(s,o-1))]},v=/[^\s.*/\.,\s]/.y=d+$/E={};let A=1;const T={mouseenter:"mouseover",mouseleave:"mouseout"},O=/^(mouseenter|mouseleave)/i,C=new Set(["click","dblclick","mouseup","mousedown","contextmenu","mousewheel","DOMMouseScroll","mouseover","mouseout","mousemove","selectstart","selectend","keydown","keypress","keyup","orientationchange","touchstart","touchmove","touchend","touchcancel","pointerdown","pointermove","pointerup","pointerleave","pointercancel","gesturestart","gesturechange","gestureend","focus","blur","change","reset","select","submit","focusin","focusout","load","unload","beforeunload","resize","move","DOMContentLoaded","readystatechange","error","abort","scroll"]);function k(t,e){return e&&"$e":$A++||t.uidEvent||A++}function L(t){const e=k(t);return t.uidEvent=e,E[e]=E[e]||{},E[e]function x(t,e,i=null){const n=Object.keys(t);for(let s=0,o=n.length;s<o;s++){const o=t[n[s]];if(o.originalHandler===e&&o.delegationSelector===i)return o}return null}function D(t,e,i){const n="string"===typeof e,s=n?e:let o=l(t);return C.has(o)?(o=t,n,s){if("string"!==typeof e||!t)return;if(!i)(i=n,n=null),O.test(e){const t=t=>function(e){if(!e.relatedTarget||e.relatedTarget!==e.delegateTarget&&!e.delegateTarget.contains(e.relatedTarget))return t.call(this,e);n?t(n):i=t(i);const[o,r,a]=D(e,i,n),l=L(t),c=l[a]||({}),h=x(c,r,o?i:null);if(h)return void(h.oneOff=h.oneOff&&s);const d=k(r,e.replace(v,"")),u=o?function(t,e,i){return function n(s){const o=t.querySelectorAll(e);for(let {target:r}=s;r&&r!==this;r=r.parentNode)for(let a=o.length;a-->0;a--){if(o[a]===r)return s.delegateTarget=r,n.oneOff&&P.off(t,n.type,e),e.apply(r,s)}(t,i),i.delegationSelector=o?n.delegateTarget=t,i.oneOff&&P.off(t,n.type,e),e.apply(t,n)}(t,i),i.delegationSelector=o?i:null,u.originalHandler=r,u.oneOff=s,u.uidEvent=d,c[d]=u,t.addEventListener(a,u,o)}function N(t,e,i,n,s){const o=x(e[i],n,s);o&&(t.removeEventListener(i,o,Boolean(s)),delete e[i]...}
```

https://aaca.ntua.edu.tw/assets/custompcoded-bthxrlbr.js

```
// 'use strict';
var fig = '0';
document.addEventListener('DOMContentLoaded', function () {
  // feather icon start
  feather.replace();
  // feather icon end

  // remove pre-loader start
  setTimeout(function () {
    document.querySelector('.loader-bg').remove();
  }, 400);

  // remove pre-loader end
  if (document.querySelector('body').hasAttribute('data-pc-layout')) {
    if (document.querySelector('body').getAttribute('data-pc-layout') === 'horizontal') {
      var docW = window.innerWidth;
      if (docW <= 1024) {
        //if (docW <= 991) {
          add_scroller();
        }
      } else {
        add_scroller();
      }
    }
  }

  var hamburger = document.querySelector('.hamburger:not(.is-active)');
```

```

if (hamburger) {
  hamburger.addEventListener('click', function () {
    if (document.querySelector('.hamburger').classList.contains('is-active')) {
      document.querySelector('.hamburger').classList.remove('is-active');
    } else {
      document.querySelector('.hamburger').classList.add('is-active');
    }
  });
}
// Menu overlay layout start
var temp_overlay_menu = document.querySelector('#overlay-menu');
if (temp_overlay_menu) {
  temp_overlay_menu.addEventListener('click', function () {
    menu_click();
    if (document.querySelector('.pc-sidebar').classList.contains('pc-over-menu-active')) {
      remove_overlay_menu();
    } else {
      document.querySelector('.pc-sidebar').classList.add('pc-over-menu-active');
      document.querySelector('.pc-sidebar').insertAdjacentHTML('beforeend', '<div class="pc-menu-overlay"></div>');
      document.querySelector('.pc-menu-overlay').addEventListener('click', function () {
        remove_overlay_menu();
        document.querySelector('.hamburger').classList.remove('is-active');
      });
    }
  });
}
// Menu overlay layout end

// Menu collapse click start
var mobile_collapse_over = document.querySelector('#mobile-collapse');
if (mobile_collapse_over) {
  mobile_collapse_over.addEventListener('click', function () {
    var temp_sidebar = document.querySelector('.pc-sidebar');
    if (temp_sidebar) {
      if (document.querySelector('.pc-sidebar').classList.contains('mob-sidebar-active')) {
        rm_menu();
      } else {
        document.querySelector('.pc-sidebar').classList.add('mob-sidebar-active');
        document.querySelector('.pc-sidebar').insertAdjacentHTML('beforeend', '<div class="pc-menu-overlay"></div>');
        document.querySelector('.pc-menu-overlay').addEventListener('click', function () {
          rm_menu();
        });
      }
    }
  });
}
// Menu collapse click end

// Menu collapse click start
var mobile_collapse = document.querySelector('.pc-horizontal #mobile-collapse');
if (mobile_collapse) {
  mobile_collapse.addEventListener('click', function () {
    if (document.querySelector('.topbar').classList.contains('mob-sidebar-active')) {
      rm_menu();
    } else {
      document.querySelector('.topbar').classList.add('mob-sidebar-active');
      document.querySelector('.topbar').insertAdjacentHTML('beforeend', '<div class="pc-menu-overlay"></div>');
      document.querySelector('.pc-menu-overlay').addEventListener('click', function () {
        rm_menu();
      });
    }
  });
}
// Menu collapse click end
// Horizontal menu click js start
var topbar_link_list = document.querySelector('.pc-horizontal .topbar .pc-navbar>li>a');
if (topbar_link_list) {
  topbar_link_list.addEventListener('click', function (e) {
    var targetElement = e.target;
    setTimeout(function () {
      targetElement.parentNode.children[1].removeAttribute('style');
    }, 1000);
  });
}
// Horizontal menu click js end

// header dropdown scrollbar start
if (document.querySelector('.header-notification-scroll')) {
  new SimpleBar(document.querySelector('.header-notification-scroll'));
}

if (document.querySelector('.profile-notification-scroll')) {
  new SimpleBar(document.querySelector('.profile-notification-scroll'));
}
// header dropdown scrollbar end

// component scrollbar start
if (document.querySelector('.component-list-card .card-body')) {
  new SimpleBar(document.querySelector('.component-list-card .card-body'));
}
// component- dropdown scrollbar end

var sidebar_hide = document.querySelector('#sidebar-hide');
if (sidebar_hide) {
  sidebar_hide.addEventListener('click', function () {
    if (document.querySelector('.pc-sidebar').classList.contains('pc-sidebar-hide')) {
      document.querySelector('.pc-sidebar').classList.remove('pc-sidebar-hide');
    } else {
      document.querySelector('.pc-sidebar').classList.add('pc-sidebar-hide');
    }
  });
}

if (document.querySelector('.trig-drp-search')) {
  const search_drp = docume...

```

<https://aaca.ntua.edu.tw/assets/feather.min-lmlwjhpj.js>

```

! function(e, n) {
  "object" == typeof exports && "object" == typeof module ? module.exports = n() : "function" == typeof define && define.amd ? define([], n) :
  "object" == typeof exports ? exports.feather = n() : e.feather = n()
} ("undefined" != typeof self ? self : this, function() {
  return function(e) {
    var n = {};

    function i(t) {
      if (n[t]) return n[t].exports;
    }
  }

```

```

var l = n[t] = {
  i: t,
  l: !l,
  exports: {}
};
return e[t].call(l.exports, l, l.exports, i), l.l = !0, l.exports
}
return i.m = e, i.c = n, i.d = function(e, n, t) {
  i.o(e, n) || Object.defineProperty(e, n, {
    configurable: !1,
    enumerable: !0,
    get: t
  })
}, i.r = function(e) {
  Object.defineProperty(e, "__esModule", {
    value: !0
  })
}, i.n = function(e) {
  var n = e && e.__esModule ? function() {
    return e.default
  } : function() {
    return e
  };
  return i.d(n, "a", n), n
}, i.o = function(e, n) {
  return Object.prototype.hasOwnProperty.call(e, n)
}, i.p = "", i(i.s = 80)
})(function(e, n, i) {
  (function(n) {
    var i = "object",
        t = function(e) {
          return e && e.Math == Math && e
        };
    e.exports = t(typeof globalThis == i && globalThis) || t(typeof window == i && window) || t(typeof self == i && self) || t(typeof n == i && n) ||
    Function("return this")()
  }).call(this, i(75))
}, function(e, n) {
  var i = {}.hasOwnProperty;
  e.exports = function(e, n) {
    return i.call(e, n)
  }
}, function(e, n, i) {
  var t = i(0),
      l = i(11),
      r = i(33),
      o = i(62),
      a = t.Symbol,
      c = l("wks");
  e.exports = function(e) {
    return c[e] || (c[e] = o && a[e] || (o ? a : r)("Symbol." + e))
  }
}, function(e, n, i) {
  var t = i(6);
  e.exports = function(e) {
    if (!t(e)) throw TypeError(String(e) + " is not an object");
    return e
  }
}, function(e, n) {
  e.exports = function(e) {
    try {
      return !!e()
    } catch (e) {
      return !0
    }
  }
}, function(e, n, i) {
  var t = i(8),
      l = i(7),
      r = i(10);
  e.exports = t ? function(e, n, i) {
    return l.f(e, n, r(1, i))
  } : function(e, n, i) {
    return e[n] = i, e
  }
}, function(e, n) {
  e.exports = function(e) {
    return "object" == typeof e ? null != e : "function" == typeof e
  }
}, function(e, n, i) {
  var t = i(8),
      l = i(35),
      r = i(3),
      o = i(18),
      a = Object.defineProperty;
  n.f = t ? a : function(e, n, i) {
    if (r(e), n = o(n, !0), r(i), l) try {
      return a(e, n, i)
    } catch (e) {}
    if ("get" in i || "set" in i) throw TypeError("Accessors not supported");
    return "value" in i && (e[n] = i.value), e
  }
}, function(e, n, i) {
  var t = i(4);
  e.exports = !t(function() {
    return 7 != Object.defineProperty({}, "a", {
      get: function() {
        return 7
      }
    })
  })
}, function(e, n) {
  e.exports = {}
}, function(e, n) {
  e.exports = function(e, n) {
    return {
      enumerable: !(1 & e),
      configurable: !(2 & e),
      writable: !(4 & e),
      value: n
    }
  }
}, function(e, n, i) {
  var t = i(0),
      l = i(19),
      r = i(17),
      o = t["__core-js_shared__"] || l["__core-js_shared__", {}];
  (e.exports = function(e, n) {
    return o[e] || (o[e] = void 0 !== n ? n : {})
  })("versions", []).push({
    version: "3.1.3",

```

```

        mode: r ? "pure" : "global",
        copyright: "© 2019 Denis Pushkarev (zloirock.ru)"
    })
}, function(e, n, i) {
    "use strict";
    Object.defineProperty(n, "__esModule", {
        value: !0
    });
    var t = o(i(43)),
        l = o(i(41)),
        r = o(i(40));

    function o(e) {
        return e && e.__esModule ? e : {
            default: e
        }
    }
    n.default = Object.keys(l.default).map(function(e) {
        return new t.default(e, l.default[e], r.default[e])
    }).reduce(function(e, n) {
        return e[n.name]
    }, {});
}

```

https://aaca.ntua.edu.tw/assets/owl.carousel_v2.3.4-bk-owla8.js

```

// JavaScript Document

/**
 * Owl Carousel v2.3.4
 * Copyright 2013-2018 David Deutsch
 * Licensed under: SEE LICENSE IN https://github.com/OwlCarousel2/OwlCarousel2/blob/master/LICENSE
 */
/**
 * Owl carousel
 * @version 2.3.4
 * @author Bartosz Wojciechowski
 * @author David Deutsch
 * @license The MIT License (MIT)
 * @todo Lazy Load Icon
 * @todo prevent animationend bubbling
 * @todo itemsScaleUp
 * @todo Test Zepto
 * @todo stagePadding calculate wrong active classes
 */
(function ($, window, document, undefined) {
    /**
     * Creates a carousel.
     * @class The Owl Carousel.
     * @public
     * @param {HTMLElement|jQuery} element - The element to create the carousel for.
     * @param {Object} [options] - The options
     */
    function Owl(element, options) {
        /**
         * Current settings for the carousel.
         * @public
         */
        this.settings = null;

        /**
         * Current options set by the caller including defaults.
         * @public
         */
        this.options = $.extend({}, Owl.Defaults, options);

        /**
         * Plugin element.
         * @public
         */
        this.$element = $(element);

        /**
         * Proxied event handlers.
         * @protected
         */
        this._handlers = {};

        /**
         * References to the running plugins of this carousel.
         * @protected
         */
        this._plugins = {};

        /**
         * Currently suppressed events to prevent them from being retriggered.
         * @protected
         */
        this._supress = {};

        /**
         * Absolute current position.
         * @protected
         */
        this._current = null;

        /**
         * Animation speed in milliseconds.
         * @protected
         */
        this._speed = null;

        /**
         * Coordinates of all items in pixel.
         * @todo The name of this member is misleading.
         * @protected
         */
        this._coordinates = [];

        /**
         * Current breakpoint.
         * @todo Real media queries would be nice.
         * @protected
         */
        this._breakpoint = null;

        /**
         * Current width of the plugin element.
         */
    }

```

```

this._width = null;

/**
 * All real items.
 * @protected
 */
this._items = [];

/**
 * All cloned items.
 * @protected
 */
this._clones = [];

/**
 * Merge values of all items.
 * @todo Maybe this could be part of a plugin.
 * @protected
 */
this._mergers = [];

/**
 * Widths of all items.
 */
this._widths = [];

/**
 * Invalidated parts within the update process.
 * @protected
 */
this._invalidated = {};

/**
 * Ordered list of workers for the update process.
 * @protected
 */
this._pipe = [];

/**
 * Current state information for the drag operation.
 * @todo #261
 * @protected
 */
this._drag = {
  time: null,
  target: null,
  pointer: null,
  stage: {
    start: null,
    current: null,
  },
  direction: null,
};

/**
 * Current state information and their tags.
 * @type {Object}
 * @protected
 */
this._states = {
  current: {},
  tags: {
    initializing: ["busy"],
    animating: ["busy"],
    dragging: ["interacting"],
  },
};

$.each(
  ["onResize", "onThrottledResize"],
  $.proxy(function (i, handler) {
    this._handlers[handler] = $.proxy(this[handler], this);
  }, this)
);

$.each(
  Owl.Plugins,
  $.proxy(function (key, plugin) {
    this._plugins[key.charAt(0).toLowerCase() + key.slice(1)] = new plugin(
      this
    );
  }, this)
);

$.each(
  Owl.Workers,
  $.proxy(function (priority, worker) {
    this._pipe.push({
      filter: worker.filter,
      run: $.proxy(worker.run, this),
    });
  }, this)
);

this.setup();
this.initialize();
}

/**
 * Default options for the carousel.
 * @public
 */
Owl.Defaults = {
  items: 3,
  loop: false,
  center: false,
  rewind: false,
  checkVisibility: true,

  mouseDrag: true,
  touchDrag: true,
  pullDrag: true,
  freeDrag: false,

  margin: 0,
  stagePadding: 0,

  merge: false,
  mergeFit: true,
  autoWidth: false,

```

```

startPosition: 0,
rtl: false,

smartSpeed: 250,
fluidSpeed: false,
dragEndSpeed: false,

responsive: {},
responsiveRefreshRate: 200,
responsiveBaseElement: window,

fallbackEasing: "swing",
slideTransition: "",

info: false,

nestedItemSelector: false,
itemElement: "div",
stageElement: "div",

refreshClass: "owl-refresh",
loadedClass: "owl-loaded",
loadingClass: "owl-loading",
rtlClass: "owl-rtl",
responsiveClass: "owl-responsive",
dragClass: "owl-drag",
itemClass: "owl-item",
stageClass...

```

<https://aaca.ntua.edu.tw/assets/index-bpbzgyg6.js>

```

const vite_mapDeps=(i,m=_vite_mapDeps,d=(m.f||m.f=["assets/LoadSpecCss-DvpspM99.css","assets/LoadSpecCss_Server-CvGY3VMI.css","assets/LoadFeaturesCss-B-N1djgj.js","assets/LoadFeaturesCss-BYG_fPge.css","assets/cms_content_format-NvYllcok.css","assets/LoadFeaturesCss_Client-BKnKf1bm.js","assets/LoadFeaturesCss_Client-Cz6Vl-KF.css"])))=>i.map(i=>d[i]);
function J(e,t){for(var n=0;n<t.length;n++){const r=t[n];if(typeof r!="string"&&Array.isArray(r)){for(const a in r){if(a!="default"&&!(a in e)){const s=Object.getPrototypeOfDescriptor(r,a);s&&Object.defineProperty(e,a,s.get??:{enumerable:!0,get:()=>r[a]}})}return Object.freeze(Object.defineProperty(e.Symbol.toStringTag,{value:"Module"}))}(function(){const t=document.createElement("link").relList;if(t&&t.supports&&t.supports("modulepreload"))return;for(const a of document.querySelectorAll("link[rel='modulepreload']"))r(a);new MutationObserver(a=>{for(const s of a){if(s.type==="childList")for(const o of s.addedNodes)o.tagName==="LINK"&&o.rel==="modulepreload"&&o}).observe(document,{childList:!0,subtree:!0});function n(a){const s={};return a.integrity&&(s.integrity=a.integrity),a.referrerPolicy&&(s.referrerPolicy=a.referrerPolicy),a.crossOrigin==="use-credentials"?s.credentials="include":a.crossOrigin==="anonymous"?s.credentials="omit":s.credentials="same-origin",s}function r(a){if(a.ep)return;a.ep=!0;const s=n(a);fetch(a.href,s)}()};const A8="modulepreload",k8=function(e){return""+e},h_={},al=function(t,n,r){let a=Promise.resolve();if(n&&n.length>0){let o=function(f){return Promise.all(f.map(g=>Promise.resolve(g)).then(y=>({status:"fulfilled",value:y})),y=>({status:"rejected",reason:y})))};document.getElementsByTagName("link");const c=document.querySelector("meta[property=csp-nonce]"),d=c?.nonce||c?.getAttribute("nonce");a=o(n.map(f=>{if(f=k8(f),f in h_)return;h_[f]=!0;const g=f.endsWith(".css"),y=g?["rel='stylesheet'"]:"";if(document.querySelector("link[href='"+f+"']"))return;const p=document.createElement("link");if(p.rel=g?"stylesheet":A8,g](p.as="script"),p.crossOrigin="",p.href=f,d&&p.setAttribute("nonce",d),document.head.appendChild(p),g)return new Promise((w,b)=>{p.addEventListener("load",w),p.addEventListener("error",()=>b(new Error("Unable to preload CSS for '"+f+"'")))}))}function s(o){const c=new Event("vite:preloadError",{cancelable:!0});if(c.payload=o,window.dispatchEvent(c),c.defaultPrevented)throw o}return a.then(o=>{for(const c of o){c.status==="rejected"&&s(c.reason);return t}).catch(s)}},function Sc(e){return e&&e.__esModule&&Object.prototype.hasOwnProperty.call(e,"default")?e.default:e}var xv={exports:{}},jd={},Sv={exports:{}},kt={};/**
 * @license React
 * react.production.min.js
 *
 * Copyright (c) Facebook, Inc. and its affiliates.
 *
 * This source code is licensed under the MIT license found in the
 * LICENSE file in the root directory of this source tree.
 */var y_={function j8(){if(y_)return kt.y_=1;var e=Symbol.for("react.element"),t=Symbol.for("react.portal"),n=Symbol.for("react.fragment"),r=Symbol.for("react.strict_mode"),a=Symbol.for("react.profiler"),s=Symbol.for("react.provider"),o=Symbol.for("react.context"),c=Symbol.for("react.forward_ref"),d=Symbol.for("react.suspense"),f=Symbol.for("react.memo"),g=Symbol.for("react.lazy"),y=Symbol.iterator;function p(A){return A===null||typeof A!="object"?null:(A=y&&A[y]||A["@@iterator"],typeof A=="function"?A:null)}var w={isMounted:function(){return!1},enqueueForceUpdate:function(){},enqueueReplaceState:function(){},enqueueSetState:function(){}},b=Object.assign,x={};function S(A,G,Z){this.props=A,this.context=G,this.refs=x,this.updater=Z||w}S.prototype.isReactComponent={},S.prototype.setState=function(A,G){if(typeof A!="object"&&typeof A!="function"&&A!=null)throw Error("setState(...): takes an object of state variables to update or a function which returns an object of state variables.");this.updater.enqueueSetState(this,A,G,"setState");S.prototype.forceUpdate=function(A){this.updater.enqueueForceUpdate(this,A,"forceUpdate");function C(){C.prototype=S.prototype;function_(A,G,Z){this.props=A,this.context=G,this.refs=x,this.updater=Z||w}var T=...prototype=new C;T.constructor=...T,S.prototype).isPureReactComponent=!0;var N=Array.isArray,E=Object.prototype.hasOwnProperty,R={current:null},P={key:0,ref:0,self:0,...source:0};function k(A,G,Z){var he,le={},Se=null,me=null;if(G!=null)for(he in G.ref!=void 0&&(me=G.ref),G.key!=void 0&&(Se=""+G.key),G.E.call(G,he)&&!P.hasOwnProperty(he)&&(le[he]=G[he]);var Ee=arguments.length-2;if(Ee===1)le.children=Z;else if(1<Ee){for(var Ge=Array(Ee),ut=0;ut<Ee;ut++)Ge[ut]=arguments[ut+2];le.children=Ge}if(A&&A.defaultProps)for(he in Ee=A.defaultProps,Ee[he]===void 0&&(le[he]=Ee[he]));return{$$typeof:e,type:A,key:G,ref:A.ref,props:A.props,owner:A._owner}}function L(A,G){return{$$typeof:e,type:A,key:G,ref:A.ref,props:A.props,owner:A._owner}}function J(A){return typeof A=="object"&&A!=null&&A.$$typeof===e}function O(A){var G={"":0,"":0},...

```

https://aaca.ntua.edu.tw/assets/loadfeaturesjs_client-dzgvx_b4.js

```

import{s as r}from"/index-BpBZgyG6.js";const a="/assets/bootstrap.bundle.min-D5O7Ww_3.js",i="/assets/ekko-lightbox-BmiW2n5W.js",l="/assets/owl.carousel_v2.3.4-bK-Owla8.js",c="/assets/swiper-bundle.min-DbP_0zCD.js",d="/assets/venobox.min-DBL3ZjsO.js",u="/assets/jquery-3.7.1.min-Bmb_Kel.js",e=s=>typeof document>"u"?Promise.resolve():new Promise((t,n)=>{const o=document.createElement("script");r(o),o.async=!1,o.onload=()=>t(),o.onerror=()=>n(new Error("Failed to load script: "+s))},document.head.appendChild(o)),m=async()=>{await Promise.all([e(a),e(c)]),w=async()=>{await e(u);const s=window;s.jQuery&&(s.$=s.jQuery),await Promise.all([e(l),e(i),e(d)]);(async()=>>typeof document>"u")||[await m(),w()]}()};

```

<https://aaca.ntua.edu.tw/assets/simplebarv6.2.5.min-cud8joas.js>

```

/**
 * simplebar - v6.2.5
 * Scrollbars, simpler.
 * https://grsmto.github.io/simplebar/
 *
 * Made by Adrien Denat from a fork by Jonathan Nicol
 * Under MIT License
 */

var SimpleBar = function() {
  "use strict";
  var e = function(t, i) {
    return e = Object.setPrototypeOf || {
      __proto__: []
    }
    instanceof Array && function(e, t) {
      e.__proto__ = t
    } || function(e, t) {
      for (var i in t) Object.prototype.hasOwnProperty.call(t, i) && (e[i] = t[i])
    }, e(t, i)
  }

```

```

};
var t = !("undefined" == typeof window || !window.document || !window.document.createElement),
i = "object" == typeof global && global && global.Object === Object && global,
s = "object" == typeof self && self && self.Object === Object && self,
r = i || s || Function("return this")(),
l = r.Symbol,
o = Object.prototype,
n = o.hasOwnProperty,
a = o.toString,
c = l ? l.toStringTag : void 0;
var h = Object.prototype.toString;
var u = l ? l.toStringTag : void 0;

function d(e) {
    return null == e ? void 0 === e ? "[object Undefined]" : "[object Null]" : u && u in Object(e) ? function(e) {
        var t = n.call(e, c),
        i = e[c];
        try {
            e[c] = void 0;
            var s = !0;
        } catch (e) {}
        var r = a.call(e);
        return s && (t ? e[c] = i : delete e[c]), r
    }(e) : function(e) {
        return h.call(e)
    }(e)
}

}
var p = /\$/;
var v = /^\$+/;

function f(e) {
    return e ? e.slice(0, function(e) {
        for (var t = e.length; t-- && p.test(e.charAt(t));)
            return t
    }(e) + 1).replace(v, "") : e
}

function m(e) {
    var t = typeof e;
    return null != e && ("object" == t || "function" == t)
}

var b = /^[+][0-9a-f]+$/i,
g = /^[0b][01]+$/i,
x = /^[0-7]+$/i,
y = parseInt;

function E(e) {
    if ("number" == typeof e) return e;
    if (function(e) {
        return "symbol" == typeof e || function(e) {
            return null != e && "object" == typeof e
        }(e) && "[object Symbol]" == d(e)
    }(e)) return NaN;
    if (m(e)) {
        var t = "function" == typeof e.valueOf ? e.valueOf() : e;
        e = m(t) ? t + "" : t
    }
    if ("string" != typeof e) return 0 === e ? e : +e;
    e = f(e);
    var i = g.test(e);
    return i || x.test(e) ? y(e.slice(2), i ? 2 : 8) : b.test(e) ? NaN : +e
}

var O = function() {
    return r.Date.now()
},
w = Math.max,
S = Math.min;

function A(e, t, i) {
    var s, r, l, o, n, a, c = 0,
    h = !1,
    u = !1,
    d = !0;
    if ("function" != typeof e) throw new TypeError("Expected a function");

    function p(t) {
        var i = s,
        l = r;
        return s = r = void 0, c = t, o = e.apply(l, i)
    }

    function v(e) {
        return c = e, n = setTimeout(b, t), h ? p(e) : o
    }

    function f(e) {
        var i = e - a;
        return void 0 === a || i >= t || i < 0 || u && e - c >= l
    }

    function b() {
        var e = O();
        if (f(e)) return g(e);
        n = setTimeout(b, function(e) {
            var i = t - (e - a);
            return u ? S(i, l - (e - c)) : i
        }(e))
    }

    function g(e) {
        return n = void 0, d && s ? p(e) : (s = r = void 0, o)
    }

    function x() {
        var e = O(),
        i = f(e);
        if (s = arguments, r = this, a = e, i) {
            if (void 0 === n) return v(a);
            if (u) return clearTimeout(n), n = setTimeout(b, t), p(a)
        }
        return void 0 === n && (n = setTimeout(b, t)), o
    }

    return t = E(t) || 0, m(i) && (h = !!i.leading, l = (u = "maxWait" in i) ? w(E(i.maxWait) || 0, t) : l, d = "trailing" in i ? !!i.trailing : d), x.cancel = function() {
        void 0 !== n && clearTimeout(n), c = 0, s = a = r = n = void 0
    }, x.flush = function() {
        return void 0 === n ? o : g(O())
    }, x
}

var k = function() {

```

```

return k = Object.assign || function(e) {
  for (var t, i = 1, s = arguments.length; i < s; i++)
    for (var r in t = arguments[i]) Object.prototype.hasOwnProperty.call(t, r) && (e[r] = t[r]);
  return e
}, k.apply(this, arguments)
},
W = null,
M = null;

function N() {
  if (null === W) {
    if ("undefined" == typeof document) return W = 0;
    var e = document...
  }
}

```

https://aaca.ntua.edu.tw/assets/jquery-3.7.1.min-ck9_gmfi.js

```

/*! jQuery v3.7.1 | (c) OpenJS Foundation and other contributors | jquery.org/license */
!function(e,t){
  "use strict";
  "object"==typeof module&&"object"==typeof module.exports?module.exports=e.document?t(e,!0):function(e){
    if(!e.document)throw new Error("jQuery requires a window with a document");return t(e)}:t(e)}("undefined"!=typeof window?
  window:this,function(i,e){
    "use strict";
    var oe=[],r=Object.getPrototypeOf,ae=oe.slice,g=oe.flat?function(e){return oe.flat.call(e)}:function(e){return
    oe.concat.apply([],e)},s=oe.push,se=oe.indexOf,n={},i=n.toString,ue=n.hasOwnProperty,o=ue.toString,a=o.call(Object),le={},v=function(e)
    {return "function"==typeof e&&"number"!=typeof e.nodeType&&"function"!=typeof e.item},y=function(e){return
    null!=e&&e===e.window},C=i.e.document,u={type:!0,src:!0,nonce:!0,noModule:!0};function m(e,t,n){var r,i,o=
    (n=n||C).createElement("script");if(o.text=e,t)for(r in u)for(i in r)u[i].test(t)&&o.setAttribute(r,i);n.head.appendChild(o).parentNode.removeChild(o)}function x(e){return null==e?
    e+"":"object"==typeof e?"function"==typeof e?n[i.call(e)]:"object":typeof e}var t="3.7.1",l=/HTML$/i,ce=function(e,t){return new
    ce.fn.init(e,t)};function c(e){var t=!le&&"length"in e&&e.length,n=x(e);return!v(e)&&!(e&&("array"===n||0===t||"number"==typeof t&&0<t&&t-1
    in e))}function fe(e,t){return e.nodeType&&e.nodeName.toLowerCase()===t.toLowerCase()}ce.fn=ce.prototype=
    {jquery:t,constructor:ce,length:0,toArray:function(){return ae.call(this)},get:function(e){return null==e?ae.call(this):e<0?
    this[e+this.length]:this[e]},pushStack:function(e){var t=ce.merge(this.constructor(),e);return t.prevObject=this,t,each:function(e){return
    ce.each(this,e)},map:function(n){return this.pushStack(ce.map(this,function(e,t){return n.call(e,t,e)})),slice:function(){return
    this.pushStack(ae.apply(this,arguments))},first:function(){return this.eq(0)},last:function(){return this.eq(-1)},even:function(){return
    this.pushStack(ce.grep(this,function(e,t){return(t+1)%2}))},odd:function(){return this.pushStack(ce.grep(this,function(e,t){return
    t%2}))},eq:function(e){var t=this.length,n=+e+(e<0?t:0);return this.pushStack(0<=n&&n<t?[this[n]]:[])},end:function(){return
    this},prevObject:function(){return this.constructor()},push:se,sort:oe.sort,splice:oe.splice,ce.extend=ce.fn.extend=function(){var e,t,n,r,i,o,a=arguments[0]||
    {},s=1,u=arguments.length,l=1;for("boolean"==typeof a&&(l=a,a=arguments[s]||{}),s++),"object"==typeof a||v(a)||({a:{}}),s===u&&(a=this,s--);
    s<u;s++)if(!null!=(e=arguments[s]))for(t in e)r=e[t],"_proto_"!==(t&&a!=r&&(l&&r&&(ce.isPlainObject(r)||(!Array.isArray(r))))?
    (n=a[t],o=i&&Array.isArray(n)?[!i||ce.isPlainObject(n)?n: {},i=1,a[t]=ce.extend(l,o,r):void 0!=r&&(a[t]=r):return a},ce.extend({expando:"jQuery"+
    (+Math.random()).toFixed(4)},replace(/D/g,""),isReady:!0,error:function(e){throw new Error(e)},noop:function(){},isPlainObject:function(e){var t,n;return(!le||
    [object Object]!==i.call(e))&&(t=r(e))&&"function"==typeof(n=ue.call(t,"constructor")&&t.constructor)&&o.call(n)===a)},isEmptyObject:function(e)
    {var t;for(t in e)return!1;return!0},globalEval:function(e,t,n){m(e,{nonce:t&&t.nonce},n),each:function(e,t){var n,r,o;if(c(e))
    {for(n=e.length;<n;r++)if(!1===t.call(e[r],r,e[r]))break}else for(r in e)if(!1===t.call(e[r],r,e[r]))break;return e},text:function(e){var
    t,n="";r=0,i=e.nodeType;if(!i)while(t=e[r++])n+=ce.text(t);return 1===i||11===i?e.textContent:9===i?
    e.documentElement.textContent:3===i||4===i?e.nodeValue:n},makeArray:function(e,t){var n=t||[];return null!=e&&(c(Object(e))?
    ce.merge(n,"string"==typeof e?[e]:e):s.call(n,e),n),isArray:function(e,t,n){return null==t?-1:se.call(t,e,n)},isXMLDoc:function(e){var
    t=e&&e.namespaceURI,n=e&&(e.ownerDocument||e).documentElement;return!!test(t||n&&n.nodeName||"HTML")},merge:function(e,t){for(var
    n=+t.length,r=0,i=e.length;r<n;r++)e[i++]=t[r];return e.length=i,e},grep:function(e,t,n){for(var r=
    [],i=0,o=e.length,a=!n;i<o;i++)!(e[i],i)!==(a&&r.push(e[i]));return r},map:function(e,t,n){var r,i,o,a=[];if(c(e))for(r=e.length;o<r;o++)null!=
    (i=t(e[o],o,n))&&a.push(i);else for(o in e)null!=i=t(e[o],o,n)&&a.push(i);return g(a)},guid:1,support:le},"function"==typeof Symbol&&
    (ce.fn[Symbol.iterator]=oe[Symbol.iterator]),ce.each("Boolean Number String Array Date RegExp Object Error Symbol".split(" "),function(e,t)
    ){n["object"!="t+"+"t"]+=t.toLowerCase();var pe=oe.pop,de=oe.sort,he=oe.splice,ge="[\\x20\\t\\r\\n\\f]",ve=new RegExp("^"+ge+"+|((?:^|^[^\\\\])
    (?:(\\\\\\\\)*"+ge+"+$)|g","g");ce.contains=function(e,t){var n=t&&t.parentNode;return e===n?!1:n!1===n.nodeType?!1:(e.contains?
    e.contains(n):e.compareDocumentPosition&&16&e.compareDocumentPosition(n)))};var f=/[\\0-\\x1f\\x7f]|^-?d|^-?[$\\^\\x80-\\uffff\\w-]/g;function p(e,t)
    {return t?"0"===e?e.toLowerCase().slice(0,-1)+"\\n"+e.charAt(e.length-1).toString(16)+" ":"\\n"+e}ce.escapeSelector=function(e)
    {return(e+"").replace(f,p)};var ye=C,me=s;function j(e,b,w,o,a,r,C,d,i,k=me,S=ce.expando,E=0,n=0,S=W(),c=W(),u=W(),h=W(),...
  }

```

https://aaca.ntua.edu.tw/assets/bootstrap.bundle.min-d5o7ww_3.js

```

/*!
 * Bootstrap v5.3.3 (https://getbootstrap.com/)
 * Copyright 2011-2024 The Bootstrap Authors (https://github.com/twbs/bootstrap/graphs/contributors)
 * Licensed under MIT (https://github.com/twbs/bootstrap/blob/main/LICENSE)
 */
!function(t,e){
  "object"==typeof exports&&"undefined"!=typeof module?module.exports=e()::"function"==typeof define&&define.amd?define(e):(t=
  "undefined"!=typeof globalThis?globalThis:t||self).bootstrap=e()
})(this,(function(){
  "use strict";
  const t=new Map,
  e={
    set(e,i,n){
      set(e,i,n){
        t.has(e)||t.set(e,new Map);
        const s=t.get(e);
        s.has(i)||0===s.size?s.set(i,n):console.error('Bootstrap doesn't allow more than one instance per element. Bound instance:
        $[Array.from(s.keys())[0]]');
      },
      get:(e,i)=>t.has(e)&&t.get(e).get(i)||null,
      remove(e,i){
        if(!t.has(e))return;
        const n=t.get(e);
        n.delete(i),0===n.size&&t.delete(e)
      }
    },
    i="transitionend",
    n=t=>(t&&window.CSS&&window.CSS.escape&&(t=t.replace(/#(?:[^\s#]|+)|/g,((t,e)=>`_${CSS.escape(e)}`))),t,
    s=t=>{
      t.dispatchEvent(new Event(i))
    },
    o=t=>!(t||"object"!=typeof t&&(void 0!==t.jquery&&(t=t[0]),void 0!==t.nodeType),
    r=t=>o(t)?t.jquery?t[0]:t:"string"==typeof t&&t.length>0?document.querySelector(n(t)):null,
    a=t=>{
      if(!o(t)||0===t.getClientRects().length)return!1;
      const e="visible"===getComputedStyle(t).getPropertyValue("visibility"),
      i=t.closest("details:not([open])");
      if(!i)return e;
      if(i!==(t=t)){
        const e=t.closest("summary");
        if(e&&e.parentNode!==(i))return!1;
        if(null===e)return!1
      }
      return e
    },
    l=t=>!t||t.nodeType!=Node.ELEMENT_NODE||!t.classList.contains("disabled")||(void 0!==t.disabled?t.disabled:
    t.hasAttribute("disabled")&&"false"!=t.getAttribute("disabled")),
    c=t=>{
      if(!document.documentElement.attachShadow)return null;
      if("function"==typeof t.getRootNode){
        const e=t.getRootNode();
        return e instanceof ShadowRoot?e:null
      }
      return t instanceof ShadowRoot?t.parentNode?c(t.parentNode):null
    },
    h=()=>>{},
    d=t=>{}
  }

```

```

t.offsetHeight
},
u = () => window.jQuery && !document.body.hasAttribute("data-bs-no-jquery") ? window.jQuery : null,
f = [],
p = () => "rtl" === document.documentElement.dir,
m = t => {
  var e;
  e = () => {
    const e = u();
    if (e) {
      const i = t.NAME,
            n = e.fn[i];
      e.fn[i] = t.jQueryInterface, e.fn[i].Constructor = t, e.fn[i].noConflict = () => (e.fn[i] = n, t.jQueryInterface)
    }
  }, "loading" === document.readyState ? (f.length || document.addEventListener("DOMContentLoaded", () => {
    for (const t of f) t()
  })), f.push(e) : e()
},
g = (t, e = [], i = t) => "function" === typeof t ? t(...e) : i,
= (t, e, n = !0) => {
  - if (!n) return void g(t);
  const o = (t => {
    if (!t) return 0;
    let {
      transitionDuration: e,
      transitionDelay: i
    } = window.getComputedStyle(t);
    const n = Number.parseFloat(e),
          s = Number.parseFloat(i);
    return n || s ? (e = e.split(",")[0], i = i.split(",")[0], 1e3 * (Number.parseFloat(e) + Number.parseFloat(i))) : 0
  })(e) + 5;
  let r = !1;
  const a = ({
    target: n
  }) => {
    n === e && (r = !0, e.removeEventListener(i, a), g(t))
  };
  e.addEventListener(i, a), setTimeout(() => {
    r || s(e)
  }, o)
},
b = (t, e, i, n) => {
  const s = t.length;
  let o = t.indexOf(e);
  return -1 === o ? !i && n ? t[s - 1] : t[0] : (o += i ? 1 : -1, n && (o = (o + s) % s), t[Math.max(0, Math.min(o, s - 1))])
},
v = /[\^.]*(?=\..*)\.\.*/i,
y = /\.\.*/i,
w = /:::~d+$/i,
A = {};
let E = 1;
const T = {
  mouseenter: "mouseover",
  mouseleave: "mouseout"
},
C = new Set(["click", "dblclick", "mouseup", "mousedown", "contextmenu", "mousewheel", "DOMMouseScroll", "mouseover", ...

```

https://aaca.ntua.edu.tw/assets/swiper-bundle.min-dbp_0zcd.js

```

/**
 * Swiper 11.1.14
 * Most modern mobile touch slider and framework with hardware accelerated transitions
 * https://swiperjs.com
 *
 * Copyright 2014-2024 Vladimir Kharlampidi
 *
 * Released under the MIT License
 *
 * Released on: September 12, 2024
 */

var Swiper = (function () {
  "use strict";
  function e(e) {
    return (
      null !== e &&
      "object" === typeof e &&
      "constructor" in e &&
      e.constructor === Object
    );
  }
  function t(s, a) {
    void 0 === s && (s = {}),
      void 0 === a && (a = {}),
      Object.keys(a).forEach((i) => {
        void 0 === s[i]
          ? (s[i] = a[i])
          : e(a[i]) && e(s[i]) && Object.keys(a[i]).length > 0 && t(s[i], a[i]);
      });
  }
  const s = {
    body: {},
    addEventListener() {},
    removeEventListener() {},
    activeElement: { blur() {}, nodeName: "" },
    querySelector: () => null,
    querySelectorAll: () => [],
    getElementById: () => null,
    createEvent: () => ({ initEvent() {} }),
    createElement: () => ({
      children: [],
      childNodes: [],
      style: {},
      setAttribute() {},
      getElementsByTagName: () => [],
    }),
    createElementNS: () => ({}),
    importNode: () => null,
    location: {
      hash: "",
      host: "",
      hostname: "",
      href: "",
      origin: "",
      pathname: "",
      protocol: "",
      search: "",
    },
  };

```

```

    },
    };
    function a() {
        const e = "undefined" != typeof document ? document : {};
        return t(e, s), e;
    }
    const i = {
        document: s,
        navigator: { userAgent: "" },
        location: {
            hash: "",
            host: "",
            hostname: "",
            href: "",
            origin: "",
            pathname: "",
            protocol: "",
            search: "",
        },
        history: { replaceState() {}, pushState() {}, go() {}, back() {} },
        CustomEvent: function () {
            return this;
        },
        addEventListener() {},
        removeEventListener() {},
        getComputedStyle: () => ({ getPropertyValue: () => "" }),
        Image() {},
        Date() {},
        screen: {},
        setTimeout() {},
        clearTimeout() {},
        matchMedia: () => ({}),
        requestAnimationFrame: (e) =>
            "undefined" == typeof setTimeout ? (e(), null) : setTimeout(e, 0),
        cancelAnimationFrame(e) {
            "undefined" != typeof setTimeout && clearTimeout(e);
        },
    };
    function r() {
        const e = "undefined" != typeof window ? window : {};
        return t(e, i), e;
    }
    function n(e) {
        return (
            void 0 === e && (e = ""),
            e
                .trim()
                .split(" ")
                .filter((e) => !!e.trim())
        );
    }
    function l(e, t) {
        return void 0 === t && (t = 0), setTimeout(e, t);
    }
    function o() {
        return Date.now();
    }
    function d(e, t) {
        void 0 === t && (t = "x");
        const s = r();
        let a, i, n;
        const l = (function (e) {
            const t = r();
            let s;
            return (
                t.getComputedStyle && (s = t.getComputedStyle(e, null)),
                !s && e.currentStyle && (s = e.currentStyle),
                s || (s = e.style),
                s
            );
        })(e);
        return (
            s.WebKitCSSMatrix
                ? ((i = l.transform || l.webkitTransform),
                  i.split(",").length > 6 &&
                    (i = i
                        .split(",")
                        .map((e) => e.replace(",", "."))
                        .join(", ")),
                    (n = new s.WebKitCSSMatrix("none" === i ? "" : i)))
                : ((n =
                    l.MozTransform ||
                    l.OTransform ||
                    l.msTransform ||
                    l.msTransform ||
                    l.transform ||
                    l
                        .getPropertyValue("transform")
                        .replace("translate(", "matrix(1, 0, 0, 1,")"),
                    (a = n.toString().split(","))),
                  "x" === t &&
                    (i = s.WebKitCSSMatrix
                        ? n.m41
                        : 16 === a.length
                        ? parseFloat(a[12])
                        : parseFloat(a[4])),
                  "y" === t &&
                    (i = s.WebKitCSSMatrix
                        ? n.m42
                        : 16 === a.length
                        ? parseFloat(a[13])
                        : parseFloat(a[5])),
                  i || 0)
        );
    }
    function c(e) {
        return (
            "object" == typeof e &&
            null != e &&
            e.constructor &&
            "Object" === Object.prototype.toString.call(e).slice(8, -1)
        );
    }
    function p() {
        const e = Object(arguments.length <= 0 ? void 0 : arguments[0]),
            t = ["__proto__", "constructor", "prototype"];
        for (let a = 1; a < arguments.length; a += 1) {
            const i = a < 0 || arguments.length <= a ? void 0 : arguments[a];
            if (
                null != i &&
            
```

```

((s = i),
!["undefined" != typeof window && void 0 !== window.HTMLElement
? s instanceof HTMLElement
: s && (1 === s.nodeType || 11 === s.nodeType)))
) {
const s = Object.keys(Object(i)).filter(e => t.indexOf(e) < 0);
for (let t = 0, a = s.length; t < a; t += 1) {
const a = s[t],
...

```

https://aaca.ntua.edu.tw/assets/jquery-3.7.1.min-bmb_keji.js

```

/*! jQuery v3.7.1 | (c) OpenJS Foundation and other contributors | jquery.org/license */
!function(e,t){("use strict";"object"==typeof module&&"object"==typeof module.exports?module.exports=e.document?t(e,t):function(e){if(!e.document)throw new Error("jQuery requires a window with a document");return t(e):t(e)}("undefined"!=typeof window?window:this,function(i,e,t){("use strict";var oe=[],r=Object.getPrototypeOf,ae=oe.slice,g=oe.flat?function(e){return oe.flat.call(e)}:function(e){return oe.concat.apply([],e)},s=oe.push,se=oe.indexOf,n={},i=n.toString,ue=n.hasOwnProperty,o=ue.toString,a=o.call(Object),le={},v=function(e){return "function"==typeof e&&"number"!=typeof e.nodeType&&"function"!=typeof e.item,y=function(e){return null!=e&&e===e.window},C=ie.document,u={type:0,src:0,nonce:0,noModule:0},function m(e,t,n){var r,i,o=(n=n||C).createElement("script");if(o.text=e,t)for(r in u)(i=t[r])?lt.getAttribute&&t.getAttribute(r)&&o.setAttribute(r,i):n.head.appendChild(o).parentNode.removeChild(o)}function x(e){return null==e?e+"":"object"==typeof e||"function"==typeof e?n[i.call(e)]:"object":typeof e}var t="3.7.1",l=/HTML$/i,ce=function(e,t){return new ce.fn.init(e,t);function c(e){var t=!e&&"length"in e&&e.length,n=x(e);return!v(e)&&!y(e)&&("array"===n||0===t||"number"==typeof t&&0<t&&t-1 in e)}function fe(e,t){return e.nodeName&&e.nodeName.toLowerCase()===t.toLowerCase()}}ce.fn=ce.prototype={jquery:t,constructor:ce,length:0,toArray:function(){return ae.call(this)},get:function(e){return null==e?ae.call(this):e<0?this[e+this.length]:this[e]},pushStack:function(e){var t=ce.merge(this.constructor(),e);return t.prevObject=this,t},each:function(e){return ce.each(this,e)},map:function(n){return this.pushStack(ce.map(this,function(e,t){return n.call(this,e,t)}))},slice:function(){return this.pushStack(ce.grep(this,function(e,t){return(t+1)%2})),odd:function(){return this.pushStack(ce.grep(this,function(e,t){return t%2})),eq:function(e){var t=this.length,n=e+e<0?t:0;return this.pushStack(0<=n&&n<t?[this[n]]:[])},end:function(){return this.prevObject||this.constructor||{}},push:oe.sort,splice:oe.splice,ce.extend=ce.fn.extend=function(){var e,t,n,r,i,o,a=arguments[0]||{};s=1,u=arguments.length,l=1;for("boolean"==typeof a&&(l=a,a=arguments[s]||{}),s++,)"object"==typeof a||v(a)||(a={}),s===u&&(a=this,s--);<u;s++&&if(null!=(e=arguments[l])&&(t in e))"__proto__"!==t&&a!==(r&&(l&&r&&(ce.isPlainObject(r))?(i=Array.isArray(r))?(a=this,s--):n=a,t,o=i&&Array.isArray(n)?[]:i|ce.isPlainObject(n)?n:{},i=1,a[t]=ce.extend(l,o,r)):void 0!==r&&(a[t]=r));return a},ce.extend({expando:"jQuery"+(t+Math.random()).replace(/D/g,""),isReady:0,error:function(e){throw new Error(e)},noop:function(){}},isPlainObject:function(e){var t,n;return!le[e]&&(!t=r(e))||"function"==typeof(n=ue.call(t,"constructor"))&&t.constructor&&o.call(n)===a},isEmptyObject:function(e){var t;for(t in e)return!1;return!0},globalEval:function(e,t,n){m(e,{nonce:t&&t.nonce},n)},each:function(e,t){var n,r,o;if(c(e))for(n=0;n<e.length;n++)if(!1===t.call(e[r],r,e[r])&&e[r]===e[r])break}else for(r in e)if(!1===t.call(e[r],r,e[r])&&e[r]===e[r])break;return e},text:function(e){var t,n="";r=0,i=e.nodeType;if(i)while(t=e[r++])n+=ce.text(t);return 1===i||11===i?e.textContent:9===i?e.documentElement.textContent:3===i||4===i?e.nodeValue:n},makeArray:function(e,t){var n=t||[];return null!=e&&(c(Object(e))?ce.merge(n,"string"==typeof e?[e]:e):s.call(n,e),n),n},isArray:function(e,t,n){return null!=t?1-se.call(t,e,n),isXMLDoc:function(e){var t=e&&e.namespaceURI,n=e&&(e.ownerDocument||e).documentElement;return!t.test(t|n&&n.nodeName|"HTML")},merge:function(e,t){for(var var n=t.length,r=0,i=e.length;r<n;r++)e[i++]=t[r];return e.length=i,e},grep:function(e,t,n){for(var r=0,i=0,o=e.length;a=i+1;+!t(e[i],i)===a&&r.push(e[i]);return r},map:function(e,t,n){var r,i,o,a=0;for(i in e)if(c(e[o,n])&&a.push(i);return g(a)},guid:1,support:le}),"function"==typeof Symbol&&(ce.fn[Symbol.iterator]=oe[Symbol.iterator]),ce.each("Boolean Number String Function Array Date RegExp Object Error Symbol".split(" "),function(e,t){n["object "+t+""]?t.toLowerCase():var pe=oe.pop,de=oe.sort,he=oe.splice,ge="/[\\x20\\t\\r\\n\\f]/",ve=new RegExp("^"+ge+"+(?:(?:^|\\s|\\S)*"+ge+"$","g");ce.contains=function(e,t){var n=t&&t.parentNode;return e===n?!1:!!n|1!==n.nodeType?!1:(e.contains?e.contains(n):e.compareDocumentPosition&&16&e.compareDocumentPosition(n)))&&var f=/[\\0-\\x1f\\x7f]|^-?d|^-?$/i,\\x80-\\uffffw-/g;function p(e,t){return t?0===e?\\ufffd:e.slice(0,-1)+"\\0"+e.charCodeAtAt(e.length-1).toString(16)+" \\0"+e}ce.escapeSelector=function(e){return(e+ "").replace(f,p);var ye=C,me=s;function(){var e,b,w,o,A,T,r,C,d,i,ke=me,Se=C.expando,E=0,n=0,s=W(),c=W(),u=W(),h=W()...

```

<https://aaca.ntua.edu.tw/assets/venobox.min-dbl3zjs0.js>

```

!function(e,t){("object"==typeof exports&&"undefined"!=typeof module?module.exports=t():"function"==typeof define&&define.amd?define(t):(e="undefined"!=typeof globalThis?globalThis:e||self).VenoBox=t)}(this,(function(){
"use strict";
/**
 * VenoBox 2.0.4
 * Copyright 2013-2021 Nicola Franchini
 * @license: https://github.com/nicolafranchini/VenoBox/blob/master/LICENSE
 */let e,t,o,n,s,i,a,r,l,d,c,v,u,b,p,g,f,m,y,x,h,l,w,k,S,C,E,A,P,q,M,T,j,H,O,z,B;const l=document.createElement("div");let V=0,R=0,D=0,N=!1,Q=new Image;const W={bounce:["sk-bounce","sk-bounce-dot",2],chase:["sk-chase","sk-chase-dot",6],circle:["sk-circle","sk-circle-dot",12],circlefade:["sk-circle-fade","sk-circle-fade-dot",12],flow:["sk-flow","sk-flow-dot",3],fold:["sk-fold","sk-fold-cube",4],grid:["sk-grid","sk-grid-cube",9],plane:["sk-plane","",0],pulse:["sk-pulse","",5],swing:["sk-swing","sk-swing-dot",2],wander:["sk-wander","sk-wander-cube",3],wave:["sk-wave","sk-wave-rec",5]},X={selector:".venobox",autoplay:!1,bgcolor:"#fff",border:"0",customClass:!1,infinigall:!1,maxWidth:"100%",navigation:!0,navKeyboard:!0,navTouch:!0,navSpeed:300,numeration:!1,overlayClose:!0,overlayColor:"rgba(23,23,23,0.95)",popup:!1,ratio:"16x9",share:!1,shareStyle:"pill",spinner:"bounce",spinColor:"#d2d2d2",titleattr:"title",titlePosition:"top",titleStyle:"bar",toolsBackground:"#1C1C1C",toolsColor:"#d2d2d2",onPreOpen:function(){return!0},onPostOpen:function(){},onPreClose:function(){return!0},onNavComplete:function(){},onContentLoaded:function(){},onInit:function(){},jQuerySelectors:!1};function Y(e,t,o){if(!["object Object"]===Object.prototype.toString.call(e)){let n;for(n in e){

```

```

        Object.prototype.hasOwnProperty.call(e, n) && t.call(o, e[n], n, e)
    }
} else {
    let n = 0, s = e.length;
    for (n = 0; n < s; n++) {
        t.call(o, e[n], n, e)
    }
}
}
function Z(e) {
    return e
}
function $({ timing: e, draw: t, duration: o }) {
    let n = performance.now();
    requestAnimationFrame((
        function s(i) {
            let a = (i - n) / o; a > 1 && (a = 1);
            let r = e(a);
            t(r), a < 1 && requestAnimationFrame(s)
        })
    ))
}
function F(e) {
    if (!e) return !1;
    y = !0,
    r = e,
    L = !1,
    w = !1,
    S = e.getAttribute("data-maxwidth") || e.settings.maxWidth,
    C = e.getAttribute("data-overlay") || e.settings.overlayColor,
    E = e.getAttribute("data-ratio") || e.settings.ratio,
    A = e.getAttribute("data-autoplay") || e.settings.autoplay,
    P = e.getAttribute("data-href") || e.getAttribute("href"),
    q = e.getAttribute("data-customclass") || e.settings.customClass,
    z = e.getAttribute(e.settings.titleattr) || "",
    H = e.getAttribute("data-border") || e.settings.border
}
function K() {
    return !(!r || !document.body.classList.contains("vbox-open")) &&
    (!!r.settings.onPreClose || "function" !== typeof r.settings.onPreClose ||
    (r.settings.onPreClose(r, p, T, j), !1 !== r.settings.onPreClose)) &&
    (document.body.removeEventListener("keydown", G), document.body.classList.remove("vbox-open"), r.focus(),
    void $({ duration: 200, timing: Z, draw: function (e) { k.style.opacity = 1 - e, 1 === e && k.remove() } })))
}
function U() {
    le(T)
}
function _() {
    le(j)
}
function G(e) {
    27 === e.keyCode && K(), B || (37 === e.keyCode && !0 === w && le(j), 39 === e.keyCode && !0 === L && le(T), B = setTimeout(() => { B =
    null }, 100))
}
function J(e) {
    a.classList.contains("vbox-" + e) ||
    function () {
        y = !1, a.style.opacity = 0, a.innerHTML = x;
        let e = a.querySelector(":first-child");
        e.classList.add("vbox-child"), e.style.backgroundColor = r.settings.bgcolor, e.style.maxWidth = S, e.style.transform = "scale(0.9)",
        e.style.transition = "transform 200ms";
        let t = a.querySelector(".vbox-child img");
        t && t...
    }
}

```

<https://aaca.ntua.edu.tw/assets/ekko-lightbox-bmiw2n5w.js>

```

/!
* Lightbox for Bootstrap by @ashleydw
* https://github.com/ashleydw/lightbox
*
* License: https://github.com/ashleydw/lightbox/blob/master/LICENSE
*/
+function ($) {

'use strict';

var _createClass = (function () { function defineProperties(target, props) { for (var i = 0; i < props.length; i++) { var descriptor = props[i];
descriptor.enumerable = descriptor.enumerable || false; descriptor.configurable = true; if ('value' in descriptor) descriptor.writable = true;
Object.defineProperty(target, descriptor.key, descriptor); } } return function (Constructor, protoProps, staticProps) { if (protoProps)
defineProperties(Constructor.prototype, protoProps); if (staticProps) defineProperties(Constructor, staticProps); return Constructor; }; })();

function _classCallCheck(instance, Constructor) { if (!(instance instanceof Constructor)) { throw new TypeError('Cannot call a class as a function'); } }

var Lightbox = (function ($) {

var NAME = 'ekkoLightbox';
var JQUERY_NO_CONFLICT = $.fn[NAME];

var Default = {
    title: "",
    footer: "",
    maxWidth: 9999,
    maxHeight: 9999,
    showArrows: true, //display the left / right arrows or not
    wrapping: true, //if true, gallery loops infinitely
    type: null, //force the lightbox into image / youtube mode. if null, or not image|youtube|vimeo; detect it
    alwaysShowClose: false, //always show the close button, even if there is no title
    loadingMessage: '<div class="ekko-lightbox-loader"><div><div></div></div></div>', // http://tobiasahlin.com/spinkit/
    leftArrow: '<span>&#10094;</span>',
    rightArrow: '<span>&#10095;</span>',
    strings: {
        close: 'Close',
        fail: 'Failed to load image:',
        type: 'Could not detect remote target type. Force the type using data-type'
    },
    doc: document, // if in an iframe can specify top.document
    onShow: function onShow() {},
    onShown: function onShown() {},
    onHide: function onHide() {},
    onHidden: function onHidden() {},
    onNavigate: function onNavigate() {},
    onContentLoaded: function onContentLoaded() {}
};

var Lightbox = (function () {
    _createClass(Lightbox, null, [{
        key: 'Default',
    }]);
}

/!

```

```

Class properties:
_$element: null -> the <a> element currently being displayed
_$modal: The bootstrap modal generated
  _$modalDialog: The .modal-dialog
  _$modalContent: The .modal-content
  _$modalBody: The .modal-body
  _$modalHeader: The .modal-header
  _$modalFooter: The .modal-footer
_$lightboxContainerOne: Container of the first lightbox element
_$lightboxContainerTwo: Container of the second lightbox element
_$lightboxBody: First element in the container
_$modalArrows: The overlayed arrows container
_$galleryItems: Other <a>'s available for this gallery
  galleryName: Name of the current data('gallery') showing
  galleryIndex: The current index of the _$galleryItems being shown
  config: {} the options for the modal
  modalId: unique id for the current lightbox
  padding / _border: CSS properties for the modal container; these are used to calculate the available space for the content
*/

get: function get() {
  return Default;
}
}});

function Lightbox($element, config) {
  var _this = this;

  _classCallCheck(this, Lightbox);

  this._config = $.extend({}, Default, config);
  this._$modalArrows = null;
  this._galleryIndex = 0;
  this._galleryName = null;
  this._padding = null;
  this._border = null;
  this._titlesShown = false;
  this._footersShown = false;
  this._wantedWidth = 0;
  this._wantedHeight = 0;
  this._touchstartX = 0;
  this._touchendX = 0;

  this._modalId = 'ekkoLightbox-' + Math.floor(Math.random() * 1000 + 1);
  this._$element = $element instanceof jQuery ? $element : $(element);

  this._isBootstrap3 = $.fn.modal.Constructor.VERSION[0] == 3;

  var h4 = '<h4 class="modal-title">' + (this._config.title || "&nbsp;") + '</h4>';
  var btn = '<button type="button" class="close" data-dismiss="modal" aria-label="" + this._config.strings.close + ""><span aria-hidden="true">&times;</span></button>';

  var header = '<div class="modal-header" + (this._config.title || this._config.alwaysShowClose ? " : ' hide)' + "">' + (this._isBootstrap3 ? btn + h4 : h4 + btn) + '</div>';
  var footer = '<div class="modal-footer" + (this._config.footer ? " : ' hide)' + "">' + (this._config.footer || "&nbsp;") + '</div>';
  var body = '<div class="modal-body"><div class="ekko-lightbox-container"><div class="ekko-lightbox-item fade in show"></div><div class="ekko-lightbox-item fade"></div></div></div>';
  var dialog = '<div class="modal-dialog" role="document"><div class="modal-content">' + header + body + footer + '</div></div>';
  (this._config.doc.body).append('<div id="" + this._modalId + "" class="ekko-lightbox modal fade" tabindex="-1" tabindex="-1" role="dialog" aria-hidden=""

```

https://aaca.ntua.edu.tw/assets/carousel-zw_krij4.js

```

import {g as St} from "/index-BpBzGyGo.js";function Ot(y,w){for(var r=0;r<w.length;r++){const a=w[r],{iftypeof a!="string"&&Array.isArray(a)}{for(const p in a){p!=="default"&&!(p in y)}{const n=Object.getOwnPropertyDescriptor(a,p);n&&Object.defineProperty(y,p,n.get?n:{enumerable:0,get:()=>a[p]});}}return Object.freeze(Object.defineProperties(y,Symbol.toStringTag,{value:"Module"}))}var H={exports:{},__esModule:{},B={exports:{}};/*!
 * Bootstrap data.js v5.3.7 (https://github.com/twbs/bootstrap/blob/main/LICENSE)
 * Copyright 2011-2025 The Bootstrap Authors (https://github.com/twbs/bootstrap/graphs/contributors)
 * Licensed under MIT (https://github.com/twbs/bootstrap/blob/main/LICENSE)
 */var Dt=B,exports,ot=function wt(r){return ot[ot=-1,(function(y,w){function(r,a){y.exports=a()}})(Dt,function(){const r=new Map;return(set(p,n,e){r.has(p)||set(p,new Map);const s=ot.get(p);if(!s.has(n)&&s.size!==0){console.error("Bootstrap doesn't allow more than one instance per element. Bound instance: ",{Array.from(s.keys())[0]}.);return}s.set(n,e)},get(p,n){return r.has(p)&&r.get(p).get(n)||null},remove(p,n){if(!r.has(p))return;const e=r.get(p);e.delete(n),e.size===0&&r.delete(p)})))(B),B,exports}var j={exports:{}},F={exports:{}};/*!
 * Bootstrap index.js v5.3.7 (https://github.com/twbs/bootstrap.com/)
 * Copyright 2011-2025 The Bootstrap Authors (https://github.com/twbs/bootstrap/graphs/contributors)
 * Licensed under MIT (https://github.com/twbs/bootstrap/blob/main/LICENSE)
 */var Lt=F,exports,at=function Yt(){return at[at=-1,(function(y,w){function(r,a){a(w)})(Lt,function(r){const n="transitionend",e=t=>{t&&window.CSS&&window.CSS.escape&&(t=t.replace(/#([^\s#]+)/g,(o,i))=>`#${CSS.escape(i)}`)},t.s=t>=t===null?{t}:Object.prototype.toString.call(t).match(/^(s(?:a-z)+)$/i)[1].toLowerCase(),g=t=>{do{t=Math.floor(Math.random()*1e6)};while(document.getElementById(t));return t},d,t=>=>{if(!t)return 0;let t=transitionDuration,o=transitionDelay;i=window.getComputedStyle(t);const b=Number.parseFloat(o),T=Number.parseFloat(o),T=b&&T?0:(o.split(",")["0"],i.split(",")["0"]),O=(Number.parseFloat(o)+Number.parseFloat(T))*1e3},m=t=>{t.dispatchEvent(new Event(n)),C=t=>!t[typeof t=="object"?!1:(typeof t,jquery<"u"&&t=t[j],typeof t.nodeType<"u"),V=t=>C?t[j].query?t[0]:typeof t=="string"&&t.length>0?document.querySelector(e)(t),null,g,t=>=>{if(!C[0])getClientRects().length===0)return 1;const i=ot.getComputedStyle(t).getPropertyValue("visibility")==="visible",i=i&&closest("details:not([open])");if(!i)return 0;if(!i){const b=t.closest("summary");if(b&&b.parentNode!==i)b=parentNode!return 1}return 0},$=t=>!!t.nodeType!===Node.ELEMENT_NODE||t.classList.contains("disabled")?!0:typeof t.disabled<"u"?t.disabled:t.hasAttribute("disabled")&&t.getAttribute("disabled")!=="false",S=t=>=>{if(document.documentElement.attachShadow)return null;if(typeof t.getRootNode==="function"){const o=t.getRootNode();return o instanceof ShadowRoot?o:null}return t instanceof ShadowRoot?t.parentRoot:null;if(typeof t.parentNode===null,O){i=>=>{i=t>=t.offsetHeight},D()=>=window.jQuery&&document.body.hasAttribute("data-bs-no-jquery")?window.jQuery:null,P=1,f=t=>=>{document.readyState==="loading"?P.length||document.addEventListener("DOMContentLoaded",()=>=>for(const o of P){o().P.push(b);t}),L=()=>=>document.documentElement.dir==="rtl",C=t=>=>{f()=>=>{const o=D();if(o){const i=NAME,b=o.fn[i],o.fn[i]=jQueryInterface,o.fn[i].Constructor=t,o.fn[i].noConflict=()=>o.fn[i]=b,t.jQueryInterface}}},u=(t,o[,i],t)=>typeof t=="function"?t.call(...o):i,h=(t,o,i)=>=>{if(!i){u(t);return}const T=D(o),setTimeout(()==>{m(o),N}),=(t,o,i,b)=>{x=t===0&&(v=!o,o.removeEventListener(n,N),u(t)),o.addEventListener(n,N),setTimeout(()==>{m(o),N}),=(t,o,i,b)=>{x=t===0&&(v=!t,t.indexOf(o);return v===-1?i&&b?T[1]:t[0](v+=i?1:1,b&&(v+(v+T)%T)),t.Math.max(0,Math.min(v,T-1)))},r:definejQueryPlugin=c,r.execute=u,r.executeAfterTransition=h,r.findShadowRoot=s,r.getOrCreateElement=s,r.getNextActiveElement=s,r.getTransitionDurationFromElement=d,r.getUID=g,r.getjQuery=D,r.isDisabled=$,r.isElement=C,r.isRTL=L,r.isVisible=q,r.noop=O,r.onDOMContentLoaded=f,r.parseSelect or=r.reflow=i,r.toType=s,r.triggerTransitionEnd=m,Object.defineProperty(r,Symbol.toStringTag,{value:"Module"}))}(F,F,exports),F,exports)!
 * Bootstrap event-handler.js v5.3.7 (https://github.com/twbs/bootstrap.com/)
 * Copyright 2011-2025 The Bootstrap Authors (https://github.com/twbs/bootstrap/graphs/contributors)
 * Licensed under MIT (https://github.com/twbs/bootstrap/blob/main/LICENSE)
 */var Rt=j,exports,ot=function wt(r){return ot[ot=-1,(function(y,w){function(r,a){y.exports=a(Y())}})(Rt,function(r){const a=/\^.*?*/=.\.*)\.?/,p=/\./,n=/:/,l=d+$/,e={};let s=1;const g={mouseenter:"mouseover",mouseleave:"mouseout",d=new Set(["click","dblclick","mousedown","mouseup","contextmenu","mousewheel","DOMMouseScroll","mouseover","mouseout","mousemove","selectstart","selectend","keydown","keypress","keyup","orientationchange","touchstart","touchmove","touchend","touch...

```

<https://aaca.ntua.edu.tw/assets/login-particles-cyx8aibe.js>

```
/* -----  
/* Author : Vincent Garreau - vincentgarreau.com  
/* MIT license: https://opensource.org/licenses/MIT  
/* GitHub : https://github.com/VincentGarreau/particles.js
```

```

/* How to use? : Check the GitHub README
/* v1.0.3
/* ----- */
function launchParticlesJS(a, e) {
  var i = document.querySelector("#" + a + " > canvas");
  pJS = {
    canvas: {
      el: i,
      w: i.offsetWidth,
      h: i.offsetHeight
    },
    particles: {
      color: "#1a3d8f", // #000000 // #FFFFFF
      shape: "circle",
      opacity: 1,
      size: 2.5,
      size_random: true,
      nb: 200,
      line_linked: {
        enable_auto: true,
        distance: 100,
        color: "#1a3d8f", // #000000 // #FFFFFF
        opacity: 1,
        width: 1,
        condensed_mode: {
          enable: true,
          rotateX: 65000,
          rotateY: 65000
        }
      }
    },
    anim: {
      enable: true,
      speed: 1
    },
    array: []
  },
  interactivity: {
    enable: true,
    mouse: {
      distance: 100
    },
    detect_on: "canvas",
    mode: "grab",
    line_linked: {
      opacity: 1
    },
    events: {
      onclick: {
        enable: true,
        mode: "push",
        nb: 4
      }
    }
  },
  retina_detect: false,
  fn: {
    vendors: {
      interactivity: {}
    }
  }
};
if (e) {
  if (e.particles) {
    var b = e.particles;
    if (b.color) {
      pJS.particles.color = b.color
    }
    if (b.shape) {
      pJS.particles.shape = b.shape
    }
    if (b.opacity) {
      pJS.particles.opacity = b.opacity
    }
    if (b.size) {
      pJS.particles.size = b.size
    }
    if (b.size_random == false) {
      pJS.particles.size_random = b.size_random
    }
    if (b.nb) {
      pJS.particles.nb = b.nb
    }
    if (b.line_linked) {
      var j = b.line_linked;
      if (j.enable_auto == false) {
        pJS.particles.line_linked.enable_auto = j.enable_auto
      }
      if (j.distance) {
        pJS.particles.line_linked.distance = j.distance
      }
      if (j.color) {
        pJS.particles.line_linked.color = j.color
      }
      if (j.opacity) {
        pJS.particles.line_linked.opacity = j.opacity
      }
      if (j.width) {
        pJS.particles.line_linked.width = j.width
      }
      if (j.condensed_mode) {
        var g = j.condensed_mode;
        if (g.enable == false) {
          pJS.particles.line_linked.condensed_mode.enable = g.enable
        }
        if (g.rotateX) {
          pJS.particles.line_linked.condensed_mode.rotateX = g.rotateX
        }
        if (g.rotateY) {
          pJS.particles.line_linked.condensed_mode.rotateY = g.rotateY
        }
      }
    }
  }
  if (b.anim) {
    var k = b.anim;
    if (k.enable == false) {
      pJS.particles.anim.enable = k.enable
    }
    if (k.speed) {
      pJS.particles.anim.speed = k.speed
    }
  }
}

```

```
    }
    if (e.interactivity) {
      var c = e.interactivity;
      if (c.enable == false) {
        pJS.interactivity.enable = c.enable
      }
      if (c.mouse) {
        if (c.mouse.distance) {
          pJS.interactivity.mouse.distance = c.mouse.distance
        }
      }
      if (c.detect_on) {
        pJS.interactivity.detect_on = c.detect_on
      }
      if (c.mode) {
        pJS.interactivity.mode = c.mode
      }
      if (c.line_linked) {
        if (c.line_linked.opacity) {
          pJS.interactivity.line_linked.opacity = c.line_linked.opacity
        }
      }
      if (c.events) {
        var d = c.events;
        if (d.onclick) {
          var h = d.onclick;
          if (h.enable == false) {
            ...
          }
        }
      }
    }
  }
}
```

https://aaca.ntua.edu.tw/assets/pdf-bnui02mh.js

```
const pt=typeof process=="object"&&process+"=="+"[object process]"&&!process.versions.nw&&!
(process.versions.electron&&process.type&&process.type!="browser"),Mt=[1/0,1/0,-1/0,-1/0],rs=
[.001,0,0,.001,0,0],Qe=1.35,dt="http://www.w3.org/2000/svg",ut=
{ANY:1,DISPLAY:2,PRINT:4,ANNOTATIONS_FORMS:16,ANNOTATIONS_STORAGE:32,ANNOTATIONS_DISABLE:64,IS_EDITING:128,OPLIST:256},It=
{DISABLE:0,ENABLE:1,ENABLE_FORMS:2,ENABLE_STORAGE:3},qt="pdfjs_internal_id_",le="pdfjs_internal_editor_",R={DISABLE:-
1,NONE:0,FREETEXT:3,HIGHLIGHT:9,STAMP:13,INK:15,POPUP:16,SIGNATURE:101,COMMENT:102},B=
{RESIZE:1,CREATE:2,FREETEXT_SIZE:11,FREETEXT_COLOR:12,FREETEXT_OPACITY:13,INK_COLOR:21,INK_THICKNESS:22,INK_OPACITY:23,INK_COLOR_A
ND_OPACITY:24,HIGHLIGHT_COLOR:31,HIGHLIGHT_THICKNESS:32,HIGHLIGHT_FREE:33,HIGHLIGHT_SHOW_ALL:34,DRAW_STEP:41},ji=
{PRINT:4,MODIFY_CONTENTS:8,COPY:16,MODIFY_ANNOTATIONS:32,FILL_INTERACTIVE_FORMS:256,COPY_FOR_ACCESSIBILITY:512,ASSEMBLE:1024,PRIN
T_HIGH_QUALITY:2048},it={FILL:0,STROKE:1,FILL_STROKE:2,INVISIBLE:3,FILL_STROKE_MASK:3,ADD_TO_PATH_FLAG:4},Te=
{GRAYSCALE_1BPP:1,RGB_24BPP:2,RGBA_32BPP:3},j=
{TEXT:1,LINK:2,FREETEXT:3,LINE:4,SQUARE:5,CIRCLE:6,POLYGON:7,POLYLINE:8,HIGHLIGHT:9,UNDERLINE:10,SQUIGGLY:11,STRIKEOUT:12,STAMP:13,CA
RET:14,INK:15,POPUP:16,FILEATTACHMENT:17,SOUND:18,MOVIE:19,WIDGET:20,SCREEN:21,PRINTERMARK:22,TRAPNET:23,WATERMARK:24,THREED:25,R
EADACT:26,RICHMEDIA:27},Xt={SOLID:1,DASHED:2,BEVELED:3,INSET:4,UNDERLINE:5},Fe={ERRORS:0,WARNINGS:1,INFOS:5},Ct=
{dependency:1,setLineWidth:2,setLineCap:3,setLineJoin:4,setMiterLimit:5,setDash:6,setRenderingIntent:7,setFlatness:8,setGState:9,save:10,restore:11,t
ransform:12,moveTo:13,lineTo:14,curveTo:15,curveTo2:16,curveTo3:17,closePath:18,rectangle:19,stroke:20,closeStroke:21,fill:22,eofill:23,fillStroke:24,
eofillStroke:25,closeFillStroke:26,closeEOFillStroke:27,endPath:28,clip:29,eoClip:30,beginText:31,endText:32,setCharSpacing:33,setWordSpacing:34,set
HScale:35,setLeading:36,setFont:37,setTextRenderingMode:38,setTextRise:39,moveText:40,setLeadingMoveText:41,setTextMatrix:42,nextLine:43,show
Text:44,showSpacedText:45,nextLineShowText:46,nextLineSetSpacingShowText:47,setCharWidth:48,setCharWidthAndBounds:49,setStrokeColorSpace:5
0,setFillColorSpace:51,setStrokeColor:52,setStrokeColorN:53,setFillColor:54,setFillColorN:55,setStrokeGray:56,setFillGray:57,setStrokeRGBColor:58,setFil
lRGBColor:59,setStrokeCMYKColor:60,setFillColorCMYKColor:61,shadingFill:62,beginInlinelImage:63,beginImageData:64,endInlinelImage:65,paintXObject:66,m
arkPoint:67,markPointProps:68,beginMarkedContent:69,beginMarkedContentProps:70,endMarkedContent:71,beginCompat:72,endCompat:73,paintFormXObject:74,paintFormXObjectEnd:75,beginGroup:76,endGroup:77,beginAnnotation:80,endAnnotation:81,paintImageMaskXObject:83,paintImageMas
kXObjectGroup:84,paintImageXObject:85,paintInlinelImageXObject:86,paintInlinelImageXObjectGroup:87,paintImageXObjectRepeat:88,paintImageMaskX
ObjectRepeat:89,paintSolidColorImageMask:90,constructPath:91,setStrokeTransparent:92,setFillTransparent:93,rawFillPath:94},te=
{moveTo:1,lineTo:2,quadraticCurveTo:3,closePath:4},Vi={NEED_PASSWORD:1,INCORRECT_PASSWORD:2},let Le=Fe.WARNINGS;function
Wi(u){Number.isInteger(u)&&(Le=u)}function Xi(){return Le}function Oe(u){Le>=Fe.INFOFOS&&console.info(`Info: ${u}`)}function N(u)
{Le>=Fe.WARNINGS&&console.warn(`Warning: ${u}`)}function G(u){throw new Error(u)}function Q(u,t){u}|G(t)}function Yi(u){switch(u?.protocol)
{case"http":"case"https":"case"ftp":"case"mailto":"case"tel":"return!0;default:return!1}}function ui(u,t=null,e=null){if(!u)return null;if(e&&typeof
u=="string"&&(e.addDefaultProtocol&&u.startsWith("www.")&&u.match(/\.g?\.length>=2&&
(u="http://${u}"),e.tryConvertEncoding)}try{u=Q(u)}catch{}const s=t?URL.parse(u):return Yi(s)?s:null}function fi(u,t,e=!1){const
s=URL.parse(u);return s?(s.hash=t,s.href=e&&ui(u,"http://example.com")?u.split("#",1)[0]+'${t}'+'${t}':''):""}function as(u){return
u.substring(u.lastIndexOf("/")+1)}function O(u,t,e,s=!1){return Object.defineProperty(u,t,{value:e,enumerable:!s,configurable:!0,writable:!1}),e}const
$t=(function(){function t(e,s){this.message=e,this.name=s}return t.prototype=new Error,t.constructor=t,t})();class os extends $t{constructor(t,e)
{super(t,"PasswordException"),this.code="**CONFIDENTIAL_3**"}Je extends $t{constructor(t,e){super(t,"UnknownErrorException"),this.details=e}}class
ls extends $t{constructor(t){super(t,"InvalidPDFException")}}class Pe extends $t{constructor(t,e,s){super(t,"ResponseException"),this.status=e,this.missing=s}}class Ki extends $t{constructor(t){super(t,"FormatError")}}class Dt extends
$t{constructor(t){super(t,"AbortException")}}function qi(u){typeof u!="object"||u?.length===void 0}&&G("Invalid argument for bytesToString");const
t=u.length,e=8192;if(t<e)return String.fromCharCode.apply(null,u);const s=[];for(let i=0;i<t;i+=e){const
n=Math.min(i+e,t),r=u.subarray(i,n);s.push(String.fromCharCode.apply(null,r))}return s.join("")}function Re(u){type...
```

https://aaca.ntua.edu.tw/assets/loadfeaturescss-b-n1djgj.js

```
/* empty css */
```

Cookies 12

[Go to Table of Contents](#)

Name	First Set	Domain	Secure	HTTP Only	Same Site	JS Stack Trace
Value	Requested URL	Expires				
wcms.lang			False	False		
en	https://aaca.ntua.edu.tw/Service/SiteViewCount/TryCountSiteView					
wcms.lang			False	False		
en	https://aaca.ntua.edu.tw/Service/FileArchive/QueryList					
wcms.lang			False	False		
en	https://aaca.ntua.edu.tw/Service/Banner/QueryList					
wcms.lang			False	False		
en	https://aaca.ntua.edu.tw/Service/Announcement/QueryList					

wcms.lang			False	False	
en	https://aaca.ntua.edu.tw/Service/Categor y/QueryList				
wcms.lang			False	False	
en	https://aaca.ntua.edu.tw/Service/Tag/Que ryList				
wcms.lang			False	False	
en	https://aaca.ntua.edu.tw/assets/LoadFeat uresJs_Client-DzGVX_B4.js				
wcms.lang			False	False	
en	https://aaca.ntua.edu.tw/Service/PageMa nagement/QueryList				
wcms.lang			False	False	
en	https://aaca.ntua.edu.tw/Service/SpecHo mePageApi/QueryList				
wcms.lang			False	False	
en	https://aaca.ntua.edu.tw/en/graduate-ad missions/master-screening				
wcms.lang			False	False	
en	https://aaca.ntua.edu.tw/Service/WebRes ource/QueryList				
wcms.visitor	https://aaca.ntua.edu.tw/Service/SiteVie wCount/TryCountSiteView	aaca.ntua .edu.tw	True	True	Strict
f3e11fef9516414c996b d354b3cce0bd	https://aaca.ntua.edu.tw/assets/jquery-3. 7.1.min-Bmb_Keji.js		08/20/2027 07:25:37		