Sem III 2021-22

Lab Number:	6
Student Name:	Sakshi Morey
Roll No:	34

Title:

- 1. To perform Multiple Inheritance in C++. Create a student class representing student roll number, name and branch and an exam class (derived class of student)representing the scores of the student in various subjects (math, physics and chemistry) and sports class representing the score in sports. The sports and exam class is inherited by a result class which adds the exam marks and sports score to generate the final result.
- 2. To perform Hierarchical Inheritance in C++. Create an Employee class with attributes EmpID and EmpSalary. Also create necessary methods/constructors to accept these values from the user. Create classes permenantEmployee and TemporaryEmployee which will be derived classes of Employee. Mention hike attribute in these derived classes and calculate the total salary using generate_salary() method for respective types of employees. Objects of the derived classes should be created and salaries for the permanent and temporary employees should be calculated and displayed on the screen.

Learning Objective:

• Students will be able to perform multiple inheritance using C++.

Learning Outcome:

• Understanding the inheritance concept and reusability of the code.

Course Outcome:

ECL304.	Comprehend building blocks of OOPs language,
2	inheritance, package and interfaces

2021-22

Theory:

• Explain in details about inheritance, its types, syntaxes and block diagrams.

Inheritance is the process of creating a new Class, called the **Derived Class**, from the existing class, called the **Base Class**.

The Inheritance has many advantages, the most important of them being the reusability of code.


Rather than developing **new Objects** from scratch, new code can be based on the work of other developers, adding only the new features that are needed.

The reuse of **existing classes** saves time and effort.

Types of inheritance:

• Single Inheritance - When a **Derived Class** to inherit properties and behavior from a single **Base Class**, it is called as single inheritance.

```
Syntax - class Base
{
// BODY OF THE BASE CLASS
};
class Derived : acess_specifier Base
{
// BODY OF THE DERIVED CLASS
};
```




 Multi Level Inheritance - A derived class is created from another derived class is called MultiLevel Inheritance.

Syntax:

```
class A // Base class
{
// BODY OF CLASS A
};
class B : acess_specifier A // Derived class of A
{
// BODY OF CLASS B
};
class C : access_specifier B // Derived from derived class B
{
```

Sem III 2021-22


// BODY OF CLASS C
};

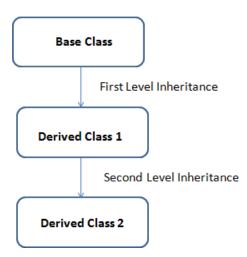

 Hierarchical Inheritance - More than one derived classes are created from a single baseclass, is called Hierarchical Inheritance.

Syntax:

```
class A // Base class of B
{
// BODY OF THE PROGRAM
};
class B : access_specifier A // Derived class of A
{
// BODY OF THE PROGRAM
};
class C : access_specifier A // Derived class of A
{
// BODY OF THE PROGRAM
};
class D : access_specifier A // Derived class of A
{
// BODY OF THE PROGRAM
};
class D : access_specifier A // Derived class of A
{
// BODY OF THE PROGRAM
};
```

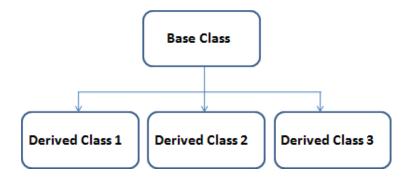

 Hybrid Inheritance - Any combination of above three inheritance (single, hierarchical and multi level) is called as hybrid inheritance.


Syntax:


```
class A
{
// BODY OF THE CLASS A
```

Sem III 2021-22

```
};
class B : public A
{
// BODY OF THE CLASS A
};
class C
{
// BODY OF THE CLASS A
};
class D : public B, public C
{
```

Sem III 2021-22



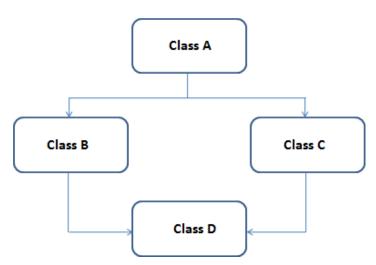


 Multiple Inheritance - Multiple inheritances allows programmers to create classes that combine aspects of multiple classes and their corresponding hierarchies.

Syntax -

```
class A // Base class of B
  {
  // BODY OF THE CLASS A
  };
  class B // Derived class of A and Base class
  {
    // BODY OF THE CLASS B
  };
  class C : acess_specifier A, access_specifier A // Derived class of A and B
  {
    // BODY OF CLASS C
  };
}
```

Sem III 2021-22



Algorithm 1 :	1 – Create a parent class student and initialize its data members.
	2- Create the derived class of student class - exam class to takeinput of marks

Sem III 2021-22

	3 - Create sports class to take input of marks
	3 – Create the result class to inherit the exam class and
	sports classpublically and to calculate the total.
	4 – Create the main function to call the class functionality and display the result.s
Program 2:	#include <iostrea< th=""></iostrea<>
	m> using
	namespace std;
	namespace stu,
	class students
	class student{
	public:
	int
	roll_number
	;string
	name; string
	branch;
	student(){
	cout<<"Enter roll
	number"< <endl;< th=""></endl;<>
	cin>>roll_number;
	cout<<"Enter
	name"< <endl;< th=""></endl;<>
	cin>>name;
	cout<<"Enter
	branch"< <endl;< th=""></endl;<>

Sem III 2021-22

cin>>branch;
}
} ;
class exam: public
student{public:
int
maths;
int
physics;
int chemistry;
exam(){

Don Bosco Institute of Technology, Kurla(W) Department of Electronics and Tele-Communication Engineering

ECL304 - Skill Lab: C++ and Java Programming Sem III 2021-22

```
cout<<"Enter Physics
Marks"<<endl;cin>>physics;
      cout<<"Enter chemistry
       Marks"<<endl;cin>>chemistry;
       cout<<"Enter Maths
       Marks"<<endl;cin>>maths;
  }
 };
 class sport{
       public:
       int
      sports;
      sport(){
      cout<<"Enter sports
       Marks"<<endl;cin>>sports;
  }
 };
 class result: public exam,
       public sport {public:
             int
             total;
             result(
```

Sem III 2021-22

){
total = maths + physics +
chemistry + sports;
cout< <total<<endl;< th=""></total<<endl;<>
}
} ;
int main()

Don Bosco Institute of Technology, Kurla(W)

Department of Electronics and Tele-Communication Engineering

ECL304 - Skill Lab: C++ and Java Programming

Sem III 2021-22

	{
	result
	obj;
	return
	0;
Input given 1:	} ROLL NO – 34
	BRANCH -EXTC
	PHYSICS MARKS -
	100
	CHEMISTRY MARKS
	-100MATHS MARKS –
	100 SPORTS MARKS –
	100
	TOTAL = 400
Output	
Screenshot	
1:	Enter roll number
1.	34 Enter name
	Enter name Sakshi Morey
	Enter Physics Marks
	100
	Enter chemistry Marks
	100
	Enter Math Marks
	100 Enter sports Marks
	100
	400
	process exited after 12.11 seconds with return value 0
	press any key to continue
	Faculty: Mc Doorali Kayanda

Sem III 2021-22

Algorithm 2:	1. Creating the parent class employee and initialize its datamembers.(EmpId ,EmpSalary) and a basic function get details() to print the details.
	2. Create 2 child class permanent employee and temporary employee that inherit employee class publically.
	3. In this classes , create generate salary() that return theemployee salary + hike in their salary
	4. In main function, Create the object of derived class and printtheir respective details.
Program 2:	

```
#include
<iostream> using
namespace std;
class Employee
{
     protected:
     string EmpID = "";
     double Empsalary;
     public:
           Employee()
     cout<<endl<<''Enter the employee
     id:";cin>>EmpID;
                cout<<endl<<"Enter the employee
     Sal: ";cin>>Empsalary;
           }
     void getDetails()
     {
           cout <<endl<< "EmployeeID is : " << EmpID;</pre>
           cout <<endl<<i"Employee Total Salary is
           :"<<
Empsalary;
```

Sem III 2021-22

}

Sem III 2021-22

```
};
class Permanent_Employee: public Employee
{
     double hike;
      public:
     Permanent_Employee( double increment)
      {
                  hike = increment;
      }
 void getDetails()
      {
            cout <<endl<< "EmployeeID is : " << EmpID;</pre>
            cout <<endl<<"Employee Total Salary</pre>
is:"<<generate_salary();</pre>
      }
     float generate_salary()
      {
           return (Empsalary + hike);
      }
};
class Temporary_Employee: public Employee
```

Sem III 2021-22

{

```
double hike;
      public:
      Temporary_Employee( double increment)
      {
                  hike = increment;
  void getDetails()
      {
            cout <<endl<< "EmployeeID is : " << EmpID;</pre>
            cout <<endl<<"Employee Total Salary</pre>
is:"<<generate_salary();</pre>
      }
      float generate_salary()
      {
            return (Empsalary + hike);
      }
};
int main()
{
  cout<<endl<<"For Temporary Employee:</pre>
```

Sem III 2021-22

''< <endl;temporary_employee< th=""></endl;temporary_employee<>
T(667.6);
cout << endl << ''Details of
Temporary_Employee: " << endl;

```
T.getDetails();
                cout<<endl<<''For Permanent Employee:
                    "<<endl;Permanent_Employee P(777.99);
                    cout << endl << "Details of
                    Permanent_Employee: "
              << endl;
                    P.getDetails();
                    return 0;
Input given 2:
              For temporary
              employee -Employee
              id – 212 Employee sal
              -2000
              For permanent
              employee -Employee
              id – 312 Employee sal
              -5000
```

Don Bosco Institute of Technology, Kurla(W) Department of Electronics and Tele-Communication Engineering

ECL304 - Skill Lab: C++ and Java Programming Sem III 2021-22

Output	
Screenshot	For temporary employee:
2:	Enter the employee id : 212
	Enter the employee Sal : 2000
	Details of temporary_Employee :
	EmployeeID is : 212
	Employee total salary is : 2667.6
	For permanent employee:
	Enter the employee id : 312
	Enter the employee Sal : 5000
	Details of permanent_Employee :
	EmployeeID is: 312
	Employee total salary is : 5777.99
	process exited after 33.11 seconds with return value 0
	press any key to continue