

Linux Plus 2

Linux Plus 2 takeaways

Training Clarusway

Pear Deck - March 29, 2020 at 9:11AM

Part 1 - Summary

Use this space to summarize your thoughts on the lesson

Part 2 - Responses

Slide 1



Linux Plus for AWS
and DevOps - 2



CLARUSWAY
Your Cloud Journey Starts Here

Use this space to take notes:

Slide 2



CLARUSWAY
WAY TO IMPROVE YOURSELF

Link(s) on this slide:

- <https://create.kahoot.it/details/linux-plus-2-managing-files-from-the-command-line/fa8c246d-c110-4a76-add6-e584a984c1b0>

Use this space to take notes:

Slide 3



Linux Environment Variables



CLARUSWAY
WAY TO IMPROVE YOURSELF

Use this space to take notes:

Slide 4

Table of Contents


- ▶ What are Environment variables?
- ▶ Common Environment Variables
- ▶ Accessing Variable
- ▶ The PATH Variable
- ▶ Quoting with Variables

CLARUSWAY
WAY TO REINVENT YOURSELF

Use this space to take notes:

Slide 5

Your Response

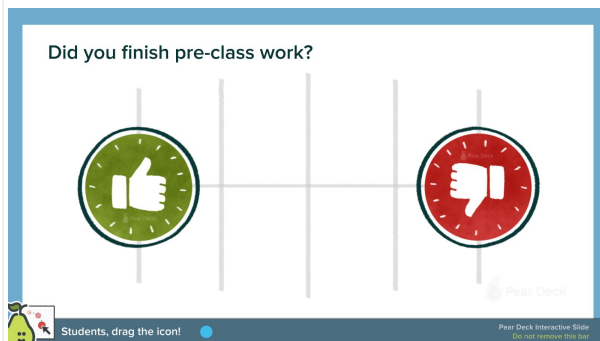

Use this space to take notes:

Slide 6

1 What are Environment variables?



CLARUSWAY
WAY TO REFINEMENT YOURSELF

Use this space to take notes:

Slide 7

► What are Environment variables? ►



An environment variable is a dynamic-named value that can affect the way running processes will behave on a computer.



Environment variables can be created, edited, saved, and deleted and give information about the system behavior.



Environment variables allow you to customize how the system works and the behavior of the applications on the system.

CLARUSWAY
WAY TO REFINEMENT YOURSELF



Use this space to take notes:

Slide 8

▶ What are Environment variables? »



A list of all specified environment variables can be viewed entering the **env** command.



There is nothing special about variable names, but, by convention, environment variables should have UPPER CASE names.

CLARUSWAY
WAY TO REINVENT YOURSELF

8

Use this space to take notes:

Slide 9



Common Environment Variables

CLARUSWAY
WAY TO REINVENT YOURSELF

Use this space to take notes:

Slide 10

► Common Environment Variables»

Variable	Description
PATH	This variable contains a colon (:) separated list of directories in which your system looks for executable files.
USER	The username
HOME	Default path to the user's home directory
EDITOR	Path to the program which edits the content of files
UID	User's unique ID
TERM	Default terminal emulator
SHELL	Shell being used by the user
LANG	The current locales settings.

CLARUSWAY
WAY TO KNOW YOURSELF

10

Use this space to take notes:

Slide 11

► Common Commands»

Command	Description
env	The command allows you to run another program in a custom environment without modifying the current one. When used without an argument it will print a list of the current environment variables.
printenv	The command prints all or the specified environment variables.
set	The command sets or unsets shell variables. When used without an argument it will print a list of all variables including environment and shell variables, and shell functions.
unset	The command deletes shell and environment variables.
export	The command sets environment variables.

CLARUSWAY
WAY TO KNOW YOURSELF

11

Use this space to take notes:

Slide 12



3 Accessing Variable

CLARUSWAY
WAY TO REINVENT YOURSELF

Use this space to take notes:

Slide 13

► Common Commands



Command	Description
echo \$VARIABLE	To display value of a variable
env	Displays all environment variables
VARIABLE_NAME=variable_value	Create a new shell variable
echo \$VARIABLE	To display value of a variable
unset	Remove a variable
export Variable=value	To set value of an environment variable

CLARUSWAY
WAY TO REINVENT YOURSELF



Use this space to take notes:

Slide 14

▶ Accessing Variable

printenv
or echo

Display Path Environment Variable.

```
clarusway@DESKTOP-UN6T2ES:~$ printenv USER
clarusway
clarusway@DESKTOP-UN6T2ES:~$ printenv HOME
/home/clarusway
clarusway@DESKTOP-UN6T2ES:~$ printenv UID
clarusway@DESKTOP-UN6T2ES:~$ echo $TERM
xterm-256color
clarusway@DESKTOP-UN6T2ES:~$ echo $PATH
/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin
```

CLARUSWAY
WAY TO REINVENT YOURSELF

14

Use this space to take notes:

Slide 15

▶ Define a New Variable



Define a new variable

```
clarusway@DESKTOP-UN6T2ES:~$ NEWVARIABLE=newvalue
clarusway@DESKTOP-UN6T2ES:~$ echo $NEWVARIABLE
newvalue
clarusway@DESKTOP-UN6T2ES:~$
```

CLARUSWAY
WAY TO REINVENT YOURSELF

15

Use this space to take notes:

Slide 16

» Remove a Variable

unset

Remove a variable from the system.


```
clarusway@DESKTOP-UN6T2ES:~$ unset NEWVARIABLE
clarusway@DESKTOP-UN6T2ES:~$ echo $NEWVARIABLE
clarusway@DESKTOP-UN6T2ES:~$
```

CLARUSWAY

WAY TO KNOWLEDGE

16

Use this space to take notes:

Slide 17	Your Response
<div><div>» Exercise</div><div><div>Create a variable named MYVAR with the value of "my value"</div><div>Print value of the MYVAR variable to the screen</div><div>Assign "new value" to the MYVAR variable</div><div>Print value of the MYVAR variable to the screen</div><div>Delete MYVAR variable</div><div>Print value of the MYVAR variable to the screen</div></div><div><div>SWAY</div><div>Students, write your response!</div><div>Peer Deck Interactive Slide</div></div></div>	<div><div>Answer 1:</div><div>MAYVAR="my value" echo \$MAYVAR export MAYVAR="new value" echo \$MYVAR unset MYVAR echo \$MYVAR</div></div>

Use this space to take notes:

Slide 18



4 The PATH Variable

CLARUSWAY
WAY TO REFINEMENT YOURSELF

Use this space to take notes:

Slide 19

▶ The PATH Variable



When we want the system to execute a command, we almost never need to give the full path to that command.



For instance, we know that the ls command is in the /bin directory (you can check with `which`), yet we don't need to enter the `/bin/ls` command for the computer to list the content of the current directory.



This is maintained by the PATH environment variable. This variable lists all directories in the system where executable files can be found.

CLARUSWAY
WAY TO REFINEMENT YOURSELF



Use this space to take notes:

Slide 20

► The PATH Variable

printenv

Display Path Environment Variable.

```
clarusway@DESKTOP-UN6T2ES:~$ printenv PATH
/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin
```

In this example, the `/usr/local/sbin`, `/usr/local/bin`, `/usr/sbin`, `/usr/bin`, `/sbin` and `/bin` directories are subsequently searched for the required program. The search will be stopped as soon as a match is found, even if not all directories in the path have been

CLARUSWAY
WAY TO REFINEMENT YOURSELF

Use this space to take notes:

Slide 21

► The PATH Variable

export

Add a New Directory to the Path.

```
clarusway@DESKTOP-UN6T2ES:~$ export PATH=$PATH:/games/awesome
clarusway@DESKTOP-UN6T2ES:~$
```

Let's say you want to run that file called `fun`. You learned from running the first command that it's in a directory called `/games/awesome`. However, `/games/awesome` is not in your path, and you don't want to type the full path just to run the game. So you can add it to PATH variable with export command.

CLARUSWAY
WAY TO REFINEMENT YOURSELF

Use this space to take notes:

Slide 22



5

Quoting with Variables

CLARUSWAY
WAY TO REINVENT YOURSELF

Use this space to take notes:

Slide 23

▶ Quoting



Quoting is used to disable special treatment of certain characters and words, as well as to prevent parameter expansion and preserve what is quoted.

The bash shell knows rare, important characters. For example, \$var is used to extend the value of the element.

```
echo "$PATH"  
echo "$PS1"
```

CLARUSWAY
WAY TO REINVENT YOURSELF



Use this space to take notes:

Slide 24

Quoting

Double Quotes

The double quote ("quote") protects everything enclosed between two double quote marks except \$, ', and \.

```
echo "$SHELL"
```

```
echo "/etc/.conf"
```

Single Quotes

The single quote ('quote') protects everything enclosed between two single quote marks.

```
echo '$SHELL'
```

```
echo '/etc/.conf'
```

Backslash

Use the backslash to change the special meaning of the characters or to escape special characters within the text such as quotation marks.

```
echo "Path is \$PATH"
```

```
root@DESKTOP-4Q215SL:~# var="these are quotes {}"
root@DESKTOP-4Q215SL:~# echo $var
these are quotes {}
root@DESKTOP-4Q215SL:~# var="these are quotes()"
root@DESKTOP-4Q215SL:~# echo $var
these are quotes()
root@DESKTOP-4Q215SL:~# var="these are quotes()"
root@DESKTOP-4Q215SL:~# echo $var
these are quotes()
root@DESKTOP-4Q215SL:~# var="The VAR1 variable is $VAR1"
root@DESKTOP-4Q215SL:~# echo $var
The VAR1 variable is
root@DESKTOP-4Q215SL:~#
```

CLARUSWAY
WAY TO MASTER YOURSELF

24

Use this space to take notes:

Slide 25

6 sudo Command



CLARUSWAY
WAY TO MASTER YOURSELF

Use this space to take notes:

Slide 26

► sudo Command

- 1 The sudo (superuser do) command gives some admin privileges to non-admin users.
- 2 When you put sudo in front of any command in terminal, that command runs with elevated privileges.
- 3 If you're not sure if you're using sudo or su, look at the trailing character on the command line. If it's a pound sign (#), you're logged in as root.

CLARUSWAY
WAY TO REFINEMENT YOURSELF



Use this space to take notes:

Slide 27

► sudo Command

Commands	Meaning
sudo -l	List available commands.
sudo command	Run command as root.
sudo -u root command	Run command as root.
sudo -u user command	Run command as user.
sudo su	Switch to the superuser account.
sudo su -	Switch to the superuser account with root's environment.
sudo su - username	Switch to the username's account with the username's environment.
sudo -s	Start a shell as root
sudo -u root -s	Same as above.
sudo -u user -s	Start a shell as user.

CLARUSWAY
WAY TO REFINEMENT YOURSELF



Use this space to take notes:

Slide 28

THANKS!

Any questions?



CLARUSWAY
WAY TO KNOWLEDGE

28

Use this space to take notes:

