

IMPORTING LIBRARIES

```
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
from sklearn.cluster import KMeans
from sklearn.preprocessing import StandardScaler
from sklearn.decomposition import PCA
from sklearn.metrics import silhouette_score
```

Penjelasan: Mengimpor pustaka yang dibutuhkan:

pandas dan numpy : untuk manipulasi data.

matplotlib.pyplot dan seaborn : untuk visualisasi.

StandardScaler, KMeans, dan PCA : bagian dari scikit-learn untuk preprocessing, model, dan reduksi dimensi.

LOAD DATASET

```
df = pd.read_csv("/content/customer_segmentation_data.csv")
print(df.head())
```

	id	age	gender	income	spending_score	membership_years	\
0	1	38	Female	99342	90	3	
1	2	21	Female	78852	60	2	
2	3	60	Female	126573	30	2	
3	4	40	Other	47099	74	9	
4	5	65	Female	140621	21	3	

	purchase_frequency	preferred_category	last_purchase_amount
0	24	Groceries	113.53
1	42	Sports	41.93
2	28	Clothing	424.36
3	5	Home & Garden	991.93
4	25	Electronics	347.08

```
df.describe()
```

	id	age	income	spending_score	membership_years
count	1000.000000	1000.000000	1000.000000	1000.000000	1000.000000
mean	500.500000	43.783000	88500.800000	50.685000	5.469000
std	288.819436	15.042213	34230.771122	28.955175	2.855000
min	1.000000	18.000000	30004.000000	1.000000	1.000000
25%	250.750000	30.000000	57911.750000	26.000000	3.000000
50%	500.500000	45.000000	87845.500000	50.000000	5.000000
75%	750.250000	57.000000	116110.250000	76.000000	8.000000
max	1000.000000	69.000000	149973.000000	100.000000	10.000000

```
df.shape
```

```
(1000, 9)
```

```
df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 1000 entries, 0 to 999
Data columns (total 9 columns):
 #   Column              Non-Null Count  Dtype
---  -
 0   id                  1000 non-null   int64
 1   age                 1000 non-null   int64
 2   gender              1000 non-null   object
 3   income              1000 non-null   int64
 4   spending_score      1000 non-null   int64
 5   membership_years    1000 non-null   int64
 6   purchase_frequency  1000 non-null   int64
```

1_kmeans.csvcustomer_segmentation_data_clu ...

1 to 10 of 1000 entriesFilter

category_Home & Garden	preferred_category_Sports	cluster
	False	1
	True	2
	False	1
	False	3
	False	1
	False	2
	False	2
	False	3
	True	0
	False	0

Show 10 per page121090100

```

7 preferred_category    1000 non-null object
8 last_purchase_amount  1000 non-null float64
dtypes: float64(1), int64(6), object(2)
memory usage: 70.4+ KB

```

```
df.isnull().sum()
```

```

id      0
age      0
gender   0
income   0
spending_score  0
membership_years  0
purchase_frequency  0
preferred_category  0
last_purchase_amount  0

dtype: int64

```

karena tidak ada missing value atau data yang hilang maka langsu lanjut saja ke proses preprocessing

DATA PREPROCESSING

```

#Drop kolom ID
df = df.drop(columns=["id"])

```

Kolom ID tidak berkontribusi pada pola segmentasi, jadi dihapus.

```

#Encode Variabel Kategorikal
df_encoded = pd.get_dummies(df, columns=["gender", "preferred_category"])

```

Variabel kategorikal diubah menjadi format numerik dengan one-hot encoding agar bisa digunakan di K-Means.

```

#Scaling Fitur Numerik
numerical_cols = ['age', 'income', 'spending_score', 'membership_years',
                  'purchase_frequency', 'last_purchase_amount']

scaler = StandardScaler()
df_encoded[numerical_cols] = scaler.fit_transform(df_encoded[numerical_cols])

```

K-Means sensitif terhadap skala fitur, jadi fitur numerik dinormalisasi agar memiliki skala yang sama.

MENENTUKAN JUMLAH CLUSTER

```


wcss = []
for k in range(1, 11):
    kmeans = KMeans(n_clusters=k, random_state=42)
    kmeans.fit(df_encoded)
    wcss.append(kmeans.inertia_)

```

```

plt.figure(figsize=(8, 4))
plt.plot(range(1, 11), wcss, marker='o')
plt.title('Metode Elbow')
plt.xlabel('Jumlah Cluster')
plt.ylabel('WCSS')
plt.grid(True)
plt.show()

```

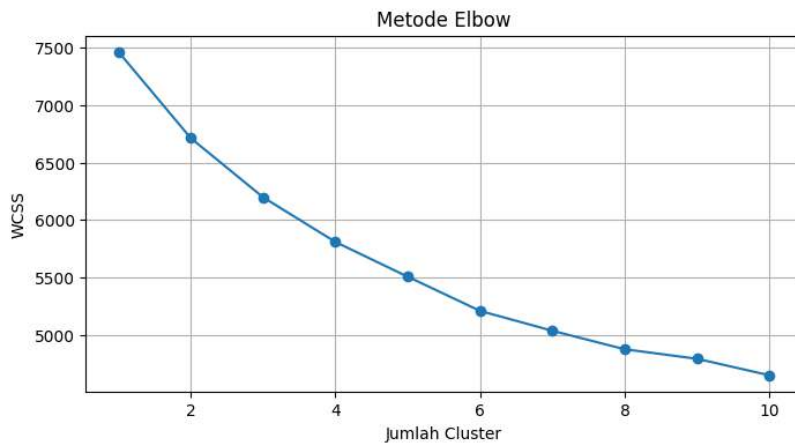

Digunakan untuk memilih jumlah cluster terbaik dengan melihat titik "siku" di grafik.

✓ Evaluasi K Alternatif dengan Silhouette Score

```
print("\nSilhouette Scores untuk masing-masing K:")
for k in range(2, 11):
    kmeans = KMeans(n_clusters=k, random_state=42)
    labels = kmeans.fit_predict(df_encoded)
    score = silhouette_score(df_encoded, labels)
    print(f"K = {k} --> Silhouette Score = {score:.3f}")
```



```
Silhouette Scores untuk masing-masing K:
K = 2 --> Silhouette Score = 0.097
K = 3 --> Silhouette Score = 0.091
K = 4 --> Silhouette Score = 0.092
K = 5 --> Silhouette Score = 0.094
K = 6 --> Silhouette Score = 0.100
K = 7 --> Silhouette Score = 0.097
K = 8 --> Silhouette Score = 0.094
K = 9 --> Silhouette Score = 0.088
K = 10 --> Silhouette Score = 0.088
```

Melihat skor kualitas clustering untuk berbagai nilai K.

✓ Training Model KMeans (Dengan K Terbaik)

```
k = 4 # Ganti nilai ini sesuai hasil analisis Elbow atau Silhouette
kmeans = KMeans(n_clusters=k, random_state=42)
df_encoded['cluster'] = kmeans.fit_predict(df_encoded)

# Hitung silhouette score akhir
final_score = silhouette_score(df_encoded.drop(columns=["cluster"]), df_encoded)
print(f"\nSilhouette Score Final (K={k}): {final_score:.3f}")
```



```
Silhouette Score Final (K=4): 0.092
```

Melatih model KMeans dan menghitung Silhouette Score akhir.


✓ Visualisasi Cluster (PCA 2D)

```
pca = PCA(n_components=2)
components = pca.fit_transform(df_encoded.drop(columns=["cluster"]))

df_viz = pd.DataFrame(components, columns=["PC1", "PC2"])
df_viz["cluster"] = df_encoded["cluster"]

plt.figure(figsize=(8, 6))
sns.scatterplot(data=df_viz, x="PC1", y="PC2", hue="cluster", palette="Set2", s=100)
plt.title("Visualisasi Cluster dengan PCA")
```

```
plt.figure(figsize=(10, 10))
plt.grid(True)
plt.show()
```

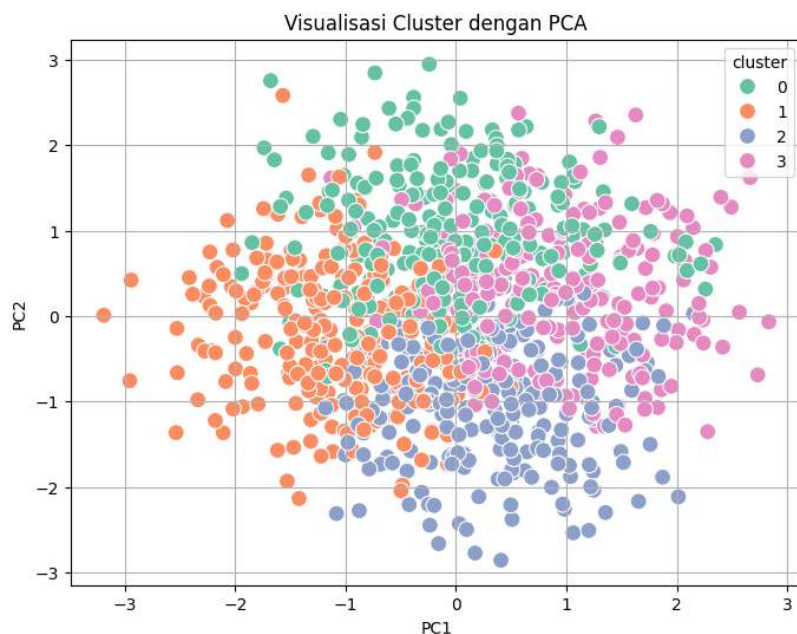

▼ Analisis Setiap Cluster

```
df_original = pd.read_csv("customer_segmentation_data.csv")
df_original['cluster'] = df_encoded['cluster']

cluster_summary = df_original.groupby('cluster').mean(numeric_only=True)
print("\nRata-rata fitur numerik per cluster:")
print(cluster_summary)
```



Rata-rata fitur numerik per cluster:

	id	age	income	spending_score \
cluster				
0	514.388000	47.596000	82713.164000	28.996000
1	491.256506	45.319703	98554.609665	56.319703
2	497.599174	35.454545	92350.235537	38.367769
3	499.313808	46.497908	79341.263598	79.502092

	membership_years	purchase_frequency	last_purchase_amount
cluster			
0	4.752000	24.576000	769.560960
1	4.330855	14.174721	273.602007
2	6.148760	38.115702	291.188223
3	6.811715	31.025105	652.267531

▼ Simpan Data K-Means Clustering

```
df_encoded.to_csv("customer_segmentation_data_clustered.csv", index=False)
```

