

```

import numpy as np
import cv2
import scipy.io
import os
from numpy.linalg import norm
from matplotlib import pyplot as plt
from numpy.linalg import det
from numpy.linalg import inv
from scipy.linalg import rq
from numpy.linalg import svd
import matplotlib.pyplot as plt
import numpy as np
import math
import random
import sys
from scipy import ndimage, spatial
from tqdm.notebook import tqdm, trange

import torch
import torch.nn as nn
import torch.optim as optim
from torch.optim import lr_scheduler
from torch.autograd import Variable
import torchvision
from torchvision import datasets, models, transforms
from torch.utils.data import Dataset, DataLoader, ConcatDataset

```

Your session crashed after using all available RAM. If you are interested in access to high-RAM runtimes, you may want to check out [Colab Pro](#).

[View runtime logs](#)

```

import matplotlib.pyplot as plt
import time
import os
import copy
import sklearn.svm
import cv2
from matplotlib import pyplot as plt
import numpy as np
from os.path import exists
import pandas as pd
import PIL
import random
from google.colab import drive
from sklearn.metrics.cluster import completeness_score
from sklearn.cluster import KMeans
from tqdm import tqdm, tqdm_notebook
from functools import partial
from torchsummary import summary
from torchvision.datasets import ImageFolder

```

```
from torch.utils.data.sampler import SubsetRandomSampler
```

```
from google.colab import drive
```

```
# This will prompt for authorization.
```

```
drive.mount('/content/drive')
```

Drive already mounted at /content/drive; to attempt to forcibly remount, call drive.moun

```
!pip install opencv-python==3.4.2.17
```

```
!pip install opencv-contrib-python==3.4.2.17
```

Requirement already satisfied: opencv-python==3.4.2.17 in /usr/local/lib/python3.7/dist-  
Requirement already satisfied: numpy>=1.14.5 in /usr/local/lib/python3.7/dist-packages (  
Requirement already satisfied: opencv-contrib-python==3.4.2.17 in /usr/local/lib/python:  
Requirement already satisfied: numpy>=1.14.5 in /usr/local/lib/python3.7/dist-packages (

```
class Image:
```

```
    def __init__(self, img, position):
```

```
        self.img = img
```

```
        self.position = position
```

```
inlier_matchset = []
```

Your session crashed after using all available RAM. If you are interested in access to high-RAM runtimes, you may want to check out [Colab Pro](#).

[View runtime logs](#)

```
index=0
```

```
for j in range(0,keypointlength):
```

```
    #For a descriptor fa in Ia, take the two closest descriptors fb1 and fb2 in Ib
```

```
    x=a[j]
```

```
    listx=x.tolist()
```

```
    x.sort()
```

```
    minval1=x[0]
```

```
    # min
```

```
    minval2=x[1]
```

```
    # 2nd min
```

```
    itemindex1 = listx.index(minval1)
```

```
    #index of min val
```

```
    itemindex2 = listx.index(minval2)
```

```
    #index of second min value
```

```
    ratio=minval1/minval2
```

```
    #Ratio Test
```

```
    if ratio<threshold:
```

```
        #Low distance ratio: fb1 can be a good match
```

```
        bestmatch[index]=itemindex1
```

```
        distance[index]=minval1
```

```
        img1index[index]=j
```

```
        index=index+1
```

```
    return [cv2.DMatch(img1index[i],bestmatch[i].astype(int),distance[i]) for i in range(0,ind
```

```

def compute_Homography(im1_pts,im2_pts):
    """
    im1_pts and im2_pts are 2xn matrices with
    4 point correspondences from the two images
    """
    num_matches=len(im1_pts)
    num_rows = 2 * num_matches
    num_cols = 9
    A_matrix_shape = (num_rows,num_cols)
    A = np.zeros(A_matrix_shape)
    a_index = 0
    for i in range(0,num_matches):
        (a_x, a_y) = im1_pts[i]
        (b_x, b_y) = im2_pts[i]
        row1 = [a_x, a_y, 1, 0, 0, 0, -b_x*a_x, -b_x*a_y, -b_x] # First row
        row2 = [0, 0, 0, a_x, a_y, 1, -b_y*a_x, -b_y*a_y, -b_y] # Second row

        # place the rows in the matrix
        A[a_index] = row1
        A[a_index+1] = row2

        a_index += 2

    U, s, Vt = np.linalg.svd(A)

    H = Vt[-1].reshape(3,3) # take the last row of the Vt matrix
    return H

```

Your session crashed after using all available RAM. If you are interested in access to high-RAM runtimes, you may want to check out [Colab Pro](#).

[View runtime logs](#)

✕ [Order](#)

```

def displayplot(img,title):

    plt.figure(figsize=(15,15))
    plt.title(title)
    plt.imshow(cv2.cvtColor(img, cv2.COLOR_BGR2RGB))
    plt.show()

def get_inliers(f1, f2, matches, H, RANSACthresh):

    inlier_indices = []
    for i in range(len(matches)):
        queryInd = matches[i].queryIdx
        trainInd = matches[i].trainIdx

```

#queryInd = matches[i].queryIdx

```
#queryInd = matches[1][0]
#trainInd = matches[i][1]
```

```
queryPoint = np.array([f1[queryInd].pt[0], f1[queryInd].pt[1], 1]).T
trans_query = H.dot(queryPoint)
```

```
comp1 = [trans_query[0]/trans_query[2], trans_query[1]/trans_query[2]] # normalize with r
comp2 = np.array(f2[trainInd].pt)[:2]
```

```
if(np.linalg.norm(comp1-comp2) <= RANSACthresh): # check against threshold
    inlier_indices.append(i)
return inlier_indices
```

```
def RANSAC_alg(f1, f2, matches, nRANSAC, RANSACthresh):
```

```
    minMatches = 4
    nBest = 0
    best_inliers = []
    H_estimate = np.eye(3,3)
    global inlier_matchset
    inlier_matchset=[]
    for iteration in range(nRANSAC):
```

```
        #Choose a minimal set of feature matches
```

Your session crashed after using all available RAM. If you are interested in access to high-RAM runtimes, you may want to check out [Colab Pro](#).

[View runtime logs](#)

```
        for i in range(0,minMatches):
            m = matchSample[i]
            im1_pts[i] = f1[m.queryIdx].pt
            im2_pts[i] = f2[m.trainIdx].pt
            #im1_pts[i] = f1[m[0]].pt
            #im2_pts[i] = f2[m[1]].pt
```

```
H_estimate=compute_Homography(im1_pts,im2_pts)
```

```
# Calculate the inliers for the H
inliers = get_inliers(f1, f2, matches, H_estimate, RANSACthresh)
```

```
# if the number of inliers is higher than previous iterations, update the best estima
if len(inliers) > nBest:
    nBest= len(inliers)
    best_inliers = inliers
```

```
print("Number of best inliers",len(best_inliers))
```

```

for i in range(len(best_inliers)):
    inlier_matchset.append(matches[best_inliers[i]])

# compute a homography given this set of matches
im1_pts=np.empty((len(best_inliers),2))
im2_pts=np.empty((len(best_inliers),2))
for i in range(0,len(best_inliers)):
    m = inlier_matchset[i]
    im1_pts[i] = f1[m.queryIdx].pt
    im2_pts[i] = f2[m.trainIdx].pt
    #im1_pts[i] = f1[m[0]].pt
    #im2_pts[i] = f2[m[1]].pt

M=compute_Homography(im1_pts,im2_pts)
return M, best_inliers

```

```

files_all=[]
for file in os.listdir("/content/drive/MyDrive/RGB-img/img/"):
    if file.endswith(".JPG"):
        files_all.append(file)

```

```

files_all.sort()
folder_path = '/content/drive/MyDrive/RGB-img/img/'

```

```

centre_file = folder_path + files_all[50]

```

Your session crashed after using all available RAM. If you are interested in access to high-RAM runtimes, you may want to check out [Colab Pro](#).

[View runtime logs](#)

```

left_files_path = left_files_path_rev[::-1]

```

```

for file in files_all[49:100]:
    right_files_path.append(folder_path + file)

```

```

gridsize = 8
clahe = cv2.createCLAHE(clipLimit=2.0,tileGridSize=(gridsize,gridsize))

```

```

images_left_bgr = []
images_right_bgr = []

```

```

images_left = []
images_right = []

```

```

for file in tqdm(left_files_path):
    left_image_sat= cv2.imread(file)
    lab = cv2.cvtColor(left_image_sat, cv2.COLOR_BGR2LAB)
    lab[...,0] = clahe.apply(lab[...,0])

```

```

left_image_sat = cv2.cvtColor(lab, cv2.COLOR_LAB2BGR)
left_img = cv2.resize(left_image_sat, None, fx=0.20, fy=0.20, interpolation = cv2.INTER_CUBIC)
images_left.append(cv2.cvtColor(left_img, cv2.COLOR_BGR2GRAY).astype('float32')/255.)
images_left_bgr.append(left_img)

```

```

for file in tqdm(right_files_path):
    right_image_sat= cv2.imread(file)
    lab = cv2.cvtColor(right_image_sat, cv2.COLOR_BGR2LAB)
    lab[...,0] = clahe.apply(lab[...,0])
    right_image_sat = cv2.cvtColor(lab, cv2.COLOR_LAB2BGR)
    right_img = cv2.resize(right_image_sat, None, fx=0.20, fy=0.20, interpolation = cv2.INTER_CUBIC)
    images_right.append(cv2.cvtColor(right_img, cv2.COLOR_BGR2GRAY).astype('float32')/255.)
    images_right_bgr.append(right_img)

```

```

100%|██████████| 51/51 [01:26<00:00, 1.70s/it]
100%|██████████| 51/51 [01:40<00:00, 1.98s/it]

```

```

images_left_bgr_no_enhance = []
images_right_bgr_no_enhance = []

```

```

for file in tqdm(left_files_path):
    left_image_sat= cv2.imread(file)
    left_img = cv2.resize(left_image_sat, None, fx=0.20, fy=0.20, interpolation = cv2.INTER_CUBIC)
    images_left_bgr_no_enhance.append(left_img)

```

Your session crashed after using all available RAM. If you are interested in access to high-RAM runtimes, you may want to check out [Colab Pro](#).



[View runtime logs](#)

interpolation = cv2.INTER\_CUBIC

```

100%|██████████| 51/51 [00:20<00:00, 2.51it/s]
100%|██████████| 51/51 [00:20<00:00, 2.53it/s]

```

```

gftt = cv2.GFTTDetector_create()
sift= cv2.xfeatures2d.SIFT_create()
keypoints_all_left_gftt = []
descriptors_all_left_gftt = []
points_all_left_gftt=[]

keypoints_all_right_gftt = []
descriptors_all_right_gftt = []
points_all_right_gftt=[]

for imgs in tqdm(images_left_bgr):
    kpt = gftt.detect(imgs, None)
    kpt, descrip = sift.compute(imgs, kpt)
    keypoints_all_left_gftt.append(kpt)
    descriptors_all_left_gftt.append(descrip)

```

```

points_all_left_gfft.append(np.asarray([[p.pt[0], p.pt[1]] for p in kpt]))

for imgs in tqdm(images_right_bgr):
    kpt = gfft.detect(imgs, None)
    kpt, descrip = sift.compute(imgs, kpt)
    keypoints_all_right_gfft.append(kpt)
    descriptors_all_right_gfft.append(descrip)
    points_all_right_gfft.append(np.asarray([[p.pt[0], p.pt[1]] for p in kpt]))

```

```

100%|██████████| 51/51 [00:05<00:00, 9.64it/s]
100%|██████████| 51/51 [00:05<00:00, 9.58it/s]

```

```

num_kps_gfft=[]
for j in tqdm (keypoints_all_left_gfft + keypoints_all_right_gfft):
    num_kps_gfft.append(len(j))

```

```

100%|██████████| 102/102 [00:00<00:00, 51389.67it/s]

```

```

def compute_homography_fast(matched_pts1, matched_pts2, thresh=4):
    #matched_pts1 = cv2.KeyPoint_convert(matched_kp1)
    #matched_pts2 = cv2.KeyPoint_convert(matched_kp2)

    # Estimate the homography between the matches using RANSAC
    H, inliers = cv2.findHomography(matched_pts1,
                                    matched_pts2,
                                    cv2.RANSAC, ransacReprojThreshold =thresh)

```

Your session crashed after using all available RAM. If you are interested in access to high-RAM runtimes, you may want to check out [Colab Pro](#).

[View runtime logs](#)

lsp=False):

```

FLANN_INDEX_KDTREE = 0
index_params = dict(algorithm=FLANN_INDEX_KDTREE, trees=5)
search_params = dict(checks=50)
flann = cv2.FlannBasedMatcher(index_params, search_params)
#flann = cv2.BFMatcher()

```

```

lff1 = np.float32(descriptors[0])
lff = np.float32(descriptors[1])

```

```

matches_lf1_lf = flann.knnMatch(lff1, lff, k=2)

```

```

print("\nNumber of matches", len(matches_lf1_lf))

```

```

matches_4 = []
ratio = ratio
# loop over the raw matches
for m in matches_lf1_lf:
    # ensure the distance is within a certain ratio of each
    # other (i.e. Lowe's ratio test)

```

```

if len(m) == 2 and m[0].distance < m[1].distance * ratio:
    #matches_1.append((m[0].trainIdx, m[0].queryIdx))
    matches_4.append(m[0])

print("Number of matches After Lowe's Ratio",len(matches_4))

matches_idx = np.array([m.queryIdx for m in matches_4])
imm1_pts = np.array([keypts[0][idx].pt for idx in matches_idx])
matches_idx = np.array([m.trainIdx for m in matches_4])
imm2_pts = np.array([keypts[1][idx].pt for idx in matches_idx])
...

# Estimate homography 1
#Compute H1
# Estimate homography 1
#Compute H1
imm1_pts=np.empty((len(matches_4),2))
imm2_pts=np.empty((len(matches_4),2))
for i in range(0,len(matches_4)):
    m = matches_4[i]
    (a_x, a_y) = keypts[0][m.queryIdx].pt
    (b_x, b_y) = keypts[1][m.trainIdx].pt
    imm1_pts[i]=(a_x, a_y)
    imm2_pts[i]=(b_x, b_y)
H=compute_Homography(imm1_pts,imm2_pts)
#Robustly estimate Homography 1 using RANSAC
Hn, best_inliers=RANSAC_alg(keypts[0],keypts[1], matches_4, nRANSAC=1000, RANSACthresh=6)
...

```

Your session crashed after using all available RAM. If you are interested in access to high-RAM runtimes, you may want to check out [Colab Pro](#).

[View runtime logs](#)



```

print("\n")
...

if len(inlier_matchset)<50:
    matches_4 = []
    ratio = 0.67
    # loop over the raw matches
    for m in matches_1f1_1f:
        # ensure the distance is within a certain ratio of each
        # other (i.e. Lowe's ratio test)
        if len(m) == 2 and m[0].distance < m[1].distance * ratio:
            #matches_1.append((m[0].trainIdx, m[0].queryIdx))
            matches_4.append(m[0])
    print("Number of matches After Lowe's Ratio New",len(matches_4))

    matches_idx = np.array([m.queryIdx for m in matches_4])
    imm1_pts = np.array([keypts[0][idx].pt for idx in matches_idx])
    matches_idx = np.array([m.trainIdx for m in matches_4])
    imm2_pts = np.array([keypts[1][idx].pt for idx in matches_idx])
    Hn,inliers = compute_homography_fast_other(imm1_pts,imm2_pts)
    inlier_matchset = np.array(matches_4)[inliers.astype(bool)].tolist()

```



```

inlier_matchset = np.array(matches_4)[inliers.astype(bool)].tolist()
print("Number of Robust matches New",len(inlier_matchset))
print("\n")
'''

#H=compute_Homography(imm1_pts,imm2_pts)
#Robustly estimate Homography 1 using RANSAC
#Hn=RANSAC_alg(keypts[0] ,keypts[1], matches_4, nRANSAC=1500, RANSACthresh=6)

#global inlier_matchset

if disp==True:
    dispimg1=cv2.drawMatches(imgs[0], keypts[0], imgs[1], keypts[1], inlier_matchset, None,fl
    displayplot(dispimg1,'Robust Matching between Reference Image and Right Image ')

return Hn/Hn[2,2], len(matches_lf1_lf), len(inlier_matchset)

from functools import partial
from tqdm import tqdm
tqdm = partial(tqdm, position=0, leave=True)

H_left_gftt = []
H_right_gftt = []

num_matches_gftt = []
num_good_matches_gftt = []

```

Your session crashed after using all available RAM. If you are interested in access to high-RAM runtimes, you may want to check out [Colab Pro](#).

[View runtime logs](#)



```

H_left_gftt.append(H_a)
num_matches_gftt.append(matches)
num_good_matches_gftt.append(gd_matches)

for j in tqdm(range(len(images_right))):
    if j==len(images_right)-1:
        break

H_a,matches,gd_matches = get_Hmatrix(images_right_bgr[j:j+2][::-1],keypoints_all_left_gftt[j
H_right_gftt.append(H_a)

4%|█          | 2/51 [00:00<00:06, 7.89it/s]
Number of matches 1000
Number of matches After Lowe's Ratio 338
Number of Robust matches 176

Number of matches 1000
Number of matches After Lowe's Ratio 406

```

Number of Robust matches 264

8%|██████ | 4/51 [00:00<00:05, 8.35it/s]  
 Number of matches 1000  
 Number of matches After Lowe's Ratio 387  
 Number of Robust matches 205

Number of matches 1000  
 Number of matches After Lowe's Ratio 494  
 Number of Robust matches 334

12%|███████ | 6/51 [00:00<00:05, 8.67it/s]  
 Number of matches 1000  
 Number of matches After Lowe's Ratio 338  
 Number of Robust matches 206

Number of matches 1000  
 Number of matches After Lowe's Ratio 406  
 Number of Robust matches 277

16%|███████ | 8/51 [00:00<00:04, 8.82it/s]  
 Number of matches 1000  
 Number of matches After Lowe's Ratio 506

Your session crashed after using all available  
 RAM. If you are interested in access to high-  
 RAM runtimes, you may want to check out  
[Colab Pro](#).



[View runtime logs](#)

Number of Robust matches 346

20%|█████████ | 10/51 [00:01<00:04, 8.54it/s]  
 Number of matches 1000  
 Number of matches After Lowe's Ratio 539  
 Number of Robust matches 362

Number of matches 1000  
 Number of matches After Lowe's Ratio 494  
 Number of Robust matches 318

```
def warpnImages(images_left, images_right,H_left,H_right):
    #img1-centre,img2-left,img3-right

    h, w = images_left[0].shape[:2]

    pts_left = []
```

```

pts_right = []

pts_centre = np.float32([[0, 0], [0, h], [w, h], [w, 0]]).reshape(-1, 1, 2)

for j in range(len(H_left)):
    pts = np.float32([[0, 0], [0, h], [w, h], [w, 0]]).reshape(-1, 1, 2)
    pts_left.append(pts)

for j in range(len(H_right)):
    pts = np.float32([[0, 0], [0, h], [w, h], [w, 0]]).reshape(-1, 1, 2)
    pts_right.append(pts)

pts_left_transformed=[]
pts_right_transformed=[]

for j,pts in enumerate(pts_left):
    if j==0:
        H_trans = H_left[j]
    else:
        H_trans = H_trans@H_left[j]
    pts_ = cv2.perspectiveTransform(pts, H_trans)
    pts_left_transformed.append(pts_)

for j,pts in enumerate(pts_right):
    if j==0:

```

Your session crashed after using all available RAM. If you are interested in access to high-RAM runtimes, you may want to check out [Colab Pro](#).



[View runtime logs](#)

```

print('Step1:Done')

#pts = np.concatenate((pts1, pts2_), axis=0)

pts_concat = np.concatenate((pts_centre,np.concatenate(np.array(pts_left_transformed),axi

[xmin, ymin] = np.int32(pts_concat.min(axis=0).ravel() - 0.5)
[xmax, ymax] = np.int32(pts_concat.max(axis=0).ravel() + 0.5)
t = [-xmin, -ymin]
Ht = np.array([[1, 0, t[0]], [0, 1, t[1]], [0, 0, 1]]) # translate

print('Step2:Done')

return xmax,xmin,ymax,ymin,t,h,w,Ht

```

```

def final_steps_left(images_left,images_right,H_left,H_right,xmax,xmin,ymax,ymin,t,h,w,Ht):

    warp_imgs_left = []

    for j,H in enumerate(H_left):
        if j==0:
            H_trans = Ht@H
        else:
            H_trans = H_trans@H
        result = cv2.warpPerspective(images_left[j+1], H_trans, (xmax-xmin, ymax-ymin))

        if j==0:
            result[t[1]:h+t[1], t[0]:w+t[0]] = images_left[0]

        warp_imgs_left.append(result)

    print('Step31:Done')

    return warp_imgs_left

def final_steps_right(images_left,images_right,H_left,H_right,xmax,xmin,ymax,ymin,t,h,w,Ht):

    warp_imgs_right = []

    for j,H in enumerate(H_right):
        if j==0:
            H_trans = Ht@H
        else:
            H_trans = H_trans@H
        result = cv2.warpPerspective(images_right[j+1], H_trans, (xmax-xmin, ymax-ymin))

        if j==0:
            result[t[1]:h+t[1], t[0]:w+t[0]] = images_right[0]

        warp_imgs_right.append(result)

    print('Step32:Done')

    return warp_imgs_right

def final_steps_union(warp_imgs_left,warp_imgs_right):
    #Union

    warp_images_all = warp_imgs_left + warp_imgs_right

    warp_img_init = warp_images_all[0]

    #warp_final_all=[]

    for j,warp_img in enumerate(warp_images_all):
        if j==len(warp_images_all)-1:
            warp_final_all.append(warp_img)
            break

```

Your session crashed after using all available RAM. If you are interested in access to high-RAM runtimes, you may want to check out [Colab Pro](#).

[View runtime logs](#)

(xmax-xmin, ymax-ymin))

```

        break
    black_pixels = np.where((warp_img_init[:, :, 0] == 0) & (warp_img_init[:, :, 1] == 0) &
                             warp_img_init[black_pixels] = warp_images_all[j+1][black_pixels]

    #warp_final = np.maximum(warp_img_init,warp_images_all[j+1])
    #warp_img_init = warp_final
    #warp_final_all.append(warp_final)

```

```
print('Step4:Done')
```

```
return warp_img_init
```

```
def final_steps_left_union(images_left,H_left,xmax,xmin,ymax,ymin,t,h,w,Ht):
```

```
for j,H in enumerate(H_left):
```

```
    if j==0:
```

```
        H_trans = Ht@H
```

```
    else:
```

```
        H_trans = H_trans@H
```

```
    input_img = images_left[j+1]
```

```
    result = np.zeros((ymax-ymin,xmax-xmin,3),dtype='uint8')
```

```
    cv2.warpPerspective(src = np.uint8(input_img), M = H_trans, dsize = (xmax-xmin, ymax-ym
```

Your session crashed after using all available RAM. If you are interested in access to high-RAM runtimes, you may want to check out [Colab Pro](#).

[View runtime logs](#)

```
        continue
```

```
    black_pixels = np.where((warp_img_init_prev[:, :, 0] == 0) & (warp_img_init_prev[:, :,
```

```
                             warp_img_init_prev[black_pixels] = warp_img_init_curr[black_pixels]
```

```
print('Step31:Done')
```

```
return warp_img_init_prev
```

```
def final_steps_right_union(warp_img_prev,images_right,H_right,xmax,xmin,ymax,ymin,t,h,w,Ht):
```

```
for j,H in enumerate(H_right):
```

```
    if j==0:
```

```
        H_trans = Ht@H
```

```
    else:
```

```
        H_trans = H_trans@H
```

```
    input_img = images_right[j+1]
```

```
    result = np.zeros((ymax-ymin,xmax-xmin,3),dtype='uint8')
```

```
cv2.warpPerspective(src = np.uint8(input_img), M = H_trans, dsize = (xmax-xmin, ymax-ym
warp_img_init_curr = result
```

```
black_pixels = np.where((warp_img_prev[:, :, 0] == 0) & (warp_img_prev[:, :, 1] == 0) &
warp_img_prev[black_pixels] = warp_img_init_curr[black_pixels]
```

```
print('Step32:Done')
```

```
return warp_img_prev
```

```
xmax,xmin,ymax,ymin,t,h,w,Ht = warpnImages(images_left_bgr_no_enhance, images_right_bgr_no_en
```

```
Step1:Done
```

```
Step2:Done
```

```
warp_imgs_left = final_steps_left_union(images_left_bgr_no_enhance,H_left_gfft,xmax,xmin,ymax
```

```
warp_imgs_all_gfft = final_steps_right_union(warp_imgs_left,images_right_bgr_no_enhance,H_rig
```

```
Step32:Done
```

```
fig,ax =plt.subplots()
```

```
fig.set_size_inches(20,20)
```


Your session crashed after using all available RAM. If you are interested in access to high-RAM runtimes, you may want to check out [Colab Pro](#).

[View runtime logs](#)



```
Text(0.5, 1.0, '100-Images Mosaic-GFTT')
```

100-Images Mosaic-GFTT

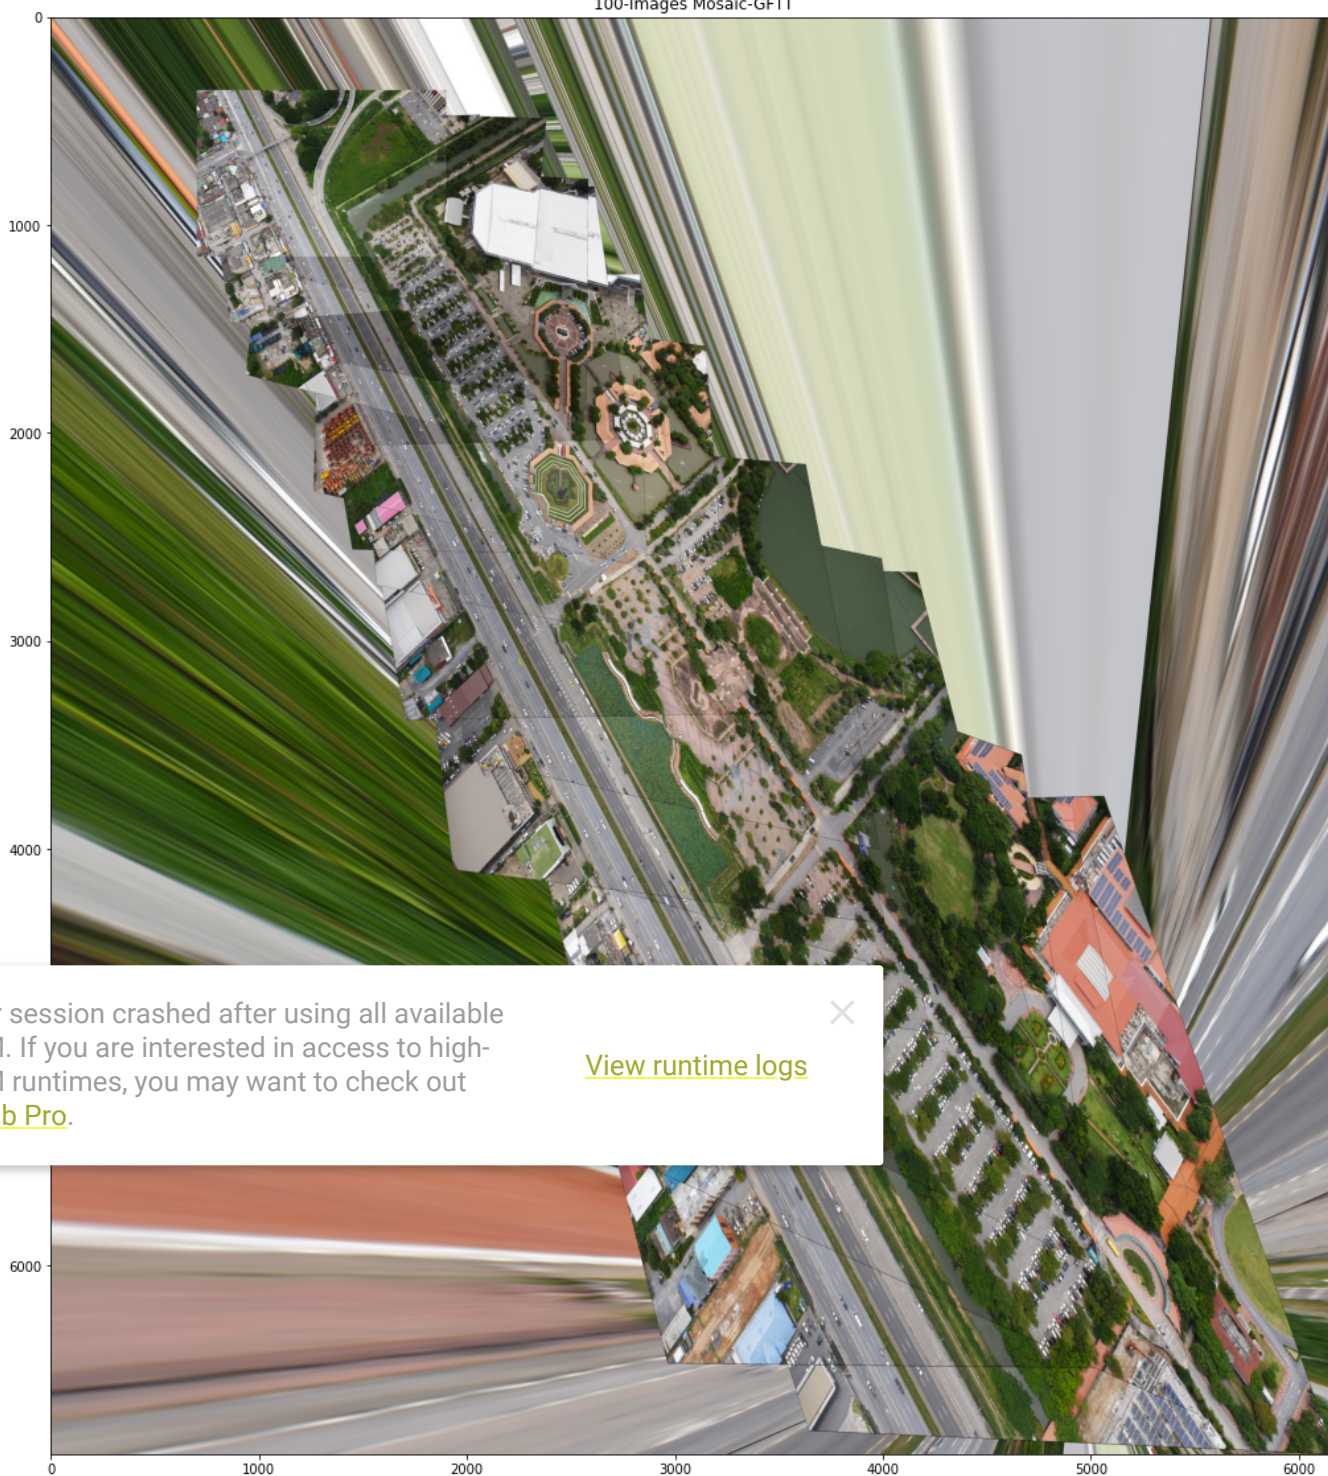

❗ 28s completed at 20:57



Your session crashed after using all available RAM. If you are interested in access to high-RAM runtimes, you may want to check out [Colab Pro](#).



[View runtime logs](#)