
## Yasin Hasim Tamboli

```
import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.Statement;
public class CreateTableDemo {
        public static void main(String[] args) {
                // TODO Auto-generated method stub
                //load Driver for register
                try
                {
                        Class.forName("com.mysql.jdbc.Driver");
                        System.out.println("Driver load successfully");
                        //step-2:Create connection
          Connection con=DriverManager.getConnection("jdbc:mysql://localhost:3306/student","root","");
                        System.out.println("connection create successfully");
                        //step-3create statement object
                        Statement stmt=con.createStatement();
                        System.out.println("Statement object create successfully");
                        //write query
                        String sql="create table Stud_data(id int,name varchar(20))";
                        stmt.execute(sql);
                        System.out.println("Table created Successfully");
                catch (Exception e)
                {
                        e.printStackTrace();
                }
        }
}
Output:
```

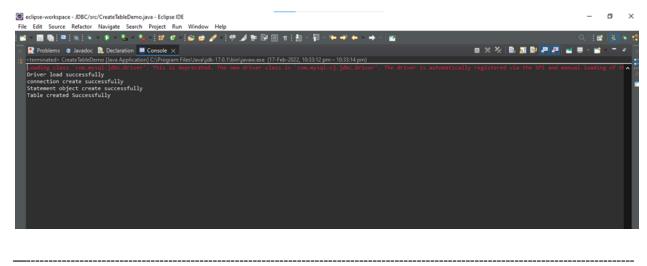

\_\_\_\_\_\_