


```

valid_lft forever preferred_lft forever
msfadmin@metasploitable:~$ sudo /etc/init.d/networking restart
* Reconfiguring network interfaces...
SIOCADDRT: No such process
Failed to bring up eth0.

msfadmin@metasploitable:~$ sudo /etc/init.d/networking restart
* Reconfiguring network interfaces...
SIOCADDRT: No such process
Failed to bring up eth0.

msfadmin@metasploitable:~$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 16436 qdisc noqueue
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast qlen 1000
    link/ether 08:00:27:28:50:89 brd ff:ff:ff:ff:ff:ff
    inet 192.168.1.149/24 brd 192.168.1.255 scope global eth0
    inet6 fe80::a00:27ff:fe28:5089/64 scope link
        valid_lft forever preferred_lft forever
msfadmin@metasploitable:~$ search vsftpd
-bash: search: command not found
msfadmin@metasploitable:~$ _

```

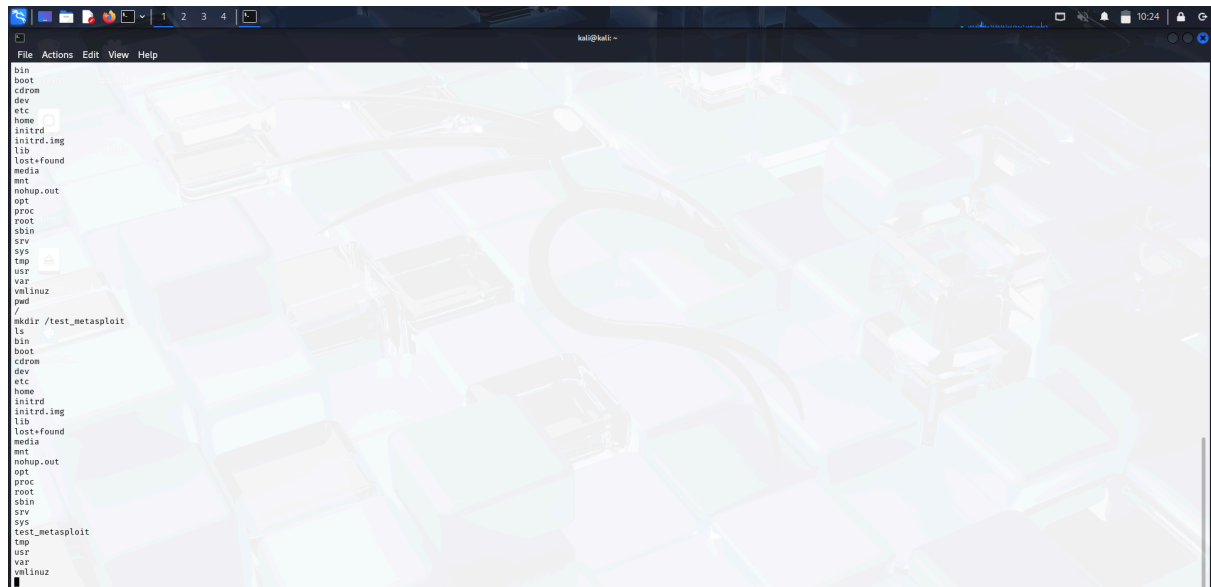

L'esercizio è andato a buon fine.