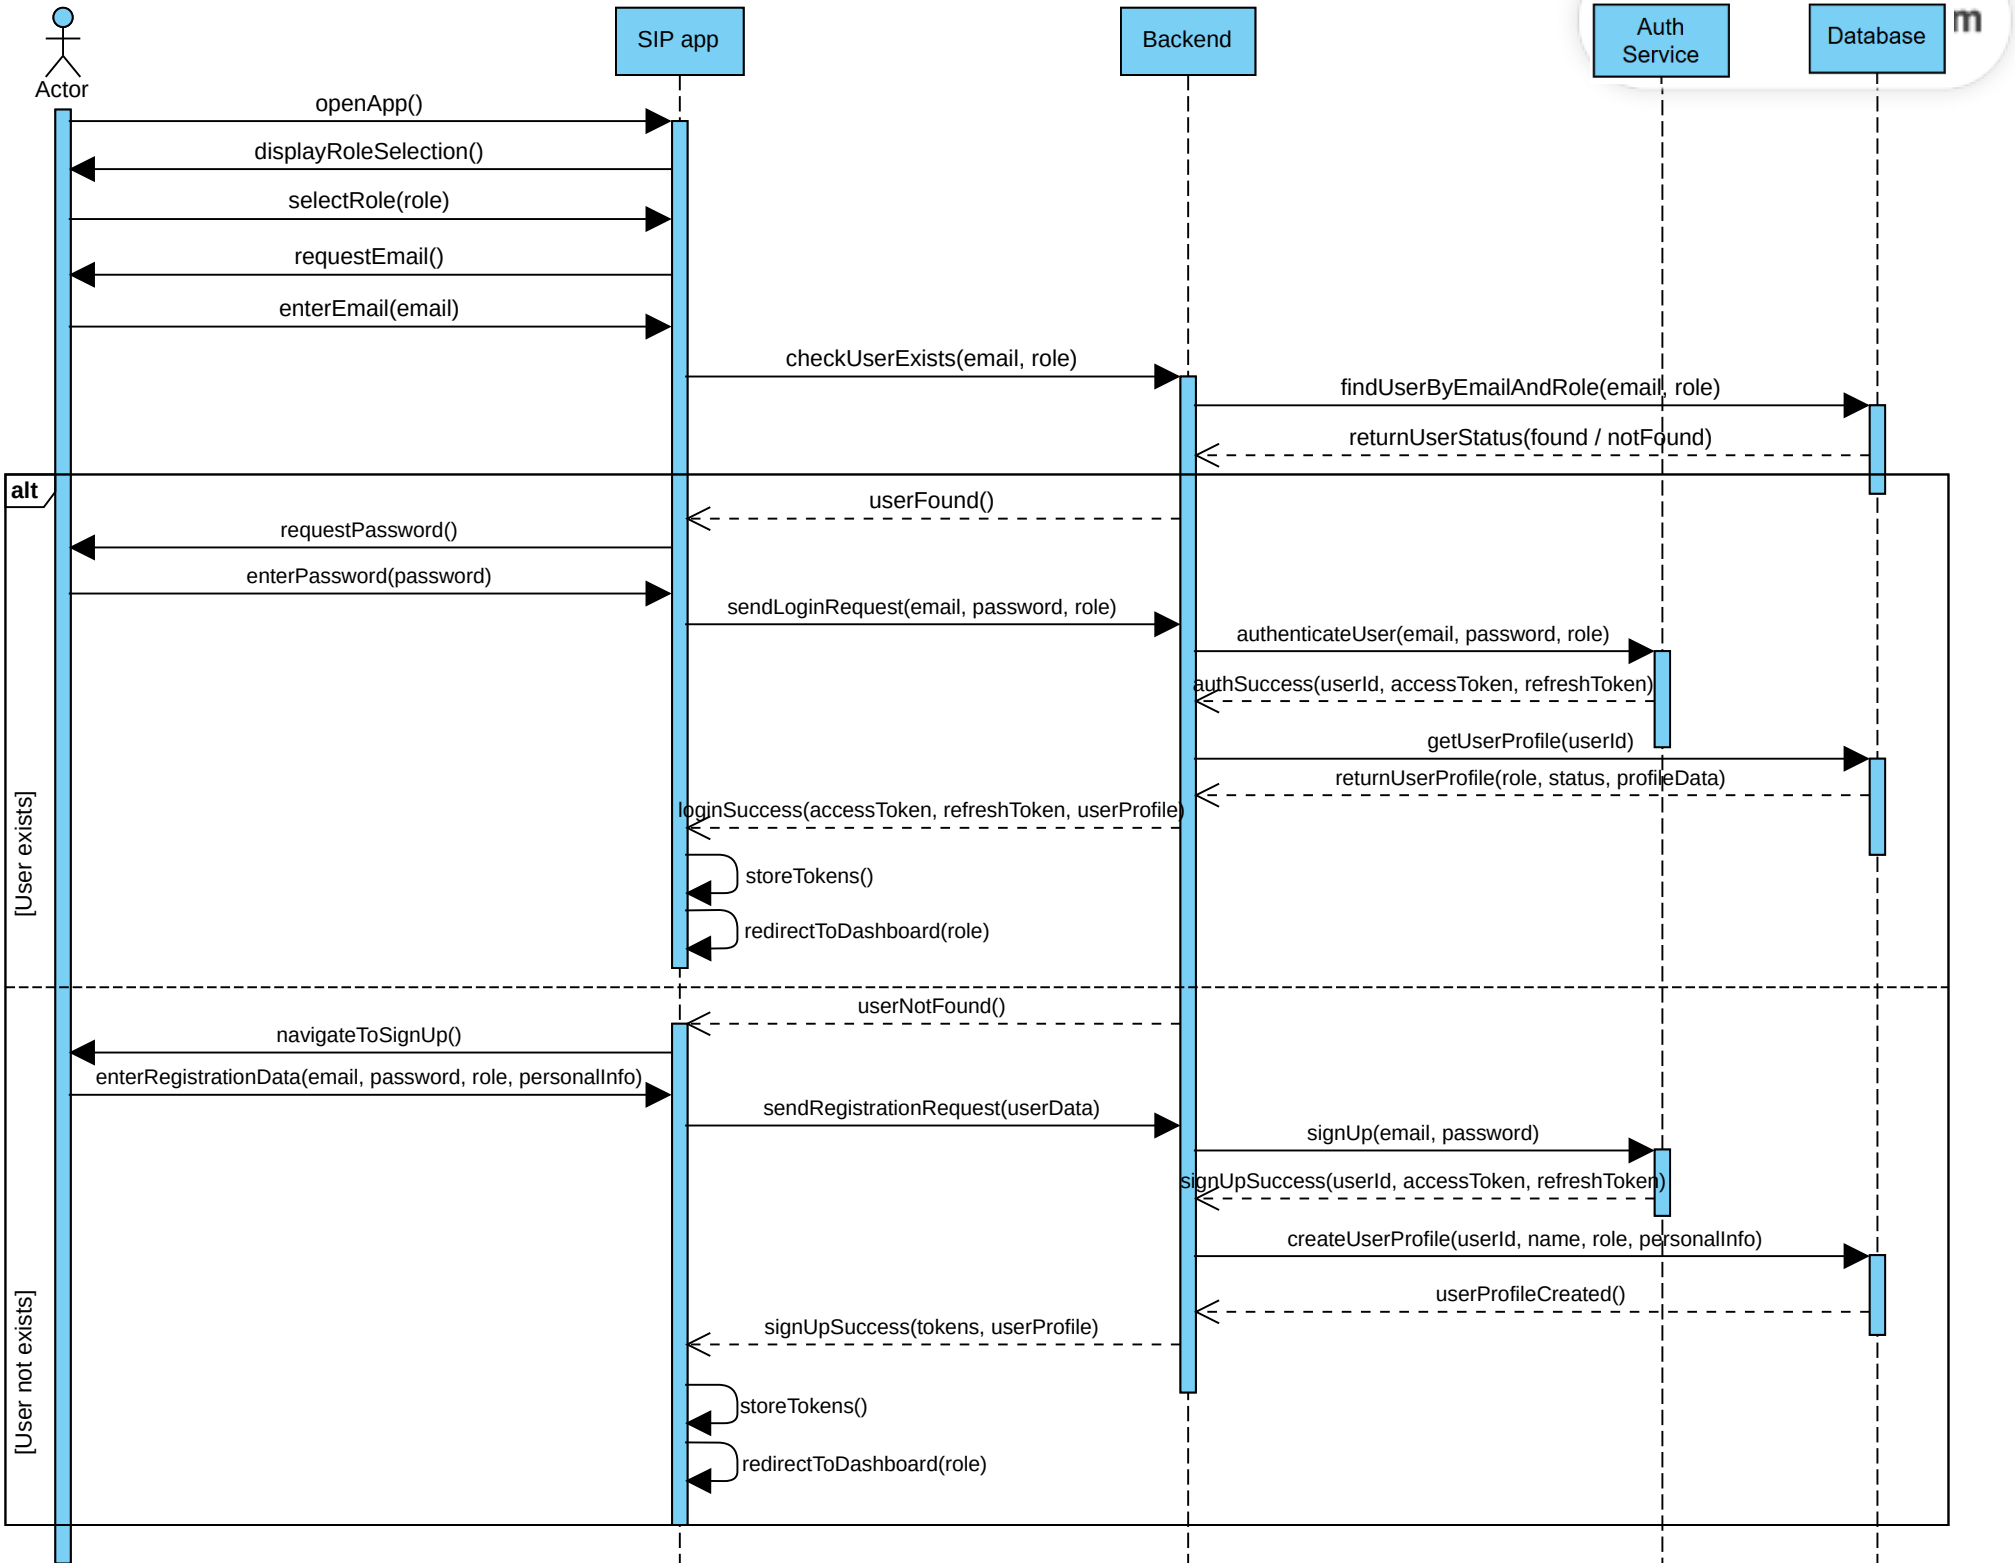
Actor
SIP app
Backend
Auth Service
Database
openApp()
displayRoleSelection()
selectRole(role)
requestEmail()
enterEmail(email)
checkUserExists(email, role)
findUserByEmailAndRole(email, role)
returnUserStatus(found / notFound)
alt
[User exists]
userFound()
requestPassword()
enterPassword(password)
sendLoginRequest(email, password, role)
authenticateUser(email, password, role)
authSuccess(userId, accessToken, refreshToken)
getUserProfile(userId)
returnUserProfile(role, status, profileData)
loginSuccess(accessToken, refreshToken, userProfile)
storeTokens()
redirectToDashboard(role)
[User not exists]
userNotFound()
navigateToSignUp()
enterRegistrationData(email, password, role, personalInfo)
sendRegistrationRequest(userData)
signUp(email, password)
signUpSuccess(userId, accessToken, refreshToken)
createUserProfile(userId, name, role, personalInfo)
userProfileCreated()
signUpSuccess(tokens, userProfile)
storeTokens()
redirectToDashboard(role)