1 Introduction

This report details the approach and implementation details relating to the first courswork project of MATH36032. Please note that all programming and testing was carried out using GNU Octave rather than MATLAB.

2 The Euler-Mascheroni constant

2.1 Context

The Euler-Mascheroni constant is a mathematical constant that first appeared in Euler's writings in 1735. It is usually denoted γ , first appearing thus by Mascheroni in 1790 [1]. Formally, it is defined as follows.

$$\gamma = \lim_{n \to \infty} \left(-\ln n + \sum_{k=0}^{n} \frac{1}{k} \right) \tag{1}$$

Very little is known about this constant, it isn't even known whether or not it's irrational. Hence it is often convenient to approximate it's value to a quotient of integers.

Of course, since we do not know whether γ is even rational, while finding this quotient of integers, which we will denote $\frac{p}{q}$ where $p,q\in\mathbb{Z}$, we must define a constraint on p and q. Since if γ is irrational, for each p,q we find, we'll be able to find another pair which is closer to γ .

Let's introduce an arbitrary integer N, we will aim to find a quotient of integers $\frac{p}{q}$ such that $p+q \leq N$. Where $\frac{p}{q}$ is the best approximation of γ with this constraint. Furthermore, where there are multiple pairs that give the best approximation, we will take the pair with the smallest value of p+q.

2.2 The brute force approach

The approach we will use to find the best integers p and q given the constraint, is to first look at a brute force method. Which is to try ever possible combination of p and q and see which one minimises $|\gamma - \frac{p}{q}|$. Then we will aim to optimise this approach.

Listing 1: A Brute force implementation to find p and q

```
function [p, q] = AppEmBruteForce(N)
     emConstant = 0.577215664901533;
2
     currentBestDiff = 1;
     currentBestPQ = [0, 0];
6
     % Try every valid combination of p and q
     for q = 1:N
       % Bound p by N - q so that p + q <= N
       for p = 1:N-q
10
11
         diffToEM = abs(p / q - emConstant);
12
13
         if (diffToEM < currentBestDiff)</pre>
           currentBestDiff = diffToEM;
15
            currentBestPQ = [p, q];
16
         end
17
18
```

The first thing we notice about the code in Listing 1 is it's inefficency. In Big-O notation we refer to this as being $O(N^2)$. Since an increase in N results in an increase proportional to N^2 in the number of operations performed.

2.3 Optimizing

We can do better than this. The aim here, is for a given q, to limit the values of p that we need to check.

First lets setup some notation. Notice that in Listing 1, when we find a better approximation, we update the currentBestPQ variable. Let's denote p_0 , q_0 as the first values of this variable, and p_i , q_i to be the i^{th} values of this variable. Hence the final value in this sequence is our answer. Let;

$$\gamma_i = \frac{p_i}{q_i} \tag{2}$$

Given a value of γ_i , we know that γ_{i+1} will be closer to the real γ than γ_i , since otherwise it wouldn't be one of the sequence. Hence;

$$|\gamma - \gamma_{i+1}| < |\gamma - \gamma_i|$$

Another way of saying this is as follows. Let $\delta_i = |\gamma - \gamma_i|$.

$$\gamma - \delta_i < \gamma_{i+1} < \gamma + \delta_i$$

Now if we substitute in equation 2 and multiply through by q_{i+1}

$$q_{i+1}(\gamma - \delta_i) < p_{i+1} < q_{i+1}(\gamma + \delta_i) \tag{3}$$

Which is exactly what we need, for a given q, we have a constraint on p. So every time we find a better approximation, (a new γ_i), we tighten the bound on which values of p we need to check.

However, to find γ_0 currently we still have to check all possible values of p when q=1 since we don't yet have a current best approximation. Notice that if N=1,2, though valid inputs, the results aren't useful. However, for $N \geq 3$, observe that $\gamma_0 = \frac{1}{2}$. Hence we can just hard-code this initial value. However, this does mean treating **trivial values of N** (N=1,2) as a special case, but which is worth it for the saved calculations.

The reader may note at this point that it is often considered bad practice to hard-code values like this, as it sometimes offects flexibility. However, I argue that in this instance, we are hard-coding the value of a base case in our sequence of γ_i values, and that it's performance improvement, combined with the legibility of the code makes it an acceptable approach.

Given this justification, the code listing is as follows.

Listing 2: An optimized implementation to find p and q

```
1 function [p, q] = AppEm (N)
```

```
emConstant = 0.577215664901533;
     % Check for the trivial case early to allow
4
     % assumptions to be made further down
     if (N <= 2)
6
       p = N - 1;
       q = 1;
       return;
9
10
11
     % Helper function for giving the difference between any
12
13
     %value and the emConstant
     absDiff = @(value) abs(value - emConstant);
14
15
     % Since we've dealt with the trivial case of N = 1, 2.
16
     % The first value value of p/q will always be 1/2,
17
     % we don't waste time calculating it but use it as the
18
19
     % initial value
     currentBestDiff = absDiff(1 / 2);
20
     currentBestPQ = [1, 2];
21
22
     % Start q off as 3 since we already accounted for q = 1, 2
23
24
     q = 3;
     qMax = N;
25
26
     while (q < qMax)
27
28
       % Limit the values of p that we check to only those that
29
30
       % could be closer to the emConstant than our current best
       pMax = floor(q * (emConstant + currentBestDiff));
31
       pMin = ceil(q * (emConstant - currentBestDiff));
32
33
        for p = pMin:min(pMax, N - q)
35
36
         diffToEM = absDiff(p / q);
37
          % Check if this approximation is better than the last one
38
39
         if (diffToEM < currentBestDiff)</pre>
           currentBestDiff = diffToEM;
40
           currentBestPQ = [p, q];
41
42
            % Recalculate the maximal value of q
43
            qMax = ceil(N / (emConstant - currentBestDiff + 1));
44
45
         end
46
47
       end
48
49
       q = q + 1;
     end
50
     p = currentBestPQ(1);
52
53
     q =
          currentBestPQ(2);
54
  end
```

There is one further optimization in Listing 2 that hasn't yet been discussed. This is the constraining of q as well as p. The reader may recall that in our brute force implementation (Listing 1), we allowed q to run from 1 to N, but it's clear that q = N (for non trivial values of N) will never contribute to the best approximation.

By the definition of the problem and by Equation 3, we have the following information.

$$p + q \le N$$

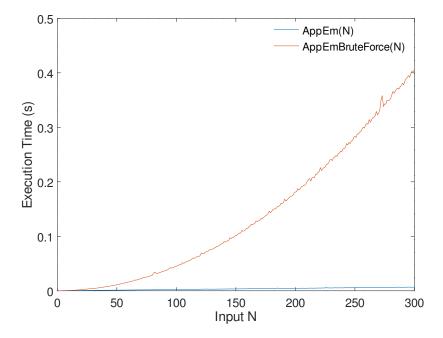


Figure 1: A performance comparison between the brute force algorithm and the optimized version

$$q(\gamma - \delta_i) < p$$

Hence combining these equation yields

$$q(\gamma - \delta_i)
$$\implies q(\gamma - \delta_i)
$$\implies q(\gamma - \delta_i + 1) < N$$

$$\implies q < \frac{N}{(\gamma - \delta_i + 1)}$$$$$$

So everytime we find a new approximation for γ , we can also update the maximal possible value of q. In practice this provides less of an optimization than the constraining of p, but for large N, does have a noticeable effect.

2.4 Performance

The performance improvement in our optimization has proven to be more than acceptable. Recall how we classified the original algorithm (Listing 1 to be an $O(N^2)$ algorithm. The following experiments show that the optimized version resembles an O(N) time complexity. I.e. as N gets larger, the time for the algorithm to terminates increases in a linear fashion.

Figure 1 shows this. It shows the time taken for both algorithms to complete, for $N=1 \rightarrow 300$.

2.5 A specific example

Let's consider the case that N = 2019.

Listing 3: A test of both implementations for N = 2019

```
1 tic();
2 [p, q] = AppEm(2019)
3 toc()
4
5 tic();
6 [p, q] = AppEmBruteForce(2019)
7 toc()
```

Running the code in Listing 3 gives the following output

```
>> test_2019
p = 228
q = 395
Elapsed time is 0.0487769 seconds.
p = 228
q = 395
Elapsed time is 18.8509 seconds.
```

We see the output from both approaches are in agreement, and that the optimizations result in an almost 400 times speed up.

3 Lucky numbers

3.1 Context

Lucky numbers, (more commonly referred to as Carmichael numbers [2]) are integers n that satisfy the following criterion.

- 1. n is not prime
- 2. All prime factors of n are odd
- 3. All n's prime factors are distinct i.e.

```
n = p_1 p_2 ... p_k, p_i is prime \forall i, and p_i \neq p_j for i \neq j
```

4. For each prime factor p of n, p-1 divides n-1

Our aim is to write a function to compute the smallest lucky number which is greater than or equal to an arbitrary integer N.

Firstly, some observations regarding the criterion.

• All prime factors of n are odd $\iff n$ is odd (since the only even prime is 2, and if 2|n then n is even).

Hence if n is even we can immediately rule out the possibility it is lucky.

• Given a list of the prime factors of n, if we find one prime factor p such that $p-1 \nmid n-1$, we can rule the number isn't a lucky number, and there is no need to check the rest of the prime factors.

3.2 The luckynum function

Returning to our function (which we'll call luckynum), with these observations in mind, our approach is to check the integers greater than N until we find one that's lucky. We can see at once that the first number s we must check is;

$$s = \begin{cases} N+1, & \text{if N is even} \\ N, & \text{if N is odd} \end{cases}$$

Of course if this number is lucky, then we're done. But if not, what is the next number we must check? Notice that s+1 must be even, since s is odd by construction. We have already observed that even numbers can't be lucky. So the next number to check is s+2. This pattern continues as we iterate, we can increment the number being checked by 2 each time, avoiding even numbers.

The implementation of the function is as follows.

Listing 4: The luckynum function

```
function n = luckvnum(N)
   % LUCKYNUM Find the smallest lucky number
   \mbox{\ensuremath{\$}} that is greater than or equal to N
     % Ensure we start from the first odd number greater
     % than or equal to N
6
     % i.e N, if N is odd, and N + 1 if even
     current = N + 1 - rem(N, 2);
     while(!isLucky(current))
10
       current += 2;
11
12
     end
13
14
     n = current;
15
  end
```

What remains, is to explore how we actually check if a given number n is lucky. In the luckynum function in Listing 4 we use the function isLucky which we will now explore.

3.3 The isLucky function

The full source is listed in Listing 5.

Listing 5: The isLucky function

```
function result = isLucky(N)
2
     result = true;
3
     % Return false if N is even
     if (mod(N, 2) == 0)
6
       result = false;
       return;
10
     primeFactors = factor(N);
11
12
     factorsCount = length(primeFactors);
13
     % Check N has at least 2 prime factors and that
```

```
% they're distinct
15
16
      if factorsCount == 1 ...
          || factorsCount != length(unique(primeFactors))
17
18
         result = false:
19
20
21
         % Check all factors divide N - 1
22
         for factor = primeFactors
23
            if (mod(N - 1, factor - 1) != 0)
24
               result = false;
26
               break;
            end
27
         end
28
     end
29
   end
```

The approach here is to initialise the result variable to true, and then as soon as one of the checks on N fails (i.e. determines N isn't lucky), result is set to false and crucially no other checks are performed.

First we check if N is even, the reader may wonder why this is needed. Since the implementation of the luckynum function never calls isLucky with even numbers, hence this check is redundant. However we aim to produce reusable code, and the next time we use the isLucky function, it may be called with an even number and so it is best practice to handle this correctly.

The order of the following checks is important, not in terms of correctness, but in terms of performance. N is first factorized and the result stored. To check if the number is prime, we must only check if the number of factors is 1, which is the fastest of the operations we must perform.

Here we take advantage of *lazy evaluation* to save making comparisons we don't need to. In a logical test

p||q

If p is evaluated to be true, then Octave knows that the whole expression must be true, and doesn't evaluate q. So, if we have more than one prime factor, we then check if the number of prime factors is equal to the number of unique prime factors, i.e. whether there are any duplicates.

The last, and clearly slowest check is the last of the criterion for lucky numbers. Notice that we make use of our observation that we can stop if we find any factors without the desired property in the code, in the form of a break in the loop.

The reader may notice that the most expensive operation in the implementation is the factorization of of N itself and whether there are any checks we could make before this. An alternative approach is to first check if the number is prime, and only if it is not do we do the factorization.

At first glance this seems a better solution since checking if a number is prime is faster than factorization. However, we must also consider that most numbers are not prime, so this check will fail more often than it passes, and it is in itself not a very fast operation. Hence the most common case is doing *both* the factorization, and the primality check.

The implementation of this alternative approach is listed in Appendix A, but more importantly Figure 2 shows a performance comparison between the two approaches. We can see clearly that our original approach is the more efficient in the general case.

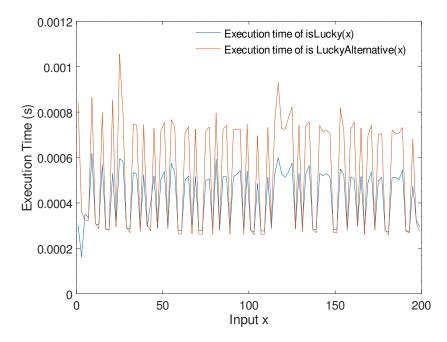


Figure 2: A performance comparison between is Lucky and is Lucky Alternative. Note that the even values of x where skipped in producing the data in order to make it more legible, since both functions treat even numbers in the same way

3.4 A specific example

The following shows the output the *luckynum* function with the input of 2019.

```
>> luckynum(2019)
ans = 2465
```

4 Perfect Numbers

4.1 Context

Given an integer $n \in \mathbb{Z}$ we say that n is *perfect* if it's square consists of all the digits $1 \to 9$ exactly once. Importantly, it does *not* include the digit 0.

For example, when n = 24237

$$n^2 = 587432169$$

So 24237 is said to be a perfect number.

The problem we're interested in solving is as follows, given an arbitrary integer N,

$$10^9 < N < 10^{10} \tag{4}$$

We seek the perfect n who's square is closest to N.

4.2 The isPerfect function

Firstly, we need a way of checking whether a given integer n is perfect. The function is listed below (Listing 7).

Listing 6: The isPerfect function

Once again we make use of the lazy evaluation property of the language. We see that three checks are made

- Checking there are 9 digits exactly (not strictly needed since we're assuming N is as in equation 4, but included for completeness since it's a very fast check anyway)
- Checking that the digit 0 doesn't appear
- Checking each digit appears exactly once

The checks are done in order of speed, this way, because of lazy evaluation, more expensive checks won't be carried out if cheaper checks rule out the possibility of N being perfect.

One thing that's been skated over so far, is the *int2Digits* function. Which returns an array of the digits of a base 10 number. (The full listing is included in Appendix 9).

The obvious alternative here would be to use the inbuilt num2str function in a similar way. However, having performed some experiments comparing the two approaches, the custom approach appears to be marginally faster.

4.3 The PerfNum function

Now that we have a mechanism for determining if a given number is perfect, we can return to the original problem.

The above problem can be restated slightly differently as follows.

Given an arbitrary integer N find $n \in \mathbb{Z}$ such that $n = \sqrt{m}$ and m is the closest perfect number to N.

The first, obvious observation is that m is a square number. Hence if we take $\lfloor \sqrt{N} \rfloor$, it is clear that by trying each integer of the form

$$\lfloor \sqrt{N} \rfloor + 1, \lfloor \sqrt{N} \rfloor - 1, \lfloor \sqrt{N} \rfloor + 2, \lfloor \sqrt{N} \rfloor - 2...$$

We'll eventually find n. If $\lfloor \sqrt{N} \rfloor + i$ and $\lfloor \sqrt{N} \rfloor - i$ both are perfect, then we'll need to manually work out which's square is closest to N.

This approach aims to check the fewest number of possibilties as possible.

The code listing is below (Listing??).

Listing 7: The PerfNum function

```
function n = PerfNum (N)
     rootN = round(sqrt(N));
     currentOffset = 0;
     found = false;
     while (!found)
9
       perfects = [];
10
       for multiplier = [-1 \ 1]
11
         current = rootN + multiplier * currentOffset;
12
13
          [isPerf, currentSquared] = isPerfect(current);
14
15
         if (isPerf)
           perfects = [perfects, currentSquared];
16
17
18
19
        % Find the index of the perfect number closest to N
20
        [delta, indexOfClosest] = min(abs(N - perfects));
21
        if (indexOfClosest > 0)
23
         n = current;
24
25
         found = true;
26
       currentOffset = currentOffset + 1;
28
```

30 end

For the function the assumption in equation 4 is made. Hence the worst case performance of this function is when N is exactly between the two perfect numbers which have the most distance between them. We can fairly easily work out that these are 20316^2 & 22887^2 .

Let's try the worst case value of N, which we can work out from this is N = 468277312

```
1 tic();
2 PerfNum(468277312)
3 toc()

>> testWorstCase
ans = 22887
Elapsed time is 0.959387 seconds.
```

It's clear that the function in the very worst case still runs in under a second, hence for any valid input it will return in an acceptable amount of time.

4.4 Another specific example

The following shows the output of the PerfNum function with the input 360322019.

```
>> PerfNum(360322019)
ans = 19023
```

Appendix A Alternative is Lucky function

Listing 8: The alternative implementation of isLucky

```
function result = isLuckyAlternative(N)
     result = true;
3
     % Return false if N is even or prime
     if (mod(N, 2) == 0 || isprime(N))
       result = false;
       return;
9
     end
10
11
     primeFactors = factor(N);
     factorsCount = length(primeFactors);
12
     % Check has distinct prime factors
14
     if factorsCount != length(unique(primeFactors))
15
        result = false;
17
18
19
        % Check all factors divide N - 1
20
        for factor = primeFactors
21
           if (mod(N - 1, factor - 1) != 0)
22
              result = false;
              break;
24
```

```
26 end27 end28 end
```

Appendix B The int2Digits function

Listing 9: The int2Digits function

```
1 % Given a base 10 integer N, returns
2 % an array of it's digits
3 function digitsVector = int2Digits(N)
4
5 digitsVector = [];
6 while (N != 0)
7 digitsVector = [mod(N, 10), digitsVector];
8 N = floor(N / 10);
9 end
10 end
```

References

- [1] Weisstein, Eric W. "Euler-Mascheroni Constant." From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/Euler-MascheroniConstant.html Referenced: 22-02-2019
- [2] Weisstein, Eric W. "Carmichael Number." From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/CarmichaelNumber.html Referenced: 23-02-2019