

LE Machine Access to Third Party Payment System Description Document

V2.3

Version	Date	Written by	Description
V1.0	2017.11.6		
V1.1	2017.11.17		Revise sign
V1.2	2018.1.18		Correction of communication link
V1.3	2018.3.27		Adding and modifying security mechanisms
V1.4	2018.03.28		Add third party order ID
V1.5	2018.03.30		Revise APPKEY
V1.6	2018.04.28		Increasing third-party integral payment interface
V1.7			Fixed document structure
V1.8	2018.09.15		Amendment of Third Party Payment Method
V1.9	2018.11.06		32-39 is defined as third-party payment, using 36 by default.
V2.0	2018.11.10		Increase the original price of goods when acquiring the two-dimensional code of the third-party payment interface
V2.1	2019.01.05		Modified partial description
V2.2	2019.10.25		Modified partial words description
V2.3	2022.02.26		Add examples

1. Summary

This document can be further developed according to the specific business needs of the partners.
This document shall not be published without the confirmation and consent of both companies.

2. Noun Interpretation

Pick up code	Pickup code is a string of numbers
weburIA	Service provider's web QR code verification interface API interface
weburIB	The service provider's web sales confirmation notification
weburIC	The service provider's web obtains the payment result API interface
machid	Machine ID(11 bit characters)eg:99999999999
twocode	QR code
trackno	The track number (10 to 69 or other track identification number) actually corresponds to the number of vending machine pallet tracks for coffee machines and beverage machines starting from (01)
orderid	Order No. Characters less than 60bits
torderid	Third Party Order Number Recommendation Available without Special Needs


3.Functional description

4. Supported models and software versions

model	Software version
Inhand 070 screen vending machines	Software needs customization
Coffee machine	Software needs customization

5.communication mode

- character set: UTF-8
- Adopt http, post mode。
- Yile vending machine ->Operator Server

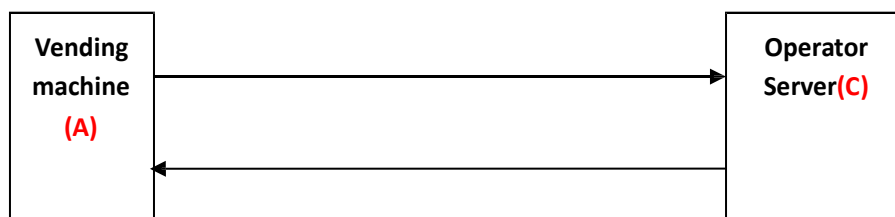

Vending machine:
terminal A Operator
Server: terminal C

6 .Interface specification

6.1 Obtaining Third Party Payment Code

Request URL	Transfer parameters (terminal A ---> terminal C)	returned value
http://weburlA	ver=v1(Interface version number) orderid=Order number (Less than 60 bits) machid=Machine ID Number trackno=Track number name=Trade name(UTF-8) price=Price(Set price*100) channelid=36 (32:Third party payment 33:Third party payment 34:Third party payment 35:Third party payment 36:Third party payment(default) 37:Third party payment 38:Third party payment 39:Third party payment) randstr=Random strings timestamp=201803271343 sign=Authentication signature	<pre>{ "orderid": "Return of original value", "torderid": "third-party system ID", "code": "0", "msg": "message content", "twocode": "lksajfddkjdsflsjfsalkj"} </pre> code(0 Indicates a failure, and needs to return when it fails. msg 1 indicates successful processing.) twocode:QR code data
sign :Authentication signature refer to Chapter 7 for authentication methods		
Official environmental address:		

Request example:

```
{
  "ver": "v1",
  "orderid": "0000000000722022615564401910140",
  "machid": "00000000007",
  "trackno": "15",
  "name": "可乐",
  "price": "400",

```

```

"channelid": "36",
"randstr": "pt9fygnwg68a6kctc",
"timestamp": "20220226155645",
"sign": "89fb5b7e3b319c57a4ca52bb0687565b862e39e3"
}

```

Return example:

```

{
  "code": "1",
  "orderid": "0000000000722022615564401910140",
  "torderid": "00000000007",
  "msg": "成功",
  "twocode": "
http://xxx/advertise.html?orderid=0000000000722022615564401910140&advurl=https://qr
.alipay.com/bax008886cy0lui4taof2570&goodsprice=0.01 "
}

```

6.2 Polling Payment Result Interface

Request URL	Transfer parameters (terminal A ---> terminal C)	returned value
http://weburlC	ver=v1 (Interface version number) orderid =Order number torderid=Order number(Third party ID) machid=Machine ID number channelid=Channel ID (See the 6.1 interface.) randstr=Random strings timestamp=201803271343 sign=Authentication signature	<pre>{"orderid":"return of original value", "torderid":"123", "code":"0", "msg":"message"}</pre>
		Code : 0 means failure, need to return msg when it fails Code :1 Consumer payment success Code :2 waiting for consumer payment Code :3 means the transaction has expired Code :4 means the transaction is closed Code:5 means the transaction has been completed
sign :Authentication signature refer to Chapter 7 for authentication methods		
The transaction validity time is set by a third party, and the requester can set a waiting time of 1-5 minutes without the consumer voluntarily withdrawing from the payment interface.		

6.3 Delivery success or failure notification interface

Request URL	Passing parameters (A end----> C end)	return value
http://weburlB	Ver=v1 (interface version number) Orderid = order number (less than 60digits) Torderid=order number (third party ID) Machid=machine ID number Trackno=track number Status=0 or 1 (0 Shipment failure 1 Shipment success) Errinfo=Error Message(UTF-8) Randstr=random string Timestamp=201803271343 Sign=certification signature	{"orderid ":"return of original value", "torderid":"123", "code":"0", "msg": "Message content"} Code : 0 means failure, need to return msg when it fails Code :1 handling success
sign :Authentication signature refer to Chapter 7 for authentication methods		

7. Authentication method

In order to prevent the interface from being maliciously invoked, the server needs to verify the data transmitted to the interface. The specific methods are as follows.:

1、 Each machine is assigned an ID (called machid) and a key (appkey). The key is a string consisting of 16 upper and lower case letters or numbers. Different machines have different machids and keys. Define can be written in code or configuration file before leaving the factory.

2、 There are three additional parameters to be transferred when calling any interface:

randstr: Random strings, also composed of 16 upper and lower case letters or numbers, should be regenerated every time the interface is called.

timestamp: Machine local Unix timestamp, with a global standard time error of no more than 2 minutes.

sign: signature, generated as follows:

1) Dictionary ordering of appkey, timestamp and randstr.

2) 'Sha1' encryption by splicing three parameter strings into one string

Here's an example of a machine request generating an order. For example, POST parameters are:

appkey 1234567890abcdef

randstr ok76oc1jkh2sy85o

timestamp 20190105144625

sign 81fd6a8d97e3b775828028371a0cc85d6678d39a

First, the three parameters of appkey, timestamp and randstr are sorted by dictionary order, and the string 1234567890abcdef 20190105144625 ok76oc1jkh2sy85o is obtained.

Then the string is encrypted by 'sha1', and the final signature is 81fd6a8d97e3b775828028371a0cc85d6678d39a.