School of Computing

Department of Computer Science and Engineering

ACADEMIC YEAR: 2025-26

(WINTER SEMESTER)

LAB RECORD

10211CS224 - Full Stack Application Development

NAME :B.SAMATHA REDDY

VTU.NO : VTU26586

REG.NO : 23UECS1025

BRANCH : CSE

YEAR/SEM : 3/6th

SLOT : E1

10211CS224 - Full Stack Application Development

TABLE OF CONTENTS

Task No	Date	Experiment Title
1.	05-01-2026	Student Registration System with Database Storage and Retrieval
2.	22-01-2026	Data Retrieval, Sorting, and Filtering Dashboard
3.	29-01-2026	Login System with Input Validation and Authentication
4.	02-02-2026	Order Management Using SQL Joins and Subqueries
5.	05-02-2026	Transaction-Based Payment Simulation Using COMMIT and ROLLBACK
6.	09-02-2026	Automated Logging Using Database Triggers and Views
7.	12-02-2026	Interactive Web Form Using JavaScript Events and Functions
8.	16-02-2026	Employee Management Using Spring Core and Dependency Injection
9.	19-02-2026	Spring MVC Application Using Annotation-Based Configuration
10.	23-02-2026	Student CRUD Operations Using Spring Boot and JPA
11.	26-02-2026	Data Access Using Spring Data JPA with Sorting and Pagination
12.	02-03-2026	RESTful API for Product Management Using Spring Boot
13.	05-03-2026	Exception Handling and Validation in RESTful Applications
14.	09-03-2026	Microservices Architecture with Service Decomposition
15.	16-03-2026	Service Registry and Discovery Using Eureka
16.	28-03-2026	API Gateway with Load Balancing for Microservices
17.	30-03-2026	Inter-Service Communication Using REST APIs
18.	02-04-2026	Unit Testing for Microservices Applications
19.	06-04-2026	Version Control Using Git and Remote Repositories
20.	08-04-2026	Git Branching, Merging, and Conflict Resolution
21.	13-04-2026	CI/CD Pipeline for Automated Build and Deployment
22.	16-04-2026	Cloud Service Providers Comparison and Pricing Models
23.	20-04-2026	Prompt Engineering for Code Generation Using Generative AI
24.	27-04-2026	Cloud-Based Application Using Vibe Coding and Generative AI
25.	30-04-2026	Use Cases

Task-1: Student Registration & Data Storage System

AIM: To develop a Student Registration System that allows users to enter, store, and manage student details efficiently using a web interface and a MySQL database.

ALGORITHM:

Step 1: Start

Step 2: Open the web application (index page)

Step 3: Display home page with option to go to registration page

Step 4: User navigates to the registration form

Step 5: User enters student details (like name, ID, course, etc.)

Step 6: Validate input fields

Check if fields are empty

Ensure correct data format

Step 7: Submit the form data to the server

Step 8: Server receives the data using Node.js

Step 9: Establish connection with MySQL database

If connection fails → display error

Else → proceed

Step 10: Insert student data into database table

Step 11: Confirm successful storage of data

Step 12: Display success message to user

Step 13: Allow user to view/manage stored data (if implemented)

Step 14: Stop

PROGRAM:

INDEX.HTML:

```
<!DOCTYPE html>
```

```html
<html>
<head>
<title>Student Portal</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<div class="home-container">
<h1>Welcome to Student Portal</h1>
<p>Register and manage student information easily.</p>
<a href="registration.html" class="start-btn">Go to Registration</a>
</div>
</body>
</html>
```

REGISTRATION.HTML:

```html
<!DOCTYPE html>
<html>
<head>
<title>Student Registration</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<div class="container">
<h1>Student Registration</h1>
<button onclick="goHome()" class="home-btn">Home</button>
<form id="studentForm">
<label>Name</label>
```

```
<input type="text" id="name" placeholder="Enter your name" required>
<label>Email</label>
<input type="email" id="email" placeholder="Enter your email" required>
<label>Date of Birth</label>
<input type="date" id="dob" required>
<label>Department</label>
<select id="department" required>
<option value="">Select Department</option>
<option>CSE</option>
<option>IT</option>
<option>ECE</option>
<option>MECH</option>
</select>
<label>Phone</label>
<input type="text" id="phone" placeholder="Enter phone number" required>
<button type="submit">Register</button>
</form>
</div>
<script src="script.js"></script>
</body>
</html>
```

STYLE.CSS:

```
body{
font-family: 'Segoe UI', sans-serif;
background: linear-gradient(135deg,#0f2027,#203a43,#2c5364);
height:100vh;
```

```
display:flex;
justify-content:center;
align-items:center;
margin:0;
}
.container{
width:420px;
padding:35px;
background:rgba(255,255,255,0.08);
border-radius:18px;
backdrop-filter: blur(10px);
box-shadow:0 10px 35px rgba(0,0,0,0.6);
}
h1{
text-align:center;
color:white;
margin-bottom:25px;
}
h2{
text-align:center;
color:white;
margin-top:30px;
}
form{
display:flex;
flex-direction:column;
```

```
}
label{
color:#ddd;
font-size:14px;
margin-bottom:5px;
margin-top:10px;
}
input,select{
width:100%;
padding:12px;
border:none;
border-radius:8px;
background:#27496d;
color:white;
font-size:14px;
outline:none;
margin-bottom:5px;
}
input:focus,select:focus{
box-shadow:0 0 8px #00eaff;
background:#2c5d8a;
}
button{
margin-top:15px;
padding:12px;
border:none;
```

```
border-radius:10px;
background:linear-gradient(45deg,#ff4b2b,#ff416c);
color:white;
font-size:16px;
font-weight:bold;
cursor:pointer;
transition:0.3s;
}
button:hover{
transform:scale(1.05);
box-shadow:0 0 15px #ff416c;
}
#studentList{
margin-top:15px;
text-align:center;
color:white;
font-size:15px;
}
.home-container{
text-align:center;
color:white;
background:rgba(255,255,255,0.08);
padding:50px;
border-radius:20px;
backdrop-filter: blur(10px);
box-shadow:0 10px 35px rgba(0,0,0,0.6);
```

```
width:420px;
}
.home-container h1{
font-size:32px;
margin-bottom:15px;
}
.home-container p{
margin-bottom:30px;
color:#ddd;
}
.start-btn{
text-decoration:none;
padding:12px 25px;
border-radius:10px;
background:linear-gradient(45deg,#ff4b2b,#ff416c);
color:white;
font-weight:bold;
transition:0.3s;
}
.start-btn:hover{
transform:scale(1.05);
box-shadow:0 0 15px #ff416c;
}
```

SCRIPT.JS:

```
const form = document.getElementById("studentForm")
```

```
form.addEventListener("submit", async (e) => {
e.preventDefault()
const student = {
name: document.getElementById("name").value,
email: document.getElementById("email").value,
dob: document.getElementById("dob").value,
department: document.getElementById("department").value,
phone: document.getElementById("phone").value
}
try{
const res = await fetch("http://localhost:3000/addStudent",{
method:"POST",
headers:{
"Content-Type":"application/json"
},
body:JSON.stringify(student)
})
const data = await res.text()
alert(data)
// clear form
form.reset()
}catch(error){
console.log("Error:",error)
}
})
function goHome(){
```

```
window.location.href="index.html"
}
```

SERVER.JS:

```
const express = require("express")
const cors = require("cors")
const path = require("path")
const db = require("./db")
const app = express()
app.use(cors())
app.use(express.json())
// Serve static files (HTML, CSS, JS)
app.use(express.static(__dirname))
// Redirect root link to index.html
app.get("/", (req, res) => {
   res.sendFile(path.join(__dirname, "index.html"))
})
// Insert student data
app.post("/addStudent", (req, res) => {
const {name,email,dob,department,phone} = req.body
const sql = "INSERT INTO students(name,email,dob,department,phone) VALUES (?,?,?,?,?)"
db.query(sql,[name,email,dob,department,phone],(err,result)=>{
if(err){
res.send(err)
}else{
res.send("Student Added Successfully")
```

```
}
})

})
// Get student data
app.get("/students",(req,res)=>{
db.query("SELECT * FROM students",(err,result)=>{
if(err){
res.send(err)
}else{
res.json(result)
}
})

})
// Start server
app.listen(3000,()=>{
console.log("Server running at: http://localhost:3000")
})
```

DB.JS:

```
const mysql = require("mysql")
const db = mysql.createConnection({
host: "localhost",
user: "root",
password: "fahi",
```

```
database: "studentdb"
})
db.connect((err)=>{
if(err){
console.log("Database Error:", err)
}else{
console.log("MySQL Connected Successfully")
}
})
module.exports = db
```

OUTPUTS:

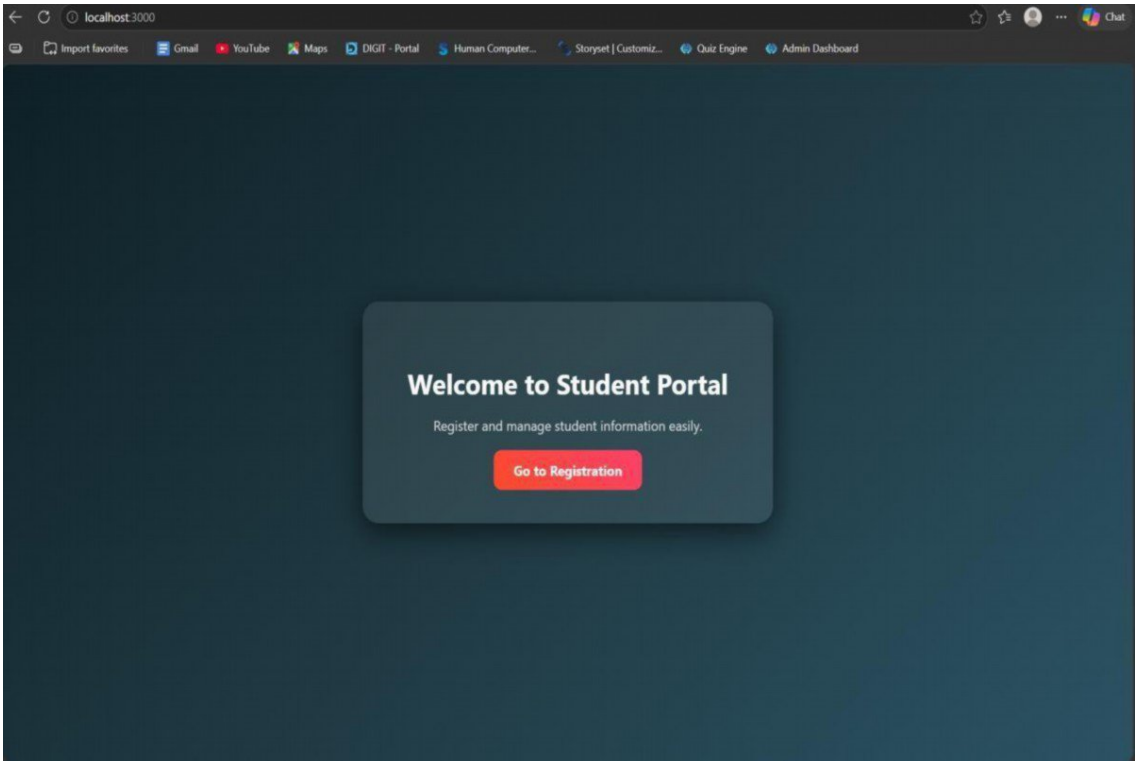

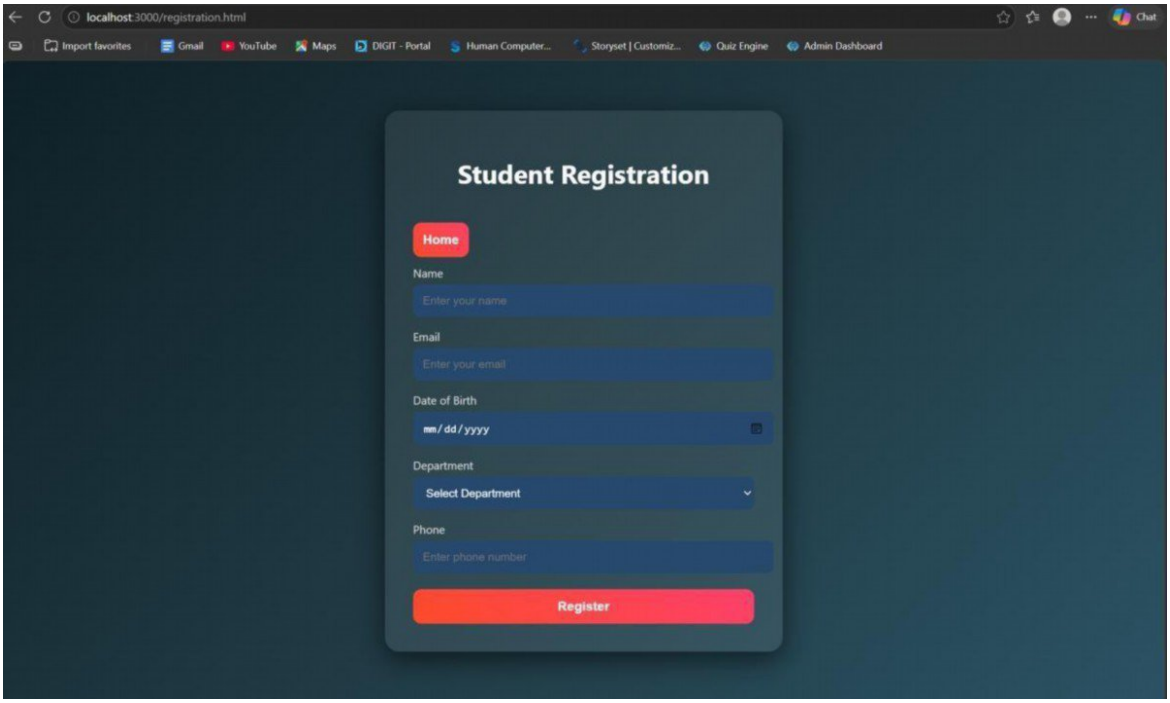

RESULT: The student registration system was successfully developed to store and manage student data using a web interface and MySQL database**.**

TASK2: **Data Retrieval & Sorting Dashboard**

AIM: To develop a web-based dashboard that allows users to store, retrieve, and display student data efficiently from a database, and present it in a structured format for easy access and management.

ALGORITHM:

1. Start the application
2. Initialize the server using Express framework
3. Establish database connection using MySQL
4. Load frontend pages (HTML, CSS, JS) in browser

➤ Data Insertion Process:

5. User enters student details (Name, Email, DOB, Department, Phone)
6. Send data to backend using POST request (/addStudent)
7. Execute SQL query to insert data into database
8. Display success message after insertion

➤ Data Retrieval Process:

9. Send GET request to server (/students)
10. Fetch all student records from database
11. Convert data into JSON format
12. Display data dynamically in dashboard table.
13. Arrange data in structured format (table/grid)
14. Allow better readability and management
15. Stop.

PROGRAM:

INDEX.HTML:

```
<!DOCTYPE html>
<html>
```

```
<head>
<title>Student Portal</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<div class="home-container">
<h1>Welcome to Student Portal</h1>
<p>Register and manage student information easily.</p>
<a href="registration.html" class="start-btn">Go to Registration</a>
<a href="dashboard.html" class="start-btn">View Dashboard</a>
</div>
</body>
</html>
```

REGISTRATION.HTML:

```
<!DOCTYPE html>
<html>
<head>
<title>Student Registration</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<div class="container">
<h1>Student Registration</h1>
<button onclick="goHome()" class="home-btn">Home</button>
<form id="studentForm">
```

```
<label>Name</label>
<input type="text" id="name" placeholder="Enter your name" required>
<label>Email</label>
<input type="email" id="email" placeholder="Enter your email" required>
<label>Date of Birth</label>
<input type="date" id="dob" required>
<label>Department</label>
<select id="department" required>
<option value="">Select Department</option>
<option>CSE</option>
<option>IT</option>
<option>ECE</option>
<option>MECH</option>
</select>
<label>Phone</label>
<input type="text" id="phone" placeholder="Enter phone number" required>
<button type="submit">Register</button>
</form>
</div>
<script src="script.js"></script>
</body>
</html>
```

DASHBOARD.HTML:

```
<!DOCTYPE html>
<html>
```

```
<head>
<title>Student Dashboard</title>
<link rel="stylesheet" href="dashboard.css">
</head>
<body>
<div class="container">
<button onclick="goHome()" class="home-btn">Home</button>
<h1>Student Dashboard</h1>
<div class="controls">
<select id="sortSelect">
<option value="">Sort By</option>
<option value="name">Name</option>
<option value="dob">Date of Birth</option>
</select>
<select id="departmentFilter">
<option value="">Filter by Department</option>
<option value="CSE">CSE</option>
<option value="IT">IT</option>
<option value="ECE">ECE</option>
<option value="MECH">MECH</option>
</select>
<button onclick="loadStudents()">Apply</button>
</div>
<table>
<thead>
<tr>
```

```
<th>ID</th>
<th>Name</th>
<th>Email</th>
<th>DOB</th>
<th>Department</th>
<th>Phone</th>
</tr>
</thead>
<tbody id="studentTable"></tbody>
</table>
<h2>Department Count</h2>
<div id="deptCount"></div>
</div>
<script src="dashboard.js"></script>
<script>
function goHome(){
window.location.href = "index.html"
}
</script>
</body>
</html>
```

STYLE.CSS:

```
body{
font-family: 'Segoe UI', sans-serif;
background: linear-gradient(135deg,#0f2027,#203a43,#2c5364);
```

```
height:100vh;
display:flex;
justify-content:center;
align-items:center;
margin:0;
}

.container{
width:420px;
padding:35px;
background:rgba(255,255,255,0.08);
border-radius:18px;
backdrop-filter: blur(10px);
box-shadow:0 10px 35px rgba(0,0,0,0.6);
}

h1{
text-align:center;
color:white;
margin-bottom:25px;
}

h2{
text-align:center;
color:white;
margin-top:30px;
```

```
}

form{
display:flex;
flex-direction:column;
}

label{
color:#ddd;
font-size:14px;
margin-bottom:5px;
margin-top:10px;
}

input,select{
width:100%;
padding:12px;
border:none;
border-radius:8px;
background:#27496d;
color:white;
font-size:14px;
outline:none;
margin-bottom:5px;
}
```

```
input:focus,select:focus{
box-shadow:0 0 8px #00eaff;
background:#2c5d8a;
}

button{
margin-top:15px;
padding:12px;
border:none;
border-radius:10px;
background:linear-gradient(45deg,#ff4b2b,#ff416c);
color:white;
font-size:16px;
font-weight:bold;
cursor:pointer;
transition:0.3s;
}

button:hover{
transform:scale(1.05);
box-shadow:0 0 15px #ff416c;
}

#studentList{
margin-top:15px;
text-align:center;
```

```
color:white;
font-size:15px;
}
.home-container{
text-align:center;
color:white;
background:rgba(255,255,255,0.08);
padding:50px;
border-radius:20px;
backdrop-filter: blur(10px);
box-shadow:0 10px 35px rgba(0,0,0,0.6);
width:420px;
}

.home-container h1{
font-size:32px;
margin-bottom:15px;
}

.home-container p{
margin-bottom:30px;
color:#ddd;
}

.start-btn{
text-decoration:none;
```

```
padding:12px 25px;
border-radius:10px;
background:linear-gradient(45deg,#ff4b2b,#ff416c);
color:white;
font-weight:bold;
transition:0.3s;
}

.start-btn:hover{
transform:scale(1.05);
box-shadow:0 0 15px #ff416c;
}
```

DASHBOARD.CSS:

```
body{
font-family:Segoe UI;
background:linear-gradient(135deg,#0f2027,#203a43,#2c5364);
margin:0;
padding:0;
display:flex;
justify-content:center;
}

.container{
width:900px;
margin-top:40px;
```

```
background:rgba(255,255,255,0.08);
padding:30px;
border-radius:15px;
backdrop-filter:blur(10px);
color:white;
}

h1{
text-align:center;
margin-bottom:20px;
}

.controls{
display:flex;
gap:10px;
margin-bottom:20px;
}

select,button{
padding:10px;
border:none;
border-radius:6px;
}

button{
background:#ff416c;
```

```
color:white;
cursor:pointer;
}

table{
width:100%;
border-collapse:collapse;
background:rgba(255,255,255,0.1);
}

th,td{
padding:10px;
text-align:center;
}

th{
background:#1f4068;
}

tr:nth-child(even){
background:rgba(255,255,255,0.05);
}

#deptCount{
margin-top:15px;
font-size:16px;
```

```
}
.home-btn{
padding:8px 16px;
border:none;
border-radius:6px;
background:#00c6ff;
color:white;
cursor:pointer;
margin-bottom:10px;
}
```

SCRIPT.JS:

```
const form = document.getElementById("studentForm")
form.addEventListener("submit", async (e) => {
e.preventDefault()
const student = {
name: document.getElementById("name").value,
email: document.getElementById("email").value,
dob: document.getElementById("dob").value,
department: document.getElementById("department").value,
phone: document.getElementById("phone").value
}
try{
const res = await fetch("http://localhost:3000/addStudent",{
method:"POST",
headers:{
```

```
"Content-Type":"application/json"
},
body:JSON.stringify(student)
})
const data = await res.text()
alert(data)
// clear form
form.reset()
}catch(error){
console.log("Error:",error)
}
})
function goHome(){
window.location.href="index.html"
}
```

SERVER.JS:

```
const express = require("express")
const cors = require("cors")
const path = require("path")
const db = require("./db")
const app = express()
app.use(cors())
app.use(express.json())
// Serve static files (HTML, CSS, JS)
app.use(express.static(__dirname))
```

```
// Redirect root link to index.html
app.get("/", (req, res) => {
   res.sendFile(path.join(__dirname, "index.html"))
})
// Insert student data
app.post("/addStudent", (req, res) => {
const {name,email,dob,department,phone} = req.body
const sql = "INSERT INTO students(name,email,dob,department,phone) VALUES (?,?,?,?,?)"
db.query(sql,[name,email,dob,department,phone],(err,result)=>{
if(err){
res.send(err)
}else{
res.send("Student Added Successfully")
}
})

})
// Get student data
app.get("/students",(req,res)=>{
db.query("SELECT * FROM students",(err,result)=>{
if(err){
res.send(err)
}else{
res.json(result)
}
})
```

```
})
// Start server
app.listen(3000,()=>{
console.log("Server running at: http://localhost:3000")
})
```

DB.JS:

```
 const mysql = require("mysql")
const db = mysql.createConnection({
host: "localhost",
user: "root",
password: "fahi",
database: "studentdb"
})
db.connect((err)=>{
if(err){
console.log("Database Error:", err)
}else{
console.log("MySQL Connected Successfully")
}
})
module.exports = db
```

OUTPUTS:

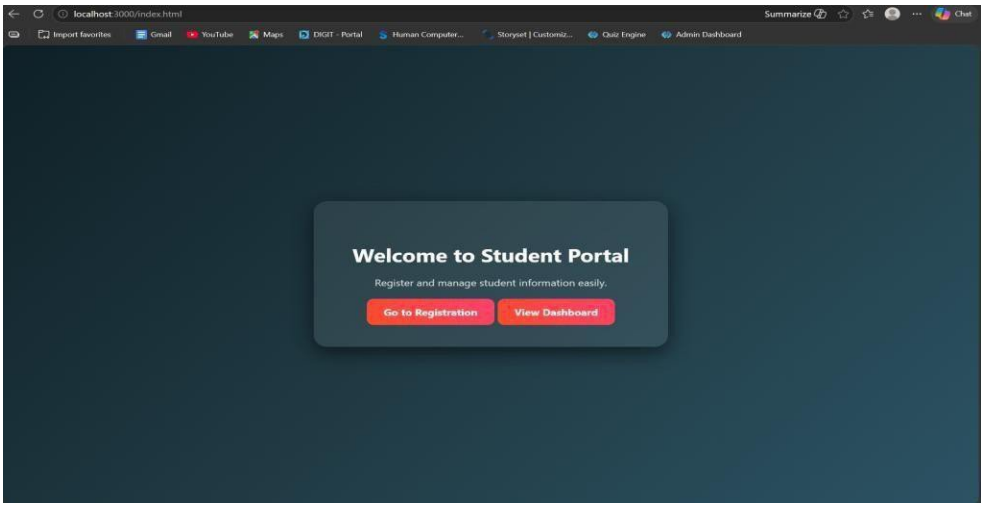

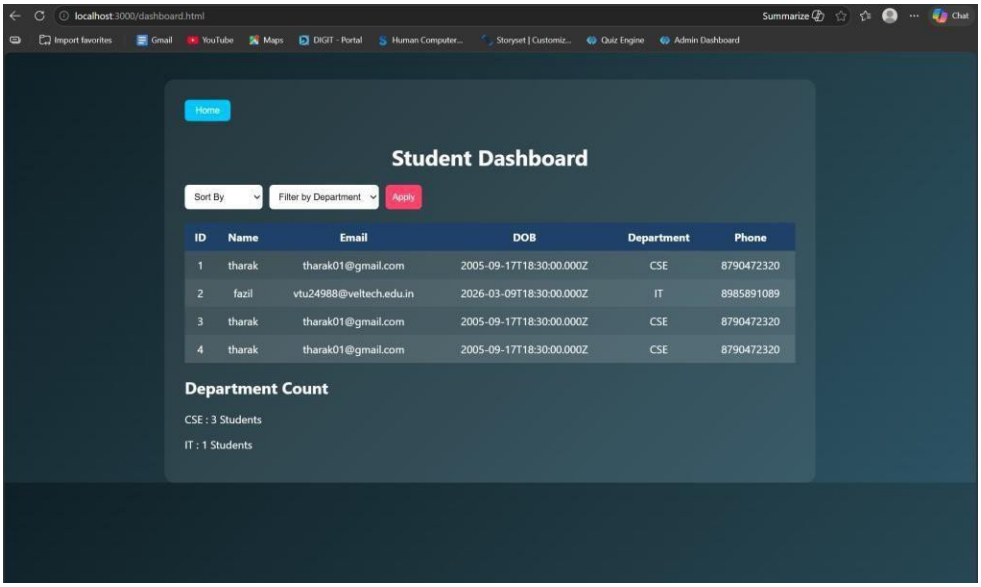

RESULT: The system successfully stores, retrieves, and displays student data efficiently through a user-friendly dashboard.

TASK3: : Login System with Validation

AIM: To develop a secure login system that validates user credentials (username and password) and allows access only to authorized users.

ALGORITHM:

1. Start the application
2. Display login form (Username & Password fields)
3. User enters login credentials
4. Perform input validation:
    - Check if fields are empty
    - Validate email format (if applicable)
    - Ensure password meets required criteria
5. Send login data to backend server
6. Server receives request and processes input
7. Compare entered credentials with database records
8. If credentials match:
    - Grant access and redirect to dashboard
9. Else:
    - Display error message (“Invalid Username/Password”)
10. End process

PROGRAM:

INDEX.HTML:

```
<!DOCTYPE html>
<html>
```

```
<head>
<title>Student Portal</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<div class="home-container">
<h1>Welcome to Student Portal</h1>
<p>Register and manage student information easily.</p>
<a href="registration.html" class="start-btn">Go to Registration</a>
<a href="dashboard.html" class="start-btn">View Dashboard</a>
</div>
</body>
</html>
```

DASHBOARD.HTML:

```
<!DOCTYPE html>
<html>
<head>
<title>Student Dashboard</title>
<link rel="stylesheet" href="dashboard.css">
</head>
<body>
<div class="container">
<button onclick="goHome()" class="home-btn">Home</button>
<h1>Student Dashboard</h1>
<div class="controls">
```

```
<select id="sortSelect">
<option value="">Sort By</option>
<option value="name">Name</option>
<option value="dob">Date of Birth</option>
</select>
<select id="departmentFilter">
<option value="">Filter by Department</option>
<option value="CSE">CSE</option>
<option value="IT">IT</option>
<option value="ECE">ECE</option>
<option value="MECH">MECH</option>
</select>
<button onclick="loadStudents()">Apply</button>
</div>
<table>
<thead>
<tr>
<th>ID</th>
<th>Name</th>
<th>Email</th>
<th>DOB</th>
<th>Department</th>
<th>Phone</th>
</tr>
</thead>
<tbody id="studentTable"></tbody>
```

```
</table>
<h2>Department Count</h2>
<div id="deptCount"></div>
</div>
<script src="dashboard.js"></script>
<script>
function goHome(){
window.location.href = "index.html"
}
</script>
</body>
</html>
```

LOGIN.HTML:

```
<!DOCTYPE html>
<html>
<head>
<title>Login</title>
<link rel="stylesheet" href="login.css">
</head>
<body>
<div class="login-container">
<h1>Login</h1>
<form id="loginForm">
<label>Username</label>
<input type="text" id="username">
```

```
<label>Password</label>
<input type="password" id="password">
<p id="errorMsg"></p>
<button type="submit">Login</button>
</form>
</div>
<script src="login.js"></script>
</body>
</html>
```

REGISTRATION.HTML:

```
<!DOCTYPE html>
<html>
<head>
<title>Student Registration</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<div class="container">
<h1>Student Registration</h1>
<button onclick="goHome()" class="home-btn">Home</button>
<form id="studentForm">
<label>Name</label>
<input type="text" id="name" placeholder="Enter your name" required>
<label>Email</label>
<input type="email" id="email" placeholder="Enter your email" required>
```

```
<label>Date of Birth</label>
<input type="date" id="dob" required>
<label>Department</label>
<select id="department" required>
<option value="">Select Department</option>
<option>CSE</option>
<option>IT</option>
<option>ECE</option>
<option>MECH</option>
</select>
<label>Phone</label>
<input type="text" id="phone" placeholder="Enter phone number" required>
<button type="submit">Register</button>
</form>
</div>
<script src="script.js"></script>
</body>
</html>
```

STYLE.CSS:

```
body{
font-family: 'Segoe UI', sans-serif;
background: linear-gradient(135deg,#0f2027,#203a43,#2c5364);
height:100vh;
display:flex;
justify-content:center;
```

```
align-items:center;
margin:0;
}

.container{
width:420px;
padding:35px;
background:rgba(255,255,255,0.08);
border-radius:18px;
backdrop-filter: blur(10px);
box-shadow:0 10px 35px rgba(0,0,0,0.6);
}

h1{
text-align:center;
color:white;
margin-bottom:25px;
}

h2{
text-align:center;
color:white;
margin-top:30px;
}

form{
```

```
display:flex;
flex-direction:column;
}

label{
color:#ddd;
font-size:14px;
margin-bottom:5px;
margin-top:10px;
}

input,select{
width:100%;
padding:12px;
border:none;
border-radius:8px;
background:#27496d;
color:white;
font-size:14px;
outline:none;
margin-bottom:5px;
}

input:focus,select:focus{
box-shadow:0 0 8px #00eaff;
background:#2c5d8a;
```

```
}

button{
margin-top:15px;
padding:12px;
border:none;
border-radius:10px;
background:linear-gradient(45deg,#ff4b2b,#ff416c);
color:white;
font-size:16px;
font-weight:bold;
cursor:pointer;
transition:0.3s;
}

button:hover{
transform:scale(1.05);
box-shadow:0 0 15px #ff416c;
}

#studentList{
margin-top:15px;
text-align:center;
color:white;
font-size:15px;
}
```

```
.home-container{
text-align:center;
color:white;
background:rgba(255,255,255,0.08);
padding:50px;
border-radius:20px;
backdrop-filter: blur(10px);
box-shadow:0 10px 35px rgba(0,0,0,0.6);
width:420px;
}

.home-container h1{
font-size:32px;
margin-bottom:15px;
}

.home-container p{
margin-bottom:30px;
color:#ddd;
}

.start-btn{
text-decoration:none;
padding:12px 25px;
border-radius:10px;
background:linear-gradient(45deg,#ff4b2b,#ff416c);
```

```
color:white;
font-weight:bold;
transition:0.3s;
}

.start-btn:hover{
transform:scale(1.05);
box-shadow:0 0 15px #ff416c;
}
```

SERVER.JS:

```
const express = require("express")
const cors = require("cors")
const path = require("path")
const db = require("./db")
const app = express()
app.use(cors())
app.use(express.json())
app.use(express.urlencoded({ extended: true }))
// Disable default index.html loading
app.use(express.static(__dirname, { index: false }))
// ==========================
// OPEN LOGIN PAGE FIRST
// ==========================
app.get("/", (req, res) => {
res.sendFile(path.join(__dirname, "login.html"))
```

```
})
// ==========================
// LOGIN SYSTEM
// ==========================
app.post("/login",(req,res)=>{
const {username,password} = req.body
const sql = "SELECT * FROM users WHERE username=? AND password=?"
db.query(sql,[username,password],(err,result)=>{
if(err){
res.send("error")
return
}
if(result.length > 0){
res.send("success")
}else{
res.send("fail")
}
})
})
// ==========================
// STUDENT REGISTRATION
// ==========================
app.post("/addStudent",(req,res)=>{
const {name,email,dob,department,phone} = req.body
const sql = "INSERT INTO students(name,email,dob,department,phone) VALUES (?,?,?,?,?)"
db.query(sql,[name,email,dob,department,phone],(err,result)=>{
```

```
if(err){
res.send(err)
}else{
res.send("Student Added Successfully")
}

})

})
// ==========================
// GET STUDENTS (Dashboard)
// ==========================

app.get("/students",(req,res)=>{

db.query("SELECT * FROM students",(err,result)=>{

if(err){
res.send(err)
}else{
res.json(result)
}

})

})
```

```
// ==========================
// START SERVER
// ==========================
app.listen(3000,()=>{
console.log("Server running at: http://localhost:3000")
})
```

OUTPUTS:

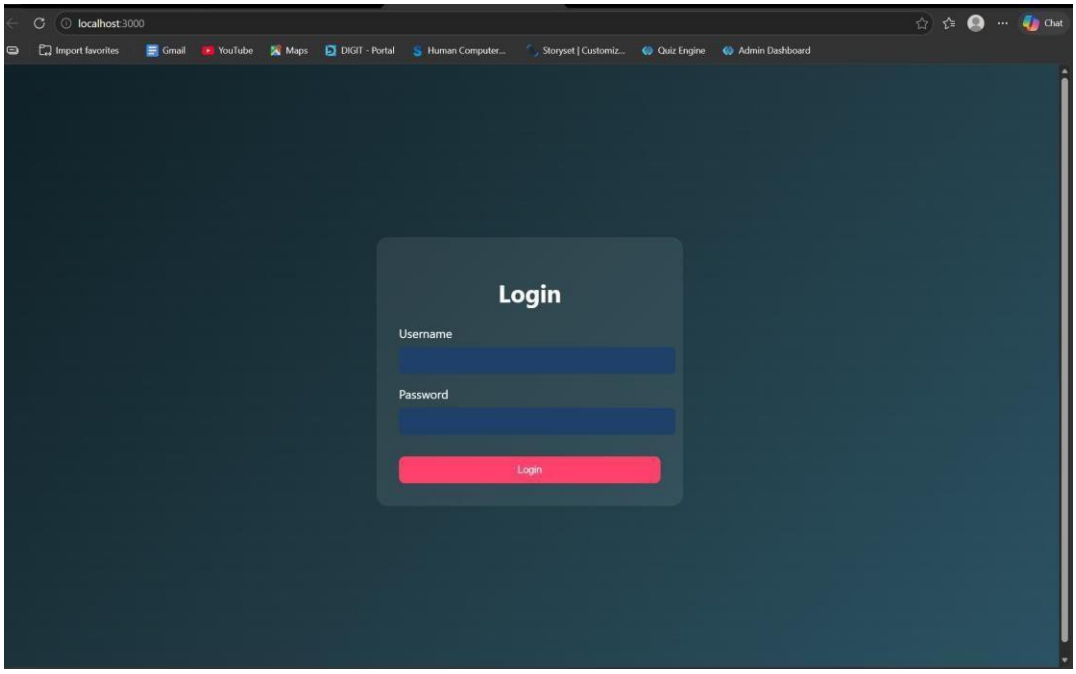

RESULT: The system successfully validates user credentials and grants access only to authorized users while preventing invalid logins**.**

TASK4: Order Management using Joins

AIM: To design and implement an order management system using SQL joins and subqueries to efficiently retrieve and analyze customer, product, and order data.

ALGORITHM:

1. Start the process
2. Create database tables:
    - Customers (CustomerID, Name, etc.)
    - Products (ProductID, ProductName, Price)
    - Orders (OrderID, CustomerID, ProductID, Quantity, TotalAmount)
3. Insert sample data into all tables

➤ Data Retrieval using Joins:

4. Use SQL JOIN queries to combine data from Customers, Orders, and Products
5. Display customer order history with details (Name, Product, Quantity, Total Amount)

➤ Subquery for Analysis:

6. Use subquery to find the highest value order
7. Use subquery with GROUP BY to find the most active customer (maximum number of orders)

➤ Sorting:

8. Apply ORDER BY clause to sort results (e.g., highest order value first)
9. Display results in structured format (table/UI with CSS if frontend used)
10. Stop

PROGRAM:

INDEX.HTML:

```
<!DOCTYPE html>
<html>
<head>
<title>Login</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<div class="login">
<h2>Admin Login</h2>
<input type="text" id="username" placeholder="Username">
<input type="password" id="password" placeholder="Password">
<button onclick="login()">Login</button>
</div>
<script src="script.js"></script>
</body>
</html>
```

ADMINDASHBOARD.HTML:

```
<!DOCTYPE html>
<html>
<head>
<title>Order Dashboard</title>
<link rel="stylesheet" href="style.css">
```

```
</head>
<body>
<!-- NAVBAR -->
<div class="navbar">
<h2>Order Management</h2>
<a href="index.html">
<button class="logout-btn">Logout</button>
</a>
</div>
<h1>Order Management Dashboard</h1>
<!-- CARDS SECTION -->
<div class="grid">
<!-- Add Customer -->
<div class="card">
<h3>Add Customer</h3>
<input id="cname" placeholder="Customer Name">
<input id="cemail" placeholder="Email">
<button onclick="addCustomer()">Add Customer</button>
</div>
<!-- Add Product -->
<div class="card">
<h3>Add Product</h3>
<input id="pname" placeholder="Product Name">
<input id="pprice" placeholder="Price">
<button onclick="addProduct()">Add Product</button>
</div>
```

```
<!-- Place Order -->
<div class="card">
<h3>Place Order</h3>
<select id="customerSelect">
<option value="">Select Customer</option>
</select>
<select id="productSelect">
<option value="">Select Product</option>
</select>
<input id="qty" placeholder="Quantity">
<button onclick="placeOrder()">Place Order</button>
</div>
</div>
<!-- ACTION BUTTONS -->
<div class="actions">
<button onclick="loadOrders()">Order History</button>
<button onclick="highestOrder()">Highest Order</button>
<button onclick="activeCustomer()">Most Active Customer</button>
</div>
<!-- RESULT AREA -->
<div id="result"></div>
<script src="script.js"></script>
</body>
</html>
```

STYLE.CSS:

```
*{
margin:0;
padding:0;
box-sizing:border-box;
font-family: 'Segoe UI', Tahoma, Geneva, Verdana, sans-serif;
}

body{
background: linear-gradient(135deg,#5f6caf,#9a6bff);
min-height:100vh;
display:flex;
flex-direction:column;
align-items:center;
}

/* LOGIN PAGE */

.login{
width:350px;
padding:40px;
margin-top:120px;
background:white;
border-radius:15px;
box-shadow:0 10px 25px rgba(0,0,0,0.2);
text-align:center;
}
```

```
.login h2{
margin-bottom:20px;
color:#333;
}

.login input{
width:100%;
padding:12px;
margin:10px 0;
border:1px solid #ccc;
border-radius:8px;
outline:none;
}

.login button{
width:100%;
padding:12px;
border:none;
background:#5f6caf;
color:white;
font-weight:bold;
border-radius:8px;
cursor:pointer;
transition:0.3s;
}
```

```
.login button:hover{
background:#7c4dff;
}

/* DASHBOARD TITLE */

h1{
margin-top:30px;
margin-bottom:25px;
color:white;
}

/* CARD GRID */

.grid{
display:flex;
gap:25px;
flex-wrap:wrap;
justify-content:center;
margin-bottom:20px;
}

/* CARDS */

.card{
```

```
width:260px;
padding:22px;
border-radius:15px;
box-shadow:0 8px 20px rgba(0,0,0,0.2);
text-align:center;
transition:0.3s;
color:white;
}

/* Different card colors */

.card:nth-child(1){
background:linear-gradient(135deg,#ff7a18,#ffb347);
}

.card:nth-child(2){
background:linear-gradient(135deg,#00c6ff,#0072ff);
}

.card:nth-child(3){
background:linear-gradient(135deg,#43e97b,#38f9d7);
color:#222;
}

.card:hover{
transform:translateY(-6px);
```

```
}

.card h3{
margin-bottom:10px;
}

/* INPUTS */

.card input{
width:90%;
padding:10px;
margin:6px;
border-radius:6px;
border:none;
}

/* CARD BUTTON */

.card button{
padding:10px 15px;
border:none;
background:white;
color:#333;
border-radius:6px;
cursor:pointer;
font-weight:bold;
```

```
transition:0.3s;
}

.card button:hover{
background:#f1f1f1;
}

/* ACTION BUTTONS */

button{
margin:10px;
padding:12px 18px;
border:none;
border-radius:6px;
background:#ffffff;
color:#333;
font-weight:bold;
cursor:pointer;
transition:0.3s;
}

button:hover{
background:#eaeaea;
}

/* TABLE */
```

```
table{
width:85%;
margin:auto;
margin-top:30px;
border-collapse:collapse;
background:white;
border-radius:12px;
overflow:hidden;
box-shadow:0 5px 15px rgba(0,0,0,0.2);
}

th{
background:#5f6caf;
color:white;
padding:14px;
font-size:18px;
}

td{
padding:12px;
text-align:center;
border-bottom:1px solid #ddd;
color:#222;
font-weight:500;
}
```

```
tr:nth-child(even){
background:#f7f7f7;
}

tr:hover{
background:#eef1ff;
}

/* RESULT TEXT */

#result{
margin-top:20px;
color:white;
font-size:18px;
text-align:center;
}
/* NAVBAR */

.navbar{

width:100%;
display:flex;
justify-content:space-between;
align-items:center;
padding:15px 40px;
```

```
background:#2c2f5c;
color:white;
box-shadow:0 4px 10px rgba(0,0,0,0.2);

}

.navbar h2{
font-weight:600;
}

.logout-btn{

background:#ff5252;
color:white;
border:none;
padding:10px 16px;
border-radius:6px;
cursor:pointer;
font-weight:bold;

}

.logout-btn:hover{

background:#ff1744;
```

```
}
.actions{

display:flex;
justify-content:center;
gap:20px;
margin-top:30px;
flex-wrap:wrap;

}
.actions button{
padding:12px 20px;
font-size:16px;
border:none;
border-radius:8px;
background:#5f6caf;
color:white;
cursor:pointer;
transition:0.3s;
}
.actions button:hover{
background:#7c4dff;
transform:scale(1.05);

}
```

SCRIPT.JS:

```
// LOGIN FUNCTION

function login(){

const username=document.getElementById("username").value
const password=document.getElementById("password").value

fetch("/login",{

method:"POST",
headers:{"Content-Type":"application/json"},

body:JSON.stringify({username,password})

})

.then(res=>res.json())

.then(data=>{

if(data.success){

window.location="admindashboard.html"
}else{
alert("Invalid login")
```

```
}
})

}
// ADD CUSTOMER

function addCustomer(){

fetch("/add-customer",{

method:"POST",
headers:{"Content-Type":"application/json"},

body:JSON.stringify({

name:document.getElementById("cname").value,
email:document.getElementById("cemail").value

})

})

.then(res=>res.text())
.then(alert)

}
```

```
// ADD PRODUCT

function addProduct(){

fetch("/add-product",{

method:"POST",
headers:{"Content-Type":"application/json"},

body:JSON.stringify({

product:document.getElementById("pname").value,
price:document.getElementById("pprice").value

})

})

.then(res=>res.text())
.then(alert)

}


// LOAD CUSTOMERS INTO DROPDOWN
```

```
async function loadCustomers(){

const res = await fetch("/customers")
const data = await res.json()

let select=document.getElementById("customerSelect")

if(!select) return

select.innerHTML='<option value="">Select Customer</option>'

data.forEach(c=>{

select.innerHTML+=`<option value="${c.id}">${c.name}</option>`

})

}


// LOAD PRODUCTS INTO DROPDOWN

async function loadProducts(){

const res = await fetch("/products")
```

```
const data = await res.json()

let select=document.getElementById("productSelect")

if(!select) return

select.innerHTML='<option value="">Select Product</option>'

data.forEach(p=>{

select.innerHTML+=`<option value="${p.id}">${p.product_name}</option>`

})

}


// PLACE ORDER

function placeOrder(){

fetch("/place-order",{

method:"POST",
headers:{"Content-Type":"application/json"},
```

```
body:JSON.stringify({

customer_id:document.getElementById("customerSelect").value,
product_id:document.getElementById("productSelect").value,
quantity:document.getElementById("qty").value

})

})

.then(res=>res.text())
.then(alert)

}


// ORDER HISTORY (JOIN)

async function loadOrders(){

const res=await fetch("/orders")
const data=await res.json()

let
html="<table><tr><th>Customer</th><th>Product</th><th>Price</th><th>Qty</th><th>Total<
/th></tr>"
```

```
data.forEach(o=>{

html+=`

<tr>

<td>${o.name}</td>
<td>${o.product_name}</td>
<td>${o.price}</td>
<td>${o.quantity}</td>
<td>${o.total}</td>

</tr>

`

})

html+="</table>"

document.getElementById("result").innerHTML=html

}


// HIGHEST ORDER (SUBQUERY)
```

```
async function highestOrder(){

const res=await fetch("/highest-order")
const data=await res.json()

document.getElementById("result").innerHTML=

`<h2>Highest Order</h2>

${data[0].name} - ₹${data[0].total}`

}


// MOST ACTIVE CUSTOMER

async function activeCustomer(){

const res=await fetch("/active-customer")
const data=await res.json()

document.getElementById("result").innerHTML=

`<h2>Most Active Customer</h2>
```

```
${data[0].name} (${data[0].total_orders} orders)`

}


// AUTO LOAD DROPDOWNS WHEN PAGE LOADS

window.onload=function(){

loadCustomers()
loadProducts()

}
```

SERVER.JS:

```
const express=require("express")
const db=require("./db")

const app=express()

app.use(express.json())
app.use(express.static(__dirname))

// LOGIN

app.post("/login",(req,res)=>{
```

```
const {username,password}=req.body

const sql="SELECT * FROM users WHERE username=? AND password=?"

db.query(sql,[username,password],(err,result)=>{

if(err) throw err

if(result.length>0){
res.json({success:true})
}else{
res.json({success:false})
}

})

})

// ADD CUSTOMER

app.post("/add-customer",(req,res)=>{

const {name,email}=req.body
```

```
const sql="INSERT INTO customers(name,email) VALUES(?,?)"

db.query(sql,[name,email],(err)=>{

if(err) throw err

res.send("Customer Added Successfully")

})

})


// ADD PRODUCT

app.post("/add-product",(req,res)=>{

const {product,price}=req.body

const sql="INSERT INTO products(product_name,price) VALUES(?,?)"

db.query(sql,[product,price],(err)=>{

if(err) throw err

res.send("Product Added Successfully")
```

```
})

})

// GET CUSTOMERS (for dropdown)

app.get("/customers",(req,res)=>{

const sql="SELECT * FROM customers"

db.query(sql,(err,result)=>{

if(err) throw err

res.json(result)

})

})

// GET PRODUCTS (for dropdown)

app.get("/products",(req,res)=>{
```

```
const sql="SELECT * FROM products"

db.query(sql,(err,result)=>{

if(err) throw err

res.json(result)

})

})

// PLACE ORDER

app.post("/place-order",(req,res)=>{

const {customer_id,product_id,quantity}=req.body

const sql="INSERT INTO orders(customer_id,product_id,quantity) VALUES(?,?,?)"

db.query(sql,[customer_id,product_id,quantity],(err)=>{

if(err) throw err

res.send("Order Placed Successfully")
```

```
})

})
// ORDER HISTORY (JOIN)

app.get("/orders",(req,res)=>{

const sql=`

SELECT customers.name,
products.product_name,
products.price,
orders.quantity,
(products.price * orders.quantity) AS total

FROM orders

JOIN customers
ON orders.customer_id = customers.id

JOIN products
ON orders.product_id = products.id

ORDER BY orders.order_date DESC

`
```

```
db.query(sql,(err,result)=>{

if(err) throw err

res.json(result)

})

})

// HIGHEST VALUE ORDER (SUBQUERY)

app.get("/highest-order",(req,res)=>{

const sql=`

SELECT customers.name,
(products.price * orders.quantity) AS total

FROM orders

JOIN customers
ON orders.customer_id = customers.id

JOIN products
ON orders.product_id = products.id
```

```
WHERE (products.price * orders.quantity) =

(
SELECT MAX(products.price * orders.quantity)
FROM orders
JOIN products
ON orders.product_id = products.id
)

`

db.query(sql,(err,result)=>{

if(err) throw err

res.json(result)

})

})

// MOST ACTIVE CUSTOMER

app.get("/active-customer",(req,res)=>{
```

```
const sql=`

SELECT customers.name,
COUNT(orders.id) AS total_orders

FROM customers

JOIN orders
ON customers.id = orders.customer_id

GROUP BY customers.id

ORDER BY total_orders DESC

LIMIT 1

`

db.query(sql,(err,result)=>{

if(err) throw err

res.json(result)

})
```

```
})

// START SERVER

app.listen(3000,()=>{

console.log("Server running at http://localhost:3000")

})
```

OUTPUTS:

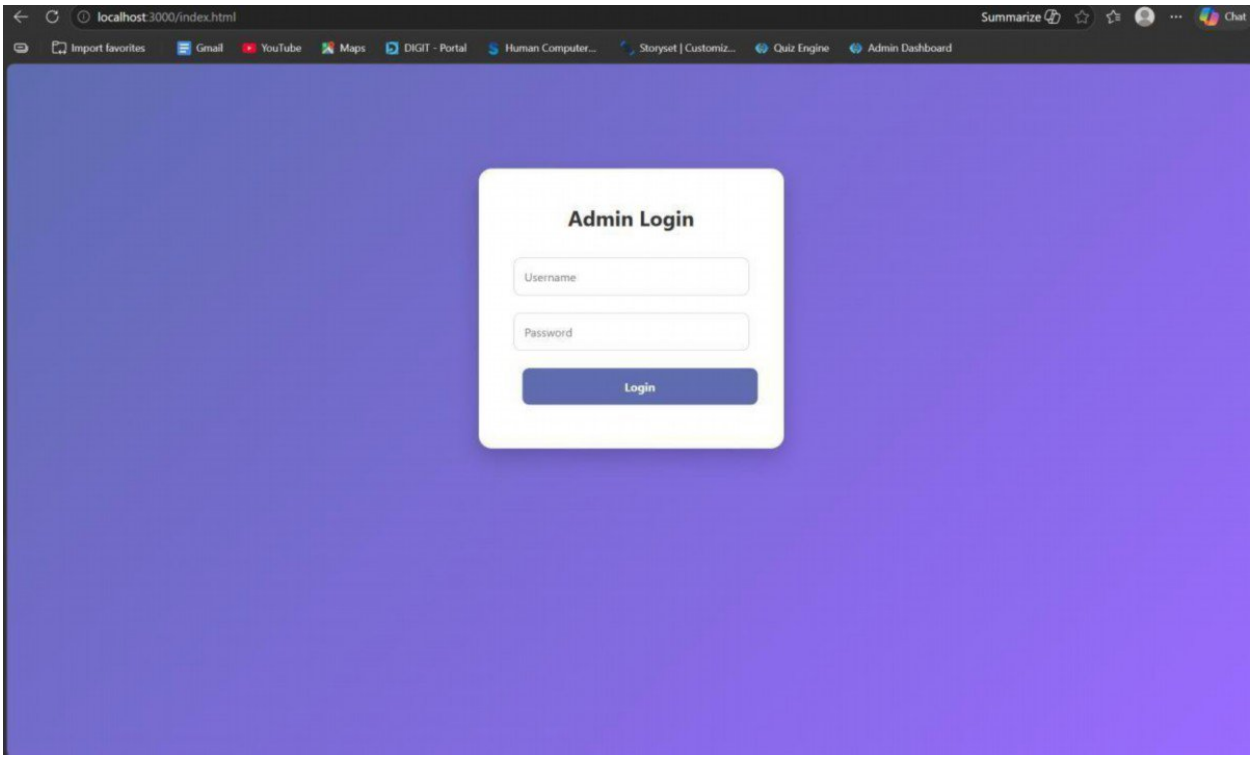

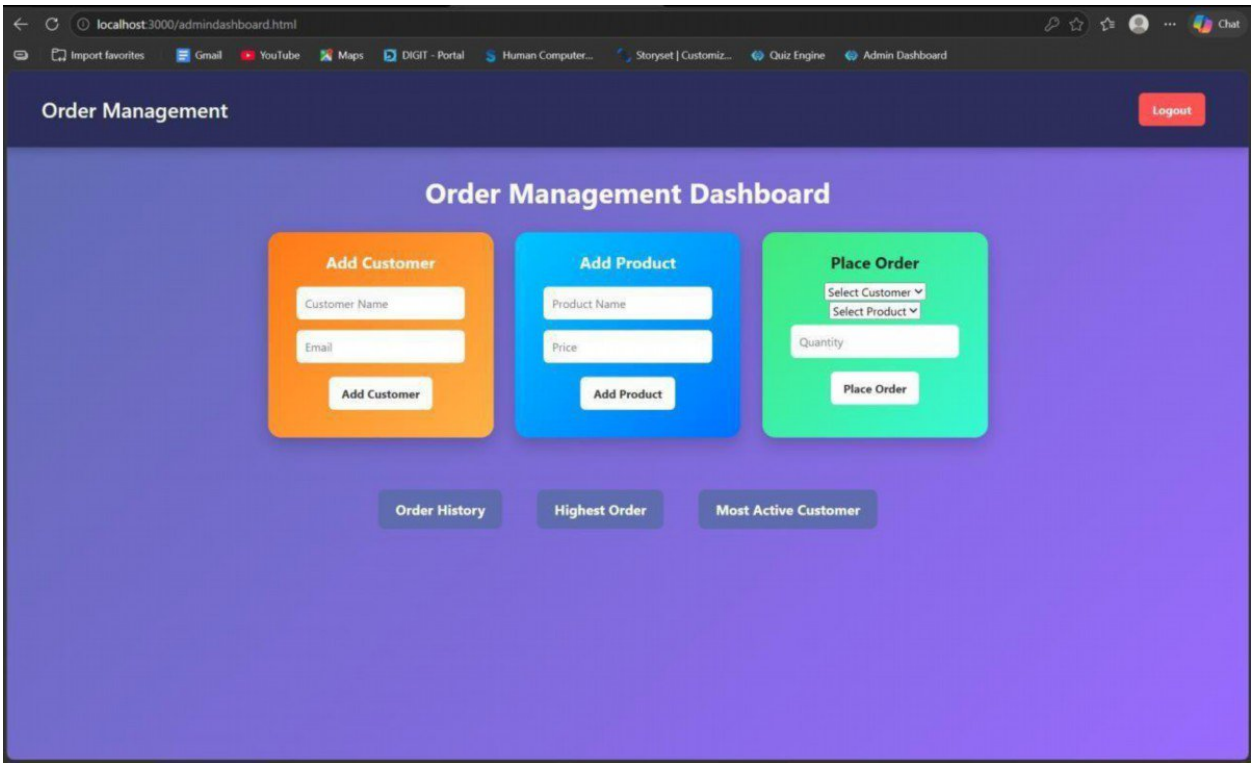

RESULT: The system successfully retrieves and analyzes customer order data using joins and subqueries, displaying meaningful insights like highest order value and most active customer.

TASK5: Transaction-Based Payment Simulation

AIM: To simulate an online payment system using database transactions that ensures safe and reliable fund transfer between user and merchant accounts using COMMIT and ROLLBACK operations.

ALGORITHM:

1. Start the process
2. Create database tables:
    - User Account (UserID, Balance)
    - Merchant Account (MerchantID, Balance)
3. Insert initial balance values for user and merchant

➤ Transaction Process:

4. Begin transaction (START TRANSACTION)
5. Deduct amount from user account
6. Add amount to merchant account

➤ Validation:

7. Check if user has sufficient balance
    - If yes → proceed
    - If no → go to rollback

➤ Commit / Rollback:

8. If all operations are successful → COMMIT transaction
9. If any error occurs → ROLLBACK transaction
10. Display transaction status (Success / Failed)
11. Stop

PROGRAM:

INDEX.HTML:

```
<!DOCTYPE html>
<html>
<head>
<title>Payment Simulation</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<div class="container">
<h2>Online Payment</h2>
<select id="user" onchange="updateBalances()"></select>
<select id="merchant" onchange="updateBalances()"></select>
<input type="number" id="amount" placeholder="Enter amount">
<button onclick="pay()">Pay</button>
<h3 id="userBalance"></h3>
<h3 id="merchantBalance"></h3>
<p id="result"></p>
</div>
<script src="script.js"></script>
</body>
</html>
```

STYLE.CSS:

```
body{
font-family: Arial;
```

```
background: linear-gradient(135deg,#dfe9f3,#ffffff);
display:flex;
justify-content:center;
align-items:center;
height:100vh;
}

.container{
background:white;
padding:30px;
border-radius:15px;
box-shadow:0 10px 25px rgba(0,0,0,0.2);
text-align:center;
width:400px;
}

select, input{
padding:10px;
margin:10px;
width:90%;
border-radius:5px;
border:1px solid #ccc;
}

button{
padding:10px;
```

```
width:95%;
background:green;
color:white;
border:none;
border-radius:5px;
cursor:pointer;
font-size:16px;
}

button:hover{
background:darkgreen;
}

h3{
margin:5px;
color:#333;
}
```

SCRIPT.JS:

```
let usersData = []
let merchantsData = []
function loadData(){
fetch("/balances")
.then(res=>res.json())
.then(data=>{
usersData = data.users
```

```
merchantsData = data.merchants
let userSelect = document.getElementById("user")
let merchantSelect = document.getElementById("merchant")
userSelect.innerHTML=""
merchantSelect.innerHTML=""
// fill users
usersData.forEach(u=>{
userSelect.innerHTML += `<option value="${u.id}">${u.name}</option>`
})
window.onload = loadData
// fill merchants
merchantsData.forEach(m=>{
merchantSelect.innerHTML += `<option value="${m.id}">${m.name}</option>`
})
// show initial balances
updateBalances()
})
}
function updateBalances(){
let userId = document.getElementById("user").value
let merchantId = document.getElementById("merchant").value
let user = usersData.find(u=>u.id == userId)
let merchant = merchantsData.find(m=>m.id == merchantId)
document.getElementById("userBalance").innerText =
"User Balance: ₹" + user.balance
document.getElementById("merchantBalance").innerText =
```

```
"Shop Balance: ₹" + merchant.balance
}
function pay(){
let userId = document.getElementById("user").value
let merchantId = document.getElementById("merchant").value
let amount = document.getElementById("amount").value
fetch("/pay",{
method:"POST",
headers:{
"Content-Type":"application/json"
},
body:JSON.stringify({
userId:userId,
merchantId:merchantId,
amount:amount
})
})
.then(res=>res.json())
.then(data=>{
document.getElementById("result").innerText = data.message
loadData()
})
}
window.onload = loadData
```

SERVER.JS:

```
const express = require("express")
const db = require("./db")
const app = express()
app.use(express.json())
app.use(express.static( dirname))
app.get("/", (req, res) => {
  res.sendFile( dirname + "/index.html")
})
app.post("/pay", (req, res) => {
  const { userId, merchantId, amount } = req.body
  const amt = parseInt(amount)
  if (!amt || amt <= 0) {
    return res.json({ message: "Enter valid amount" })
  }
  db.beginTransaction(err => {
    if (err) return res.status(500).send("Transaction error")
    // 1. Get user balance
    db.query("SELECT balance FROM users WHERE id=?", [userId], (err, result) => {
      if (err || result.length === 0) {
        return db.rollback(() => res.send("User not found"))
      }
      let balance = result[0].balance
      if (balance < amt) {
        return db.rollback(() => {
          res.json({ message: "Insufficient Balance" })
```

```
    })
}

// 2. Deduct from user
db.query(
    "UPDATE users SET balance = balance - ? WHERE id=?",
    [amt, userId],
    (err) => {

        if (err) {
            return db.rollback(() => res.send("Deduction failed"))
        }

        // 3. Add to merchant
        db.query(
            "UPDATE merchants SET balance = balance + ? WHERE id=?",
            [amt, merchantId],
            (err) => {

                if (err) {
                    return db.rollback(() => res.send("Merchant update failed"))
                }
                // 4. Commit
                db.commit(err => {

                    if (err) {
```

```
                    return db.rollback(() => res.send("Commit failed"))
                }

                res.json({ message: "Payment Successful       " })
            })
        }
    )
  }
)
})
})
})
app.get("/balances", (req, res) => {

  db.query("SELECT * FROM users", (err, users) => {

    if (err) return res.send("Error fetching users")

    db.query("SELECT * FROM merchants", (err, merchants) => {

      if (err) return res.send("Error fetching merchants")

      res.json({
        users: users,
        merchants: merchants
      })
```

```
        })
    })
})
app.listen(3000, () => {
    console.log("Server running on http://localhost:3000")
})
```

OUTPUTS:

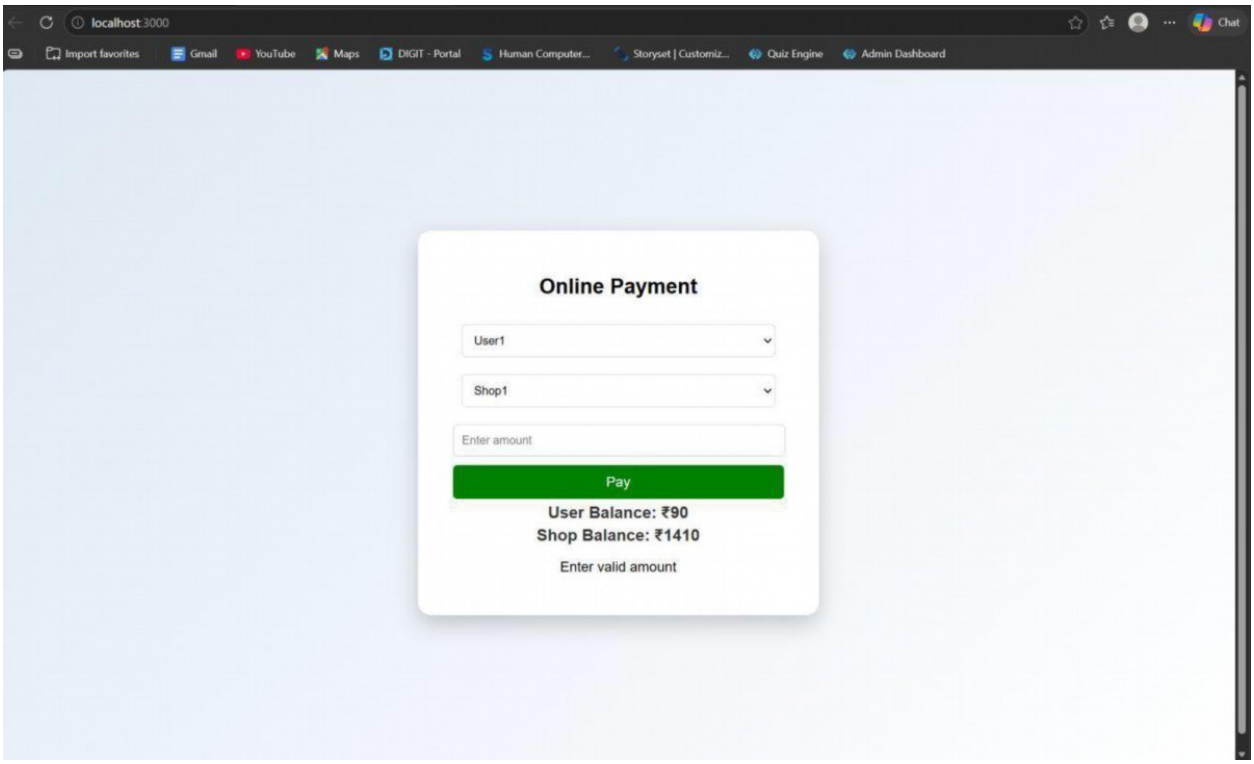

RESULT: The system successfully performs secure payment transactions by updating balances accurately using COMMIT on success and ROLLBACK on failure.

TASK6: Automated Logging using Triggers & Views

AIM: To develop a web-based application for automated logging of database activities using MySQL triggers and views, integrated with a Node.js backend and frontend interface, in order to track INSERT and UPDATE operations and generate daily activity reports.

ALGORITHM:

1. Start the program
2. Create database and required tables
3. Create triggers for INSERT and UPDATE operations
4. Store actions in log table automatically
5. Create a view for daily activity report
6. Develop backend using Node.js and Express
7. Connect backend with MySQL database
8. Create APIs for add, update, logs, and report
9. Design frontend using HTML, CSS, and JavaScript
10. Run the application and display results
11. Stop the program

PROGRAM:

INDEX.HTML:

```
<!DOCTYPE html>
<html>
<head>
   <title>Employee Audit System</title>
   <link rel="stylesheet" href="style.css">
</head>
<body>
```

```
<h2>Employee Management</h2>
<div class="form">
    <input type="number" id="emp_id" placeholder="Employee ID">
    <input type="text" id="name" placeholder="Name">
    <input type="number" id="salary" placeholder="Salary">
    <button onclick="addEmployee()">Add</button>
</div>
<div class="form">
    <input type="number" id="update_id" placeholder="Employee ID">
    <input type="number" id="new_salary" placeholder="New Salary">
    <button onclick="updateEmployee()">Update</button>
</div>
<button onclick="loadLogs()">View Logs</button>
<button onclick="loadReport()">View Daily Report</button>
<h3>Output</h3>
<pre id="output"></pre>
<script src="script.js"></script>
</body>
</html>
```

STYLE.CSS:

```
body {
    font-family: Arial;
    text-align: center;
    background: #f4f4f4;
}
```

```
.form {
    margin: 15px;
}
input {
    padding: 8px;
    margin: 5px;
}
button {
    padding: 8px 15px;
    background: blue;
    color: white;
    border: none;
    cursor: pointer;
}
button:hover {
    background: darkblue;
}
pre {
    background: white;
    padding: 10px;
    width: 60%;
    margin: auto;
    text-align: left;
}
```

SCRIPT.JS:

```
const BASE_URL = "http://localhost:3000";
```

```
// Add Employee
function addEmployee() {
    const data = {
        emp_id: document.getElementById("emp_id").value,
        name: document.getElementById("name").value,
        salary: document.getElementById("salary").value
    };
    fetch(`${BASE_URL}/add`, {
        method: "POST",
        headers: { "Content-Type": "application/json" },
        body: JSON.stringify(data)
    })
    .then(res => res.text())
    .then(data => alert(data));
}
// Update Employee
function updateEmployee() {
    const id = document.getElementById("update_id").value;
    const salary = document.getElementById("new_salary").value;

    fetch(`${BASE_URL}/update/${id}`, {
        method: "PUT",
        headers: { "Content-Type": "application/json" },
        body: JSON.stringify({ salary })
    })
    .then(res => res.text())
```

```
    .then(data => alert(data));
}
// Load Logs
function loadLogs() {
    fetch(`${BASE_URL}/logs`)
    .then(res => res.json())
    .then(data => {
        document.getElementById("output").innerText =
            JSON.stringify(data, null, 2);
    });
}
// Load Report
function loadReport() {
    fetch(`${BASE_URL}/report`)
    .then(res => res.json())
    .then(data => {
        document.getElementById("output").innerText =
            JSON.stringify(data, null, 2);
    });
}
```

DB.JS:

```
const mysql = require('mysql2');
const db = mysql.createConnection({
    host: 'localhost',
    user: 'root',
    password: 'fahi',
```

```
    database: 'audit_db'
});
db.connect((err) => {
    if (err) {
        console.error('DB Connection Failed:', err);
    } else {
        console.log('Connected to MySQL');
    }
});
module.exports = db;
```

OUTPUTS:

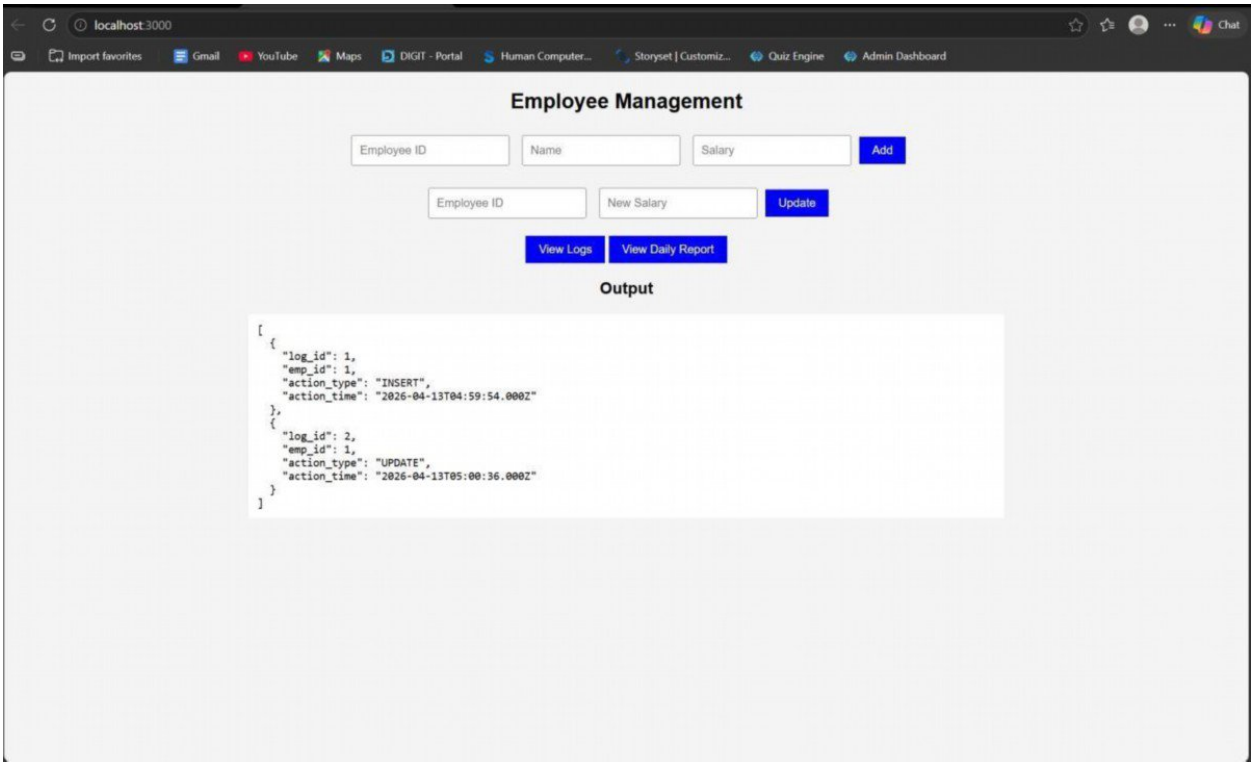

RESULT: The system successfully logs all INSERT and UPDATE operations automatically using triggers and displays daily activity reports through a web interface.

TASK7: Interactive Web Form with Events & Functions

AIM: To develop an interactive web-based feedback form with real-time validation, UI effects, and backend data storage using HTML, CSS, JavaScript, and Node.js.

ALGORITHM:

1.Start the program

2.Create project files (HTML, CSS, JS, server.js, db.js)

3.Design feedback form with input fields (name, email, message)

4.Apply CSS styling for layout and visual effects

5.Define reusable validation functions in JavaScript

6.Capture user input using DOM elements

7.Apply keyup event for real-time validation

8.Add hover effect to highlight input fields

9.Implement double-click event on submit button

10.Validate all fields before submission

11.Send data to server using fetch API (POST request)

12.Store data in database module and display success message

PROGRAM:

INDEX.HTML:

```
<!DOCTYPE html>
<html lang="en">
<head>
   <title>Feedback Form</title>
   <link rel="stylesheet" href="style.css">
</head>
```

```
<body>
<div class="container">
    <h2>       Customer Feedback</h2>
    <form id="feedbackForm">
        <input type="text" id="name" placeholder="Your Name" required>
        <span class="error" id="nameError"></span>
        <input type="email" id="email" placeholder="Your Email" required>
        <span class="error" id="emailError"></span>
        <textarea id="message" placeholder="Your Feedback" required></textarea>
        <span class="error" id="msgError"></span>
        <button type="button" id="submitBtn">Submit</button>
    </form>
    <p id="successMsg"></p>
</div>
<script src="script.js"></script>
</body>
</html>
```

STYLE.CSS:

```
body {
    font-family: 'Segoe UI', sans-serif;
    background: linear-gradient(135deg, #1f1c2c, #928dab);
    display: flex;
    justify-content: center;
    align-items: center;
    height: 100vh;
    color: white;
```

```
}
.container {
    background: rgba(255, 255, 255, 0.1);
    padding: 25px;
    border-radius: 15px;
    backdrop-filter: blur(10px);
    width: 320px;
    box-shadow: 0 10px 25px rgba(0,0,0,0.3);
}
h2 {
    text-align: center;
}
input, textarea {
    width: 100%;
    padding: 10px;
    margin: 8px 0;
    border-radius: 8px;
    border: none;
    outline: none;
    transition: 0.3s;
}
input:hover, textarea:hover {
    transform: scale(1.05);
    box-shadow: 0 0 8px #00f7ff;
}
button {
```

```
    width: 100%;
    padding: 10px;
    background: #00c6ff;
    border: none;
    border-radius: 10px;
    color: white;
    font-weight: bold;
    cursor: pointer;
}
button:hover {
    background: #0072ff;
}
.error {
    color: #ff6b6b;
    font-size: 12px;
}
#successMsg {
    text-align: center;
    margin-top: 10px;
    color: #00ffae;
}
```

SCRIPT.JS:

```
const nameInput = document.getElementById("name");
const emailInput = document.getElementById("email");
const messageInput = document.getElementById("message");
const submitBtn = document.getElementById("submitBtn");
```

```
function validateName() {
    if (nameInput.value.length < 3) {
        document.getElementById("nameError").innerText = "Min 3 characters";
        return false;
    }
    document.getElementById("nameError").innerText = "";
    return true;
}
function validateEmail() {
    let pattern = /^[^ ]+@[^ ]+\.[a-z]{2,3}$/;
    if (!emailInput.value.match(pattern)) {
        document.getElementById("emailError").innerText = "Invalid email";
        return false;
    }
    document.getElementById("emailError").innerText = "";
    return true;
}
function validateMessage() {
    if (messageInput.value.length < 5) {
        document.getElementById("msgError").innerText = "Too short";
        return false;
    }
    document.getElementById("msgError").innerText = "";
    return true;
}
nameInput.addEventListener("keyup", validateName);
```

```
emailInput.addEventListener("keyup", validateEmail);
messageInput.addEventListener("keyup", validateMessage);
submitBtn.addEventListener("dblclick", () => {
    if (validateName() && validateEmail() && validateMessage()) {
        sendData();
    } else {
        alert("Fix errors before submitting!");
    }
});
function sendData() {
    fetch("http://localhost:3000/submit", {
        method: "POST",
        headers: {
            "Content-Type": "application/json"
        },
        body: JSON.stringify({
            name: nameInput.value,
            email: emailInput.value,
            message: messageInput.value
        })
    })
    .then(res => res.json())
    .then(data => {
        document.getElementById("successMsg").innerText = "       Feedback Submitted!";
    });
}
```

SERVER.JS:

```
const express = require("express");
const cors = require("cors");
const bodyParser = require("body-parser");
const path = require("path");
const db = require("./db");
const app = express();
app.use(cors());
app.use(bodyParser.json());
app.use(express.static(__dirname));
app.get("/", (req, res) => {
  res.sendFile(path.join(__dirname, "index.html"));
});
app.post("/submit", (req, res) => {
  const { name, email, message } = req.body;
  db.saveFeedback({ name, email, message });
  res.json({ status: "success" });
});
app.listen(3000, () => {
  console.log("Server running on http://localhost:3000");
});
```

DB.JS:

```
let feedbacks = [];
function saveFeedback(data) {
  feedbacks.push(data);
  console.log("Saved:", data);
```

```
}

module.exports = {

   saveFeedback

};
```

OUTPUT:

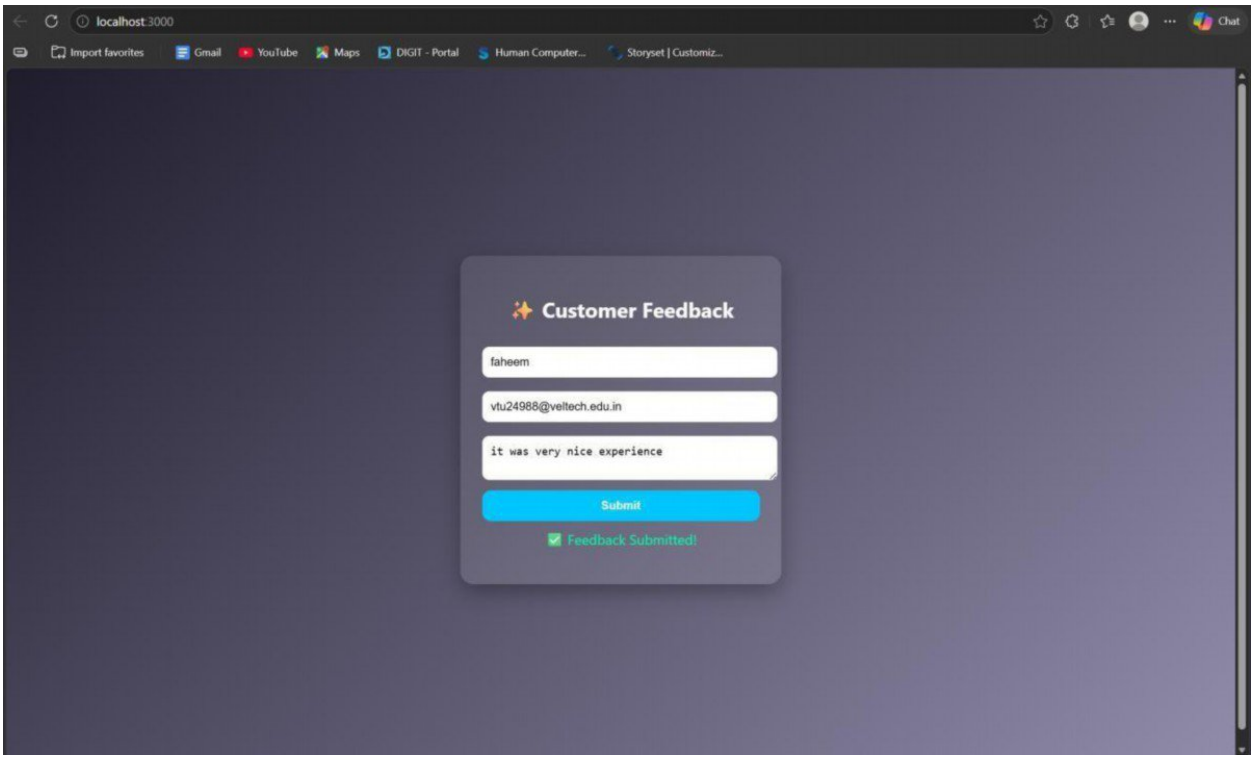

RESULT: The interactive feedback form was successfully implemented with real-time validation, enhanced UI effects, and backend data handling.

TASK8: Employee Management

AIM: To develop a simple Employee Management system using HTML, CSS, JavaScript, and Node.js for adding and displaying employee data.

ALGORITHM:

1. Start the program
2. Create project files (HTML, CSS, JS, server.js, db.js)
3. Design the user interface with input fields (name, role)
4. Apply CSS styling for layout and centering
5. Capture user input using JavaScript
6. Create function to add employee data
7. Send data to server using fetch API (POST request)
8. Create backend using Node.js and Express
9. Receive and store employee data in memory (db.js)
10. Create API to fetch all employee records (GET request)
11. Display employee list dynamically on the webpage
12. Stop the program

PROGRAM:

INDEX.HTML:

```
<!DOCTYPE html>
<html>
<head>
   <title>Employee Management</title>
   <link rel="stylesheet" href="style.css">
</head>
```

```html
<body>
<div class="container">
    <h2>Employee Management</h2>
    <input id="name" placeholder="Name">
    <input id="role" placeholder="Role">
    <button onclick="addEmployee()">Add</button>
    <ul id="list"></ul>
</div>
<script src="script.js"></script>
</body>
</html>
```

STYLE.CSS:

```css
body {
    font-family: Arial;
    background: #1e1e2f;
    color: white;
    display: flex;
    justify-content: center;
    align-items: center;
    height: 100vh;
    margin: 0;
}
.container {
    text-align: center;
}
```

```
input {
    padding: 10px;
    margin: 5px;
    border-radius: 5px;
    border: none;
}
button {
    padding: 10px;
    background: #00c6ff;
    border: none;
    border-radius: 5px;
    cursor: pointer;
}
```

SCRIPT.JS:

```
function addEmployee() {
    const name = document.getElementById("name").value;
    const role = document.getElementById("role").value;
    fetch("http://localhost:3000/add", {
        method: "POST",
        headers: {
            "Content-Type": "application/json"
        },
        body: JSON.stringify({ name, role })
    })
    .then(res => res.json())
```

```
    .then(() => loadEmployees());
}
function loadEmployees() {
    fetch("http://localhost:3000/all")
    .then(res => res.json())
    .then(data => {
        let list = document.getElementById("list");
        list.innerHTML = "";

        data.forEach(emp => {
            let li = document.createElement("li");
            li.innerText = emp.name + " - " + emp.role;
            list.appendChild(li);
        });
    });
}
loadEmployees();
```

SERVER.JS:

```
const express = require("express");
const cors = require("cors");
const path = require("path");
const db = require("./db");
const app = express();
app.use(cors());
app.use(express.json());
app.use(express.static(__dirname));
```

```
app.get("/", (req, res) => {
   res.sendFile(path.join(__dirname, "index.html"));
});
app.post("/add", (req, res) => {
   db.addEmployee(req.body);
   res.json({ msg: "Added" });
});
app.get("/all", (req, res) => {
   res.json(db.getEmployees());
});
app.listen(3000, () => {
   console.log("•    Server running at: http://localhost:3000");
});
```

DB.JS:

```
let employees = [];
function addEmployee(emp) {
   employees.push(emp);
}
function getEmployees() {
   return employees;
}
module.exports = { addEmployee, getEmployees };
```

OUTPUT:

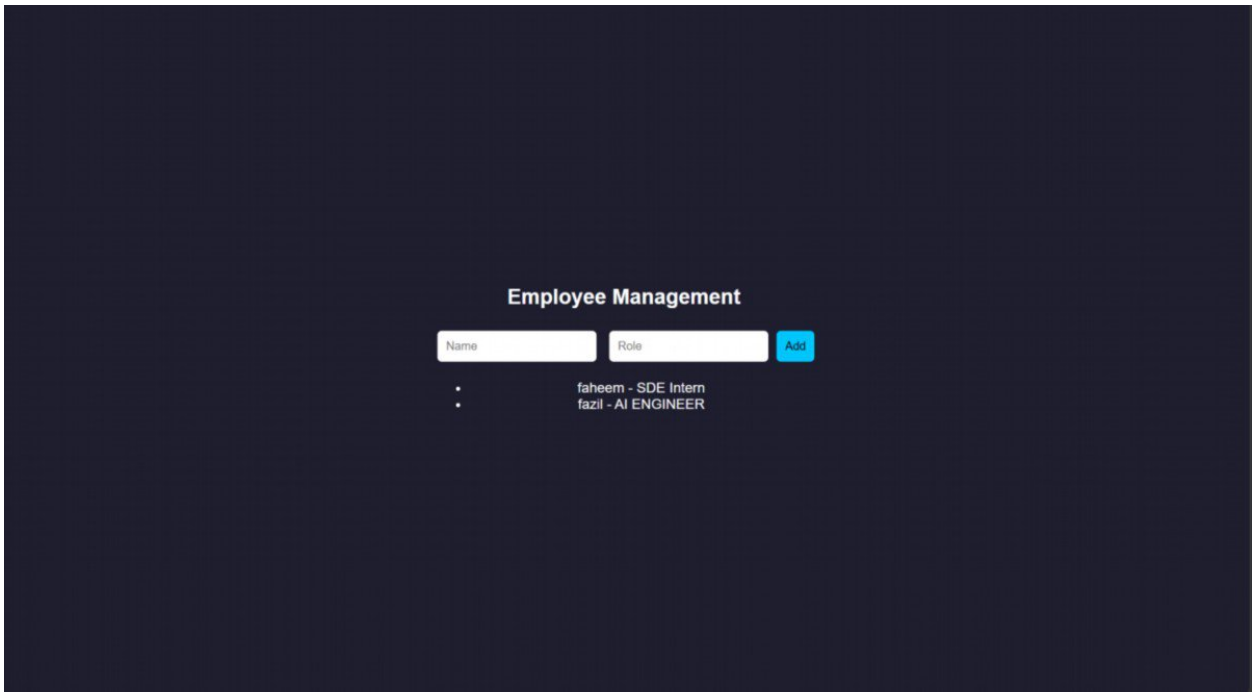

RESULT: The Employee Management system was successfully implemented with a user-friendly interface and dynamic data handling using Node.js backend.

TASK9: Employee MVC APP

AIM: To develop a basic MVC-based Employee application using HTML, CSS, JavaScript, and Node.js to handle user requests and display employee details.

ALGORITHM:

1. Start the program
2. Create project files (HTML, CSS, JS, server.js, db.js)
3. Design UI form to accept employee details
4. Apply CSS styling for better user interface
5. Capture user input using JavaScript
6. Send request to server using fetch API
7. Create controller logic in server.js
8. Define routes to handle requests (/add, /all)
9. Store employee data in memory using db.js
10. Retrieve employee data from database module
11. Send response back to frontend (view)
12. Display employee details dynamically and stop

PROGRAM:

INDEX.HTML:

```
<!DOCTYPE html>
<html>
<head>
  <title>Employee MVC</title>
  <link rel="stylesheet" href="style.css">
</head>
<body>
```

```
    <div class="container">
        <h2>Employee Details</h2>
        <input id="name" placeholder="Name">
        <input id="role" placeholder="Role">
        <button onclick="addEmployee()">Add</button>
        <ul id="list"></ul>
    </div>
    <script src="script.js"></script>
    </body>
    </html>
```

STYLE.CSS:

```
* {
    margin: 0;
    padding: 0;
    box-sizing: border-box;
}
body {
    font-family: 'Segoe UI', sans-serif;
    background: linear-gradient(135deg, #1f1c2c, #928dab);
    height: 100vh;

    display: flex;
    justify-content: center;
    align-items: center;

    color: white;
```

```
}
.container {
    background: rgba(255, 255, 255, 0.1);
    padding: 30px;
    border-radius: 15px;
    backdrop-filter: blur(10px);
    width: 320px;
    text-align: center;

    box-shadow: 0 10px 25px rgba(0,0,0,0.4);
}
h2 {
    margin-bottom: 15px;
}
input {
    width: 100%;
    padding: 10px;
    margin: 8px 0;

    border: none;
    border-radius: 8px;
    outline: none;

    transition: 0.3s;
}
input:hover,
```

```
input:focus {
    transform: scale(1.05);
    box-shadow: 0 0 8px #00f7ff;
}
button {
    width: 100%;
    padding: 10px;
    margin-top: 10px;

    background: #00c6ff;
    border: none;
    border-radius: 10px;

    color: white;
    font-weight: bold;
    cursor: pointer;

    transition: 0.3s;
}
button:hover {
    background: #0072ff;
    transform: scale(1.05);
}
ul {
    list-style: none;
    margin-top: 15px;
```

```
}
li {
    background: rgba(255,255,255,0.15);
    padding: 8px;
    margin: 5px 0;
    border-radius: 6px;

    transition: 0.3s;
}
li:hover {
    background: rgba(255,255,255,0.3);
}
```

SCRIPT.JS:

```
function addEmployee() {
    const name = document.getElementById("name").value;
    const role = document.getElementById("role").value;
    fetch("/add", {
        method: "POST",
        headers: { "Content-Type": "application/json" },
        body: JSON.stringify({ name, role })
    })
    .then(() => loadEmployees());
}
function loadEmployees() {
    fetch("/all")
    .then(res => res.json())
```

```
  .then(data => {
    let list = document.getElementById("list");
    list.innerHTML = "";
    data.forEach(emp => {
      let li = document.createElement("li");
      li.innerText = emp.name + " - " + emp.role;
      list.appendChild(li);
    });
  });
}
loadEmployees();
```

SERVER.JS:

```
const express = require("express");
const cors = require("cors");
const path = require("path");
const db = require("./db");
const app = express();
app.use(cors());
app.use(express.json());
app.use(express.static(__dirname));
app.post("/add", (req, res) => {
  db.addEmployee(req.body);
  res.json({ msg: "Employee Added" });
});
app.get("/all", (req, res) => {
  res.json(db.getEmployees());
```

```
});
app.listen(3000, () => {
    console.log("http://localhost:3000");
});
```

DB.JS:

```
let employees = [];
function addEmployee(emp) {
    employees.push(emp);
}
function getEmployees() {
    return employees;
}
module.exports = { addEmployee, getEmployees };
```

OUTPUT:

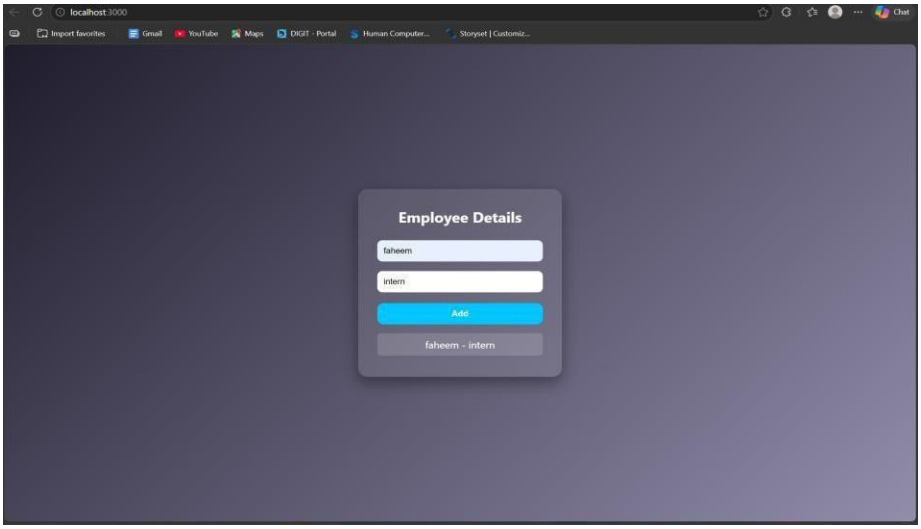

RESULT: The MVC-based Employee application was successfully implemented using Node.js, where user requests were processed and employee details were displayed dynamically.

TASK10: Student Crud App

AIM: To develop a Student CRUD application using HTML, CSS, JavaScript, and Node.js to perform create, read, update, and delete operations.

ALGORITHM:

1. Start the program
2. Create project files (HTML, CSS, JS, server.js, db.js)
3. Design UI for student input (id, name, course)
4. Apply CSS for styling and layout
5. Capture user input using JavaScript
6. Send data to server using fetch API
7. Create backend using Node.js and Express
8. Implement Create operation (POST request)
9. Implement Read operation (GET request)
10. Implement Update operation (PUT request)
11. Implement Delete operation (DELETE request)
12. Display updated student data dynamically and stop

PROGRAM:

INDEX.HTML:

```
<!DOCTYPE html>
<html>
<head>
   <title>Student CRUD</title>
   <link rel="stylesheet" href="style.css">
</head>
<body>
<div class="container">
```

```
    <h2>Student CRUD</h2>
    <input id="id" placeholder="ID">
    <input id="name" placeholder="Name">
    <input id="course" placeholder="Course">
    <button onclick="addStudent()">Add</button>
    <button onclick="updateStudent()">Update</button>
    <ul id="list"></ul>
</div>
<script src="script.js"></script>
</body>
</html>
```

STYLE.CSS:

```
body {
    font-family: 'Segoe UI';
    background: linear-gradient(135deg,#1f1c2c,#928dab);
    height: 100vh;
    display:flex;
    justify-content:center;
    align-items:center;
    color:white;
}
.container {
    background: rgba(255,255,255,0.1);
    padding:20px;
    border-radius:10px;
    text-align:center;
```

```
}
input {
    display:block;
    margin:8px auto;
    padding:8px;
}
button {
    margin:5px;
    padding:8px;
    background:#00c6ff;
    border:none;
    color:white;
}
```

SCRIPT.JS:

```
function addStudent() {
    let data = getInput();
    fetch("/add", {
        method: "POST",
        headers: {"Content-Type":"application/json"},
        body: JSON.stringify(data)
    }).then(loadStudents);
}
function loadStudents() {
    fetch("/all")
    .then(res => res.json())
    .then(data => {
```

```
        let list = document.getElementById("list");
        list.innerHTML = "";
        data.forEach(s => {
            let li = document.createElement("li");
            li.innerHTML = `
                ${s.id} - ${s.name} (${s.course})
                <button onclick="deleteStudent(${s.id})">      </button>
            `;
            list.appendChild(li);
        });
    });
}
function updateStudent() {
    let data = getInput();
    fetch("/update", {
        method: "PUT",
        headers: {"Content-Type":"application/json"},
        body: JSON.stringify(data)
    }).then(loadStudents);
}
function deleteStudent(id) {
    fetch(`/delete/${id}`, { method: "DELETE" })
    .then(loadStudents);
}
function getInput() {
    return {
```

```
        id: document.getElementById("id").value,
        name: document.getElementById("name").value,
        course: document.getElementById("course").value
    };
}
loadStudents();
```

SERVER.JS:

```
const express = require("express");
const cors = require("cors");
const db = require("./db");
const app = express();
app.use(cors());
app.use(express.json());
app.use(express.static(__dirname));
// CREATE
app.post("/add", (req, res) => {
    db.add(req.body);
    res.json({msg:"Added"});
});
// READ
app.get("/all", (req, res) => {
    res.json(db.getAll());
});
// UPDATE
app.put("/update", (req, res) => {
    db.update(req.body);
```

```
    res.json({msg:"Updated"});
});
// DELETE
app.delete("/delete/:id", (req, res) => {
    db.remove(req.params.id);
    res.json({msg:"Deleted"});
});
app.listen(3000, () => console.log("http://localhost:3000"));
```

DB.JS:

```
let students = [];
function add(s) {
    students.push(s);
}
function getAll() {
    return students;
}
function update(updated) {
    students = students.map(s =>
        s.id == updated.id ? updated : s
    );
}
function remove(id) {
    students = students.filter(s => s.id != id);
}
module.exports = { add, getAll, update, remove };
```

OUTPUT:

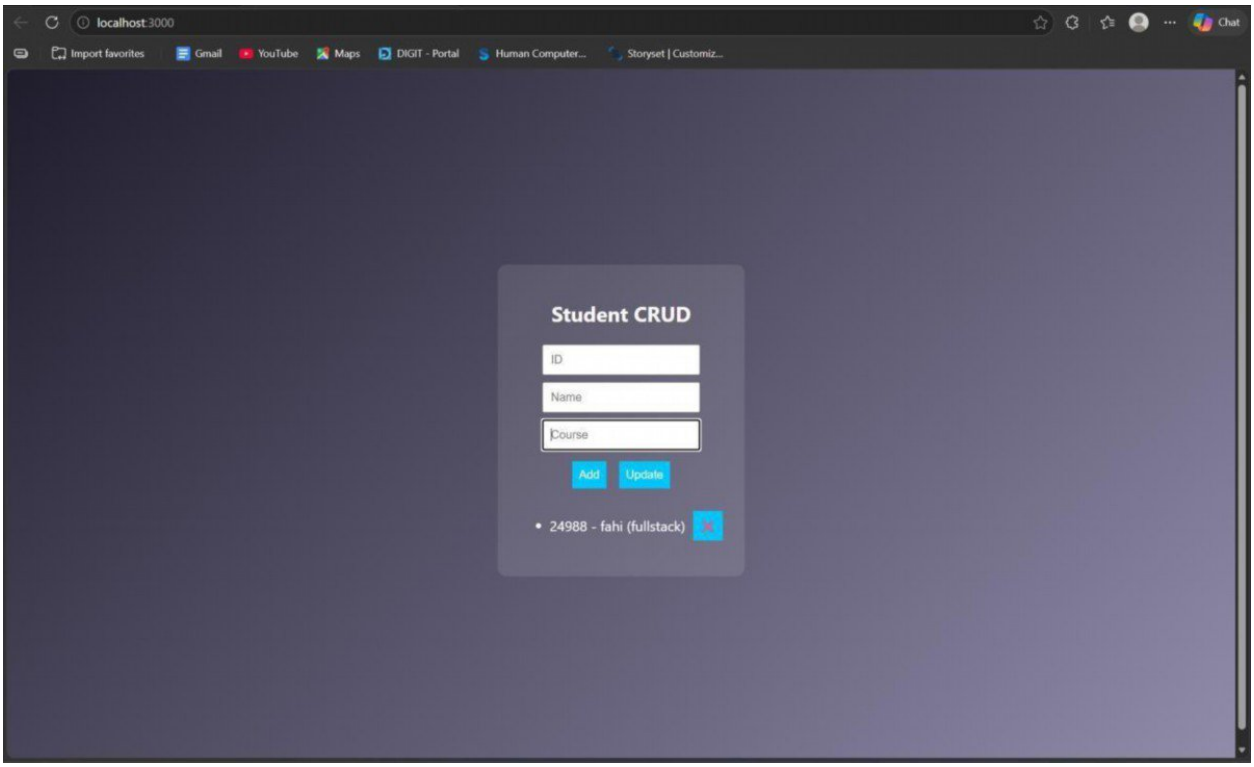

RESULT: The Student CRUD application was successfully implemented with full create, read, update, and delete operations using Node.js and a dynamic web interface.

TASK11: Student Data Layer

AIM: To implement a data access layer for managing student records with filtering, sorting, and pagination using HTML, CSS, JavaScript, and Node.js.

ALGORITHM:

1. Start the program
2. Create project files (HTML, CSS, JS, server.js, db.js)
3. Design UI for student details (id, name, age, department)
4. Apply CSS styling for layout and UI
5. Capture input using JavaScript
6. Send data to backend using fetch API
7. Create Node.js server using Express
8. Store student data in memory (db.js)
9. Implement filtering (by department/age)
10. Implement sorting (by name/age)
11. Implement pagination (limit & page number)
12. Display filtered, sorted, paginated data

PROGRAM:

INDEX.HTML:

```
<!DOCTYPE html>
<html>
<head>
   <title>Student Data Layer</title>
   <link rel="stylesheet" href="style.css">
</head>
<body>
```

```
<div class="container">
    <h2>Student Data</h2>
    <input id="name" placeholder="Name">
    <input id="age" placeholder="Age">
    <input id="dept" placeholder="Department">
    <button onclick="addStudent()">Add</button>
    <hr>
    <input id="filterDept" placeholder="Filter Dept">
    <input id="sortBy" placeholder="Sort (name/age)">
    <input id="page" placeholder="Page No">
    <button onclick="loadStudents()">Search</button>
    <ul id="list"></ul>
</div>
<script src="script.js"></script>
</body>
</html>
```

STYLE.CSS:

```
body {
    font-family: Arial;
    background: #1e1e2f;
    color: white;
    display:flex;
    justify-content:center;
    align-items:center;
    height:100vh;
}
```

```
.container {
    text-align:center;
}
input {
    display:block;
    margin:5px;
    padding:8px;
}
```

SCRIPT.JS:

```
function addStudent() {
    const data = {
        name: val("name"),
        age: val("age"),
        dept: val("dept")
    };
    fetch("/add", {
        method: "POST",
        headers: {"Content-Type":"application/json"},
        body: JSON.stringify(data)
    }).then(loadStudents);
}
function loadStudents() {
    const dept = val("filterDept");
    const sort = val("sortBy");
    const page = val("page");
```

```
    fetch(`/students?dept=${dept}&sort=${sort}&page=${page}`)
    .then(res => res.json())
    .then(data => {
        let list = document.getElementById("list");
        list.innerHTML = "";
        data.forEach(s => {
            let li = document.createElement("li");
            li.innerText = `${s.name} (${s.age}) - ${s.dept}`;
            list.appendChild(li);
        });
    });
}
function val(id){
    return document.getElementById(id).value;
}
loadStudents();
```

SERVER.JS:

```
const express = require("express");
const cors = require("cors");
const db = require("./db");
const app = express();
app.use(cors());
app.use(express.json());
app.use(express.static(__dirname));
// Add student
app.post("/add", (req, res) => {
```

```
    db.add(req.body);
    res.json({msg:"Added"});
});
// Filter + Sort + Pagination
app.get("/students", (req, res) => {
    let { dept, sort, page } = req.query;
    let data = db.getAll();
    // FILTER
    if (dept) {
        data = data.filter(s => s.dept === dept);
    }
    // SORT
    if (sort === "name") {
        data.sort((a,b)=>a.name.localeCompare(b.name));
    } else if (sort === "age") {
        data.sort((a,b)=>a.age - b.age);
    }
    // PAGINATION
    let limit = 3;
    page = parseInt(page) || 1;
    let start = (page - 1) * limit;
    let paginated = data.slice(start, start + limit);
    res.json(paginated);
});
app.listen(3000, () => console.log("http://localhost:3000"));
```

DB.JS:

```
let students = [];

function add(s) {

   students.push(s);

}

function getAll() {

   return students;

}

module.exports = { add, getAll };
```

OUTPUT:

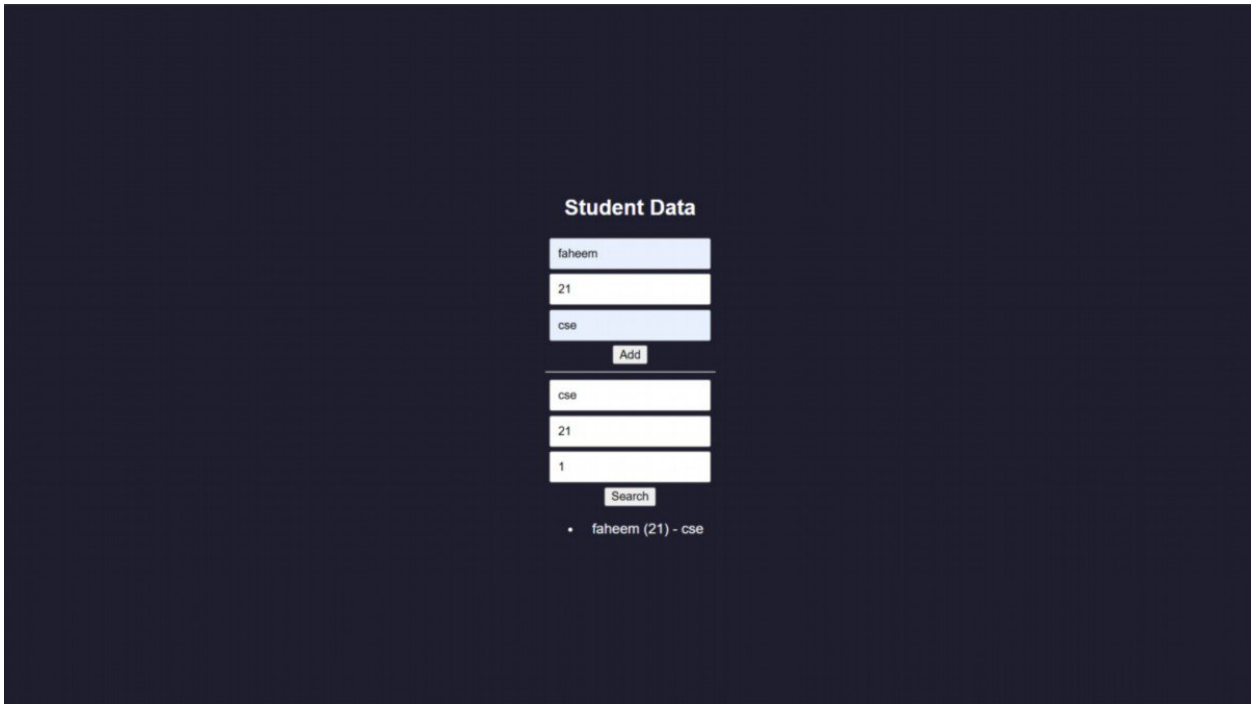

RESULT: The data access layer was successfully implemented with filtering, sorting, and pagination using Node.js and dynamic frontend interaction.

TASK12: Product Api

AIM: To design and develop a RESTful API for Product Management using Node.js that supports GET, POST, PUT, and DELETE operations with JSON responses.

ALGORITHM:

1. Start the program
2. Create project files (server.js, db.js, HTML, CSS, JS)
3. Design product structure (id, name, price)
4. Create Node.js server using Express
5. Enable JSON parsing using middleware
6. Implement POST method to add products
7. Implement GET method to fetch all products
8. Implement PUT method to update product details
9. Implement DELETE method to remove a product
10. Store product data in memory using db.js
11. Send JSON responses for all API requests
12. Test APIs using browser or REST client

PROGRAM:

INDEX.HTML:

```
<!DOCTYPE html>
<html>
<head>
    <title>Product API</title>
</head>
<body>
<h2>Product API Test</h2>
<input id="id" placeholder="ID">
```

```
<input id="name" placeholder="Name">
<input id="price" placeholder="Price">
<button onclick="add()">Add</button>
<button onclick="get()">Get All</button>
<ul id="list"></ul>
<script src="script.js"></script>
</body>
</html>
```

STYLE.CSS:

```
/* Reset */
* {
    margin: 0;
    padding: 0;
    box-sizing: border-box;
}
/* Background */
body {
    font-family: 'Segoe UI', sans-serif;
    background: linear-gradient(135deg, #141e30, #243b55);
    height: 100vh;
    display: flex;
    justify-content: center;
    align-items: center;
    color: white;
}
/* Container */
```

```
.container {
    background: rgba(255, 255, 255, 0.1);
    padding: 25px;
    border-radius: 15px;
    backdrop-filter: blur(10px);

    width: 350px;
    text-align: center;
    box-shadow: 0 10px 25px rgba(0,0,0,0.4);
}
/* Heading */
h2 {
    margin-bottom: 15px;
}
/* Inputs */
input {
    width: 100%;
    padding: 10px;
    margin: 8px 0;
    border: none;
    border-radius: 8px;
    outline: none;
    transition: 0.3s;
}
/* Hover + focus effect */
input:hover,
```

```
input:focus {
    transform: scale(1.05);
    box-shadow: 0 0 8px #00f7ff;
}
/* Buttons */
button {
    width: 100%;
    padding: 10px;
    margin-top: 8px;
    background: #00c6ff;
    border: none;
    border-radius: 10px;
    color: white;
    font-weight: bold;
    cursor: pointer;
    transition: 0.3s;
}
/* Button hover */
button:hover {
    background: #0072ff;
    transform: scale(1.05);
}
/* Product List */
ul {
    list-style: none;
    margin-top: 15px;
```

```
}
/* List items */
li {
    background: rgba(255,255,255,0.15);
    padding: 10px;
    margin: 6px 0;
    border-radius: 8px;
    display: flex;
    justify-content: space-between;
    align-items: center;
    transition: 0.3s;
}
/* Hover effect */
li:hover {
    background: rgba(255,255,255,0.3);
}
/* Optional delete button inside list */
li button {
    width: auto;
    padding: 5px 8px;
    font-size: 12px;
    background: #ff4b5c;
}
li button:hover {
    background: #ff1e38;
}
```

SCRIPT.JS:

```
function add() {
    fetch("/products", {
        method: "POST",
        headers: {"Content-Type":"application/json"},
        body: JSON.stringify(getData())
    }).then(get);
}
function get() {
    fetch("/products")
    .then(res => res.json())
    .then(data => {
        let list = document.getElementById("list");
        list.innerHTML = "";
        data.forEach(p => {
            let li = document.createElement("li");
            li.innerText = `${p.id} - ${p.name} - ₹${p.price}`;
            list.appendChild(li);
        });
    });
}
function getData() {
    return {
        id: document.getElementById("id").value,
        name: document.getElementById("name").value,
        price: document.getElementById("price").value
```

```
    };
}
```

SERVER.JS:

```
const express = require("express");
const cors = require("cors");
const db = require("./db");
const app = express();
app.use(cors());
app.use(express.json());
// GET all products
app.get("/products", (req, res) => {
    res.json(db.getAll());
});
// POST add product
app.post("/products", (req, res) => {
    db.add(req.body);
    res.json({ message: "Product added" });
});
// PUT update product
app.put("/products/:id", (req, res) => {
    db.update(req.params.id, req.body);
    res.json({ message: "Product updated" });
});
// DELETE product
app.delete("/products/:id", (req, res) => {
```

```
    db.remove(req.params.id);
    res.json({ message: "Product deleted" });
});
// Server start
app.listen(3000, () => {
    console.log("• API running at http://localhost:3000/products");
});
```

DB.JS:

```
let products = [];
function getAll() {
    return products;
}
function add(p) {
    products.push(p);
}
function update(id, newData) {
    products = products.map(p =>
        p.id == id ? { ...p, ...newData } : p
    );
}
function remove(id) {
    products = products.filter(p => p.id != id);
}
module.exports = { getAll, add, update, remove };
```

OUTPUT:

Pretty-print


```
[
  {
    "id": 1,
    "name": "Phone",
    "price": 20000
  },
  {
    "id": 2,
    "name": "Laptop",
    "price": 50000
  }
]
```


RESULT: The RESTful API for Product Management was successfully implemented with GET, POST, PUT, and DELETE methods returning JSON responses**.**

TASK13: PRODUCT-API

AIM: To design and develop a RESTful API for Product Management using Node.js that supports GET, POST, PUT, and DELETE operations with JSON responses.

ALGORITHM:

1. Start the program
2. Create project files (server.js, db.js, HTML, CSS, JS)
3. Design product structure (id, name, price)
4. Create Node.js server using Express
5. Enable JSON parsing using middleware
6. Implement POST method to add products
7. Implement GET method to fetch all products
8. Implement PUT method to update product details
9. Implement DELETE method to remove a product
10. Store product data in memory using db.js
11. Send JSON responses for all API requests
12. Test APIs using browser or REST client

PROGRAM:

INDEX.HTML:

```
<!DOCTYPE html>
<html>
<head>
    <title>Product API</title>
</head>
<body>
<h2>Product API Test</h2>
<input id="id" placeholder="ID">
```

```
<input id="name" placeholder="Name">
<input id="price" placeholder="Price">
<button onclick="add()">Add</button>
<button onclick="get()">Get All</button>
<ul id="list"></ul>
<script src="script.js"></script>
</body>
</html>
```

STYLE.CSS:

```
/* Reset */
* {
    margin: 0;
    padding: 0;
    box-sizing: border-box;
}
/* Background */
body {
    font-family: 'Segoe UI', sans-serif;
    background: linear-gradient(135deg, #141e30, #243b55);
    height: 100vh;
    display: flex;
    justify-content: center;
    align-items: center;
    color: white;
}
/* Container */
```

```
.container {
    background: rgba(255, 255, 255, 0.1);
    padding: 25px;
    border-radius: 15px;
    backdrop-filter: blur(10px);

    width: 350px;
    text-align: center;
    box-shadow: 0 10px 25px rgba(0,0,0,0.4);
}
/* Heading */
h2 {
    margin-bottom: 15px;
}
/* Inputs */
input {
    width: 100%;
    padding: 10px;
    margin: 8px 0;
    border: none;
    border-radius: 8px;
    outline: none;
    transition: 0.3s;
}
/* Hover + focus effect */
input:hover,
```

```
input:focus {
    transform: scale(1.05);
    box-shadow: 0 0 8px #00f7ff;
}
/* Buttons */
button {
    width: 100%;
    padding: 10px;
    margin-top: 8px;
    background: #00c6ff;
    border: none;
    border-radius: 10px;
    color: white;
    font-weight: bold;
    cursor: pointer;
    transition: 0.3s;
}
/* Button hover */
button:hover {
    background: #0072ff;
    transform: scale(1.05);
}
/* Product List */
ul {
    list-style: none;
    margin-top: 15px;
```

```
}
/* List items */
li {
    background: rgba(255,255,255,0.15);
    padding: 10px;
    margin: 6px 0;
    border-radius: 8px;
    display: flex;
    justify-content: space-between;
    align-items: center;
    transition: 0.3s;
}
/* Hover effect */
li:hover {
    background: rgba(255,255,255,0.3);
}
/* Optional delete button inside list */
li button {
    width: auto;
    padding: 5px 8px;
    font-size: 12px;
    background: #ff4b5c;
}
li button:hover {
    background: #ff1e38;
}
```

SCRIPT.JS:

```
function add() {
    fetch("/products", {
        method: "POST",
        headers: {"Content-Type":"application/json"},
        body: JSON.stringify(getData())
    }).then(get);
}
function get() {
    fetch("/products")
    .then(res => res.json())
    .then(data => {
        let list = document.getElementById("list");
        list.innerHTML = "";
        data.forEach(p => {
            let li = document.createElement("li");
            li.innerText = `${p.id} - ${p.name} - ₹${p.price}`;
            list.appendChild(li);
        });
    });
}
function getData() {
    return {
        id: document.getElementById("id").value,
        name: document.getElementById("name").value,
        price: document.getElementById("price").value
```

```
    };
}
```

SERVER.JS:

```
const express = require("express");
const cors = require("cors");
const db = require("./db");
const app = express();
app.use(cors());
app.use(express.json());
// GET all products
app.get("/products", (req, res) => {
    res.json(db.getAll());
});
// POST add product
app.post("/products", (req, res) => {
    db.add(req.body);
    res.json({ message: "Product added" });
});
// PUT update product
app.put("/products/:id", (req, res) => {
    db.update(req.params.id, req.body);
    res.json({ message: "Product updated" });
});
// DELETE product
app.delete("/products/:id", (req, res) => {
```

```
    db.remove(req.params.id);
    res.json({ message: "Product deleted" });
});
// Server start
app.listen(3000, () => {
    console.log("• API running at http://localhost:3000/products");
});
```

DB.JS:

```
let products = [];
function getAll() {
    return products;
}
function add(p) {
    products.push(p);
}
function update(id, newData) {
    products = products.map(p =>
        p.id == id ? { ...p, ...newData } : p
    );
}
function remove(id) {
    products = products.filter(p => p.id != id);
}
module.exports = { getAll, add, update, remove };
```

OUTPUT:

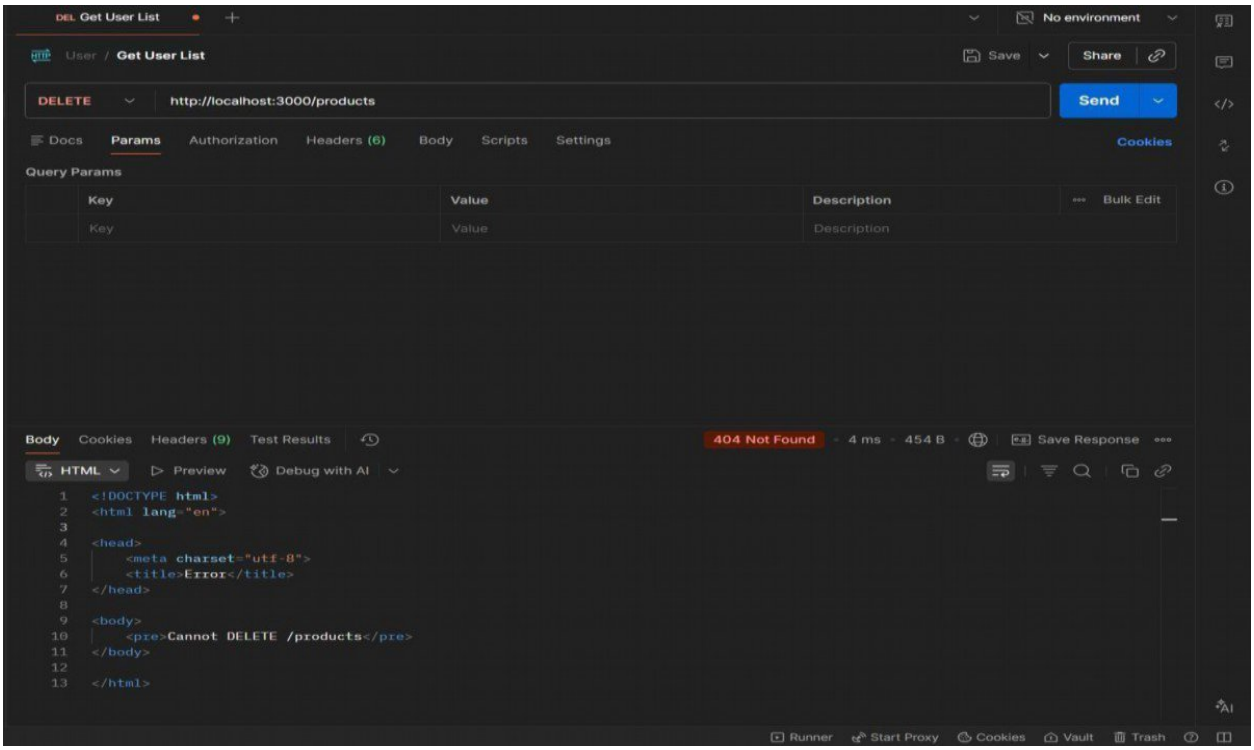

RESULT: The RESTful API for Product Management was successfully implemented with GET, POST, PUT, and DELETE methods returning JSON responses**.**

TASK14: MICROSERVICES APP

AIM: To design a simple microservices-based system by splitting a monolithic application into independent services with loose coupling and single responsibility.

ALGORITHM:

1. Start the program
2. Identify modules in monolithic system
3. Split system into independent services
4. Create separate folders for each service
5. Implement Service 1 (Product Service)
6. Implement Service 2 (Order Service)
7. Use separate databases (db.js) for each service
8. Assign different ports for each service
9. Enable communication via REST APIs
10. Keep services loosely coupled
11. Deploy and run services independently
12. Access services and verify functionality

PROGRAM:

INDEX.HTML:

```
<!DOCTYPE html>
<html>
<head>
   <title>Microservices App</title>
   <link rel="stylesheet" href="style.css">
</head>
<body>
<div class="container">
```

```
    <h2>Microservices Demo</h2>
    <input id="pname" placeholder="Product Name">
    <button onclick="addProduct()">Add Product</button>
    <input id="order" placeholder="Order Item">
    <button onclick="addOrder()">Place Order</button>
</div>
<script src="script.js"></script>
</body>
</html>
```

STYLE.CSS:

```
body {
    font-family: Arial;
    background: #1e1e2f;
    color: white;
    display:flex;
    justify-content:center;
    align-items:center;
    height:100vh;
}
.container {
    text-align:center;
}
input {
    margin: 5px;
    padding: 8px;
}
```

```
button {
    padding: 8px;
    margin: 5px;
    background: #00c6ff;
    border: none;
}
```

SCRIPT.JS:

```
function addProduct() {
    fetch("http://localhost:3001/products", {
        method: "POST",
        headers: { "Content-Type": "application/json" },
        body: JSON.stringify({ name: val("pname") })
    });
}
function addOrder() {
    fetch("http://localhost:3002/orders", {
        method: "POST",
        headers: { "Content-Type": "application/json" },
        body: JSON.stringify({ item: val("order") })
    });
}
function val(id) {
    return document.getElementById(id).value;
}
```

SERVER.JS:

```
const express = require("express");
```

```
const cors = require("cors");
const db = require("./db");
const app = express();
app.use(cors());
app.use(express.json());
// GET products
app.get("/products", (req, res) => {
  res.json(db.getAll());
});
// ADD product
app.post("/products", (req, res) => {
  db.add(req.body);
  res.json({ msg: "Product added" });
});
app.listen(3001, () => {
  console.log("Product Service running at http://localhost:3001");
});
```

DB.JS:

```
let products = [];
function add(p) {
  products.push(p);
}
function getAll() {
  return products;
}
module.exports = { add, getAll };
```

OUTPUT:

1. **GET :**

http://localhost:3001/products

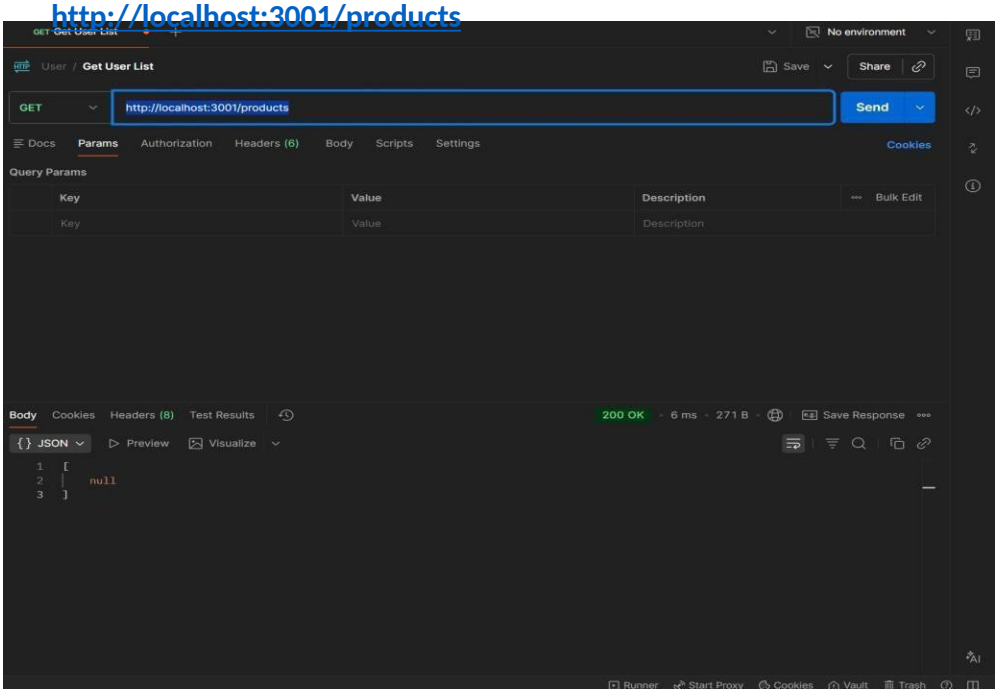

2. POST: http://localhost:3001/products

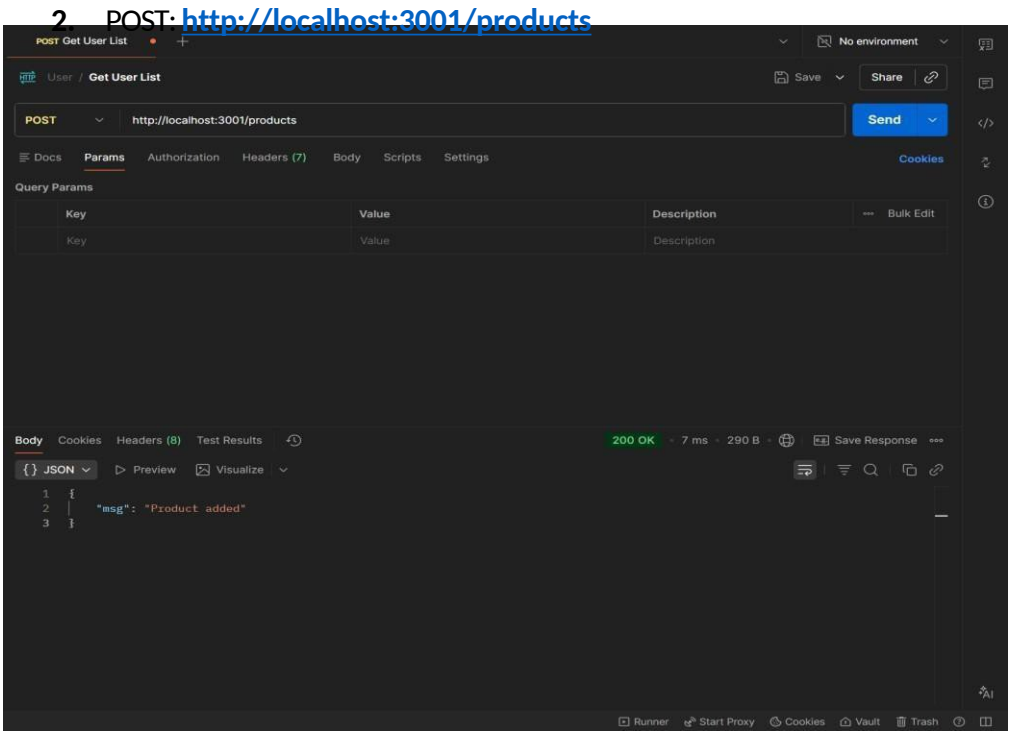

RESULTS: The application was successfully divided into independent microservices with separate responsibilities and communication via REST APIs

TASK15: Service Registry App

Aim: To implement service registry and discovery using Node.js by dynamically registering and discovering microservices without hard-coded URLs.

ALGORITHM:

1. Start the program
2. Create a registry server
3. Store service name and URL in memory
4. Start Product Service
5. Register Product Service to registry
6. Start Order Service
7. Register Order Service to registry
8. Maintain service list in registry
9. Client requests service from registry
10. Fetch service URL dynamically
11. Call the discovered service API
12. Stop the program

PROGRAM:

SERVER.JS:

```
const express = require("express");

const app = express();

app.use(express.json());

let services = {};

app.post("/register", (req, res) => {

   const { name, url } = req.body;

   services[name] = url;
```

```
    console.log(`${name} registered at ${url}`);
    res.json({ msg: "Registered" });
});
app.get("/service/:name", (req, res) => {
    const service = services[req.params.name];
    if (!service) {
        return res.status(404).json({ error: "Service not found" })
    res.json({ url: service });
});
app.listen(4000, () => {
    console.log("Registry running at http://localhost:4000");
});
```

OUTPUT

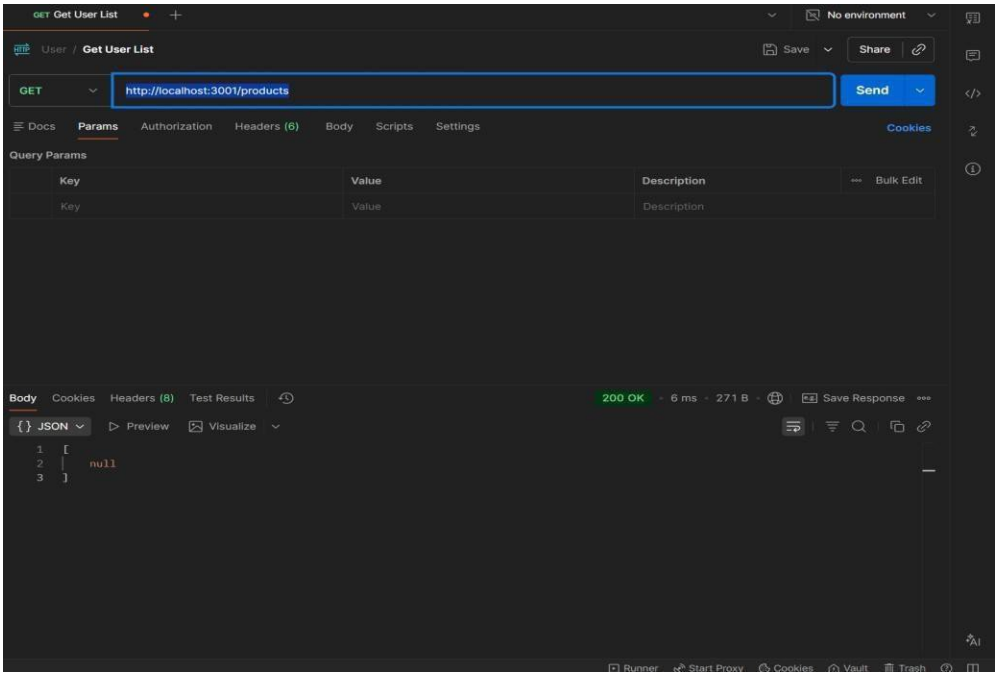

RESULT: The microservices-based system was successfully implemented with service registry and discovery, enabling dynamic communication between independent services without hard-coded URLs.

TASK16: API GATEWAY API

AIM: To configure an API Gateway that routes client requests to microservices and performs basic load balancing across multiple service instances.

ALGORITHM:

1. Start the program
2. Create API Gateway server
3. Define routes for microservices
4. Create multiple instances of a service
5. Store service URLs in an array
6. Implement round-robin load balancing
7. Receive client request at gateway
8. Select service instance dynamically
9. Forward request to selected instance
10. Get response from service
11. Send response back to client
12. Stop the program

PROGRAM:

SERVER.JS:

```
const express = require("express");

const axios = require("axios");

const app = express();

const services = [

    "http://localhost:3001",

    "http://localhost:3002"

];
```