

## **Cucumber Report**

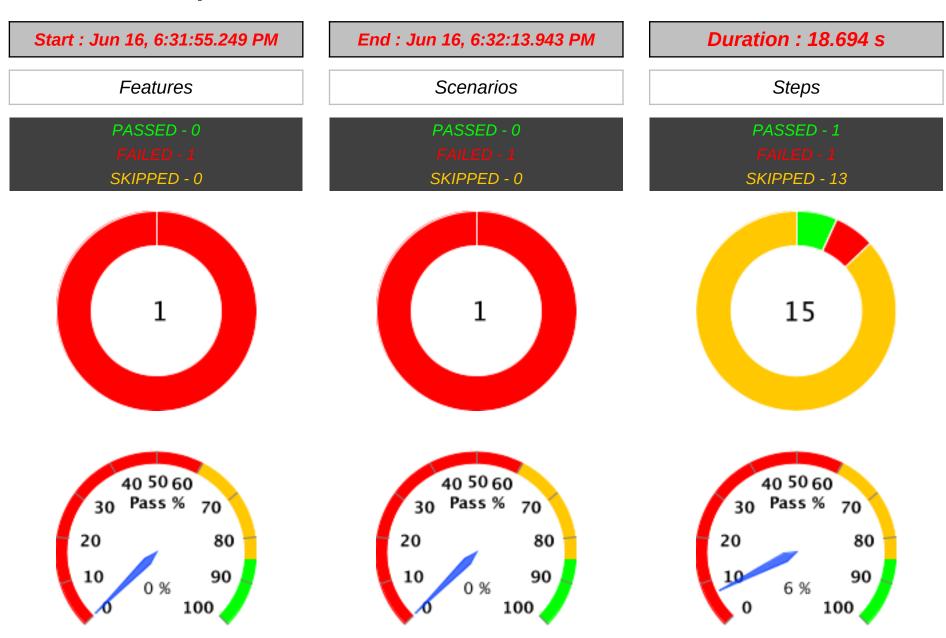

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Add to cart Functionality	18.694 s	1	0	1	0	15	1	1	13


Tag	Scenario			Feature				
Name	T	P	F	S	T	P	F	S
@tag1	1	0	1	0	1	0	1	0

FEATURES SUMMARY -- 4

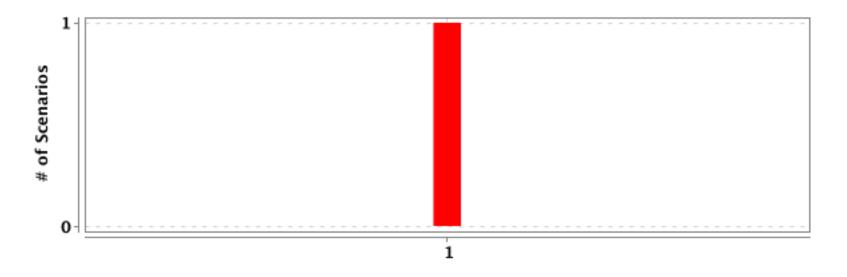

#	#	Feature Name	T	P	F	S	Duration
2	1	Add to cart Functionality	1	0	1	0	18.694 s

SCENARIOS SUMMARY

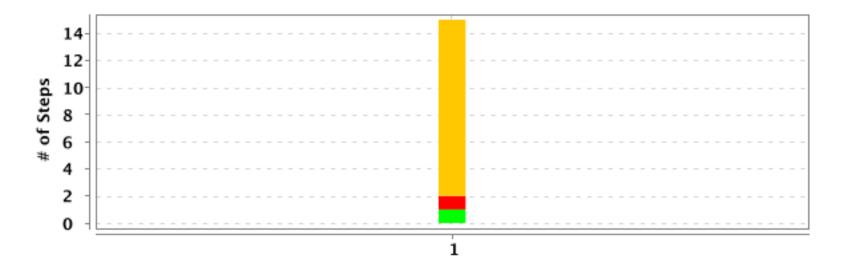


	#	Feature Name	Scenario Name	T	P	F	S	Duration
	1	Add to cart Functionality	Ordering an Item	15	1	1	13	18.674 s

DETAILED SECTION -- 6 --

## **Add to cart Functionality**

FAILED	DURATION - 18.694 s	Scenarios		Steps	
		Total - 1		Total - 15	
/ 6:31:55.249 PM //	6:32:13.943 PM /	Pass - 0	1	Pass - 1	15
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 13	

## **Ordering an Item**

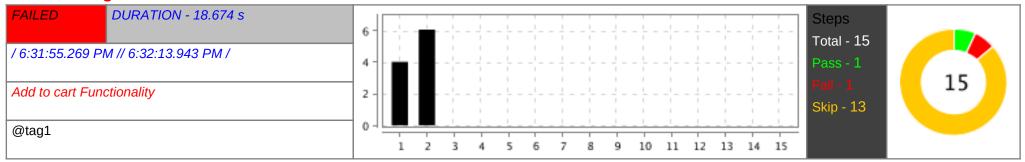

#	Step / Hook Details	Status	Duration
1	Given User is on QAA Astra page	PASSED	4.030 s
2	When User enters "iphone" in the search box	FAILED	6.070 s
	org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=125.0.6422.176) Build info: version: '4.0.0', revision: '3a21814679' System info: host: 'Samarths-MacBook-Air.local', ip: '2607:fea8:1d9e:9f00:0:00:6337%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.3', java.version: '1.8.0_381' Driver info: org. openqa.selenium.chrome.ChromeDriver Command: [019964108eec20e0d6e30628f81ea1f8, findElement {using=xpath, value=//input[@placeholder='Search for items and brands']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 125.0.6422.176, chrome: {chromedriverVersion: 125.0.6422.141 (4b1e8393712, userDataDir: /var/folders/30/crd1hy9x7hd}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:52219}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: MAC, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52219/devtoo, se:cdpVersion: 125.0.6422.176, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:largeBlob: true, at sun.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at sun.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at sun.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.lang.reflect.Constructor.newInstance(Constructor.java:423) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:559) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162)		
	at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:102)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:383)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:375)		
	at com.pages.OrderPage.searchbox(OrderPage.java:37)		
	at StepDef.OrderStepDef.user_enters_in_the_search_box(OrderStepDef.java:30) at ?.User enters "iphone" in the search box(file:///Users/samarthbhatt/git/QAAstraa-Project/QAAstraa/./src/test/resources/Features/order.		
	feature:25)		
	* Not displayable characters are replaced by '?'.		
3	And User click on search button	SKIPPED	0.002 s
4	And User click on the item	SKIPPED	0.000 s
5	And User increases the quantity by clicking on plus icon	SKIPPED	0.001 s
6	And User clicks on add to cart button	SKIPPED	0.000 s
7	And User clicks on checkout button	SKIPPED	0.000 s
8	And User inputs "Samarth" and "Bhatt"	SKIPPED	0.000 s
9	And User selects the country	SKIPPED	0.000 s
10	And User inputs street "Verona" and city "Kitchener"	SKIPPED	0.000 s
11	And User selects state	SKIPPED	0.000 s
12	And User inputs zipcode "N2R1T9" and email "samarthbhatt@gmail.com" and "123456789"	SKIPPED	0.000 s
13	And User enters special note	SKIPPED	0.000 s
14	And User clicks on place order	SKIPPED	0.000 s
15	Then User should not be able to order and should get an error message	SKIPPED	0.001 s
	AFTER - Hooks.AppHooks.screenshot(io.cucumber.java.Scenario)	FAILED	0.022 s
	org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=125.0.6422.176) Build info: version: '4.0.0', revision: '3a21814679' System info: host: 'Samarths-MacBook-Air.local', ip: '2607:fea8:1d9e:9f00:0:0:0:6337%en0', os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.3', java.version: '1.8.0_381' Driver info: org. openqa.selenium.chrome.ChromeDriver Command: [019964108eec20e0d6e30628f81ea1f8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 125.0.6422.176, chrome: {chromedriverVersion: 125.0.6422.141 (4b1e8393712, userDataDir: /var/folders/30/crd1hy9x7hd}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:52219}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: MAC, platformName: MAC, proxy: Proxy(), se:cdp: ws://localhost:52219/devtoo, se:cdpVersion: 125.0.6422.176, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true,		

#	Step / Hook Details	Status	Duration
	webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 019964108eec20e0d6e30628f81ea1f8		
	at sun.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method)		
	at sun.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62)		
	at sun.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.lang.reflect.Constructor.newInstance(Constructor.java:423)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:559)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:614)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:618)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:349)		
	at Hooks.AppHooks.screenshot(AppHooks.java:48)		