


IDE interface showing a Spring Boot application. The top bar includes the project name "spring-learn", version control, and various tool icons. The left sidebar shows the project structure with "spring-learn" and "Idea". The main editor displays the "country.xml" file with the following content:

```
<bean id="countryList" class="java.util.ArrayList">
  <constructor-arg>
```

The bottom panel shows the "Run" output for "SpringLearnApplication". The console displays a series of log messages, including "restartedMain" and "displayCountry|Country [code=IN, name=India]". The "Beans" tab shows the following beans:

- Country [code=IN, name=India]
- Country [code=US, name=United States]
- Country [code=DE, name=Germany]
- Country [code=JP, name=Japan]

The status bar at the bottom indicates the file encoding is UTF-8 and the line ending is CRLF.

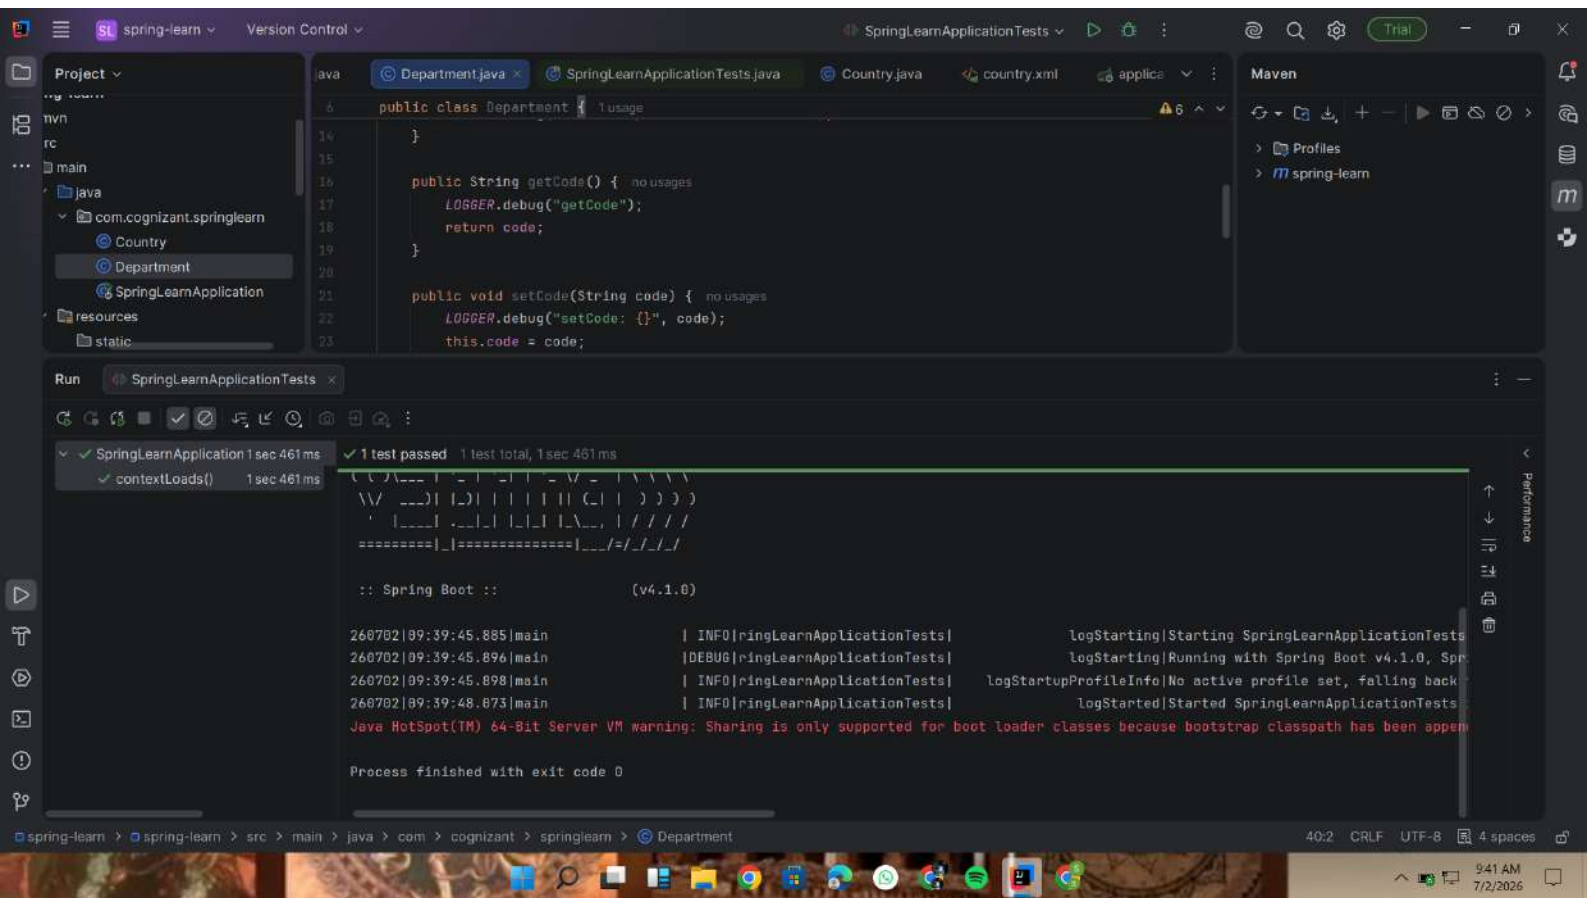

IDE interface showing a Spring Boot application project named "spring-learn". The project structure includes:

- DepartmentDao
- EmployeeDao
- service
 - DepartmentService
 - EmployeeService
- Country
- Department
- Employee
- SpringLearnApplication
- resources


The main code file, `DepartmentService.java`, contains the following code:


```
12 public class DepartmentService {
16
17     public List<Department> getAllDepartments() { 1 usage
18         return departmentDao.getAllDepartments();
19     }
20 }
```


The Run console shows the application output:


```
260702|09:50:54.304|restartedMain |DEBUG|c.c.springlearn.Country | setName|setName: United States
260702|09:50:54.305|restartedMain |DEBUG|c.c.springlearn.Country | <init>|Inside Country Constructor.
260702|09:50:54.305|restartedMain |DEBUG|c.c.springlearn.Country | setCode|setCode: DE
260702|09:50:54.305|restartedMain |DEBUG|c.c.springlearn.Country | setName|setName: Germany
260702|09:50:54.306|restartedMain |DEBUG|c.c.springlearn.Country | <init>|Inside Country Constructor.
260702|09:50:54.306|restartedMain |DEBUG|c.c.springlearn.Country | setCode|setCode: JP
260702|09:50:54.306|restartedMain |DEBUG|c.c.springlearn.Country | setName|setName: Japan
260702|09:50:54.306|restartedMain |DEBUG|c.c.springlearn.Country | <init>|Inside Country Constructor.
260702|09:50:54.307|restartedMain |DEBUG|c.c.springlearn.Country | setCode|setCode: IN
260702|09:50:54.307|restartedMain |DEBUG|c.c.springlearn.Country | setName|setName: India
260702|09:50:54.309|restartedMain |DEBUG|.s.SpringLearnApplication| displayCountries|Country [code=IN, name=India]
260702|09:50:54.309|restartedMain |DEBUG|.s.SpringLearnApplication| displayCountries|Country [code=US, name=United States]
260702|09:50:54.309|restartedMain |DEBUG|.s.SpringLearnApplication| displayCountries|Country [code=DE, name=Germany]
260702|09:50:54.309|restartedMain |DEBUG|.s.SpringLearnApplication| displayCountries|Country [code=JP, name=Japan]
260702|09:50:54.309|restartedMain | INFO|.s.SpringLearnApplication| displayCountries|END
```

The bottom status bar indicates the file encoding is UTF-8 and the line ending is CRLF.

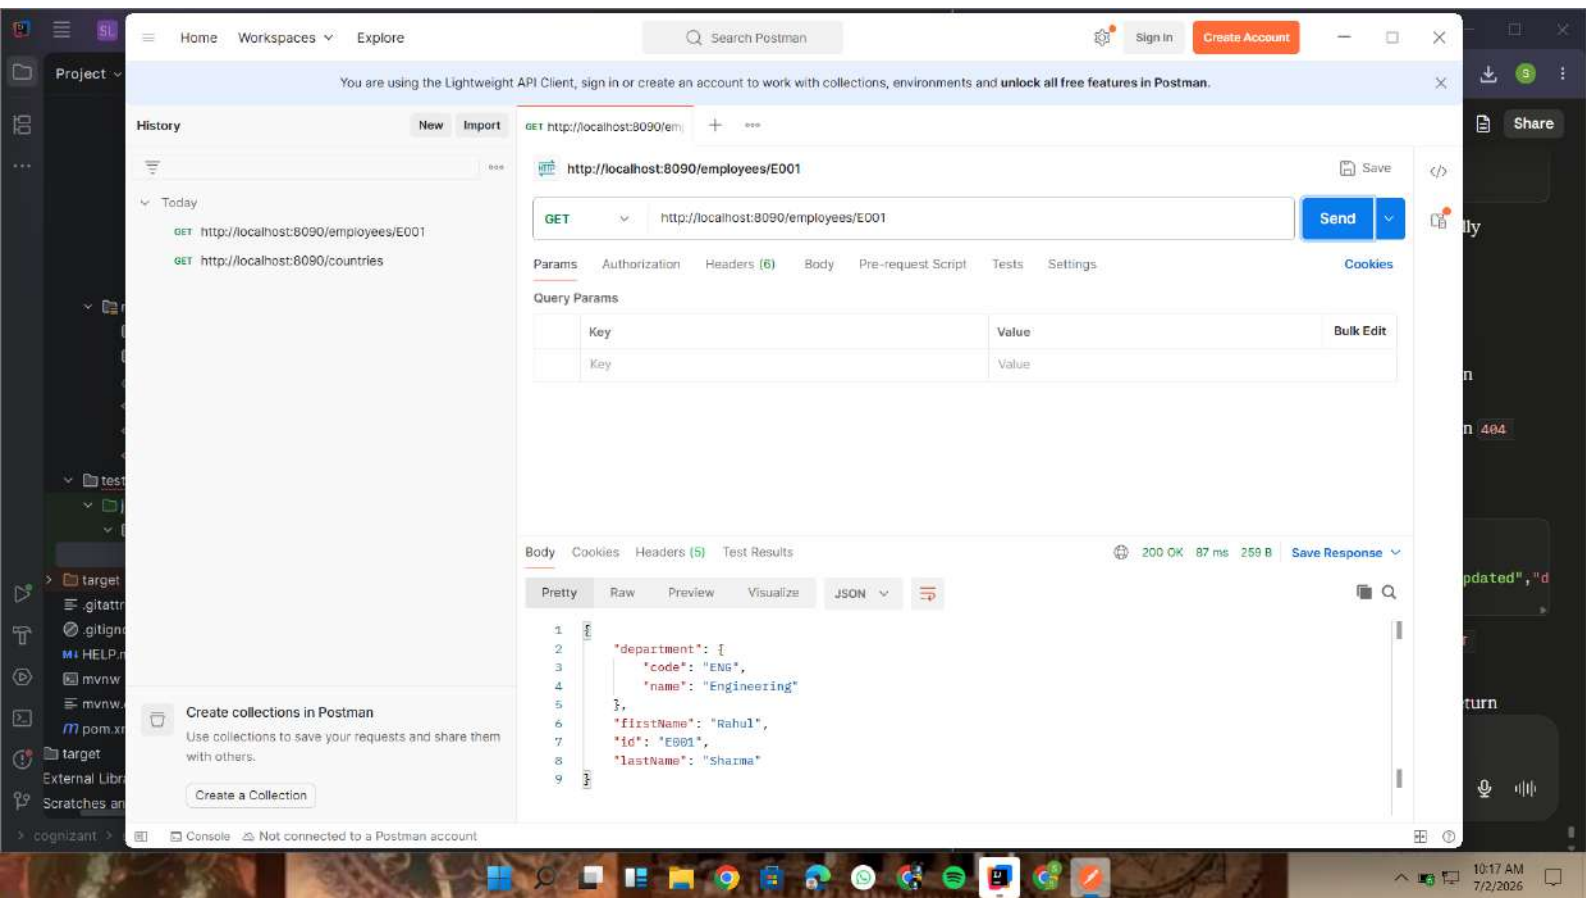

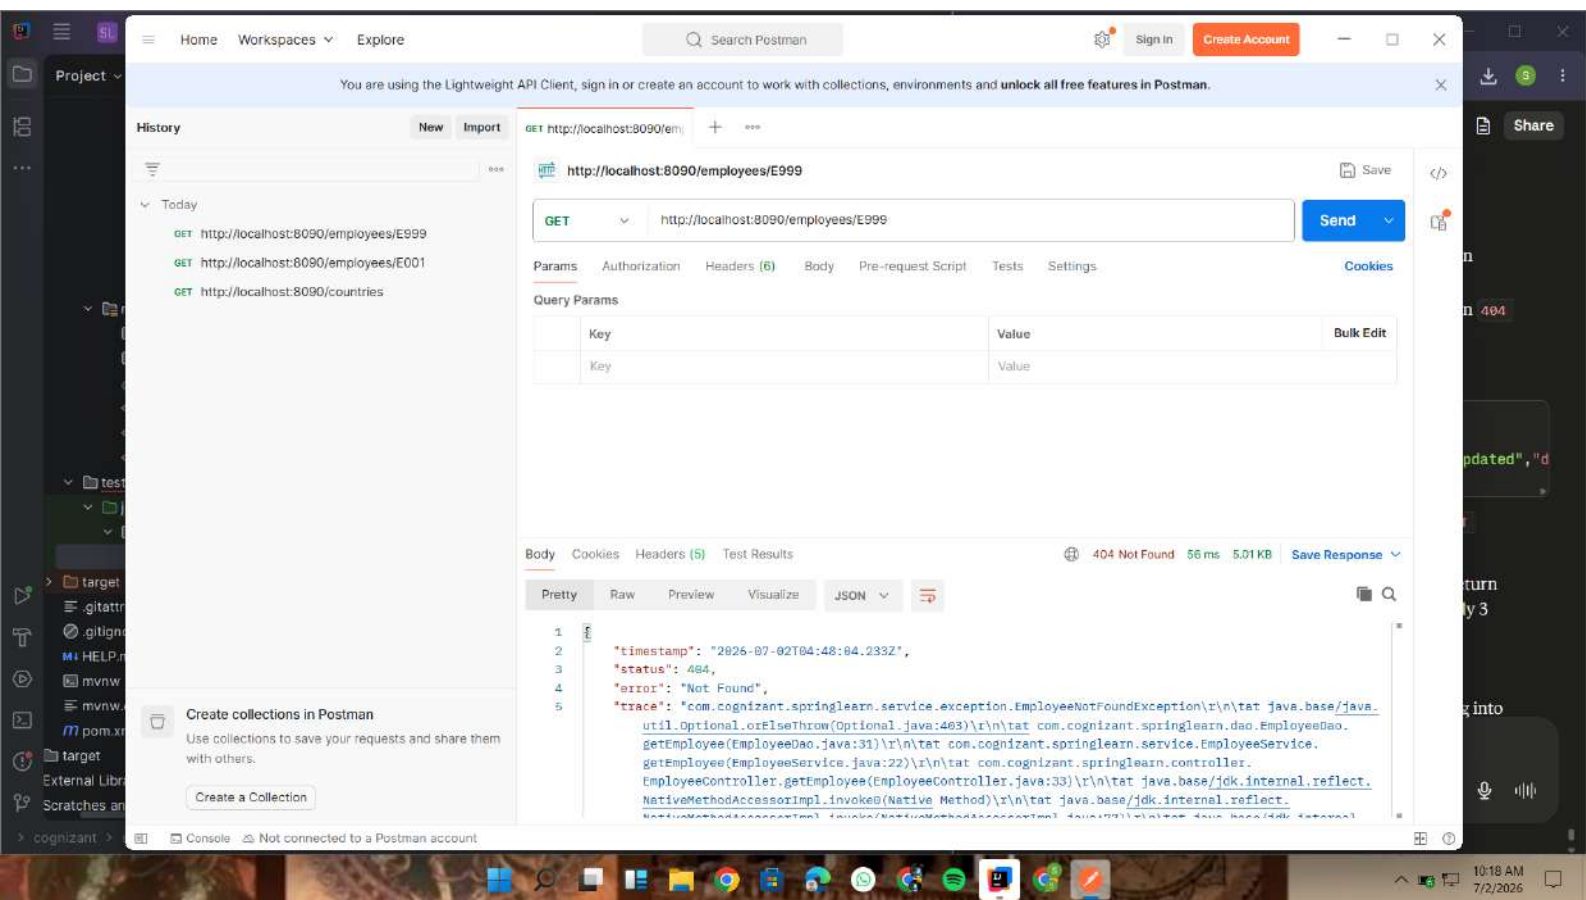

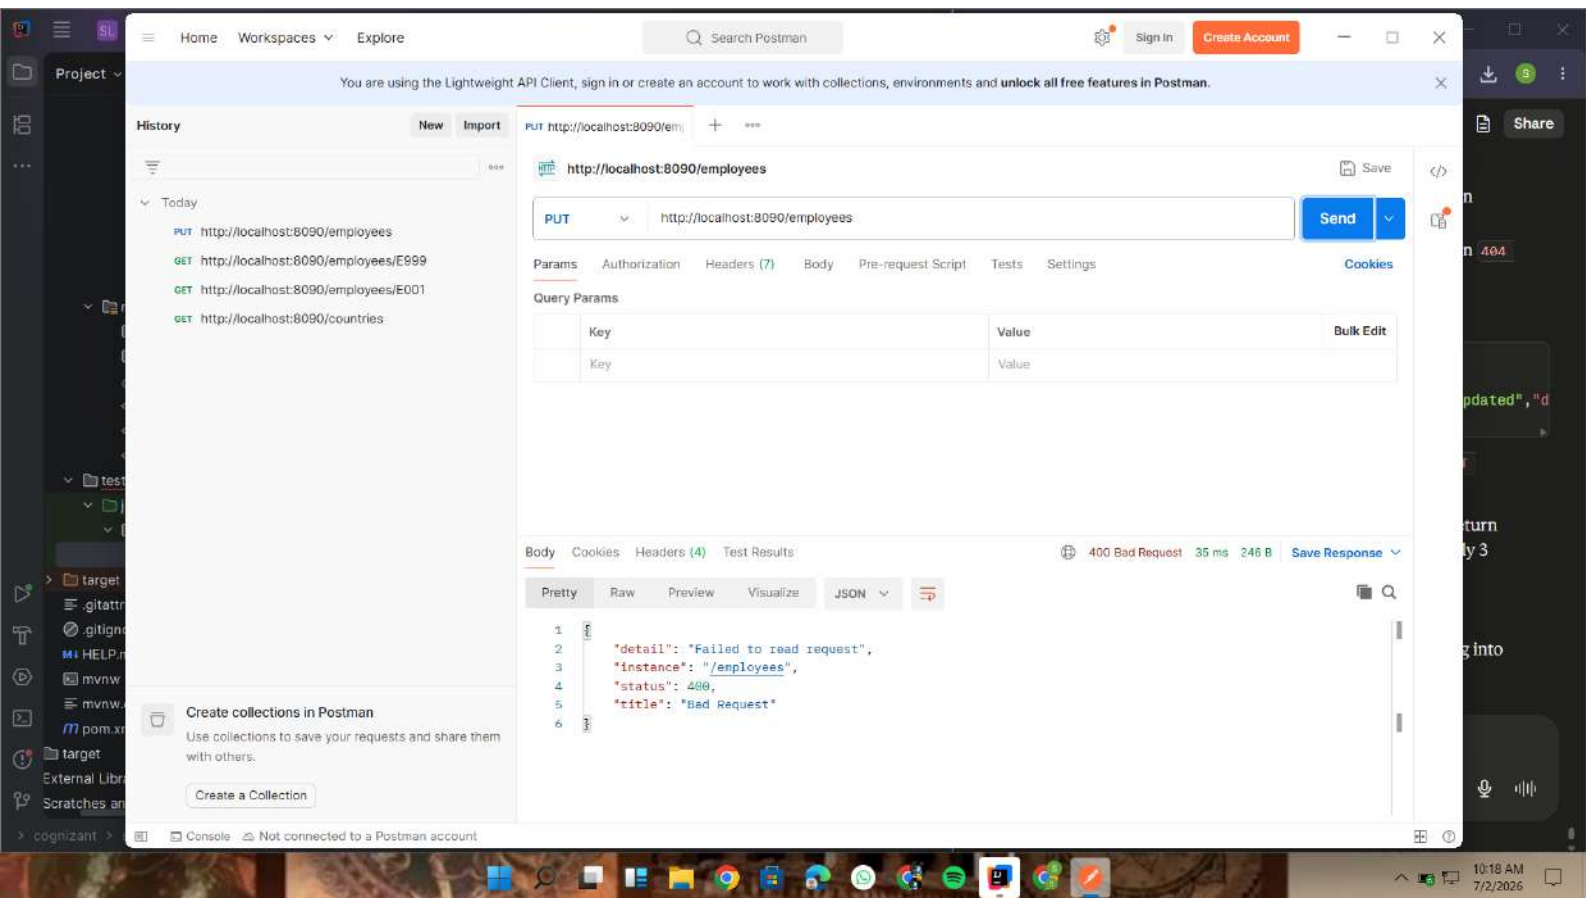

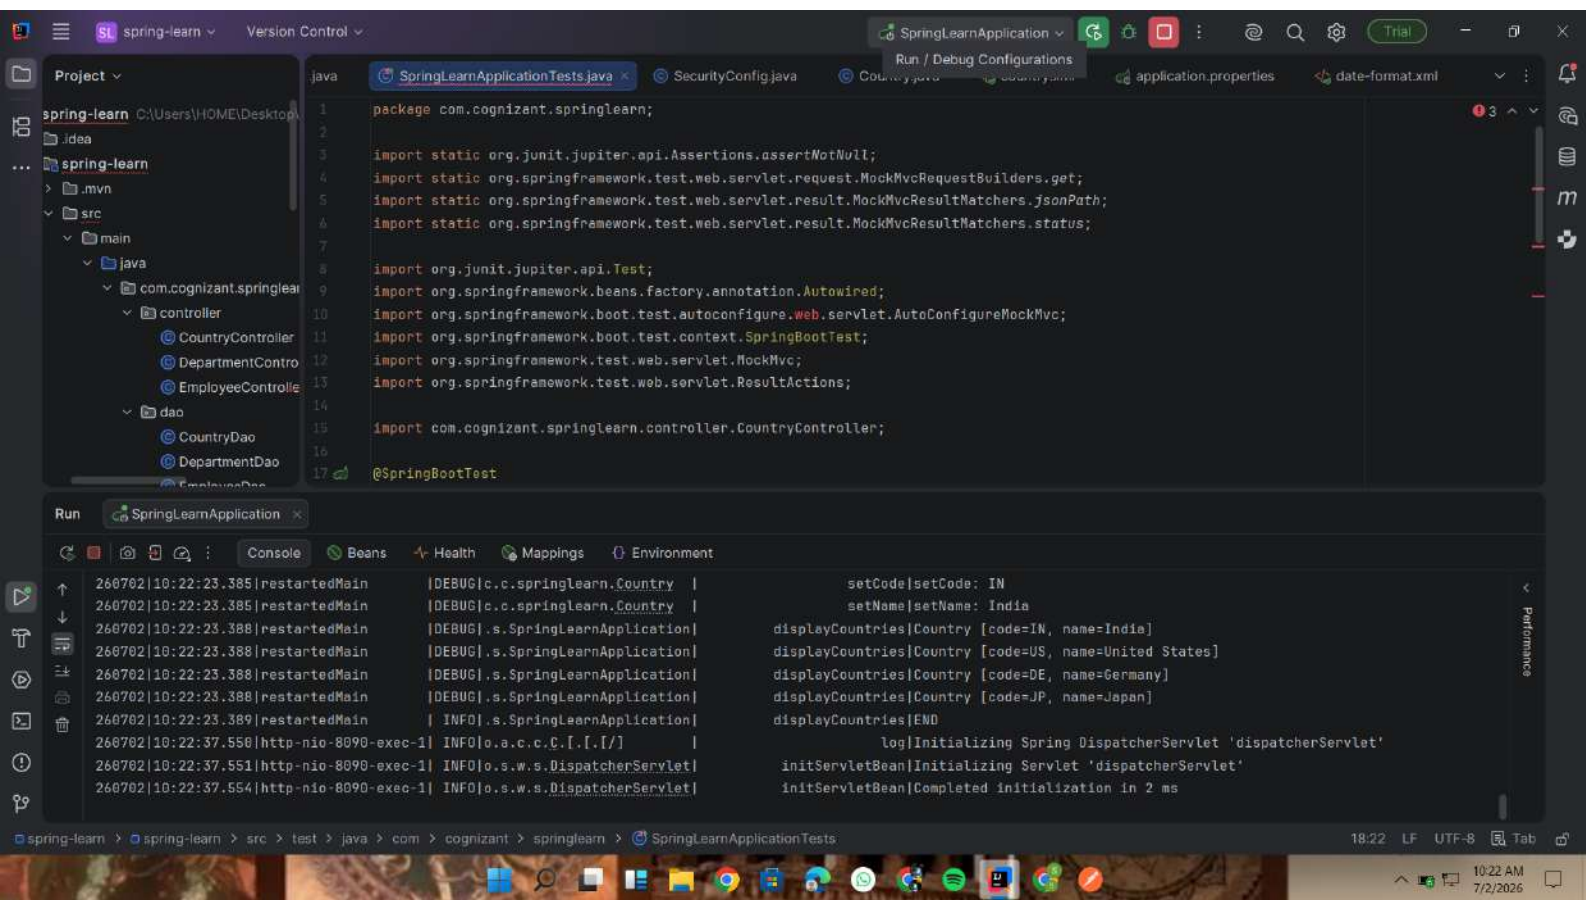

IDE screenshot showing a Spring Boot application project named "spring-learn". The main editor displays the file `SpringLearnApplicationTests.java` with the following code:

```
4 import static org.springframework.test.web.servlet.request.MockMvcRequestBuilders.get;
5 import static org.springframework.test.web.servlet.result.MockMvcResultMatchers.jsonPath;
6 import static org.springframework.test.web.servlet.result.MockMvcResultMatchers.status;
7
8 import org.junit.jupiter.api.Test;
9 import org.springframework.beans.factory.annotation.Autowired;
10 import org.springframework.boot.test.autoconfigure.web.servlet.AutoConfigureMockMvc;
11 import org.springframework.boot.test.context.SpringBootTest;
12 import org.springframework.test.web.servlet.MockMvc;
13 import org.springframework.test.web.servlet.ResultActions;
14
15 import com.cognizant.springLearn.controller.CountryController;
16
17 @SpringBootTest
18 @AutoConfigureMockMvc
19 class SpringLearnApplicationTests {
20
21 }
```


The Project Explorer on the left shows the package structure:

- service
 - exception
 - CountryNotFoundException
 - EmployeeNotFoundException
 - CountryService
 - DepartmentService
 - EmployeeService
 - Country
 - Department
 - Employee
 - GlobalExceptionHandler
 - SpringLearnApplication
- resources
 - static

The Run console at the bottom shows the application output:

```
260702|10:31:01.250|restartedMain | DEBUG|c.c.springLearn.Country | setCode|setCode: JP
260702|10:31:01.250|restartedMain | DEBUG|c.c.springLearn.Country | setName|setName: Japan
260702|10:31:01.251|restartedMain | DEBUG|c.c.springLearn.Country | <init>|Inside Country Constructor.
260702|10:31:01.252|restartedMain | DEBUG|c.c.springLearn.Country | setCode|setCode: IN
260702|10:31:01.253|restartedMain | DEBUG|c.c.springLearn.Country | setName|setName: India
260702|10:31:01.255|restartedMain | DEBUG|.s.SpringLearnApplication| displayCountries|Country [code=IN, name=India]
260702|10:31:01.255|restartedMain | DEBUG|.s.SpringLearnApplication| displayCountries|Country [code=US, name=United States]
260702|10:31:01.255|restartedMain | DEBUG|.s.SpringLearnApplication| displayCountries|Country [code=DE, name=Germany]
260702|10:31:01.256|restartedMain | DEBUG|.s.SpringLearnApplication| displayCountries|Country [code=JP, name=Japan]
260702|10:31:01.256|restartedMain | INFO|.s.SpringLearnApplication| displayCountries|END
```

The status bar at the bottom indicates the file encoding is UTF-8 and the current tab is "SpringLearnApplicationTests".

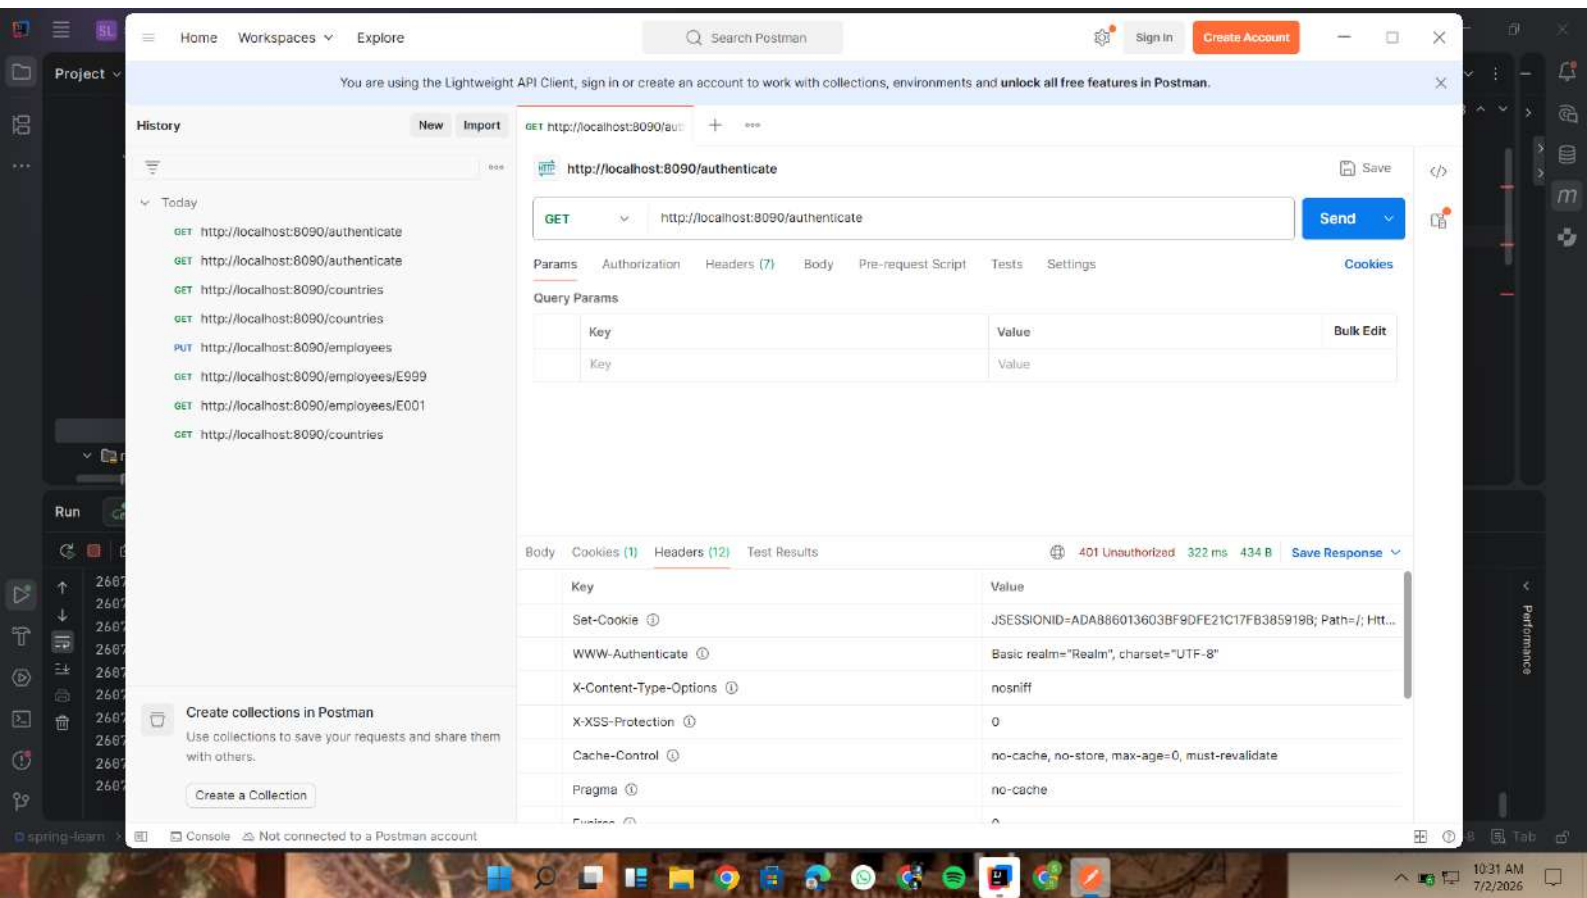

GET http://localhost:8090/authenticate

http://localhost:8090/authenticate

GET http://localhost:8090/authenticate

Params Authorization Headers (7) Body Pre-request Script Tests Settings

Query Params

Key	Value	Bulk Edit
Key	Value	

Body Cookies (1) Headers (12) Test Results

401 Unauthorized 322 ms 434 B Save Response

Key	Value
Set-Cookie	JSESSIONID=ADA86013603BF9DFE21C17F63859198; Path=/; Http...
WWW-Authenticate	Basic realm="Realm", charset="UTF-8"
X-Content-Type-Options	nosniff
X-XSS-Protection	0
Cache-Control	no-cache, no-store, max-age=0, must-revalidate
Pragma	no-cache

Create collections in Postman

Use collections to save your requests and share them with others.

Create a Collection

Console Not connected to a Postman account

10:31 AM
7/2/2026