


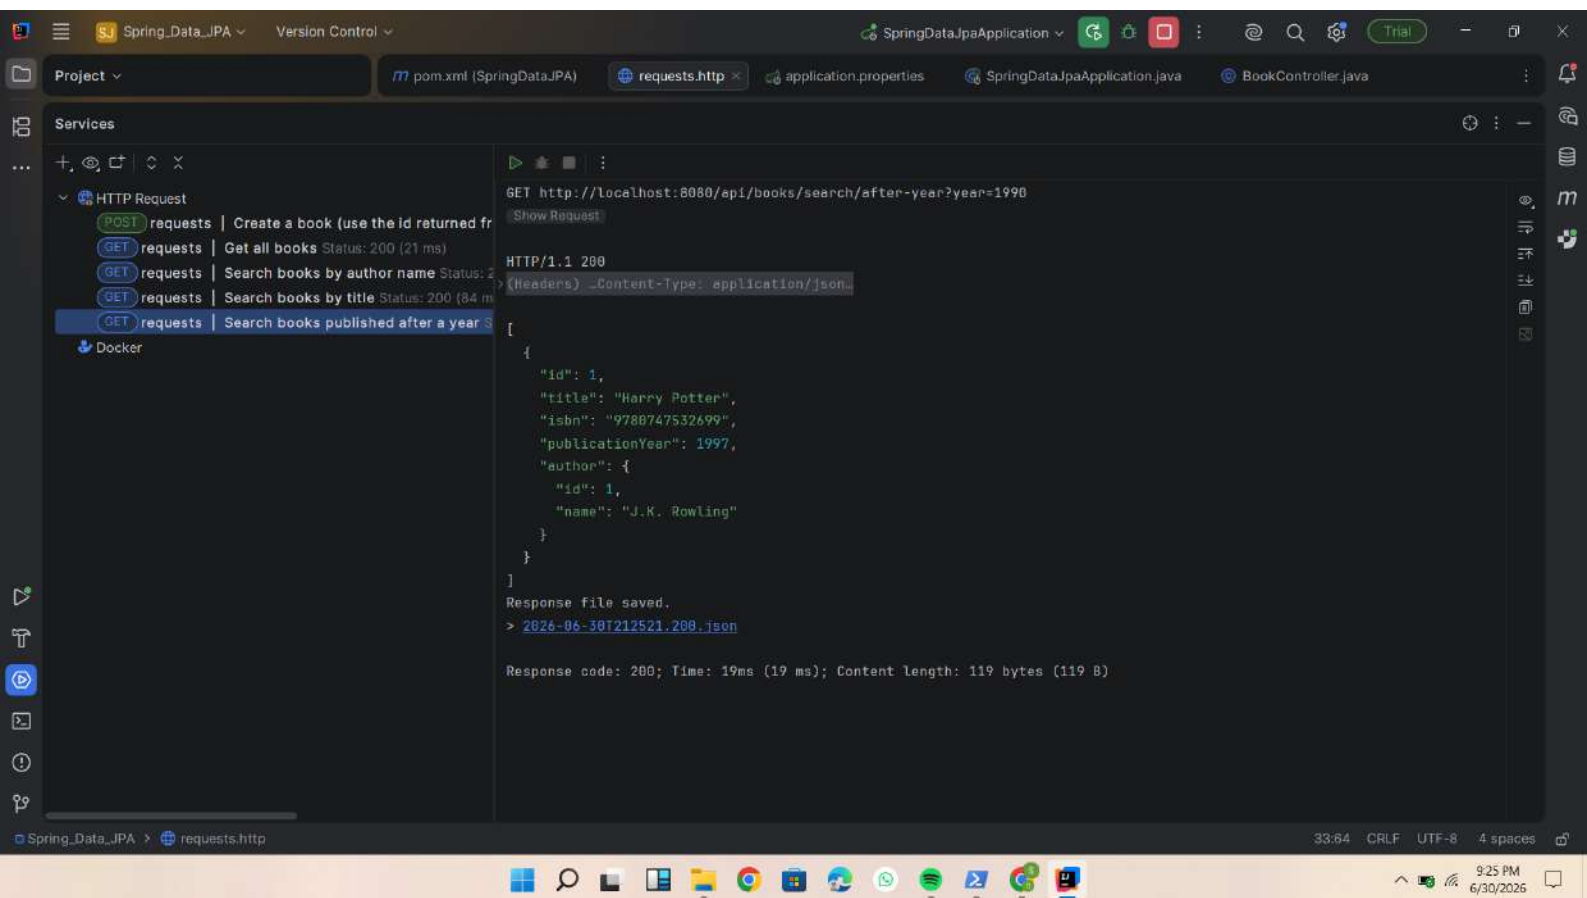

EmployeeManagementSystem Version Control EmployeeManagementSystemApplication requests.http application.properties Department.java Employee.java Department

Services

HTTP Request

- GET requests | #19 Status: 200 (47 ms)
- GET requests | #20 Status: 200 (16 ms)
- GET requests | #21 Status: 200 (19 ms)
- GET requests | #22 Status: 200 (32 ms)
- GET requests | #23 Status: 200 (13 ms)

Docker

GET http://localhost:8080/api/employees/dto

Show Request

HTTP/1.1 200

(Headers) Content-Type: application/json

```
[
  {
    "id": 1,
    "name": "Alice Smith",
    "email": "alice.smith@example.com"
  },
  {
    "id": 2,
    "name": "Bob",
    "email": "bob@example.com"
  }
]
```

Response file saved.

> 2026-07-01T14:17:38.200.json

Response code: 200; Time: 13ms (13 ms); Content length: 113 bytes (113 B)

EmployeeManagementSystem > requests.http 6:4 CRLF UTF-8 4 spaces

2:18 PM 7/1/2026

EmployeeManagementSystem Version Control EmployeeManagementSystemApplication requests.http application.properties Department.java Employee.java Department

Services

- HTTP Request
 - GET requests #19 Status: 200 (47 ms)
 - GET requests #20 Status: 200 (16 ms)
 - GET requests #21 Status: 200 (19 ms)
 - GET requests #22 Status: 200 (32 ms)
 - GET requests #23 Status: 200 (13 ms)
- Docker

GET http://localhost:8080/api/employees/projected

Show Request

HTTP/1.1 200

(Headers) Content-Type: application/json

```
[
  {
    "name": "Alice Smith",
    "id": 1
  },
  {
    "name": "Bob",
    "id": 2
  }
]
```


Response file saved.

> 2026-07-01T14:1734.200.json

Response code: 200; Time: 32ms (32 ms); Content length: 53 bytes (53 B)

EmployeeManagementSystem > requests.http 6:4 CRLF UTF-8 4 spaces

2:18 PM 7/1/2026

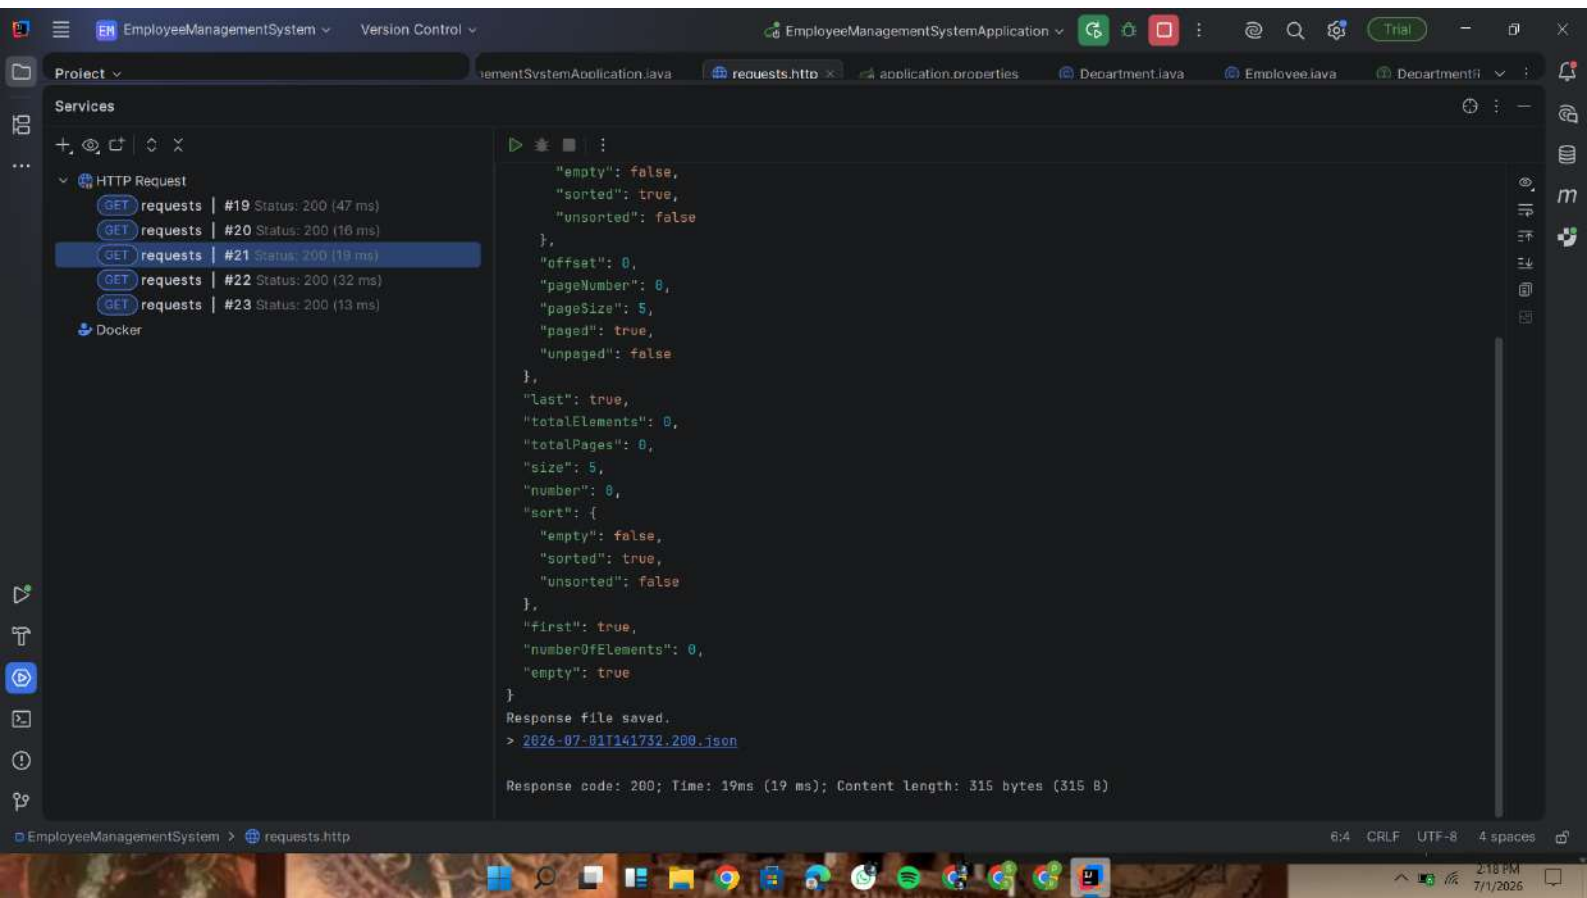

EmployeeManagementSystem Version Control EmployeeManagementSystemApplication requests.http application.properties Department.java Employee.java Department

Services

HTTP Request

- GET requests | #19 Status: 200 (47 ms)
- GET requests | #20 Status: 200 (10 ms)
- GET requests | #21 Status: 200 (19 ms)
- GET requests | #22 Status: 200 (32 ms)
- GET requests | #23 Status: 200 (13 ms)

Docker

```
"empty": false,
"sorted": true,
"unsorted": false
},
"offset": 0,
"pageNumber": 0,
"pageSize": 5,
"paged": true,
"unpaged": false
},
"last": true,
"totalElements": 2,
"totalPages": 1,
"size": 5,
"number": 0,
"sort": {
  "empty": false,
  "sorted": true,
  "unsorted": false
},
"first": true,
"numberOfElements": 2,
"empty": false
}
Response file saved.
> 2026-07-01T14:17:25.200.json

Response code: 200; Time: 16ms (16 ms); Content length: 1007 bytes (1.01 kB)
```

EmployeeManagementSystem > requests.http 6:4 CRLF UTF-8 4 spaces 2:18 PM 7/1/2026

EmployeeManagementSystem Version Control EmployeeManagementSystemApplication requests.http application.properties Department.java Employee.java Department

Services

HTTP Request

- GET requests #19 Status: 200 (47 ms)
- GET requests #20 Status: 200 (16 ms)
- GET requests #21 Status: 200 (19 ms)
- GET requests #22 Status: 200 (32 ms)
- GET requests #23 Status: 200 (13 ms)

Docker

```
"empty": false,
"sorted": true,
"unsorted": false
},
"offset": 0,
"pageNumber": 0,
"pageSize": 2,
"paged": true,
"unpaged": false
},
"last": true,
"totalElements": 2,
"totalPages": 1,
"size": 2,
"number": 0,
"sort": {
  "empty": false,
  "sorted": true,
  "unsorted": false
},
"first": true,
"numberOfElements": 2,
"empty": false
}
Response file saved.
> 2026-07-01T14:17:19.200.json

Response code: 200; Time: 47ms (47 ms); Content length: 1007 bytes (1.01 kB)
```

EmployeeManagementSystem > requests.http 6:4 CRLF UTF-8 4 spaces 2:18 PM 7/1/2026

orm-learn Version Control

OrmLearnApplication

Project

- service
 - exception
 - CountryNotFound
 - CountryService
 - OrmLearnApplication
 - resources
 - static
 - templates
 - application.properties
 - test
 - target
 - gitattributes

orm.xml (orm-learn)

application.properties

```
logging.level.org.hibernate.type.descriptor.sql=trace

spring.datasource.driver-class-name=com.mysql.cj.jdbc.Driver
spring.datasource.url=jdbc:mysql://localhost:3306/ormlearn
spring.datasource.username=root
spring.datasource.password=Samhi@1411

spring.jpa.hibernate.ddl-auto=validate
spring.jpa.properties.hibernate.dialect=org.hibernate.dialect.MySQL8Dialect
spring.jpa.show-sql=true
spring.jpa.properties.hibernate.format_sql=true
```

Run OrmLearnApplication

Console

```
country0.co_code as co_code1_0_,
country0.co_name as co_name2_0_
from
country country0_
where
country0.co_name like ? escape ?
2026-07-01 14:57:06.123 TRACE 21528 --- [
2026-07-01 14:57:06.124 TRACE 21528 --- [
2026-07-01 14:57:06.126 TRACE 21528 --- [
2026-07-01 14:57:06.127 TRACE 21528 --- [
2026-07-01 14:57:06.128 TRACE 21528 --- [
2026-07-01 14:57:06.128 TRACE 21528 --- [
2026-07-01 14:57:06.132 DEBUG 21528 --- [
2026-07-01 14:57:06.132 INFO 21528 --- [

main] o.h.type.descriptor.sql.BasicBinder : binding parameter [1] as [VARCHAR] - [Z%]
main] o.h.type.descriptor.sql.BasicBinder : binding parameter [2] as [CHAR] - [\]
main] o.h.type.descriptor.sql.BasicExtractor : extracted value ([co_code1_0_] : [VARCHAR]) - [ZM]
main] o.h.type.descriptor.sql.BasicExtractor : extracted value ([co_name2_0_] : [VARCHAR]) - [Zambia]
main] o.h.type.descriptor.sql.BasicExtractor : extracted value ([co_code1_0_] : [VARCHAR]) - [ZW]
main] o.h.type.descriptor.sql.BasicExtractor : extracted value ([co_name2_0_] : [VARCHAR]) - [Zimbabwe]
main] c.c.ormlearn.OrmLearnApplication : Countries starting with Z: [Country{code='ZM', name='Zambia'}, Country
main] c.c.ormlearn.OrmLearnApplication : End testSearchCountries
```

orm-learn > src > main > resources > application.properties

14:41 LF UTF-8 4 spaces

257 PM 7/1/2026

orm-learn Version Control

OrmLearnApplication

Project

- service
 - exception
 - CountryNotFound
 - CountryService
 - OrmLearnApplication
 - resources
 - static
 - templates
 - application.properties
 - test
 - target
 - gitattributes

orm.xml (orm-learn)

application.properties

```
4 logging.level.org.hibernate.type.descriptor.sql=trace
5
6 spring.datasource.driver-class-name=com.mysql.cj.jdbc.Driver
7 spring.datasource.url=jdbc:mysql://localhost:3306/ormlearn
8 spring.datasource.username=root
9 spring.datasource.password=Samhi@1411
10
11 spring.jpa.hibernate.ddl-auto=validate
12 spring.jpa.properties.hibernate.dialect=org.hibernate.dialect.MySQL8Dialect
13 spring.jpa.show-sql=true
14 spring.jpa.properties.hibernate.format_sql=true
```

Run OrmLearnApplication

Console

```
country country0_
where
country0_.co_name like ? escape ?
order by
country0_.co_name asc
2026-07-01 14:57:06.113 TRACE 21528 --- [main] o.h.type.descriptor.sql.BasicBinder : binding parameter [1] as [VARCHAR] - [%ou%]
2026-07-01 14:57:06.113 TRACE 21528 --- [main] o.h.type.descriptor.sql.BasicBinder : binding parameter [2] as [CHAR] - [\]
2026-07-01 14:57:06.115 TRACE 21528 --- [main] o.h.type.descriptor.sql.BasicExtractor : extracted value ([co_code1_0_] : [VARCHAR]) - [ZA]
2026-07-01 14:57:06.116 TRACE 21528 --- [main] o.h.type.descriptor.sql.BasicExtractor : extracted value ([co_name2_0_] : [VARCHAR]) - [South Africa]
2026-07-01 14:57:06.119 DEBUG 21528 --- [main] c.c.ormlearn.OrmLearnApplication : Countries containing 'ou' ordered: [Country{code='ZA', name='South Afr
2026-07-01 14:57:06.122 DEBUG 21528 --- [main] org.hibernate.SQL :
select
country0_.co_code as co_code1_0_,
country0_.co_name as co_name2_0_
from
```

orm-learn > src > main > resources > application.properties

14:41 LF UTF-8 4 spaces

257 PM 7/1/2026

orm-learn Version Control

OrmLearnApplication

Project

- service
 - exception
 - CountryNotFound
 - CountryService
 - OrmLearnApplication
 - resources
 - static
 - templates
 - application.properties
 - test
 - target
 - gitattributes

orm.xml (orm-learn)

application.properties

```
4 logging.level.org.hibernate.type.descriptor.sql=trace
5
6 spring.datasource.driver-class-name=com.mysql.cj.jdbc.Driver
7 spring.datasource.url=jdbc:mysql://localhost:3306/ormlearn
8 spring.datasource.username=root
9 spring.datasource.password=Samhi@1411
10
11 spring.jpa.hibernate.ddl-auto=validate
12 spring.jpa.properties.hibernate.dialect=org.hibernate.dialect.MySQL8Dialect
13 spring.jpa.show-sql=true
14 spring.jpa.properties.hibernate.format_sql=true
```

Run OrmLearnApplication

Console

```
country0_.co_code as co_code1_0_,
country0_.co_name as co_name2_0_
from
  country country0_
where
  country0_.co_name like ? escape ?
order by
  country0_.co_name asc
Hibernate:
select
  country0_.co_code as co_code1_0_,
  country0_.co_name as co_name2_0_
from
  country country0_
where
  country0_.co_name like ? escape ?
```

orm-learn > src > main > resources > application.properties

14:41 LF UTF-8 4 spaces

257 PM 7/1/2026

MySQL Workbench

Local instance MySQL80 x

File Edit View Query Database Server Tools Scripting Help

Exercise 3 to 5 Exercise 6 to 7 SQL File 4*

Limit to 1000 rows

```
1 CREATE SCHEMA ormlearn;
2
3 USE ormlearn;
4
5 CREATE TABLE country (
6     co_code VARCHAR(2) PRIMARY KEY,
7     co_name VARCHAR(50)
8 );
9
10 INSERT INTO country VALUES ('IN', 'India');
11 INSERT INTO country VALUES ('US', 'United States');
12 INSERT INTO country VALUES ('AU', 'Australia');
13 INSERT INTO country VALUES ('GB', 'United Kingdom');
14 INSERT INTO country VALUES ('CA', 'Canada');
15 INSERT INTO country VALUES ('ZA', 'South Africa');
16 INSERT INTO country VALUES ('ZM', 'Zambia');
17 INSERT INTO country VALUES ('ZW', 'Zimbabwe');
```

SQLAdditions

My Snippets

Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
✓ 7	14:21:48	INSERT INTO country VALUES ('GB', 'United Kingdom')	1 row(s) affected	0.000 sec
✓ 8	14:21:48	INSERT INTO country VALUES ('CA', 'Canada')	1 row(s) affected	0.000 sec
✓ 9	14:21:48	INSERT INTO country VALUES ('ZA', 'South Africa')	1 row(s) affected	0.016 sec
✓ 10	14:21:48	INSERT INTO country VALUES ('ZM', 'Zambia')	1 row(s) affected	0.000 sec
✓ 11	14:21:48	INSERT INTO country VALUES ('ZW', 'Zimbabwe')	1 row(s) affected	0.015 sec

Query Completed

Application v

CountryService.java CountryNotFoundException.java

select

Performance

14:41 LF UTF-8 4 spaces

2:58 PM 7/1/2025