

ASSIGNMENT-2

11.Container With Most Water


You are given an integer array `height` of length `n`. There are `n` vertical lines drawn such that the two endpoints of the `i`th line are $(i, 0)$ and $(i, \text{height}[i])$.

Find two lines that together with the x-axis form a container, such that the container contains the most water.

Return *the maximum amount of water a container can store*.

Notice that you may not slant the container.

Example 1:

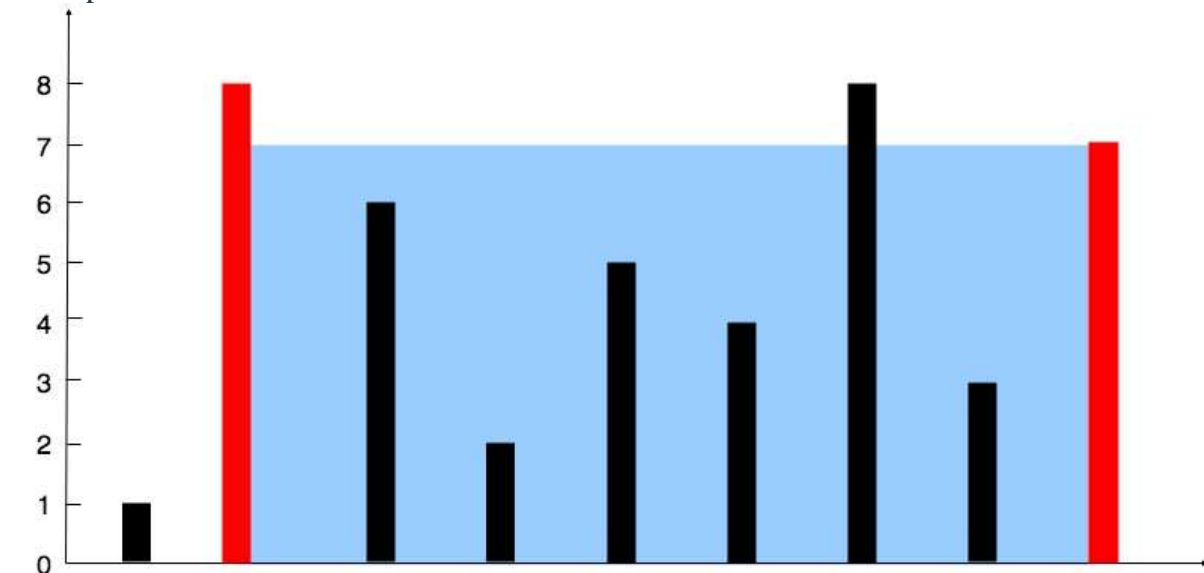

Input: `height = [1,8,6,2,5,4,8,3,7]`

Output: 49

Explanation: The above vertical lines are represented by array `[1,8,6,2,5,4,8,3,7]`. In this case, the max area of water (blue section) the container can contain is 49.

Example 2:

Input: `height = [1,1]`

Output: 1

Constraints:

- `n == height.length`
- `2 <= n <= 105`
- `0 <= height[i] <= 104`

PROGRAM:

Def area(height):

left = 0

right = len(height) - 1

area = 0

```

while left < right:
    current = min(height[left], height[right]) * (right - left)
    area = max(area, current)

    if height[left] < height[right]:
        left += 1
    else:
        right -= 1

return area

```

```

hei = [1, 8, 6, 2, 5, 4, 8, 3, 7]
print("Max area :", area(hei))

```

OUTPUT:

Max area : 49

Time complexity

O(n)

12.Integer to Roman

Roman numerals are represented by seven different symbols: I, V, X, L, C, D and M.

Symbol	Value
I	1
V	5
X	10
L	50
C	100
D	500
M	1000

For example, 2 is written as II in Roman numeral, just two one's added together. 12 is written as XII, which is simply X + II. The number 27 is written as XXVII, which is XX + V + II.

Roman numerals are usually written largest to smallest from left to right. However, the numeral for four is not IIII. Instead, the number four is written as IV. Because the one is before the five we subtract it making four. The same principle applies to the number nine, which is written as IX. There are six instances where subtraction is used:

- I can be placed before V (5) and X (10) to make 4 and 9.
- X can be placed before L (50) and C (100) to make 40 and 90.
- C can be placed before D (500) and M (1000) to make 400 and 900.

Given an integer, convert it to a roman numeral.

Example 1:

Input: num = 3

Output: "III"

Explanation: 3 is represented as 3 ones.

Example 2:

Input: num = 58

Output: "LVIII"

Explanation: L = 50, V = 5, III = 3.

Example 3:

Input: num = 1994

Output: "MCMXCIV"

Explanation: M = 1000, CM = 900, XC = 90 and IV = 4.

PROGRAM:

```
def introman(num):  
    valuemap = [  
        (1000, 'M'), (900, 'CM'), (500, 'D'), (400, 'CD'),  
        (100, 'C'), (90, 'XC'), (50, 'L'), (40, 'XL'),  
        (10, 'X'), (9, 'IX'), (5, 'V'), (4, 'IV'), (1, 'I')  
    ]  
  
    romannumeral = ""  
    for value, symbol in valuemap:  
        while num >= value:  
            romannumeral += symbol  
            num -= value  
    return romannumeral  
  
print(introman(3))  
print(introman(58))  
print(introman(1994))
```

OUTPUT:

III
LVIII
MCMXCIV

Time
complexity

O(n)

13. Roman to Integer

Roman numerals are represented by seven different symbols: I, V, X, L, C, D and M.

Symbol	Value
--------	-------

I	1
V	5
X	10
L	50
C	100
D	500
M	1000

For example, 2 is written as II in Roman numeral, just two ones added together. 12 is written as XII, which is simply X + II. The number 27 is written as XXVII, which is XX + V + II.

Roman numerals are usually written largest to smallest from left to right. However, the numeral for four is not IIII. Instead, the number four is written as IV. Because the one is before the five we subtract it making four. The same principle applies to the number nine, which is written as IX. There are six instances where subtraction is used:

- I can be placed before V (5) and X (10) to make 4 and 9.
- X can be placed before L (50) and C (100) to make 40 and 90.
- C can be placed before D (500) and M (1000) to make 400 and 900.

Given a roman numeral, convert it to an integer.

Example 1:

Input: s = "III"

Output: 3

Explanation: III = 3.

Example 2:

Input: s = "LVIII"

Output: 58

Explanation: L = 50, V = 5, III = 3.

Example 3:

Input: s = "MCMXCIV"

Output: 1994

Explanation: M = 1000, CM = 900, XC = 90 and IV = 4.

Constraints:

- $1 \leq s.length \leq 15$
- s contains only the characters ('I', 'V', 'X', 'L', 'C', 'D', 'M').

It is guaranteed that s is a valid roman numeral in the range [1, 3999].

PROGRAM:

```
def romanint(s):
```

```
    romanmap = {'I': 1, 'V': 5, 'X': 10, 'L': 50, 'C': 100, 'D': 500, 'M': 1000}
```

```
    total = 0
```

```
    prev = 0
```

```

for char in reversed(s):
    value = romanmap[char]
    if value < prev:
        total -= value
    else:
        total += value
    prev = value

```

```

return total

```

```

print(romanint("III"))
print(romanint("LVIII"))
print(romanint("MCMXCIV"))

```

OUTPUT:

```

3
58
1994

```

Time complexity
O(n)

14. Longest Common Prefix

Write a function to find the longest common prefix string amongst an array of strings. If there is no common prefix, return an empty string "".

Example 1:

Input: strs = ["flower", "flow", "flight"]

Output: "fl"

Example 2:

Input: strs = ["dog", "racecar", "car"]

Output: ""

Explanation: There is no common prefix among the input strings.

Constraints:

- $1 \leq \text{strs.length} \leq 200$
- $0 \leq \text{strs}[i].\text{length} \leq 200$
- $\text{strs}[i]$ consists of only lowercase English letters.

PROGRAM:

```

def longpre(strs):
    if not strs:
        return ""

    prefix = strs[0]

```

```
for s in strs[1:]:  
  
    while not s.startswith(prefix):  
        prefix = prefix[:-1]  
        if not prefix:  
            return ""  
    return prefix  
  
print(longpre(["flower", "flow", "flight"]))
```

OUTPUT:

fl

time complexity

$O(n \cdot m)$

15. 3sums

Given an integer array `nums`, return all the triplets `[nums[i], nums[j], nums[k]]` such that $i \neq j$, $i \neq k$, and $j \neq k$, and $nums[i] + nums[j] + nums[k] == 0$.

Notice that the solution set must not contain duplicate triplets.

Example 1:

Input: `nums = [-1,0,1,2,-1,-4]`

Output: `[[-1,-1,2],[-1,0,1]]`

Explanation:

`nums[0] + nums[1] + nums[2] = (-1) + 0 + 1 = 0.`

`nums[1] + nums[2] + nums[4] = 0 + 1 + (-1) = 0.`

`nums[0] + nums[3] + nums[4] = (-1) + 2 + (-1) = 0.`

The distinct triplets are `[-1,0,1]` and `[-1,-1,2]`.

Notice that the order of the output and the order of the triplets does not matter.

Example 2:

Input: `nums = [0,1,1]`

Output: `[]`

Explanation: The only possible triplet does not sum up to 0.

Example 3:

Input: `nums = [0,0,0]`

Output: `[[0,0,0]]`

Explanation: The only possible triplet sums up to 0.

Constraints:

- `3 <= nums.length <= 3000`
- `-105 <= nums[i] <= 105`

PROGRAM:

```
def threesum(nums):
```

```
    nums.sort()
```

```
    result = []
```

```
    for i in range(len(nums) - 2):
```

```
        if i > 0 and nums[i] == nums[i - 1]:
```

```
            continue
```

```
        left, right = i + 1, len(nums) - 1
```

```
        while left < right:
```

```
            total = nums[i] + nums[left] + nums[right]
```

```
            if total == 0:
```

```
                result.append([nums[i], nums[left], nums[right]])
```

```
                while left < right and nums[left] == nums[left + 1]:
```

```
                    left += 1
```

```
                while left < right and nums[right] == nums[right - 1]:
```

```
        right -= 1
        left += 1
        right -= 1
    elif total < 0:
        left += 1
    else:
        right -= 1

    return result

print(threesum([-1,0,1,2,-1,-4]))
```

OUTPUT:

[[-1, -1, 2], [-1, 0, 1]]

Time complexity

$O(n^2)$

16. 3Sum Closest

Given an integer array `nums` of length `n` and an integer `target`, find three integers in `nums` such that the sum is closest to `target`.

Return *the sum of the three integers*.

You may assume that each input would have exactly one solution.

Example 1:

Input: `nums = [-1,2,1,-4]`, `target = 1`

Output: 2

Explanation: The sum that is closest to the target is 2. $(-1 + 2 + 1 = 2)$.

Example 2:

Input: `nums = [0,0,0]`, `target = 1`

Output: 0

Explanation: The sum that is closest to the target is 0. $(0 + 0 + 0 = 0)$.

Constraints:

- `3 <= nums.length <= 500`
- `-1000 <= nums[i] <= 1000`
- `-104 <= target <= 104`

PROGRAM:

```
def closest(nums, target):
```

```
    nums.sort()
```

```
    closestsum = float('inf')
```

```
    for i in range(len(nums) - 2):
```

```
        left, right = i + 1, len(nums) - 1
```

```
        while left < right:
```

```
            current = nums[i] + nums[left] + nums[right]
```

```
            if abs(current - target) < abs(closestsum - target):
```

```
                closestsum = current
```

```
            if currentsum < target:
```

```
                left += 1
```

```
            elif currentsum > target:
```

```
                right -= 1
```

```
            else:
```

```
                return target
```

```
    return closestsum
```

```
print(closest([-1,2,1,-4], 1))
```

OUTPUT:

2

Time complexity

$O(n^2)$

17. Letter Combinations of a Phone Number

Given a string containing digits from 2-9 inclusive, return all possible letter combinations that the number could represent. Return the answer in any order.

A mapping of digits to letters (just like on the telephone buttons) is given below. Note that 1 does not map to any letters.



Example 1:

Input: digits = "23"

Output: ["ad","ae","af","bd","be","bf","cd","ce","cf"]

Example 2:

Input: digits = ""

Output: []

Example 3:

Input: digits = "2"

Output: ["a","b","c"]

Constraints:

- $0 \leq \text{digits.length} \leq 4$
- `digits[i]` is a digit in the range ['2', '9'].

PROGRAM:

```
def letter_combinations(digits):  
    if not digits:  
        return []  
  
    mapping = {  
        '2': 'abc', '3': 'def', '4': 'ghi', '5': 'jkl',  
        '6': 'mno', '7': 'pqrs', '8': 'tuv', '9': 'wxyz'  
    }  
  
    result = []  
    for digit in digits:  
        result = [prefix + letter for prefix in result for letter in mapping[digit]]  
  
    return result  
print(letter_combinations("23"))
```

OUTPUT:

['ad', 'ae', 'af', 'bd', 'be', 'bf', 'cd', 'ce', 'cf']

Time complexity

O(n)

18. 4Sum

Given an array `nums` of `n` integers, return *an array of all the unique quadruplets* `[nums[a], nums[b], nums[c], nums[d]]` such that:

- a. $0 \leq a, b, c, d < n$
 - b. `a`, `b`, `c`, and `d` are distinct.
 - c. $nums[a] + nums[b] + nums[c] + nums[d] == target$
- You may return the answer in any order.

Example 1:

Input: `nums = [1,0,-1,0,-2,2]`, `target = 0`

Output: `[[-2,-1,1,2],[-2,0,0,2],[-1,0,0,1]]`

Example 2:

Input: `nums = [2,2,2,2,2]`, `target = 8`

Output: `[[2,2,2,2]]`

Constraints:

- d. $1 \leq nums.length \leq 200$
- e. $-109 \leq nums[i] \leq 109$
- f. $-109 \leq target \leq 109$

PROGRAM:

```
def foursum(nums, target):
    nums.sort()
    n = len(nums)
    result = []

    for i in range(n - 3):
        if i > 0 and nums[i] == nums[i - 1]:
            continue
        for j in range(i + 1, n - 2):
            if j > i + 1 and nums[j] == nums[j - 1]:
                continue
            left, right = j + 1, n - 1
            while left < right:
                total = nums[i] + nums[j] + nums[left] + nums[right]
                if total == target:
                    result.append([nums[i], nums[j], nums[left], nums[right]])
                    while left < right and nums[left] == nums[left + 1]:
                        left += 1
                    while left < right and nums[right] == nums[right - 1]:
                        right -= 1
                    left += 1
                    right -= 1
                elif total < target:
                    left += 1
                else:
```

```
right -= 1
```

```
return result
```

```
print(four_sum([1,0,-1,0,-2,2], 0))
```

OUTPUT:

`[-2,-1,1,2],[-2,0,0,2],[-1,0,0,1]`


Time complexity

$O(n^3)$

19. Remove Nth Node From End of List

Given the head of a linked list, remove the nth node from the end of the list and return its head.

Example 1:

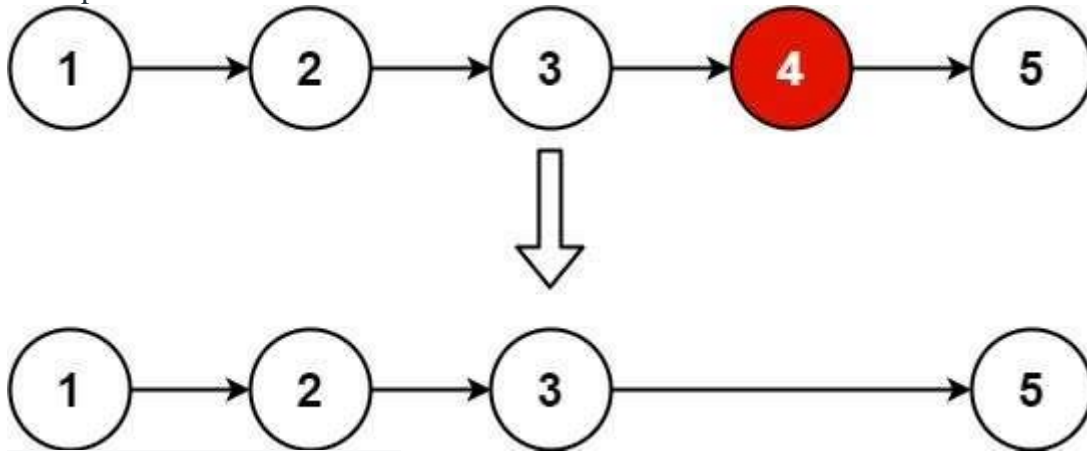

Input: head = [1,2,3,4,5], n = 2

Output: [1,2,3,5]

Example 2:

Input: head = [1], n = 1

Output: []

Example 3:

Input: head = [1,2], n = 1

Output: [1]

Constraints:

- The number of nodes in the list is `sz`.
- `1 <= sz <= 30`
- `0 <= Node.val <= 100`
- `1 <= n <= sz`

PROGRAM:

class ListNode:

def init(self, val=0, next=None):

self.val = val

self.next = next

def remove(head, n):

dummy = ListNode(0)

dummy.next = head

fast = slow = dummy

for _ in range(n + 1):

fast = fast.next

while fast:

fast = fast.next

slow = slow.next

slow.next = slow.next.next

return dummy.next

head = ListNode(1)

head.next = ListNode(2)

head.next.next = ListNode(3)

head.next.next.next = ListNode(4)

head.next.next.next.next = ListNode(5)

nhead = remove(head, 2)

while nhead:

print(nhead.val, end=" -> ")

nhead = nhead.next

OUTPUT:

1 -> 2 -> 3 -> 5 ->

Time complexity

O(n)

20. Valid Parentheses

Given a string `s` containing just the characters '(', ')', '{', '}', '[' and ']', determine if the input string is valid.

An input string is valid if:

1. Open brackets must be closed by the same type of brackets.
2. Open brackets must be closed in the correct order.
3. Every close bracket has a corresponding open bracket of the same type.

Example 1:

Input: `s = "()"`

Output: true

Example 2:

Input: `s = "()[]{}"`

Output: true

Example 3:

Input: `s = "(]"`

Output: false

Constraints:

- `1 <= s.length <= 104`
- `s` consists of parentheses only '`()[]{}'`.

PROGRAM:

```
def valid(s):
```

```
    stack = []
```

```
    map = {'(': ')', '[': ']', '{': '}'}
```

```
    for char in s:
```

```
        if char in map:
```

```
            top = stack.pop() if stack else '#'
```

```
            if map[char] != top:
```

```
                return False
```

```
        else:
```

```
            stack.append(char)
```

```
    return not stack
```

```
print(valid("()"))
```

OUTPUT:

True

Time complexity

$O(n)$