



UML diag.
↳
Abhishek Sir

Today's agenda


observer design pattern



AlgoPrep



observer design pattern

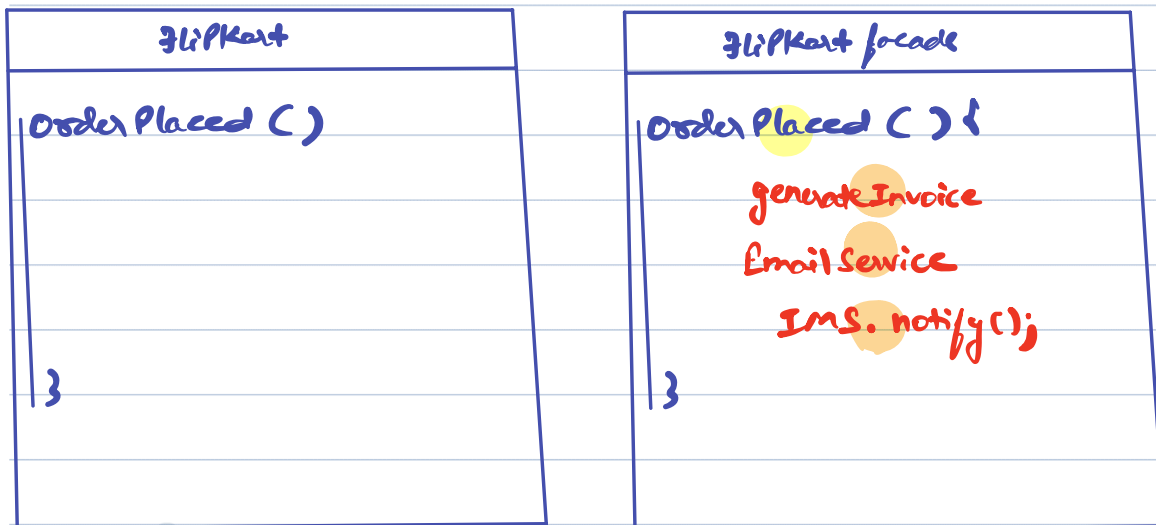


↳ when event happens and we might need to trigger multiple services but the services can be different for different scenarios.

↳ you can't add/remove these actions everytime.

↓
observer design pattern solves this problem.

1:m mapping

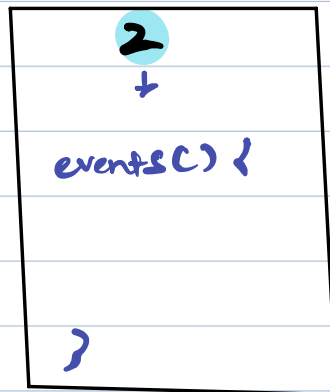

↑
Publisher
{Selects events}


A

B

C

D

⇒ Subscribers
{services used
by Publishers}

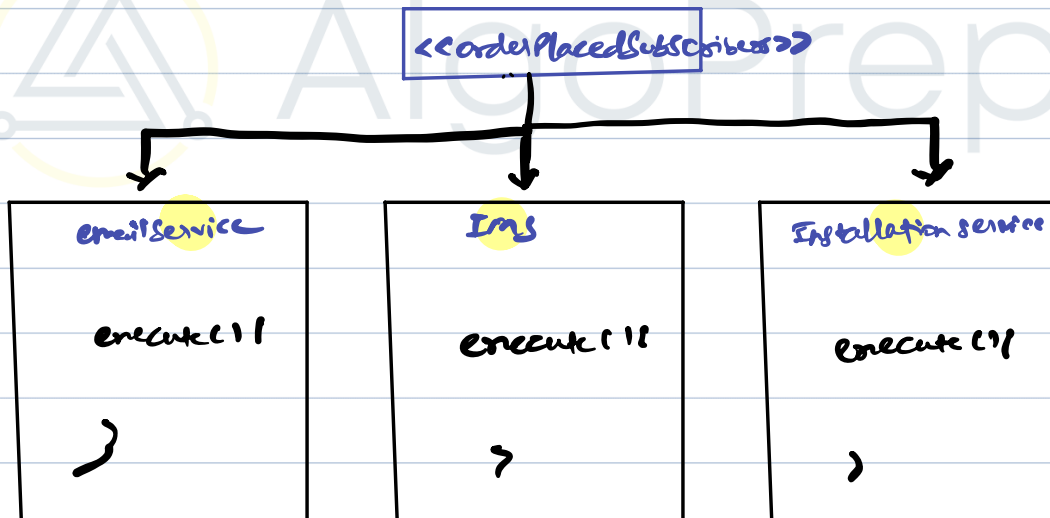



311 Kart orderPlaced

→ List <orderPlacedSubscribers> OPS

```
registerPlacedOrderSubscriber (orderPlacedSubscribers obj) {  
    ops.add(obj);  
}
```

```
registerPlacedOrderSubscriber (orderPlacedSubscribers obj) {  
    =  
}
```

```
orderPlaced() {
```

```
    for (orderPlacedSubscribers temp: OPS) {
```

```
        temp.create();
```

```
    }
```

→ At runtime, if you want to have dynamic things selected. you are looking for observer design pattern.