


ensure that each vector/vertex is visited only once, preventing infinite loops in cyclic graphs.

Example:-


Uniformed Search technique or blind Search

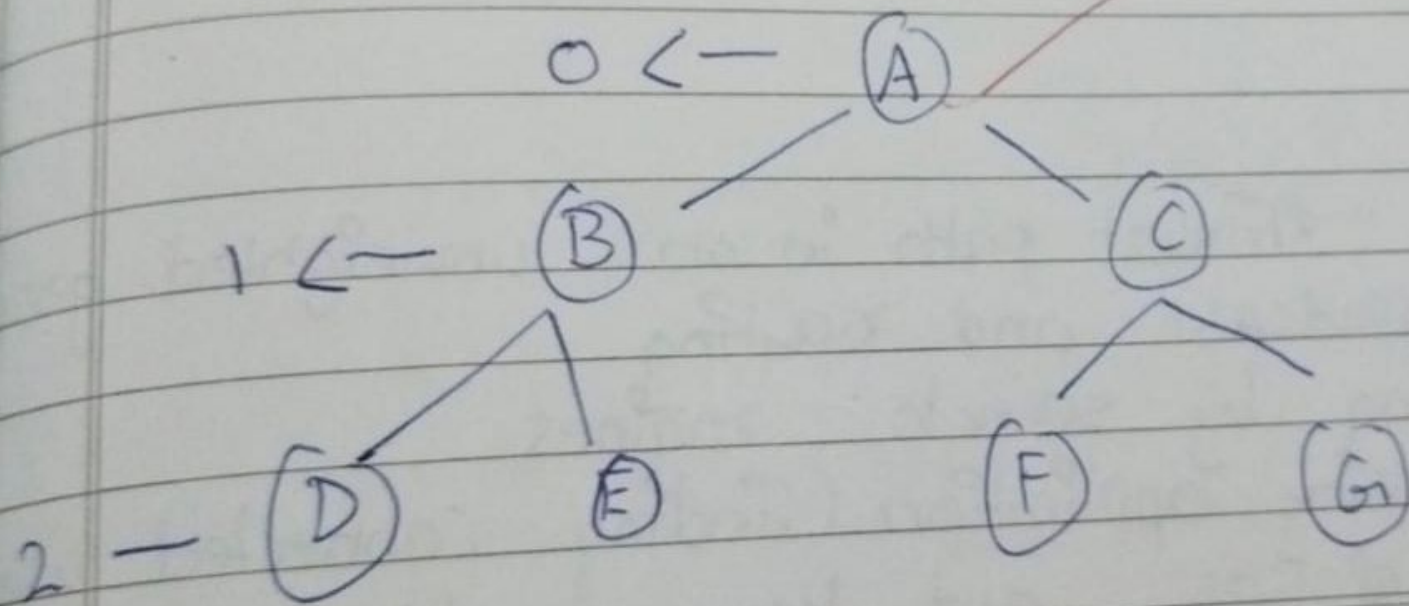

For Educational Use

1. It combines the advantages of Depth First Search (DFS), Breadth Search (BFS), and Depth Limited Search (DLS).
2. It performs a depth-limited search by increasing the depth limit in each iteration until the goal node is found. This ensures completeness and optimality.
3. It explores all nodes at the current depth before increasing the depth limit and moving deeper.

Example

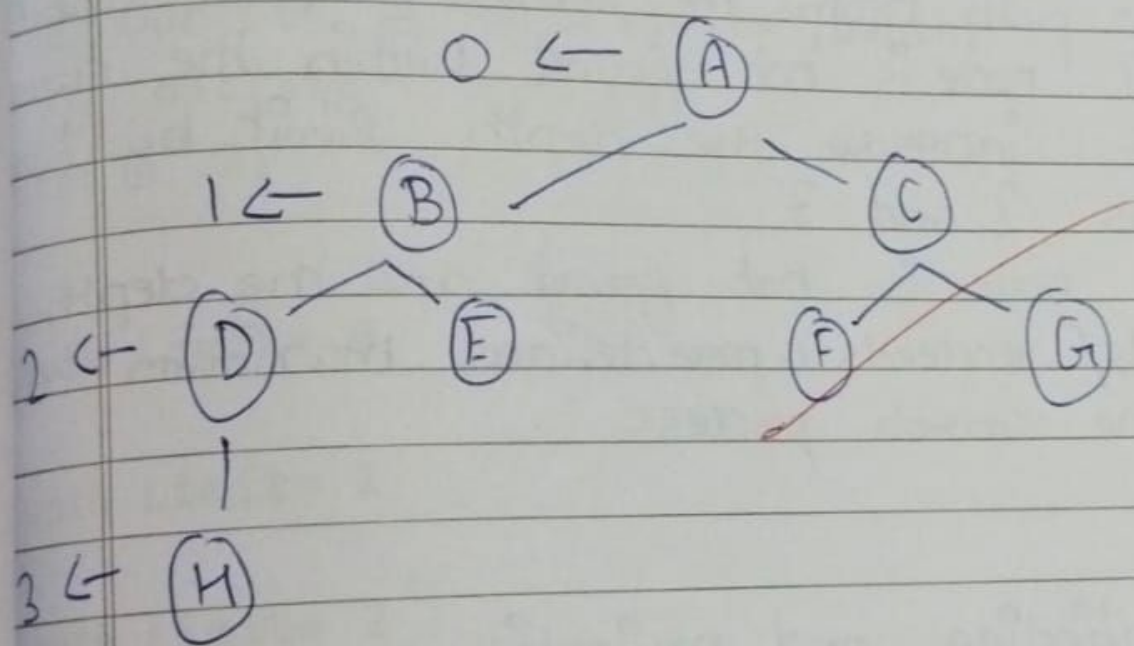

$L=0$
A

$L=1$ B
A C

For Educational Use

A^* always expands the node with the lowest $f(n)$ value, making it efficient and optimal when an appropriate heuristic is used

Example.

