Test Run Report




Test Run Overview

Started 14 Jun 2022, 17:29:20 Ended 14 Jun 2022, 17:32:32


Duration (mm:ss) 03:11.281

Test Results Summary

Passed 1 Failed 0 Skipped 0

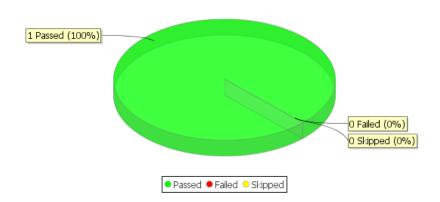

Test Case Summary





DataDriven.testcase

Output

- Salesforce Connect: CrukTrainingOrg (Test)
 - (i) Connecting to Salesforce as CrukTrainingOrg
 - (i) Successfully connected to Salesforce as CrukTrainingOrg
- (i) Loading data from Parameter Value Source ...
- 1 Loading Parameter Value Source row 1:
- 1 ==Column=> AccountName = PrimitiveValueImpl [value: TestDD, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> Type = PrimitiveValueImpl [value: Analyst, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- 1 ==Column=> Phone = PrimitiveValueImpl [value: 12344555555, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① Loading Parameter Value Source row 2:
- 1 ==Column=> AccountName = PrimitiveValueImpl [value: Testdd2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- 1 ==Column=> Type = PrimitiveValueImpl [value: Analyst, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- 1 ==Column=> Phone = PrimitiveValueImpl [value: 123469765, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- (i) Loaded 2 rows from Parameter Value Source.

Read

- 1 Loading data from Parameter Value Source ...
- i Loading Parameter Value Source row 1:
- 1 ==Column=> AccountName = PrimitiveValueImpl [value: TestDD, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> Type = PrimitiveValueImpl [value: Analyst, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- 1 ==Column=> Phone = PrimitiveValueImpl [value: 12344555555, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- 1 Loading Parameter Value Source row 2:
- ① ==Column=> AccountName = PrimitiveValueImpl [value: Testdd2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> Type = PrimitiveValueImpl [value: Analyst, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- ① ==Column=> Phone = PrimitiveValueImpl [value: 123469765, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- 1 Loaded 2 rows from Parameter Value Source.

On SF Account Home screen

- ① Start of With Screen. Connection Name: CrukTrainingOrg, target: sf:ui:target?object=Account&action=ObjectHome
- ⚠ Failed to connect to Master Lock Manager in timeout period assuming dead. Host: localhost, port: 57672
- ⚠ Salesforce Object not found for Builtin Tab. Key prefix: Quote
- ① Opening Chrome webdriver instance to https://test.salesforce.com/
- ① Successfully opened Chrome webdriver to https://test.salesforce.com/
- (i) Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Account, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/001/list?filterName=Recent, Current URL: chrome://new-tab-page/
- (i) Opening Salesforce user home page
- (i) Successfully opened user home page
- (i) Going to update browser window handles.
- (i) Successfully updated browser window handles.

Click the New button

- ① Start of Interact. Connection: CrukTrainingOrg, Locator: ui:locator?name=New&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount %26action%3DNew, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=New&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount%26action%3DNew
- 1 Interaction: ui:interaction?name=action

- 1 Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Account/list?filterName=Recent
- 1 Interaction: ui:interaction?name=action
- ① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]// div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'forceRelatedListDesktop') or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]//ul[contains(@class, 'oneActionsRibbon')] | // div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')]//a[contains(@data-aura-rendered-by, '607:0')]
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- 1 End of <default> wait.
- ① Found element: [[ChromeDriver: chrome on XP (51c9bee4c0a4c0408c532323dd100a0b)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]//div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop')or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]//ul[contains(@class, 'oneActionsRibbon')] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])//a[contains(@data-aura-rendered-by, '607:0')]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]
- i Doing after wait. waitUrl: default
- (i) End of <default> wait.
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (i) Closing Page context. Name: screen, data: null, frame: null
- (i) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Account/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=165520807872520506&backgroundContext=%2Flightning%2Fo%2FAccount%2Flist%3FfilterName%3DRecent
- Going to update browser window handles.
- Successfully updated browser window handles.
- On SF Account New screen
 - 1 Start of With Screen. Connection Name: CrukTrainingOrg, target: sf:ui:target?object=Account&action=New&noOverride=true
 - (i) Opening Page context. Name: screen, data: null, frame: null
 - (i) Hover>Clicking WebElement. WebElement [tag: h2, text: New Account]
 - Going to update browser window handles.
 - (i) Successfully updated browser window handles.
 - Set the Account Name field to {srcdetails.AccountName}
 - ① Start of Interact. Connection: CrukTrainingOrg, Locator: ui:locator?name=Name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount%26field%3DName, before wait: default, after wait: default, auto retry: default
 - ① Locator: ui:locator?name=Name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount%26field%3DName
 - 1 Interaction: ui:interaction?name=set
 - ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Account/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=165520807872520506&backgroundContext=%2Flightning%2Fo%2FAccount%2Flist%3FfilterName%3DRecent
 - ① Interaction: ui:interaction?name=set
 - ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])[[last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Account Name'] or .//text() = 'Account Name')]/ancestor::div[1]
 - Find field using relative xpath: .//input
 - ① Waiting for element to be present. Timeout(seconds): 10
 - 1 Doing before wait. waitUrl: default
 - End of <default> wait.
 - 1 Found element: [[[org.openqa.selenium.remote.RemoteWebElement@278d1ee0 -> unknown locator]] -> xpath: .//input

- 1 Got webElement. tagName: INPUT, id: input-134, type: text, class: slds-input
- ① Typing value. tagName: INPUT, type: text, value: , blur: false
- 1 Doing after wait. waitUrl: default
- i End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

Set the Type picklist to Press

- ① Start of Interact. Connection: CrukTrainingOrg, Locator: ui:locator?name=Type&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount%26field%3DType, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=Type&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount%26field%3DType
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Account/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=165520807872520506&backgroundContext=%2Flightning%2Fo%2FAccount%2Flist%3FfilterName%3DRecent
- i Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Type'] or .//text() = 'Type')]/ ancestor::div[1]
- ⑤ Find field using relative xpath: //*[self::a or self::input or self::button[contains(@class, 'slds-combobox_input')]]
- (i) Waiting for element to be present. Timeout(seconds): 10
- 1 Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@278d1ee4 -> unknown locator]] -> xpath: //*[self::a or self::input or self::button[contains(@class, 'slds-combobox_input')]]
- ① Got webElement. tagName: BUTTON, id: combobox-button-154, type: button, class: slds-combobox__input_slds-input_sld-input_slds-input_slds-input_sld-input_slds-input_sld-input_s
- ① Typing value. tagName: BUTTON, type: button, value: Press, blur: false
- ① Clicking WebElement. WebElement [tag: button, text: --None--]
- ① Clicking WebElement. WebElement [tag: div, text: --None-- --None-- Analyst Competitor Customer Integrator Investor Partner Press Prospect Reseller Other]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]
- Doing after wait. waitUrl: default
- End of <default> wait.
- Going to update browser window handles.
- Successfully updated browser window handles.

Set the Phone field

- ① Start of Interact. Connection: CrukTrainingOrg, Locator: ui:locator?name=Phone&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount%26field%3DPhone, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Phone&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount%26field%3DPhone
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Account/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=165520807872520506&backgroundContext=%2Flightning%2Fo%2FAccount%2Flist%3FfilterName%3DRecent
- ① Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div

and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text()) and (.//text()[normalize-space()='Phone'] or .//text() = 'Phone']/ ancestor::div[1] i Find field using relative xpath: .//input (i) Waiting for element to be present. Timeout(seconds): 10 i Doing before wait. waitUrl: default i End of <default> wait. ⑤ Found element: [[[org.openqa.selenium.remote.RemoteWebElement@278d1ee8 -> unknown locator]] -> xpath: .//input] (i) Got webElement. tagName: INPUT, id: input-130, type: text, class: slds-input ① Typing value. tagName: INPUT, type: text, value: , blur: false i Doing after wait. waitUrl: default End of <default> wait. Going to update browser window handles. Successfully updated browser window handles. Click the Save button 1 Start of Interact. Connection: CrukTrainingOrg, Locator: ui:locator?name=save&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount %26action%3Dsave, before wait: default, after wait: default, auto retry: default ① Locator: ui:locator?name=save&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DAccount%26action%3Dsave i Interaction: ui:interaction?name=action ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Account/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=165520807872520506&backgroundContext= %2Flightning%2Fo%2FAccount%2Flist%3FfilterName%3DRecent 1 Interaction: ui:interaction?name=action 1 Find action link element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) $and \ (contains(@class, 'active') \ or \ following-sibling::div[contains(@class, 'forceFormPageError')])]\\ [last()]//div[(contains(@class, 'footer') \ and \ (contains(@class, 'active') \ or \ following-sibling::div[contains(@class, 'footer') \ and \ (contains(@class, 'active') \ or \ following-sibling::div[contains(@class, 'footer') \ and \ (contains(@class, 'active') \ or \ following-sibling::div[contains(@class, 'footer') \ and \ (contains(@class, 'foote$ contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or self::records-base-record-form][@records-|wcdetailpanel_lwcdetailpanel]/runtime_platform_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']//*[self::a or self::button] (i) Waiting for element to be present. Timeout(seconds): 10 Doing before wait. waitUrl: default i End of <default> wait. ① Found element: [[ChromeDriver: chrome on XP (51c9bee4c0a4c0408c532323dd100a0b)] -> xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ ancestor::*[self::force-form-footer or self::records-base-record-form][@records-lwcdetailpanel]//runtime_platform_actions-actionrenderer[@apiname='save' or @apiname='SaveEdit']//*[self::a or self::button]] ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save] Doing after wait. waitUrl: default i End of <default> wait. Going to update browser window handles. Successfully updated browser window handles. All Sub-Test Steps were successful. ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Account/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=165520807872520506&backgroundContext=%2Flightning %2Fo%2FAccount%2Flist%3FfilterName%3DRecent Injecting script to get created object ID from aura component ⚠ Some toast message(s) are still open and might cause inconsistent issues in execution. Fetching created Id from URL (i) Reattempting for the createdId Reattempting for the createdId

■ Storing created Salesforce Object ID. Result Name: accountId, created ID: null, location: https://provar-trial-org--training.lightning.force.com/lightning/o/Account/new?
count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=165520807872520506&backgroundContext=%2Flightning
%2Fo%2FAccount%2Flist%3FfilterName%3DRecent

Reattempting for the createdId

- (i) Closing Page context. Name: screen, data: null, frame: null
- (i) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provar-trial-org--training.lightning.force.com/lightning/o/Account/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=165520807872520506&backgroundContext=%2Flightning%2Fo%2FAccount%2Flist%3FfilterName%3DRecent
- (i) Going to update browser window handles.
- Successfully updated browser window handles.
- ♠ For Each: {SourceData}=>srcdetails
- ♠ On SF Account Home screen
- 6 On SF Account New screen