

Data Wrangling

with pandas Cheat Sheet

<http://pandas.pydata.org>

[Pandas API Reference](#) [Pandas User Guide](#)

Creating DataFrames

	a	b	c
1	4	7	10
2	5	8	11
3	6	9	12

```
df = pd.DataFrame(  
    {"a" : [4, 5, 6],  
     "b" : [7, 8, 9],  
     "c" : [10, 11, 12]},  
    index = [1, 2, 3])  
Specify values for each column.
```

```
df = pd.DataFrame(  
    [[4, 7, 10],  
     [5, 8, 11],  
     [6, 9, 12]],  
    index=[1, 2, 3],  
    columns=['a', 'b', 'c'])  
Specify values for each row.
```

		a	b	c
N	v			
D	1	4	7	10
	2	5	8	11
e	2	6	9	12

```
df = pd.DataFrame(  
    {"a" : [4, 5, 6],  
     "b" : [7, 8, 9],  
     "c" : [10, 11, 12]},  
    index = pd.MultiIndex.from_tuples(  
        [('d', 1), ('d', 2),  
         ('e', 2)], names=['n', 'v']))  
Create DataFrame with a MultiIndex
```


Method Chaining

Most pandas methods return a DataFrame so that another pandas method can be applied to the result. This improves readability of code.

```
df = (pd.melt(df)  
      .rename(columns={  
          'variable': 'var',  
          'value': 'val'})  
      .query('val >= 200'))
```


Tidy Data – A foundation for wrangling in pandas

In a tidy data set:




Each **variable** is saved in its own **column**

&




Each **observation** is saved in its own **row**


Tidy data complements pandas's **vectorized operations**. pandas will automatically preserve observations as you manipulate variables. No other format works as intuitively with pandas.

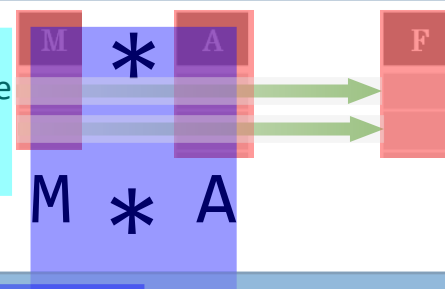


Reshaping Data – Change layout, sorting, reindexing, renaming

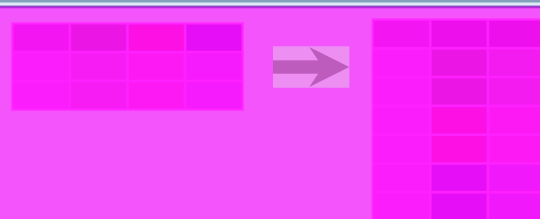


`pd.melt(df)`
Gather columns into rows.

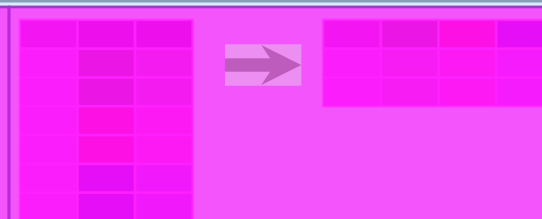

`df.pivot(columns='var', values='val')`
Spread rows into columns.

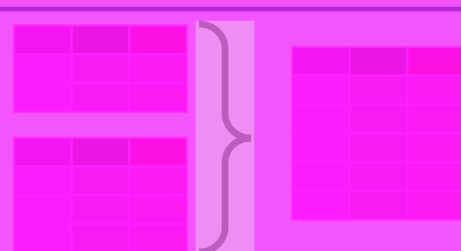

`pd.concat([df1, df2])`
Append rows of DataFrames

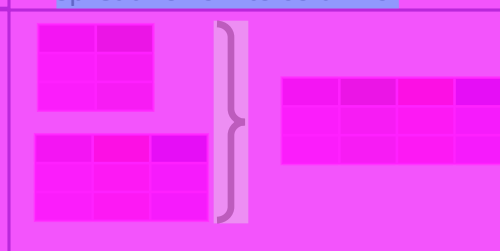

`pd.concat([df1, df2], axis=1)`
Append columns of DataFrames

`df.sort values('mpg')`

Order rows by values of a column (low to high).

`df.sort values('mpg', ascending=False)`

Order rows by values of a column (high to low).

`df.rename(columns = {'y': 'year'})`

Rename the columns of a DataFrame

`df.sort index()`

Sort the index of a DataFrame

`df.reset index()`

Reset index of DataFrame to row numbers, moving index to columns.

`df.drop(columns=['Length', 'Height'])`

Drop columns from DataFrame

Subset Observations - rows



`df[df.Length > 7]`

Extract rows that meet logical criteria.

`df.drop duplicates()`

Remove duplicate rows (only considers columns).

`df.sample(frac=0.5)`

Randomly select fraction of rows.

`df.sample(n=10)` Randomly select n rows.

`df.nlargest(n, 'value')`

Select and order top n entries.

`df.nsmallest(n, 'value')`

Select and order bottom n entries.


`df.head(n)`

Select first n rows.

`df.tail(n)`

Select last n rows.

Subset Variables - columns



`df[['width', 'length', 'species']]`

Select multiple columns with specific names.

`df['width']` or `df.width`

Select single column with specific name.

`df.filter(regex='regex')`

Select columns whose name matches regular expression *regex*.

Using query

`query()` allows Boolean expressions for filtering rows.

`df.query('Length > 7')`

`df.query('Length > 7 and Width < 8')`

`df.query('Name.str.startswith("abc")', engine="python")`

Subsets - rows and columns

Use `df.loc[]` and `df.iloc[]` to select only rows, only columns or both.

Use `df.at[]` and `df.iat[]` to access a single value by row and column.

First index selects rows, second index columns.

`df.iloc[10:20]`

Select rows 10-20.

`df.iloc[:, [1, 2, 5]]`

Select columns in positions 1, 2 and 5 (first column is 0).

`df.loc[:, 'x2': 'x4']`

Select all columns between x2 and x4 (inclusive).

`df.loc[df['a'] > 10, ['a', 'c']]`

Select rows meeting logical condition, and only the specific columns.

`df.iat[1, 2]` Access single value by index

`df.at[4, 'A']` Access single value by label


Logic in Python (and pandas)

<	Less than	!=	Not equal to
>	Greater than	<code>df.column.isin(values)</code>	Group membership
==	Equals	<code>pd.isnull(obj)</code>	Is NaN
<=	Less than or equals	<code>pd.notnull(obj)</code>	Is not NaN
>=	Greater than or equals	<code>&, , ~, ^, df.any(), df.all()</code>	Logical and, or, not, xor, any, all

regex (Regular Expressions) Examples

<code>'\.'</code>	Matches strings containing a period '.'
<code>'Length\$'</code>	Matches strings ending with word 'Length'
<code>'^Sepal'</code>	Matches strings beginning with the word 'Sepal'
<code>'^x[1-5]\$'</code>	Matches strings beginning with 'x' and ending with 1,2,3,4,5
<code>'^(?!Species\$).*\$'</code>	Matches strings except the string 'Species'

Group Data



df.groupby(by="col")
Return a GroupBy object, grouped by values in column named "col".

df.groupby(level="ind")
Return a GroupBy object, grouped by values in index level named "ind".

All of the summary functions listed above can be applied to a group.
Additional GroupBy functions:

size() Size of each group.
agg(function) Aggregate group using function.

Summarize Data

df['w'].value_counts()

Count number of rows with each unique value of variable
len(df)

of rows in DataFrame.

df.shape

Tuple of # of rows, # of columns in DataFrame.

df['w'].nunique()

of distinct values in a column.

df.describe()

Basic descriptive and statistics for each column (or GroupBy).

df.info()


Prints a concise summary of the DataFrame.

df.memory_usage()

Prints the memory usage of each column in the DataFrame.

df.dtypes()

Prints a Series with the dtype of each column in the DataFrame.



pandas provides a large set of **summary functions** that operate on different kinds of pandas objects (DataFrame columns, Series, GroupBy, Expanding and Rolling (see below)) and produce single values for each of the groups. When applied to a DataFrame, the result is returned as a pandas Series for each column. Examples:

sum()

Sum values of each object.

count()

Count non-NA/null values of each object.

median()

Median value of each object.

quantile([0.25,0.75])

Quantiles of each object.

apply(function)

Apply function to each object.

min()

Minimum value in each object.

max()

Maximum value in each object.

mean()

Mean value of each object.

var()

Variance of each object.

std()

Standard deviation of each object.

The examples below can also be applied to groups. In this case, the function is applied on a per-group basis, and the returned vectors are of the length of the original DataFrame.

shift(1)

Copy with values shifted by 1.

rank(method='dense')

Ranks with no gaps.

rank(method='min')

Ranks. Ties get min rank.

rank(pct=True)

Ranks rescaled to interval [0, 1].

rank(method='first')

Ranks. Ties go to first value.

shift(-1)

Copy with values lagged by 1.

cumsum()

Cumulative sum.

cummax()

Cumulative max.

cummin()

Cumulative min.

cumprod()

Cumulative product.

Handling Missing Data


df.dropna()

Drop rows with any column having NA/null data.

df.fillna(value)

Replace all NA/null data with value.

Make New Columns



df.assign(Area=lambda df: df.Length*df.Height)


Compute and append one or more new columns.

df['Volume'] = df.Length*df.Height*df.Depth

Add single column.

pd.qcut(df.col, n, labels=False)

Bin column into n buckets.



pandas provides a large set of **vector functions** that operate on all columns of a DataFrame or a single selected column (a pandas Series). These functions produce vectors of values for each of the columns, or a single Series for the individual Series. Examples:

max(axis=1)

Element-wise max.

clip(lower=-10,upper=10)

Trim values at input thresholds

min(axis=1)

Element-wise min.

abs()

Absolute value.

Windows

df.expanding()

Return an Expanding object allowing summary functions to be applied cumulatively.

df.rolling(n)

Return a Rolling object allowing summary functions to be applied to windows of length n.

Combine Data Sets



Standard Joins

x1	x2	x3
A	1	T
B	2	F
C	3	NaN

pd.merge(adf, bdf, how='left', on='x1')
Join matching rows from bdf to adf.

x1	x2	x3
A	1.0	T
B	2.0	F
D	NaN	T

pd.merge(adf, bdf, how='right', on='x1')
Join matching rows from adf to bdf.

x1	x2	x3
A	1	T
B	2	F

pd.merge(adf, bdf, how='inner', on='x1')
Join data. Retain only rows in both sets.

x1	x2	x3
A	1	T
B	2	F
C	3	NaN
D	NaN	T

pd.merge(adf, bdf, how='outer', on='x1')
Join data. Retain all values, all rows.

Filtering Joins

x1	x2
A	1
B	2

adf[adf.x1.isin(bdf.x1)]
All rows in adf that have a match in bdf.

x1	x2
C	3

adf[~adf.x1.isin(bdf.x1)]
All rows in adf that do not have a match in bdf.



Set-like Operations

x1	x2
B	2
C	3

pd.merge(ydf, zdf)
Rows that appear in both ydf and zdf (Intersection).

x1	x2
A	1
B	2
C	3
D	4

pd.merge(ydf, zdf, how='outer')
Rows that appear in either or both ydf and zdf (Union).


x1	x2
A	1

pd.merge(ydf, zdf, how='outer', indicator=True)
.query('_merge == "left_only"')
.drop(columns=['_merge'])
Rows that appear in ydf but not zdf (Setdiff).

Plotting


df.plot()

Plot a line graph for the DataFrame.



df.plot.bar()

Plot a line graph for the DataFrame.



df.plot(subplots=True)

Separate into different graphs for each column in the DataFrame.

df.plot(title="Graph of A against B")


Sets the title of the graph.

df.plot(subplots=True, title=['col1', 'col2', 'col3'])

Arguments can be combined for more flexibility when graphing, this would plot a separate line graph for of column of a 3-columned DataFrame. The first string in the list of titles applies to the graph of the left-most column.


df.plot.scatter(x='w', y='h')

Plot a scatter graph of the DataFrame.



df.plot.boxplot()

Plot a scatter graph of the DataFrame.



df.plot(cumulative=True)


Creates a cumulative plot

df.plot(bins=30)

Set the number of bins into which data is grouped (histograms)


df.plot.hist()

Plot a histogram of the DataFrame.




df.plot.area()

Plot an area graph of the DataFrame.




df.plot.pie()

Plot a pie chart of the DataFrame.



df.plot.hexbin()

Plot a hexbin graph of the DataFrame.



df.plot(stacked=True)

Stacks the data for the columns on top of each other. (bar, barh and area only)

df.plot(alpha=0.5)

Sets the transparency of the plot to 50%.

Changing Type

pd.to_numeric(data)

Convert non-numeric types to numeric.

pd.to_datetime(data)

Convert non-datetime types to datetime type

pd.to_timedelta(data)

Convert non- timedelta types to timedelta

df.astype(type)

Convert data to (almost) any given type including categorical

df.infer_objects()

Attempts to infer a better type for object type data.

df.convert_dtypes()

Convert columns to best possible dtypes

Series String Operations

Similar to python string operations, except these are vectorized to apply to the entire Series efficiently.

s.str.count(pattern)

Returns a series with the integer counts in each element.

s.str.get(index)

Returns a series with the data at the given index for each element.

s.str.join(sep)

Returns a series where each element has been concatenated.

s.str.title()

Converts the first character of each word to be a capital.

s.str.len()

Returns a series with the lengths of each element.

s.str.cat()

Concatenate elements into a single string

s.str.partition(sep)

Splits the string on the first instance of the separator

s.str.slice(start, stop, step)

Slices each string

s.str.replace(pat, rep)

Use regex to replace patterns in each string.

s.str.isalnum()

Checks whether each element is alpha-numeric

Datetime

With a Series containing data of type datetime, the dt accessor is used to get various components of the datetime values:

s.dt.year

Extract the year

s.dt.month

Extract the month as an integer.

s.dt.day

Extract the day (int) from the date.

s.dt.quarter

Find which quarter the date lies in.

s.dt.hour

Extract the hour.

s.dt.minute

Extract the minute.

s.dt.second

Extract the second.

Mapping

Apply a mapping to every element in a DataFrame or Series, useful for recategorizing or transforming data.

s.map(lambda x: 2*x)

Returns a copy of the series where every entry is doubled

df.apply(lambda s: s.max() - s.min(), axis=1)

Returns a Series with the difference of the maximum and minimum values of each row of the DataFrame

Frequently Used Options

Pandas offers some 'options' to globally control how Pandas behaves, display etc. Options can be queried and set via: **pd.options.option_name** (where *option_name* is the name of an option). For example:

pd.options.display.max_rows = 20

Set the **display.max_rows** option to 20.

Functions

get_option(option)

Fetch the value of the given option.

set_option(option)

Set the value of the given option.

reset_option(options)

Reset the values of all given options to default settings.

describe_option(options)

Print descriptions of given options.

option_context(options)

Execute code with temporary option settings that revert to prior settings after execution.

Display options

display.max_rows

The maximum number of rows displayed in pretty-print.

display.max_columns

The maximum number of columns displayed in pretty-print.

display.expand_frame_repr

Controls whether the DataFrame representation stretches across pages.

display.large_repr

Controls whether a DataFrame that exceeds maximum rows/columns is truncated or summarized

display.precision

The output display precision in decimal places.

display.max_colwidth

The maximum width of columns, longer cells will be truncated.

display.max_info_columns

The maximum number of columns displayed after calling **info()**.

display.chop_threshold

Sets the rounding threshold to zero when displaying a Series/DataFrame.

display.colheader_justify

Controls how column headers are justified.