



Code-Hunters 2.0! LIVE



[Problems](#) [My Submissions](#) [Hall of Fame](#) [Analytics](#) [Judge](#) Time left : **00:51:12**

[← Problems](#) / Counting the units

Counting the units

Max. Marks: 100

Developing tools for creation of locations maps for turn-based fights in a new game, Petya faced the following problem.

A field map consists of hexagonal cells. Since locations sizes are going to be big, a game designer wants to have a tool for quick filling of a field part with identical enemy units. This action will look like following: a game designer will select a rectangular area on the map, and each cell whose center belongs to the selected rectangle will be filled with the enemy unit.

More formally, if a game designer selected cells having coordinates (x_1, y_1) and (x_2, y_2) , where $x_1 \leq x_2$ and $y_1 \leq y_2$, then all cells having center coordinates (x, y) such that $x_1 \leq x \leq x_2$ and $y_1 \leq y \leq y_2$ will be filled.

Orthogonal coordinates system is set up so that one of cell sides is parallel to OX axis, all hexagon centers have integer coordinates and for each integer x there are cells having center with such x coordinate and for each integer y there are cells having center with such y coordinate. It is guaranteed that difference $x_2 - x_1$ is divisible by 2.

Working on the problem Petya decided that before painting selected units he wants to output number of units that will be painted on the map.

Help him implement counting of these units before painting.

Input:::

The only line of input contains four integers x_1, y_1, x_2, y_2 ($-109 \leq x_1 \leq x_2 \leq 109$, $-109 \leq y_1 \leq y_2 \leq 109$) — the coordinates of the centers of two cells.

![[Output:::]]1]

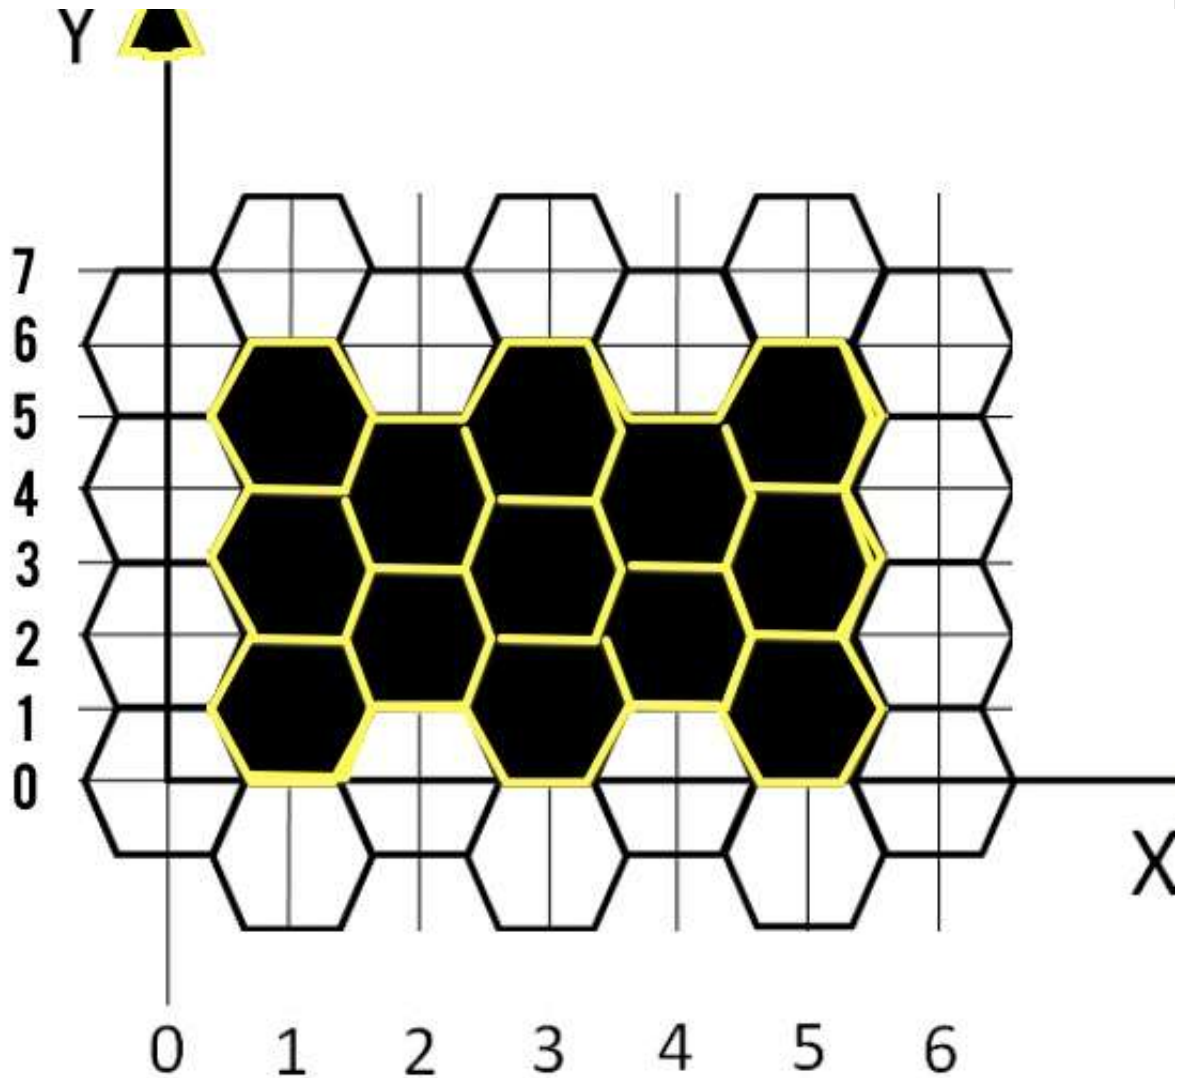
Output one integer — the number of cells to be filled.

Sample Input ([Plaintext Link](#))

```
1 1 5 5
```

Sample Output ([Plaintext Link](#))

```
13
```

Explanation

Time Limit: 1.0 sec(s) for each input file.

Memory Limit: 256 MB

Source Limit: 1024 KB

Marking Scheme: Marks are awarded when all the testcases pass.

Allowed languages: C, CPP, CLOJURE, CSHARP, GO, HASKELL, JAVA, JAVASCRIPT, JAVASCRIPT_NODE, LISP, OBJECTIVEC, PASCAL, PERL, PHP, PYTHON, RUBY, R, RUST, SCALA

Problem Author: [Sagar Vegad](#)

[Load Code Editor](#)

You can submit code after loading editor.

Your Rating:

RECENT SUBMISSIONS



DEVELOPERS	RESULT	LANGUAGE
Param Pa...	0.605562	Java
Param Pa...	0.606231	Java
mks2103	0.605776	C++
mks2103	C++	
Param Parikh	Java	
Anjali Manocha	C++	
Vignesh Jayavel	Python	
Dhaval	Java	
mks2103	C++	
Param Parikh	Java	
POOJAN TRIVEDI	C++	

[View All](#)

ABOUT US

[Blog](#)[Engineering Blog](#)[Updates & Releases](#)

HACKEREARTH

[API](#)[Chrome Extension](#)[CodeTable](#)

DEVELOPERS

[AMA](#)[Code Monk](#)[Judge Environment](#)

