Deep Q-Networks for Event Summarization

Columbia University in the City of New York

December 13, 2016

Motivation

Deep Q-Networks

Actions

Reward

Policy

Core Algorithm

Experiments

Benchmarking

DQN-BOW

DQN-LSTM

Resources

- ▶ In the extractive streaming summarization task, we are given as input a query (i.e., a short text description of a topic or an event), a document stream, and a time ordered set of sentences relevant to the query.
- ▶ Starting with an initially empty summary, an extractive, streaming summarization algorithm is intended to examine each sentence in order and, when new and important (relative to the query) information is identified, add that sentence to the summary.

- ▶ Recent research in text retrieval has focused on extractive algorithms to identify important sentences from a large set of documents (e.g., [1], [4], [2], and [3]) for summarizing articles from different events in the news.
- ▶ [4] has shown that it is possible to select relevant sentences from a massive number of documents on the web to create summaries with meaningful content by adapting classifiers to maximize search policies.
- ▶ These systems have been shown to fall short of algorithms that employ simple heuristics [2], which may be due to inadequate capturing of the rich structure and often idiosyncratic information by traditional n-gram language models.

This leads us to explore Deep Q-Networks (DQN) for 3 reasons:

- ▶ Both the representation and interaction between the stream, summary, and query can be learned
- ► The embeddings can learn a more robust semantic representations than classic n-gram models by using a RNN-LSTM
- ▶ By randomly exploring the state space, the ϵ -greedy strategy learns a policy that yields more consistency between train and test distributions

Actions

We define an action, a_t , at each time step from our set of actions as $\mathcal{A} := \{select, skip\}$ where select corresponds to adding the current sentence x_t to the predicted summary \tilde{y}_t and incrementing the current system time, or skip where only t is incremented without changing the current summary.


Reward

The reward for a given action is measured by the change in ROUGE-N F1 score of the predicted summary \tilde{y}_t measured against a gold standard summary Y. More formally, the reward r at time t is

$$r_t = \text{ROUGE-NF1}(\tilde{y}_t, Y) - \text{ROUGE-NF1}(\tilde{y}_{t-1}, Y).$$
 (1)

Policy

- ▶ A policy takes as input a state and a set of possible actions and returns the optimal state, this policy can be deterministic or probabilistic. We define our policy as a Q-Learner using both an LSTM and a bag-of-words model
- ▶ We define an architecture similar to that of [?] and map our three inputs (query, sentence, and current predicted summary) into LSTM embeddings according to **Figure 1**
- \triangleright Our extraction policy then takes as input the state s_t at time t and returns the expected optimal action

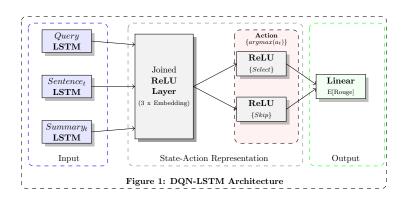

DQN-LSTM for Event Summarization Training Procedure

```
Input: \{D: \text{ Event queries, } X_d: \text{ Input sentences, } N: \text{ Number of epochs}\}
Output: \{\hat{Q}: \text{ extraction policy, } \tilde{Y}_d: \text{ event summary for query } d\}
 1: Initialize extraction policy \hat{Q} with random weights
 2: Initialize memory and summary: \Gamma, \tilde{Y} = \{\emptyset\}_{d=1}^{|\mathcal{D}|}, \{\emptyset\}_{d=1}^{|\mathcal{D}|}
 3: for epoch = 1, ..., N do
           for query d \in \mathcal{D} do
 4:
                 \vec{X}_d, \vec{Y}_d = \{\text{Extract } t = 1, ..., T_d \ (\text{sentences}_d, \text{summary}_d)\}
 5:
                for x_t, \tilde{y}_t \in X_d, \tilde{Y}_d do
 6:
 7:
                      Set s_t = s(x_t, \tilde{y}_t, d)
                      \forall a_t \in \mathcal{A}(s_t) \text{ compute } \hat{Q}(s_t, a_t) \text{ and select } a_t^* = \operatorname{argmax}_{a_t} \hat{Q}(s_t, a_t)
 8:
                      if random() < \epsilon then select a_t^* at random with Pr(a_t) = \frac{1}{|A|}
 9:
                      Update \tilde{y}_{t+1} according to equation (1)
10:
11:
                      Execute action a_t^* and observe reward r_t and new state s_{t+1}
12:
                      Update \Gamma_d = \Gamma_d \cup \{[s_t, a_t^*, r_t, s_{t+1}]\}
           for j = 1, ..., J transitions sampled from \Gamma do
13:
14:
                                Set y_j = \begin{cases} r_j & \text{if } s_{j+1} \text{ is terminal} \\ r_j + \gamma \max_{a'} \hat{Q}(s_{j+1}, a'; \theta) & \text{if } s_{j+1} \text{ is non-terminal} \end{cases}
                 Perform gradient step on \mathcal{L}(\theta) = (y_j - \hat{Q}(s_j, a_j; \theta))^2
15:
```

Benchmarking DQN-BOW DQN-LSTM

Benchmarking DQN-BOW DQN-LSTM

Benchmarking DQN-BOW DQN-LSTM

Useful Links below

Thank you

► GitHub



Fernando Diaz, Bhaskar Mitra, and Nick Craswell. Query expansion with locally-trained word embeddings. In *Proceedings of the 54th Annual Meeting of the Association for Computational*. ACL—Association for Computational Linguistics.



Chris Kedzie and Kathleen McKeown.

Extractive and abstractive event summarization over streaming web text.

In Proceedings of the Twenty-Fifth International Joint Conference on Artificial Intelligence, IJCAI 2016, New York, NY, USA, 9-15 July 2016, pages 4002–4003, 2016.



Chris Kedzie, Kathleen McKeown, and Fernando Diaz. Predicting salient updates for disaster summarization. In Proceedings of the 53rd annual meeting of the ACL and the 7th International Conference on Natural Language Processing, pages 1608–1617, 2015.