Take Home Code Challenge

Reqres API Key Configuration

Contents

Prerequisites 1

Step 1 – Create Reqres account using temp mail 1

Step 2 – Configure .env file 4

Step 3 – Configure Postman collection (optional) 5

Currently the provided Reqres website for API testing **requires authentication** to be able to get the API Key to make requests to the provided endpoints.

This document aims to explain how to get the API key, on a step-by-step basis (with images) the hole process from: getting the API Key, to config the custom Postman collection created specifically for this challenge and finally the .env file configuration.

Prerequisites

Before reading this document it's highly recommended to read steps (1 to 4) mentioned in the README.md file at the root of the project to make sure everything is properly installed, then come back to this document to finish configuring the .env and Postman collection.

NOTE: It's normal that API tests fail, when running npx playwright test or npx playwright test:api before configuring the API Key

Step 1 – Create Reqres account using temp mail

Open https://reqres.in and click on "**Create your backend**" and then click "**Sign up**":

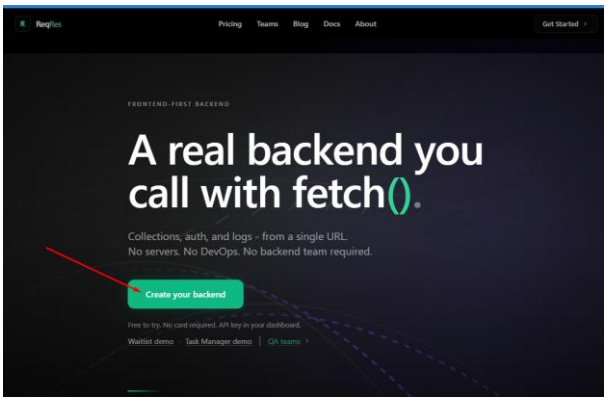

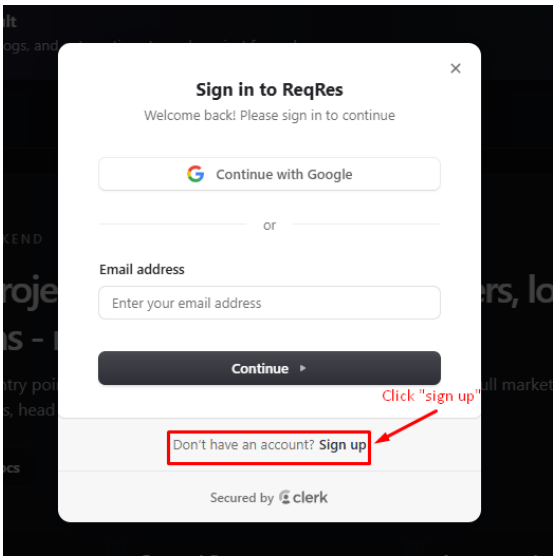

After, open a new tab and **open temp mail website**: https://temp-mail.org/en and **copy the generated email**:

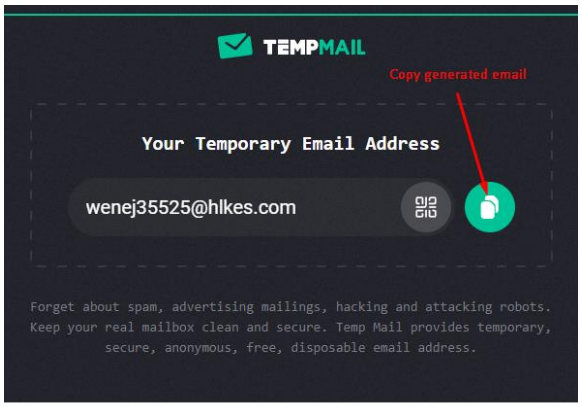

Paste the email in Reqres login pop-up form and set a password of your choice:

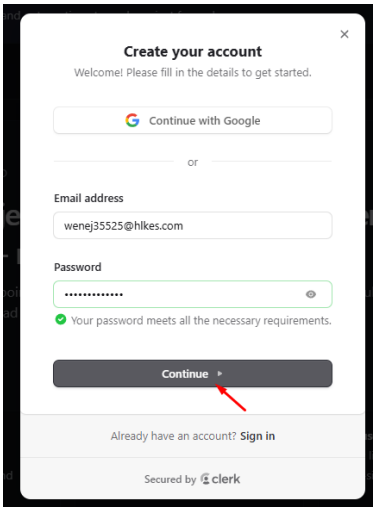

After this step an email verification token is required, go back to the temporary mail's inbox (in https://temp-mail.org/en) and **copy the token**:

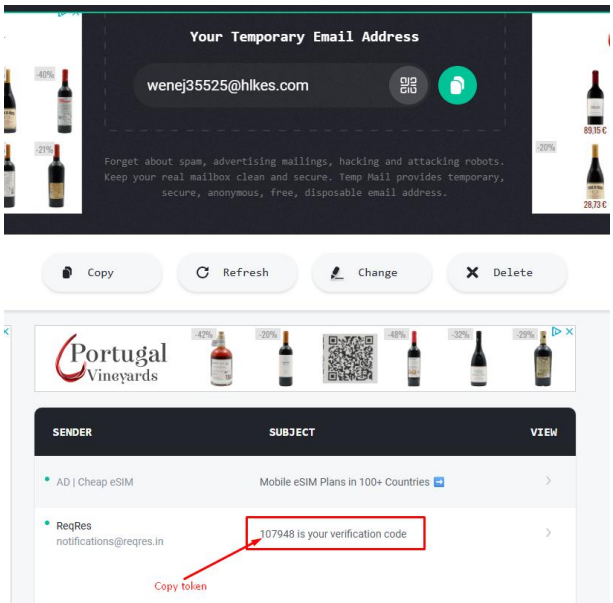

Now inside the Reqres dashboard click “**Get free API key**”:

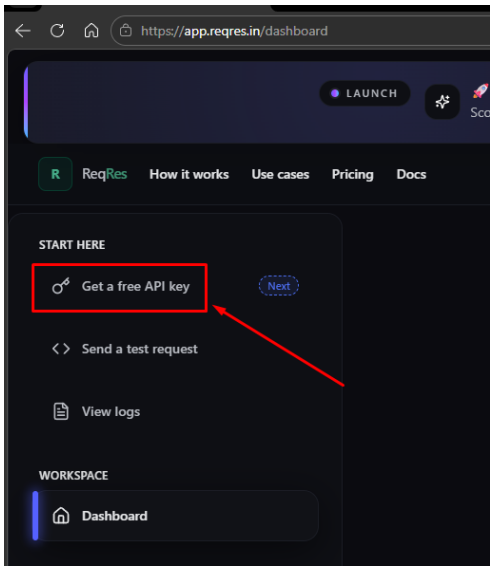

Click on “**Create free API key**”:

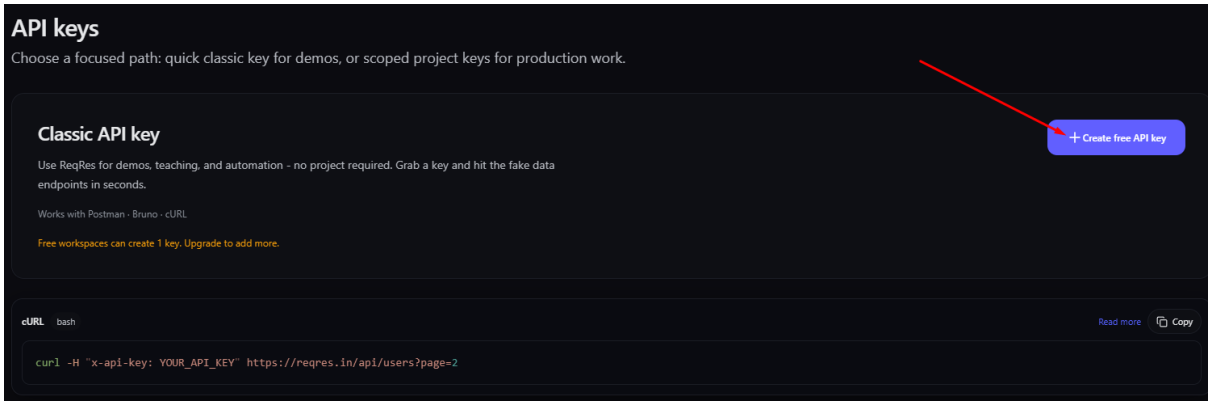

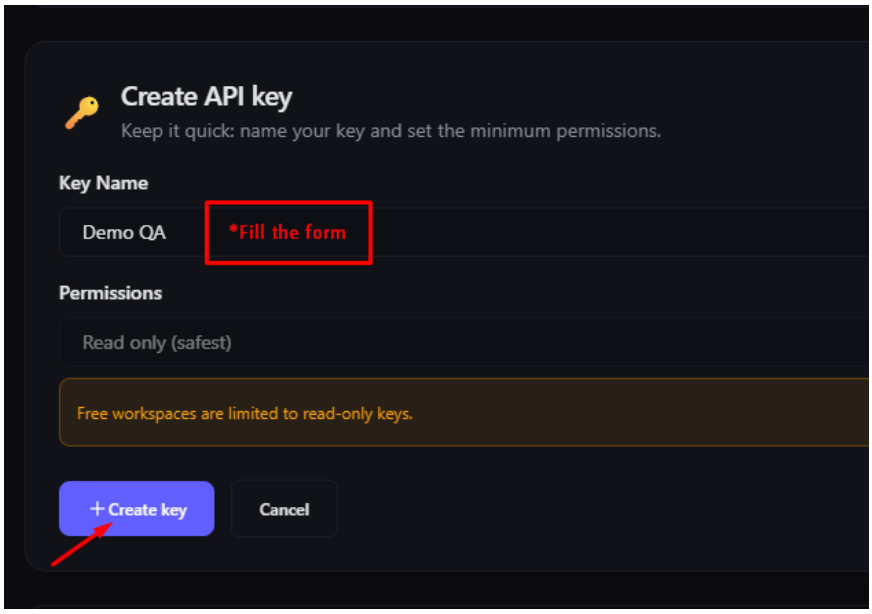

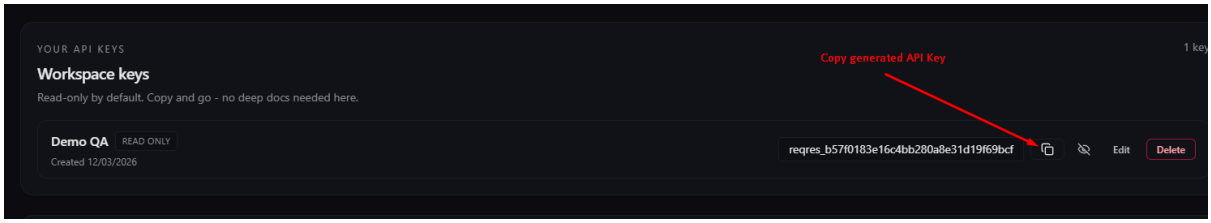

Step 2 – Configure .env file

After getting the API key, go back to the project and **paste it in the .env file** and save using CRTL+ S:

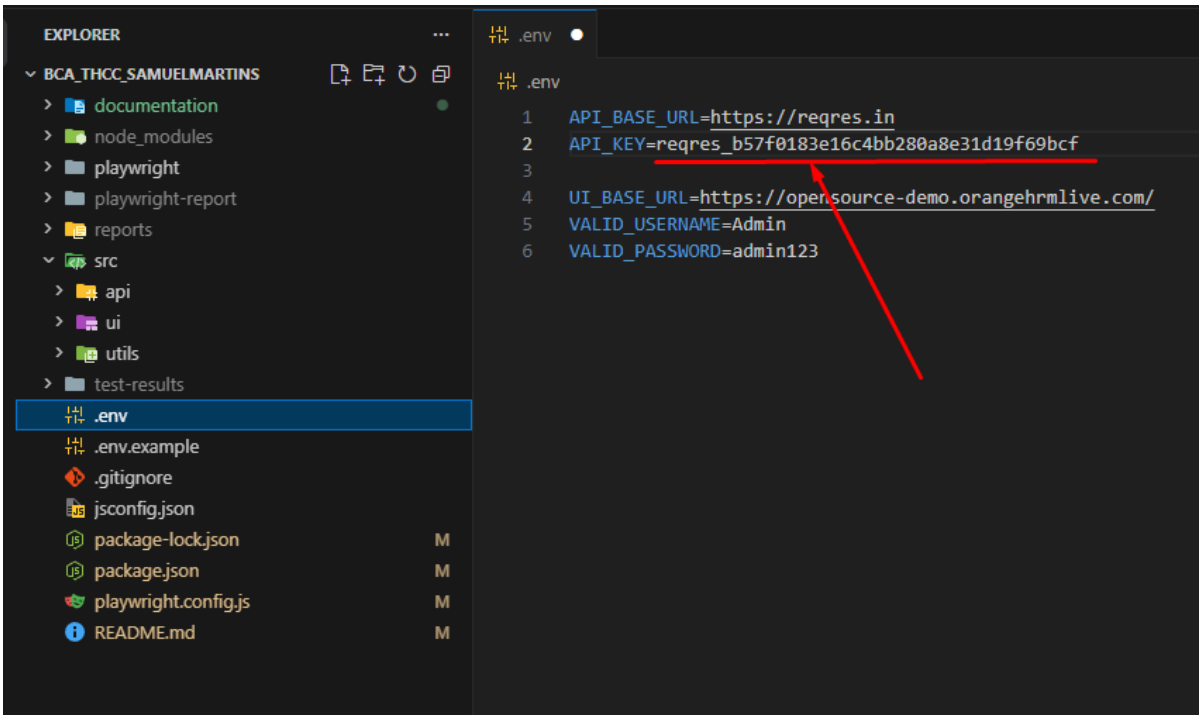

Adicionally insert values for the username and password data:

Variable name	Value
VALID_USERNAME	Admin
VALID_PASSWORD	admin123

IMPORTANT NOTE: Since this is a test project and was made for academic reasons, the data is clearly reflected in this document. For real applications is supposed to have this sensitive information

Done, the project is now configured.

Now optionally we can use the same API key key to configure the postman collection. To do so just follow Step 3.

Step 3 – Configure Postman collection (optional)

In the root directory of the project, inside **documentation** folder there is a Postman collection.

First is necessary to import the collection to Postman, then configure the API_Key variable (used across all requests):

First import collection inside the **/documentation/** folder of the project called BCA THCC - Part A.postman_collection.json to Postman:

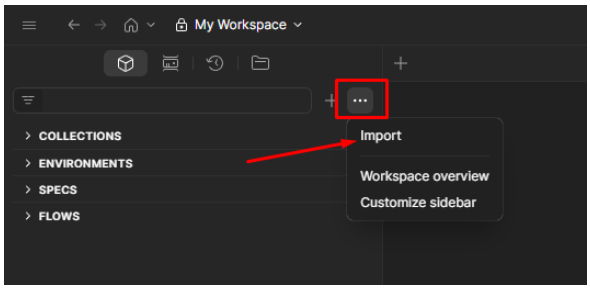

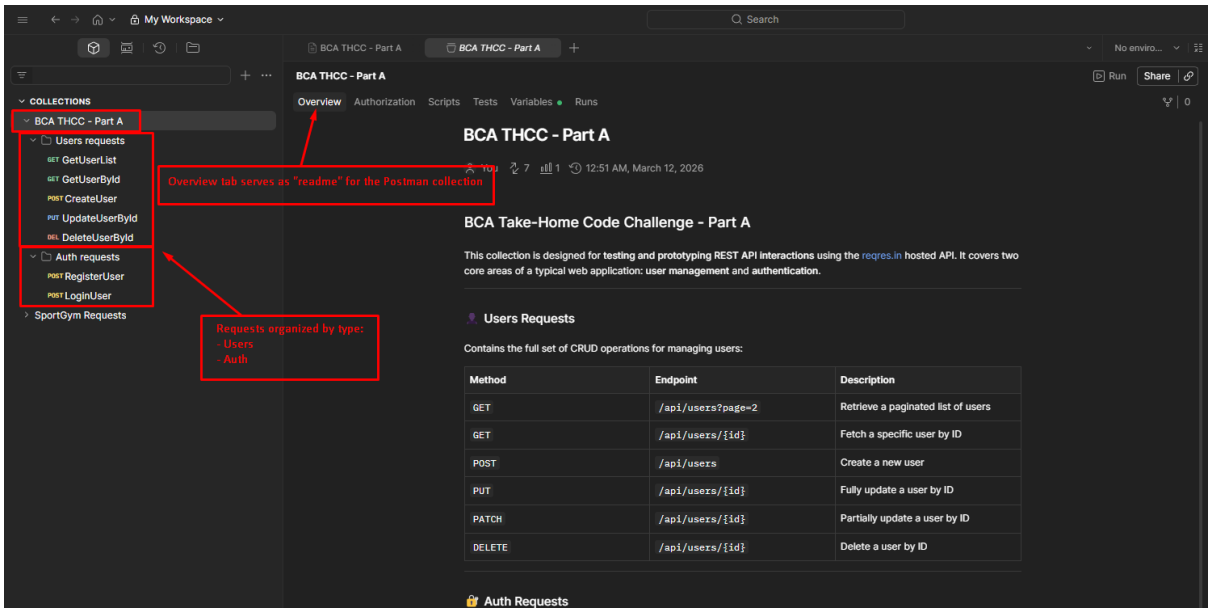

Click on “variables”:

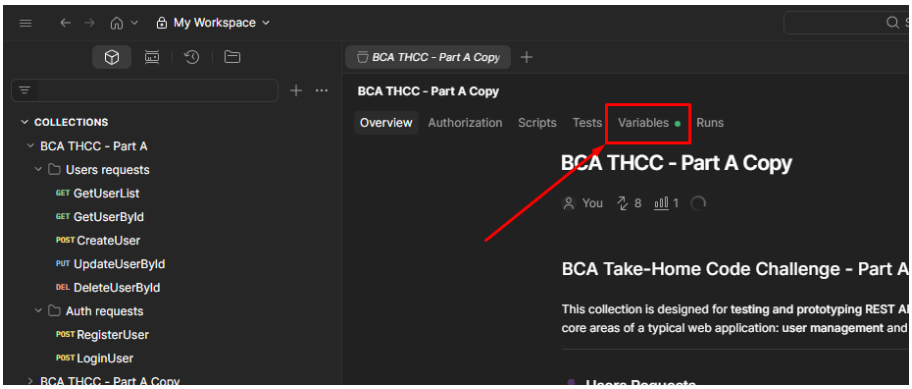

Paste the API key:

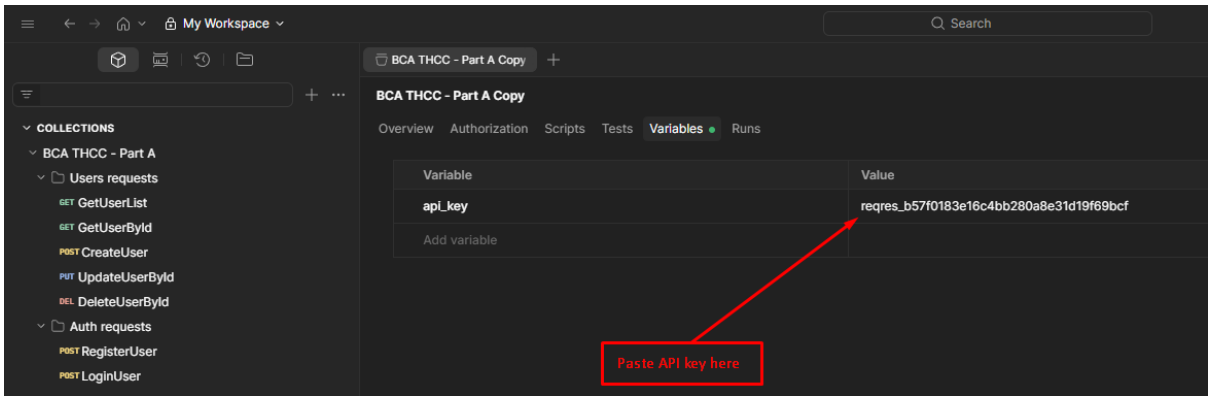
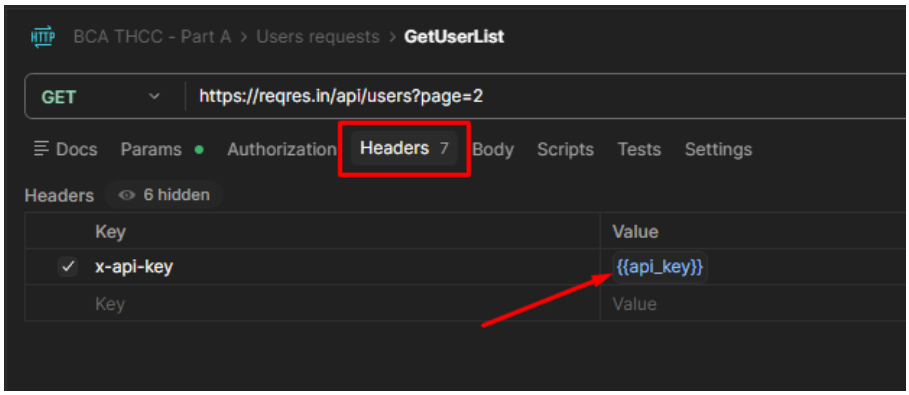
Done, all the requests in Postman should work now as the **api_key** variable is mapped in every request header as “x-api-key”: