



< Previous



Next >

Error Evaluation

Bookmark this page


REMINDER

The equations in this course are displayed via a system that gives you a lot of options for how to view them. If you're having trouble seeing them, you can right-click on them to adjust the settings, or use your browser's built-in zoom feature to make all the text on your screen larger.

We created several different models in the example of different k-nearest neighbors, so we need a way to decide which model is best. We evaluate the error of our model by looking at how well the model is doing outside the data that is used to make the prediction.

We start with a set of data and randomly hide some of that data from our model. This is called a **train-validation split**. We use the visible part of the data (the training set) to estimate \hat{y} , and the hidden part (the validation set) to evaluate the model.

The one-neighbor model ($k=1$) used to make predictions \hat{y} using the training set is shown on the plot. Now, we look at the data we have *not* used to make the model, the validation data shown as purple crosses.

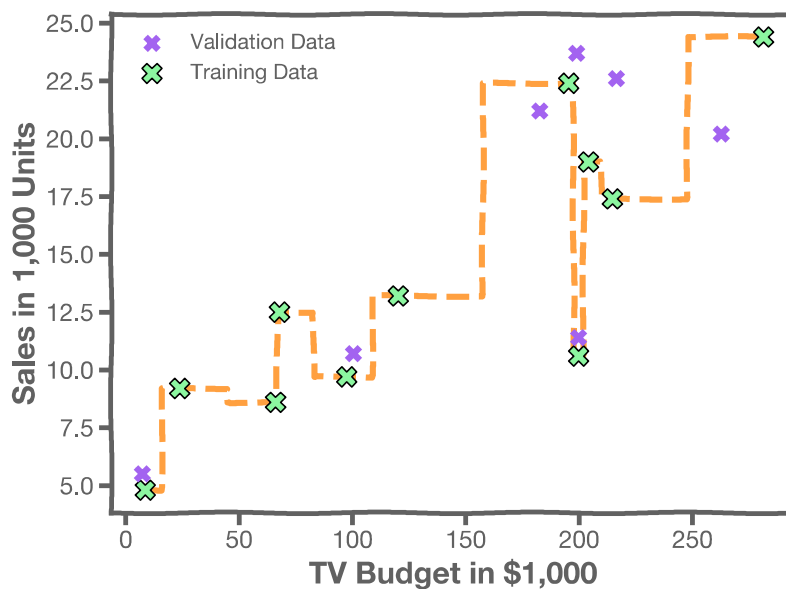

The difference between the true value (the red cross) and the prediction is called the residual.

OBSERVATION ERRORS

For each observation (x_n, y_n) , the absolute values of the residuals, $r_i = |y_i - \hat{y}_i|$ quantify the error at each observation.

Error Evaluation Continued

In order to quantify how well a model performs, we aggregate the errors across the data, and we call that the **loss, error, or cost function**. Cost usually refers to the total loss, while loss refers to a single training point.

A common loss function for quantitative outcomes is the **Mean Squared Error (MSE)**:

MEAN SQUARED ERROR (MSE)

$$MSE = \frac{1}{n} \sum_{i=1}^n (y_i - \hat{y}_i)^2$$

⚠ WATCH OUT!

The MSE is by no means the only valid loss function, and it's not always the best one to use! Other choices for loss function include:

- Max Absolute Error
- Mean Absolute Error
- Mean Squared Error

The square **R**oot of the **M**ean of the **S**quared **E**rrors (**RMSE**) is also commonly used.

$$RMSE = \sqrt{MSE} = \sqrt{\frac{1}{n} \sum_{i=1}^n (y_i - \hat{y}_i)^2}$$

🔗 OTHER KINDS OF ERRORS

Numerical error isn't the only kind you'll have to worry about. Sometimes the error is more fundamental. Sometimes we end up putting data - or the person the data represents - into the wrong category. Listen to Nabib as he talks about Type 1 and Type 2 errors.

Video



Video

📄 [Download video file](#)

Transcripts

📄 [Download SubRip \(.srt\) file](#)

📄 [Download Text \(.txt\) file](#)

LTI Consumer (External resource)

HarvardX CS109x - Ed Discussion

S

New Thread

🔍 Search

Filter ▾

CATEGORIES

General

Introduce Yourself

0 Welcome

1 Linear Regression

2 Multi and Poly

3 Model Selection

🔗 Issue with grades not updating on edx ha... 🌟

General PatrickDeKelly STAFF 2mth 8 ❤ 2

🔗 Please provide problem locations 🌟

General TDiSorbo STAFF 5mth 14

🔗 Issue report thread 🌟

🧮 Calculator

3 Model Selection
4 Bias and Variance
5 Classification
6 Multi-logistic
7 Bootstrap
8 Capstone
Recommendations

General Colin Fredericks STAFF 6mth 45

Show 1 more

This Week

Hi

✓

Introduce Yourself Koome 6h 1

Cross validation error function doesn't r...

3 Model Selection - 3.2 Cross-Validation ing_jsosa 7h

Plotting with dummy variables [STAFF]

2 Multi and Poly - 2.2 Techniques ing_jsosa 8h

Incomplete information

✓

General AylaMendonca 1d 1

< Previous

Next >



Select a thread

© All Rights Reserved



edX

[About](#)
[Affiliates](#)
[edX for Business](#)
[Open edX](#)
[Careers](#)
[News](#)

Legal

[Terms of Service & Honor Code](#)
[Privacy Policy](#)
[Accessibility Policy](#)
[Trademark Policy](#)
[Sitemap](#)
[Cookie Policy](#)
[Your Privacy Choices](#)

Connect

[Blog](#)
[Contact Us](#)
[Help Center](#)
[Security](#)
[Media Kit](#)



© 2023 edX LLC. All rights reserved.
深圳市恒宇博科技有限公司 [粤ICP备17044299号-2](#)

Calculator