




ReconMed

Automated Medicine Reconciliation

Reconciled before the visit.


Pre-visit medication reconciliation
for clinical trial sites.

HackMIT 2026

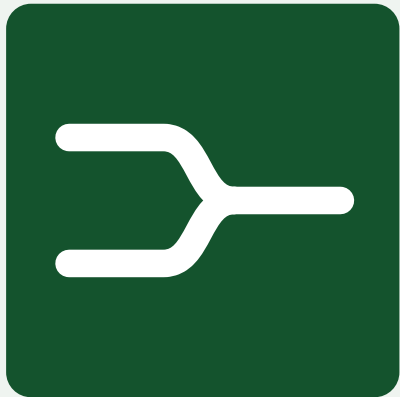

The medication list is stale, and the visit is now

Every medication a participant takes besides the study drug is collected once, at the visit.

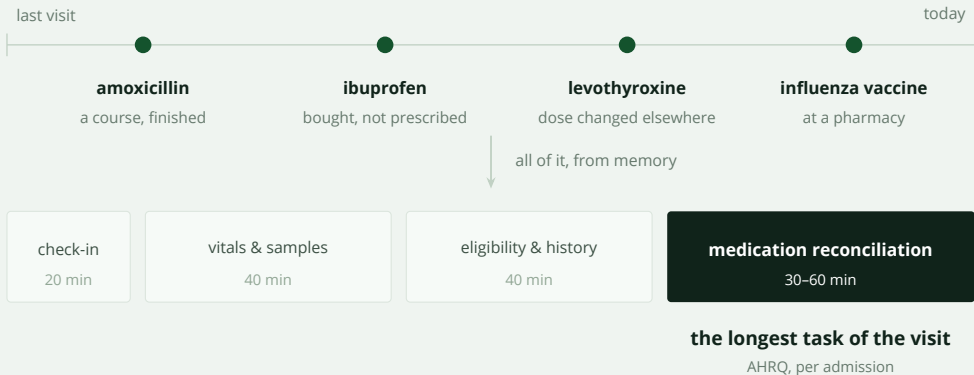


Medication reconciliation happens at the visit, so the record is whatever the participant remembers.

Nothing above reaches the site any other way. A course that ended six weeks ago is the easiest thing in the world to forget.

Reconciliation times: AHRQ *Patient Safety and Quality*; time-and-motion study of 103 reconciliations, *BMC Health Serv Res* 13:485. Hospital settings.

By Phase III, one participant in three has a protocol deviation

187 protocols from 20 sponsors and CROs — Tufts CSDD, 2022

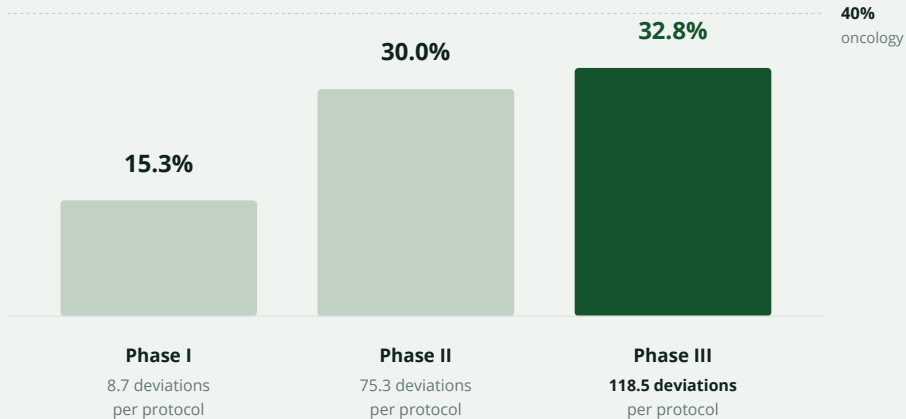


bars: share of enrolled patients with at least one protocol deviation

Getz et al., *Therapeutic Innovation & Regulatory Science* 56:632–636, 2022. All deviation types, not medication-specific.

The same error, found later, costs \$4,862

Retrospective verification of one phase 2 trial — I-SPY COVID, 2025

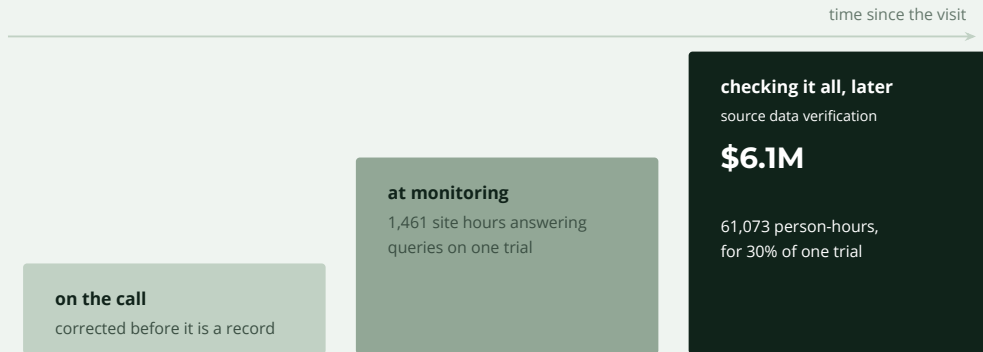

All of that verification found errors in 0.36% of the fields it checked.

Checking everything late is the expensive way to learn almost nothing. Catching it on the call is the cheap way.

Communications Medicine 5, 2025 · 333 of 1,111 patients, 10,101 of 44,486 eCRFs verified.

Calling participants between visits already works

25,829 pharmacist calls across 12 clinical trials — Martinez et al., 2017

45.5%

of those calls produced at least one intervention

Around 55% were rated high-impact — affecting trial outcomes or adherence.

Participants with an issue found by phone

adverse events



medication use against protocol



concurrent medications




A pharmacist made every one of those calls.

That is why it is not standard practice. ReconMed makes the call, and a coordinator reviews only what it found.

Martinez et al., *Clinical Therapeutics* 39(3), 2017. 3,873 participants; 12 trials in type 2 diabetes.

The agent proposes. A coordinator decides.

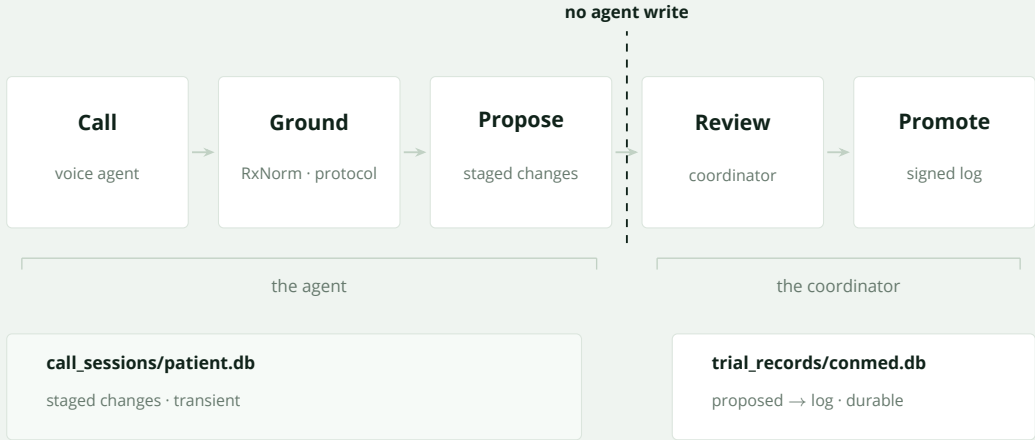


the medication log is written only on Promote, under an electronic signature

Two models, because a realtime agent cannot wait

The Talker speaks. The Thinker plans between turns and never touches the line.




Every claim resolves to a lookup



Deepgram nova-3 in, aura-2 out · GPT-5.6 Luna both sides · prompts are files, swappable without a deploy

The model is not the source of truth




AP News

26 Oct 2024

Researchers say an AI-powered transcription tool used in hospitals invents things no one ever said

"hyperactivated antibiotics" — a drug that does not exist, invented in a patient's notes.




STAT

25 Jul 2018

IBM's Watson supercomputer recommended "unsafe and incorrect" cancer treatments, internal documents show

recommended a drug that could cause severe or fatal bleeding — for a patient already bleeding.




Science

26 Apr 2024

AI transcription tools "hallucinate", too

made up whole sentences in about 1.4% of the transcriptions tested.

The agent may not answer from memory

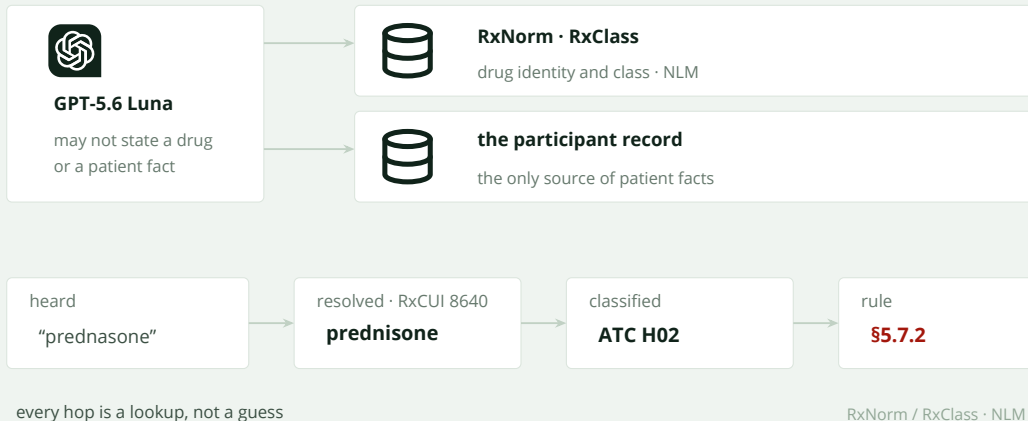

Review queue

6 proposed changes



Prohibited

Prednisone
20 mg daily · oral

Protocol §5.7.2



matched drug
prednisone

matched class
systemic corticosteroid
ATC H02

protocol section
§5.7.2
excluded above 10 mg/day

What is on file, and what the call proposed

Review queue

7 proposed changes · 2 prohibited

on file

from the call

Add

—



Atorvastatin 20 mg nightly



pending

Modify

Metformin 500 mg twice daily



Metformin 1000 mg twice daily



accepted

Stop

Ibuprofen 400 mg as needed



stopped — GI bleed reported



rejected

each row: confirm, edit, reject · and “why” opens the tool trace

Promote 1 accepted

Nothing has to leave the machine

Three real published protocols, 25 participants — trials real, participant data synthetic.

The record



conmed.db

the trial record



patient.db

the call in progress



drugs.db

RxNorm · RxClass



general_health.db

plain-language guidance

The voice, too

speech in

Parakeet 0.6B

NVIDIA · NeMo

speech out

Qwen3-TTS 0.6B

open weights

Runs on CPU. No API key.

A participant's voice never reaches a vendor.

Or a server

```
DATABASE_URL=  
postgres://...
```

one environment
variable, same code

MIT · open

The demo runs the hosted speech path. The local models are built and round-trip tested in `local-ai/`; switching is configuration, not a rewrite.



ReconMed

Automated Medicine Reconciliation

Thank you · questions

HackMIT 2026