

https://samueltussing.github.io/SEO\_NinaCarducci/











Performance

Accessibility

**Best Practices** 

**SEO** 

**PWA** 



## Performance

Values are estimated and may vary. The performance score is calculated directly from these metrics. See calculator.

0-49

50-89

90-100



**METRICS** Expand view

First Contentful Paint

1.5 s

70 ms

Total Blocking Time

Speed Index

1.6 s

Largest Contentful Paint

2.6 s

**Cumulative Layout Shift** 

0.001

## View Treemap

## View Original Trace















about:blank



Show audits relevant to: All FCP LCP TBT CLS

#### **OPPORTUNITIES**

Opportunity Estimated Savings

Properly size images 0.58s ^

Serve images that are appropriately-sized to save cellular data and improve load time. Learn how to size images.

	URL	Resource Size	Potential Savings
GitHub Utility  1st Party		92.5 KiB	79.4 KiB
	min/nina-carducci-photographe-1920x665px-min.avif (samueltussing.github.io)	92.5 KiB	79.4 KiB
img.d-block.w-100			

Reduce unused CSS 0.30s ^

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. <u>Learn how to reduce unused CSS</u>. FCP <u>LCP</u>

URL	Transfer Size	Potential Savings
GitHub Utility 1st Party	24.6 KiB	23.6 KiB
bootstrap/bootstrap.min.css (samueltussing.github.io)	24.6 KiB	23.6 KiB


These suggestions can help your page load faster. They don't <u>directly affect</u> the Performance score.

#### DIAGNOSTICS

about:blank 2/26

▲ Image elements do not have explicit width and height

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. <u>Learn how to set image</u> <u>dimensions</u> (CLS)

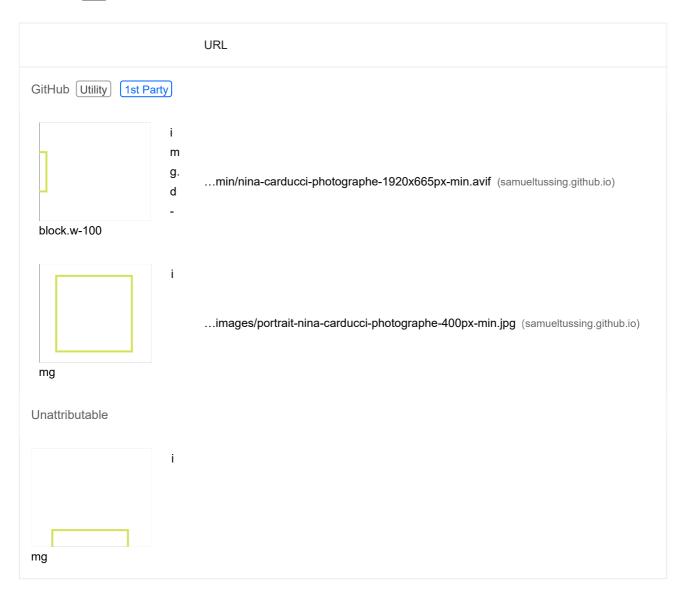

▲ Serve static assets with an efficient cache policy — 10 resources found

A long cache lifetime can speed up repeat visits to your page. Learn more about efficient cache policies.

URL	Cache TTL	Transfer Size
GitHub Utility 1st Party		188 KiB
min/nina-carducci-photographe-1920x665px-min.avif (samueltussing.github.io)	10m	93 KiB
bootstrap/bootstrap.min.css (samueltussing.github.io)	10m	25 KiB
bootstrap/bootstrap.bundle.min.js (samueltussing.github.io)	10m	23 KiB

about:blank 3/26

URL	Cache TTL	Transfer Size
min/festival-de-musique-nina-carducci-440px-min.avif (samueltussing.github.io)	10m	22 KiB
images/portrait-nina-carducci-photographe-400px-min.jpg (samueltussing.github.io)	10m	17 KiB
min/business-portrait-nina-carducci-440px-min.avif (samueltussing.github.io)	10m	5 KiB
assets/maugallery.min.js (samueltussing.github.io)	10m	2 KiB
assets/style.min.css (samueltussing.github.io)	10m	1 KiB
images/instagram.png (samueltussing.github.io)	10m	1 KiB
assets/scripts.min.js (samueltussing.github.io)	10m	0 KiB

Minimize main-thread work — 2.6 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to minimize main-thread work (TBT)

Category	Time Spent
Other	1,074 ms
Style & Layout	786 ms
Script Evaluation	464 ms
Rendering	134 ms
Parse HTML & CSS	103 ms
Script Parsing & Compilation	23 ms

Avoid chaining critical requests — 3 chains found

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. <u>Learn how to avoid chaining critical requests.</u> [FCP] [LCP]

Maximum critical path latency: 83.943 ms

Initial Navigation

/SEO\_NinaCarducci/ (samueltussing.github.io)

about:blank 4/26

...assets/style.min.css (samueltussing.github.io) - 14.052 ms, 1.49 KiB

...bootstrap/bootstrap.min.css (samueltussing.github.io) - 33.291 ms, 24.57 KiB

/jquery-3.4.1.min.js (code.jquery.com) - 33.571 ms, 30.06 KiB

Keep request counts low and transfer sizes small — 17 requests • 283 KiB

To set budgets for the quantity and size of page resources, add a budget.json file. Learn more about performance budgets.

Resource Type	Requests	Transfer Size
Total	17.0	283.0 KiB
Image	5.0	136.9 KiB
Font	4.0	60.0 KiB
Script	4.0	55.0 KiB
Stylesheet	3.0	27.0 KiB
Document	1.0	4.2 KiB
Media	0.0	0.0 KiB
Other	0.0	0.0 KiB
Third-party	17.0	283.0 KiB

○ Largest Contentful Paint element — 2,570 ms

This is the largest contentful element painted within the viewport. <u>Learn more about the Largest Contentful Paint element</u> [LCP]

Element			
	img		

Phase	% of LCP	Timing
TTFB	24%	620 ms

about:blank 5/26

Phase	% of LCP	Timing
Load Delay	0%	0 ms
Load Time	1%	10 ms
Render Delay	75%	1,940 ms

 $\bigcirc$  Avoid large layout shifts — 5 elements found

These DOM elements contribute most to the CLS of the page. <u>Learn how to improve CLS [CLS]</u>

Element	CLS Contribution
h2.about-metitle	0.001
h1.name	0.000
h1.name	0.000
a	0.000
a	0.000

O Avoid long main-thread tasks — 8 long tasks found

about:blank 6/26

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. <u>Learn how to avoid long main-thread tasks</u> (TBT)

✓ Show 3rd-party resources (1)

URL	Start Time	Duration
GitHub Utility 1st Party		714 ms
/SEO_NinaCarducci/ (samueltussing.github.io)	1,078 ms	254 ms
/SEO_NinaCarducci/ (samueltussing.github.io)	766 ms	170 ms
/SEO_NinaCarducci/ (samueltussing.github.io)	1,332 ms	149 ms
assets/scripts.min.js (samueltussing.github.io)	2,869 ms	73 ms
/SEO_NinaCarducci/ (samueltussing.github.io)	1,591 ms	68 ms
jQuery CDN Cdn		121 ms
/jquery-3.4.1.min.js (code.jquery.com)	2,167 ms	121 ms
Unattributable		110 ms
Unattributable	1,481 ms	56 ms
Unattributable	1,537 ms	54 ms

More information about the performance of your application. These numbers don't directly affect the Performance score.

PASSED AUDITS (30)

Eliminate render-blocking resources  $\,$ — Potential savings of 0 ms

Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. Learn how to eliminate render-blocking resources. FCP [LCP]

URL	Transfer Size	Potential Savings
GitHub Utility 1st Party	24.6 KiB	450 ms
bootstrap/bootstrap.min.css (samueltussing.github.io)	24.6 KiB	450 ms

about:blank 7/26

Defer offscreen images Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. Learn how to defer offscreen images. Minify CSS Minifying CSS files can reduce network payload sizes. Learn how to minify CSS. FCP LCP Minify JavaScript Minifying JavaScript files can reduce payload sizes and script parse time. Learn how to minify JavaScript. FCP LCP Reduce unused JavaScript Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. Learn how to reduce unused JavaScript. [LCP] Efficiently encode images Optimized images load faster and consume less cellular data. Learn how to efficiently encode images. Serve images in next-gen formats Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. Learn more about modern image formats. Enable text compression Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. Learn more about text compression. [FCP] [LCP] Preconnect to required origins Consider adding preconnect or dns-prefetch resource hints to establish early connections to important third-party origins. Learn how to preconnect to required origins. FCP [LCP] Initial server response time was short — Root document took 10 ms Keep the server response time for the main document short because all other requests depend on it. Learn more about the Time to First Byte metric. FCP [LCP] URL Time Spent GitHub (Utility) 10 ms 1st Party

URL Time Spent /SEO NinaCarducci/ (samueltussing.github.io) 10 ms Avoid multiple page redirects Redirects introduce additional delays before the page can be loaded. Learn how to avoid page redirects. FCP [CCP] Preload key requests Consider using <link rel=preload> to prioritize fetching resources that are currently requested later in page load. Learn how to preload key requests. FCP [LCP] Use HTTP/2 HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. Learn more about HTTP/2. Use video formats for animated content Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. Learn more about efficient video formats [LCP] Remove duplicate modules in JavaScript bundles Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. TBT Avoid serving legacy JavaScript to modern browsers Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/nomodule feature detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. Learn how to use modern JavaScript TBT Preload Largest Contentful Paint image If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. Learn more about preloading LCP elements. [LCP] Avoids enormous network payloads — Total size was 283 KiB Large network payloads cost users real money and are highly correlated with long load times. Learn how to reduce payload sizes. LCP

about:blank 9/26

Show 3rd-party resources (5)

URL	Transfer Size
GitHub Utility 1st Party	178.5 KiB
min/nina-carducci-photographe-1920x665px-min.avif (samueltussing.github.io)	92.7 KiB
bootstrap/bootstrap.min.css (samueltussing.github.io)	24.6 KiB
bootstrap/bootstrap.bundle.min.js (samueltussing.github.io)	22.9 KiB
min/festival-de-musique-nina-carducci-440px-min.avif (samueltussing.github.io)	21.8 KiB
images/portrait-nina-carducci-photographe-400px-min.jpg (samueltussing.github.io)	16.5 KiB
Google Fonts Cdn	60.0 KiB
v12/UcCO3FwrKwoff2 (fonts.gstatic.com)	16.4 KiB
v13/rnCu-xNNwwoff2 (fonts.gstatic.com)	15.4 KiB
v13/rnCu-xNNwwoff2 (fonts.gstatic.com)	14.6 KiB
v13/rnCr-xNNwwoff2 (fonts.gstatic.com)	13.6 KiB
jQuery CDN Cdn	30.1 KiB
/jquery-3.4.1.min.js (code.jquery.com)	30.1 KiB

Avoids an excessive DOM size — 136 elements

A large DOM will increase memory usage, cause longer <u>style calculations</u>, and produce costly <u>layout reflows</u>. <u>Learn how to avoid an excessive DOM size</u>. <u>TBT</u>

Statistic	Element	Value
Total DOM Elements		136
Maximum DOM Depth	div.mg-prev	9
Maximum Child Elements	body	12

about:blank 10/26

User Timing marks and measures

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. <u>Learn more about User Timing marks</u>.

JavaScript execution time - 0.4 s

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to reduce Javascript execution time. (TBT)

✓ Show 3rd-party resources (1)

URL	Total CPU Time	Script Evaluation	Script Parse
GitHub Utility 1st Party	1,434 ms	192 ms	8 ms
/SEO_NinaCarducci/ (samueltussing.github.io)	1,278 ms	72 ms	7 ms
assets/scripts.min.js (samueltussing.github.io)	156 ms	120 ms	1 ms
Unattributable	633 ms	17 ms	0 ms
Unattributable	633 ms	17 ms	0 ms
jQuery CDN Cdn	389 ms	213 ms	10 ms
/jquery-3.4.1.min.js (code.jquery.com)	389 ms	213 ms	10 ms

All text remains visible during webfont loads

Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. <u>Learn more about font-display</u>. (FCP) (LCP)

Minimize third-party usage — Third-party code blocked the main thread for 50 ms

Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. Learn how to minimize third-party impact. (TBT)

Third-Party	Transfer Size	Main-Thread Blocking Time
jQuery CDN Cdn	30 KiB	54 ms
/jquery-3.4.1.min.js (code.jquery.com)	30 KiB	54 ms
Google Fonts Cdn	61 KiB	0 ms
v12/UcCO3FwrKwoff2 (fonts.gstatic.com)	16 KiB	0 ms

about:blank 11/26

Third-Party	Transfer Size	Main-Thread Blocking Time
v13/rnCu-xNNwwoff2 (fonts.gstatic.com)	15 KiB	0 ms
v13/rnCu-xNNwwoff2 (fonts.gstatic.com)	15 KiB	0 ms
v13/rnCr-xNNwwoff2 (fonts.gstatic.com)	14 KiB	0 ms


0	Lazy I	load	third-party	resources	with	facades
---	--------	------	-------------	-----------	------	---------

Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. <u>Learn how to defer third-parties with a facade</u>. <u>TBT</u>

Largest Contentful Paint image was not lazily loaded

Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint.

<u>Learn more about optimal lazy loading. [LCP]</u>

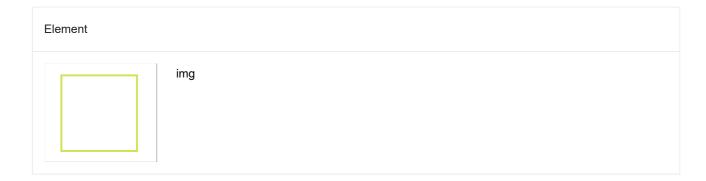

Uses passive listeners to improve scrolling performance

Consider marking your touch and wheel event listeners as passive to improve your page's scroll performance. <u>Learn more about adopting passive event listeners</u>.

Avoids document.write()

For users on slow connections, external scripts dynamically injected via document.write() can delay page load by tens of seconds. Learn how to avoid document.write().

Avoid non-composited animations

Animations which are not composited can be janky and increase CLS. Learn how to avoid non-composited animations CLS

Has a <meta name="viewport"> tag with width or initial-scale

A <meta name="viewport"> not only optimizes your app for mobile screen sizes, but also prevents a 300 millisecond delay to user input. Learn more about using the viewport meta tag. (TBT)

Page didn't prevent back/forward cache restoration

about:blank 12/26

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. <u>Learn more about the bfcache</u>



# Accessibility

These checks highlight opportunities to improve the accessibility of your web app. Only a subset of accessibility issues can be automatically detected so manual testing is also encouraged.

detected so manual testing is also choodraged.	
ADDITIONAL ITEMS TO MANUALLY CHECK (10)	Hide
The page has a logical tab order	^
Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. <u>Learn more about logical tab ordering</u> .	
Interactive controls are keyboard focusable	^
Custom interactive controls are keyboard focusable and display a focus indicator. <u>Learn how to make custom controls focusable</u> .	
Interactive elements indicate their purpose and state	^
Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. Learn how to decorate interactive elements with affordance hints.	
The user's focus is directed to new content added to the page	^
If new content, such as a dialog, is added to the page, the user's focus is directed to it. Learn how to direct focus to new content.	
User focus is not accidentally trapped in a region	^
A user can tab into and out of any control or region without accidentally trapping their focus. Learn how to avoid focus tra	aps.
Custom controls have associated labels	^
Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more about custom controls and labels.	
Custom controls have ARIA roles	^

about:blank 13/26

Custom interactive controls have appropriate ARIA roles. Learn how to add roles to custom controls.

O Visual order on the page follows DOM order

DOM order matches the visual order, improving navigation for assistive technology. Learn more about DOM and visual ordering.

Offscreen content is hidden from assistive technology

Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content.

O HTML5 landmark elements are used to improve navigation

A Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology.

These items address areas which an automated testing tool cannot cover. Learn more in our guide on conducting an accessibility

<u>review</u>.

Hide

[aria-\*] attributes match their roles

PASSED AUDITS (19)

Learn more about landmark elements.

Each ARIA role supports a specific subset of aria-\* attributes. Mismatching these invalidates the aria-\* attributes. <u>Learn how to match ARIA attributes to their roles</u>.

[aria-hidden="true"] is not present on the document <body>

Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. <a href="Learn how aria-hidden affects the document body">Learn how aria-hidden affects the document body</a>.

[aria-\*] attributes have valid values

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. <u>Learn more about valid values</u> for ARIA attributes.

[aria-\*] attributes are valid and not misspelled

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. <u>Learn more about valid ARIA</u> attributes.

Buttons have an accessible name

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. <u>Learn how to make buttons more accessible</u>.

about:blank 14/26

ARIA IDs are unique

The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. <u>Learn</u> how to fix duplicate ARIA IDs.

Image elements have [alt] attributes

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute.

Input buttons have discernible text.

Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. <u>Learn more about input buttons</u>.

Form elements have associated labels

Labels ensure that form controls are announced properly by assistive technologies, like screen readers. <u>Learn more about form element labels</u>.

[user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximum-scale] attribute is not less than 5.

Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. <u>Learn more about the viewport meta tag.</u>

[aria-hidden="true"] elements do not contain focusable descendents

Focusable descendents within an [aria-hidden="true"] element prevent those interactive elements from being available to users of assistive technologies like screen readers. <u>Learn how aria-hidden affects focusable elements</u>.

Background and foreground colors have a sufficient contrast ratio

Low-contrast text is difficult or impossible for many users to read. Learn how to provide sufficient color contrast.

Document has a <title> element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. <u>Learn more about document titles</u>.

<html> element has a [lang] attribute

If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. <u>Learn more about the lang attribute</u>.

about:blank 15/26

<html> element has a valid value for its [lang] attribute Specifying a valid BCP 47 language helps screen readers announce text properly. Learn how to use the lang attribute. Links have a discernible name Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. Learn how to make links accessible. Lists contain only elements and script supporting elements (<script> and <template>). Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. Learn more about proper list structure. List items () are contained within , or <menu> parent elements Screen readers require list items () to be contained within a parent , or <menu> to be announced properly. Learn more about proper list structure. Heading elements appear in a sequentially-descending order Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. Learn more about heading order. NOT APPLICABLE (29) Hide [accesskey] values are unique Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more about access keys. button, link, and menuitem elements have accessible names When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to make command elements more accessible. ARIA input fields have accessible names When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about input field labels. ARIA meter elements have accessible names When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it

unusable for users who rely on screen readers. <u>Learn how to name meter elements</u>.

about:blank 16/26

ARIA progressbar elements have accessible names	^
When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, mak it unusable for users who rely on screen readers. <u>Learn how to label progressbar elements</u> .	ing
O [role]s have all required [aria-*] attributes	^
Some ARIA roles have required attributes that describe the state of the element to screen readers. <u>Learn more about role and required attributes</u> .	<u>es</u>
O Elements with an ARIA [role] that require children to contain a specific [role] have all required children.	^
Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. <u>Learn more ab roles and required children elements</u> .	<u>oout</u>
[role]s are contained by their required parent element	^
Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility function Learn more about ARIA roles and required parent element.	าร.
O [role] values are valid	^
ARIA roles must have valid values in order to perform their intended accessibility functions. <u>Learn more about valid ARIA roles</u> .	7
ARIA toggle fields have accessible names	^
When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusa for users who rely on screen readers. <u>Learn more about toggle fields</u> .	ble
ARIA tooltip elements have accessible names	^
When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn how to name tooltip elements</u> .	
ARIA treeitem elements have accessible names	^
When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making in unusable for users who rely on screen readers. <u>Learn more about labeling treeitem elements</u> .	it
The page contains a heading, skip link, or landmark region	^
Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. Learn more about bypa	<u>iss</u>

about:blank 17/26

<dl>'s contain only properly-ordered <dt> and <dd> groups, <script>, <template> or <div> elements.</th><th>^</th></tr><tr><td>When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. <u>Learn has tructure definition lists correctly.</u></td><td>now to</td></tr><tr><td><ul>     <li>Definition list items are wrapped in <d1> elements</li> </ul></td><td>^</td></tr><tr><td>Definition list items (<dt> and <dd>) must be wrapped in a parent <d1> element to ensure that screen readers can pro announce them. Learn how to structure definition lists correctly.</td><td>perly</td></tr><tr><td>O [id] attributes on active, focusable elements are unique</td><td>^</td></tr><tr><td>All focusable elements must have a unique id to ensure that they're visible to assistive technologies. <u>Learn how to fix duplicate ids</u>.</td><td></td></tr><tr><td>No form fields have multiple labels</td><td>^</td></tr><tr><td>Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use the first, the last, or all of the labels. <u>Learn how to use form labels</u>.</td><td>either</td></tr><tr><td><frame> or <iframe> elements have a title</td><td>^</td></tr><tr><td>Screen reader users rely on frame titles to describe the contents of frames. Learn more about frame titles.</td><td></td></tr><tr><td><html> element has an [xml:lang] attribute with the same base language as the [lang] attribute.</td><td>^</td></tr><tr><td>If the webpage does not specify a consistent language, then the screen reader might not announce the page's text con Learn more about the lang attribute.</td><td>rrectly.</td></tr><tr><td><pre><input type="image"> elements have [alt] text</pre></td><td>^</td></tr><tr><td>When an image is being used as an <input> button, providing alternative text can help screen reader users understand purpose of the button. Learn about input image alt text.</td><td>nd the</td></tr><tr><td>The document does not use <meta http-equiv="refresh"></td><td>^</td></tr><tr><td>Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This macreate a frustrating or confusing experience. <u>Learn more about the refresh meta tag</u>.</td><td>ay</td></tr><tr><td>Cobject> elements have alternate text</td><td>^</td></tr><tr><td>Screen readers cannot translate non-text content. Adding alternate text to <object> elements helps screen readers or meaning to users. Learn more about alt text for object elements.</td><td>onvey</td></tr><tr><td>No element has a [tabindex] value greater than 0</td><td>^</td></tr></tbody></table></script></dd></dt></dl>
---

about:blank 18/26

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. <u>Learn more about the tabindex attribute</u>.

Tables use <caption> instead of cells with the [colspan] attribute to indicate a caption.

Screen readers have features to make navigating tables easier. Ensuring that tables use the actual caption element instead of cells with the [colspan] attribute may improve the experience for screen reader users. <u>Learn more about captions</u>.

elements in a large have one or more table headers.

Screen readers have features to make navigating tables easier. Ensuring that elements in a large table (3 or more cells in width and height) have an associated table header may improve the experience for screen reader users. <u>Learn more about table headers</u>.

O Cells in a element that use the [headers] attribute refer to table cells within the same table.

Screen readers have features to make navigating tables easier. Ensuring cells using the [headers] attribute only refer to other cells in the same table may improve the experience for screen reader users. <u>Learn more about the headers</u> <u>attribute</u>.

elements and elements with [role="columnheader"/"rowheader"] have data cells they describe.

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. <u>Learn more about table headers</u>.

[lang] attributes have a valid value

Specifying a valid <u>BCP 47 language</u> on elements helps ensure that text is pronounced correctly by a screen reader. <u>Learn</u> how to use the <u>lang attribute</u>.

<video> elements contain a <track> element with [kind="captions"]

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. <u>Learn more about video captions</u>.



TRUST AND SAFETY

about:blank 19/26

0	Ensure	<b>CSP</b>	is	effective	against	XSS	attacks

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. <u>Learn how to use</u> a <u>CSP to prevent XSS</u>

Description	Directive	Severity
No CSP found in enforcement mode		High

#### **GENERAL**

Detected JavaScript libraries

**Uses HTTPS** 

All front-end JavaScript libraries detected on the page. Learn more about this JavaScript library detection diagnostic audit.

Name	Version
Bootstrap	5.1.3
jQuery	3.4.1

PASSED AUDITS (13)
Hide

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding <u>mixed content</u>, where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. <u>Learn more about HTTPS</u>.

Avoids requesting the geolocation permission on page load

Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. <u>Learn more about the geolocation permission</u>.

Avoids requesting the notification permission on page load

Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. <u>Learn more about responsibly getting permission for notifications</u>.

Allows users to paste into input fields

about:blank 20/26

Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. <u>Learn more about user-friendly input fields</u>.

Displays images with correct aspect ratio

Image display dimensions should match natural aspect ratio. Learn more about image aspect ratio.

Serves images with appropriate resolution

Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. <u>Learn how to provide responsive images</u>.

Page has the HTML doctype

Specifying a doctype prevents the browser from switching to quirks-mode. Learn more about the doctype declaration.

Properly defines charset

A character encoding declaration is required. It can be done with a <meta> tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. <u>Learn more about declaring the character encoding</u>.

Avoids unload event listeners

The unload event does not fire reliably and listening for it can prevent browser optimizations like the Back-Forward Cache. Use pagehide or visibilitychange events instead. <u>Learn more about unload event listeners</u>

Avoids deprecated APIs

Deprecated APIs will eventually be removed from the browser. Learn more about deprecated APIs.

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. Learn more about this errors in console diagnostic audit

No issues in the Issues panel in Chrome Devtools

No browser errors logged to the console

Page has valid source maps

Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

etails on each issue.

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. <u>Learn more about source maps</u>.

about:blank 21/26

URL	Map URL
GitHub Utility 1st Party	
bootstrap/bootstrap.bundle.min.js (samueltussing.github .io)	bootstrap/bootstrap.bundle.min.js.map (samueltussing.githu b.io)

NOT APPLICABLE (1)

Fonts with font-display: optional are preloaded

Preload optional fonts so first-time visitors may use them. Learn more about preloading fonts



These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on <a href="Core Web Vitals">Core Web Vitals</a>. Learn more about Google Search Essentials.

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Structured data is valid

Run the Structured Data Testing Tool and the Structured Data Linter to validate structured data. Learn more about Structured Data.

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (13)

Hide

Has a <meta name="viewport"> tag with width or initial-scale

A <meta name="viewport"> not only optimizes your app for mobile screen sizes, but also prevents a 300 millisecond delay to user input. Learn more about using the viewport meta tag. TBT

about:blank 22/26

Document has a <title> element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. <u>Learn more about document titles</u>.

Document has a meta description Meta descriptions may be included in search results to concisely summarize page content. Learn more about the meta description. Page has successful HTTP status code Pages with unsuccessful HTTP status codes may not be indexed properly. Learn more about HTTP status codes. Links have descriptive text Descriptive link text helps search engines understand your content. Learn how to make links more accessible. Links are crawlable Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. Learn how to make links crawlable Page isn't blocked from indexing Search engines are unable to include your pages in search results if they don't have permission to crawl them. Learn more about crawler directives. Image elements have [alt] attributes Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute. Document has a valid hreflang hreflang links tell search engines what version of a page they should list in search results for a given language or region. Learn more about hreflang. Document has a valid rel=canonical Canonical links suggest which URL to show in search results. Learn more about canonical links. Document uses legible font sizes — 100% legible text Font sizes less than 12px are too small to be legible and require mobile visitors to "pinch to zoom" in order to read. Strive to

about:blank 23/26

have >60% of page text ≥12px. Learn more about legible font sizes.

Source	Selector	% of Page Text	Font Size
Legible text		100.00%	≥ 12px

Document avoids plugins

more about

Search engines can't index plugin content, and many devices restrict plugins or don't support them. <u>Learn more about avoiding plugins</u>.

Tap targets are sized appropriately — 100% appropriately sized tap targets

Interactive elements like buttons and links should be large enough (48x48px), or have enough space around them, to be easy enough to tap without overlapping onto other elements. <u>Learn more about tap targets</u>.

NOT APPLICABLE (1)

O robots.txt is valid

If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. Learn more about robots.txt.



## **PWA**

These checks validate the aspects of a Progressive Web App. <u>Learn what</u> <u>makes a good Progressive Web App</u>.

**INSTALLABLE** 

▲ Web app manifest or service worker do not meet the installability requirements — 1 reason

Service worker is the technology that enables your app to use many Progressive Web App features, such as offline, add to homescreen, and push notifications. With proper service worker and manifest implementations, browsers can proactively prompt users to add your app to their homescreen, which can lead to higher engagement. <a href="Learn more about manifest">Learn more about manifest</a> installability requirements.

Failure reason

Page has no manifest <link> URL

about:blank 24/26

### PWA OPTIMIZED

▲ Does not register a service worker that controls page and start_url	^
The service worker is the technology that enables your app to use many Progressive Web App features, such as offline, to homescreen, and push notifications. <u>Learn more about Service Workers</u> .	add
▲ Is not configured for a custom splash screen Failures: No manifest was fetched.	^
A themed splash screen ensures a high-quality experience when users launch your app from their homescreens. <u>Learn</u> more about splash screens.	
Does not set a theme color for the address bar.  Failures: No manifest was fetched, No ` <meta name="theme-color"/> ` tag found.	^
The browser address bar can be themed to match your site. <u>Learn more about theming the address bar</u> .	
▲ Content is not sized correctly for the viewport The viewport size of 424px does not match the window size of 412px.	^
If the width of your app's content doesn't match the width of the viewport, your app might not be optimized for mobile screens. <u>Learn how to size content for the viewport</u> .	
Has a <meta name="viewport"/> tag With width Or initial-scale	^
A <meta name="viewport"/> not only optimizes your app for mobile screen sizes, but also prevents <u>a 300 millisecond of to user input</u> . <u>Learn more about using the viewport meta tag</u> . <u>TBT</u>	<u>elay</u>
▲ Manifest doesn't have a maskable icon No manifest was fetched	^
A maskable icon ensures that the image fills the entire shape without being letterboxed when installing the app on a dev <u>Learn about maskable manifest icons</u> .	ice.
ADDITIONAL ITEMS TO MANUALLY CHECK (3)	Hide
O Site works cross-browser	^
To reach the most number of users, sites should work across every major browser. <u>Learn about cross-browser compatib</u>	<u>ility</u> .
O Page transitions don't feel like they block on the network	^
Transitions should feel snappy as you tap around, even on a slow network. This experience is key to a user's perception performance. <u>Learn more about page transitions</u> .	of
O Each page has a URL	^

about:blank 25/26

Ensure individual pages are deep linkable via URL and that URLs are unique for the purpose of shareability on social media. <u>Learn more about providing deep links</u>.

These checks are required by the baseline <u>PWA Checklist</u> but are not automatically checked by Lighthouse. They do not affect your score but it's important that you verify them manually.

Captured at Aug 31, 2023, 3:41

PM GMT+2

Initial page load

Emulated Moto G Power with

Lighthouse 10.3.0

Slow 4G throttling

Single page load

Using Chromium 116.0.0.0 with

devtools

Generated by **Lighthouse** 10.3.0 | File an issue

about:blank 26/26