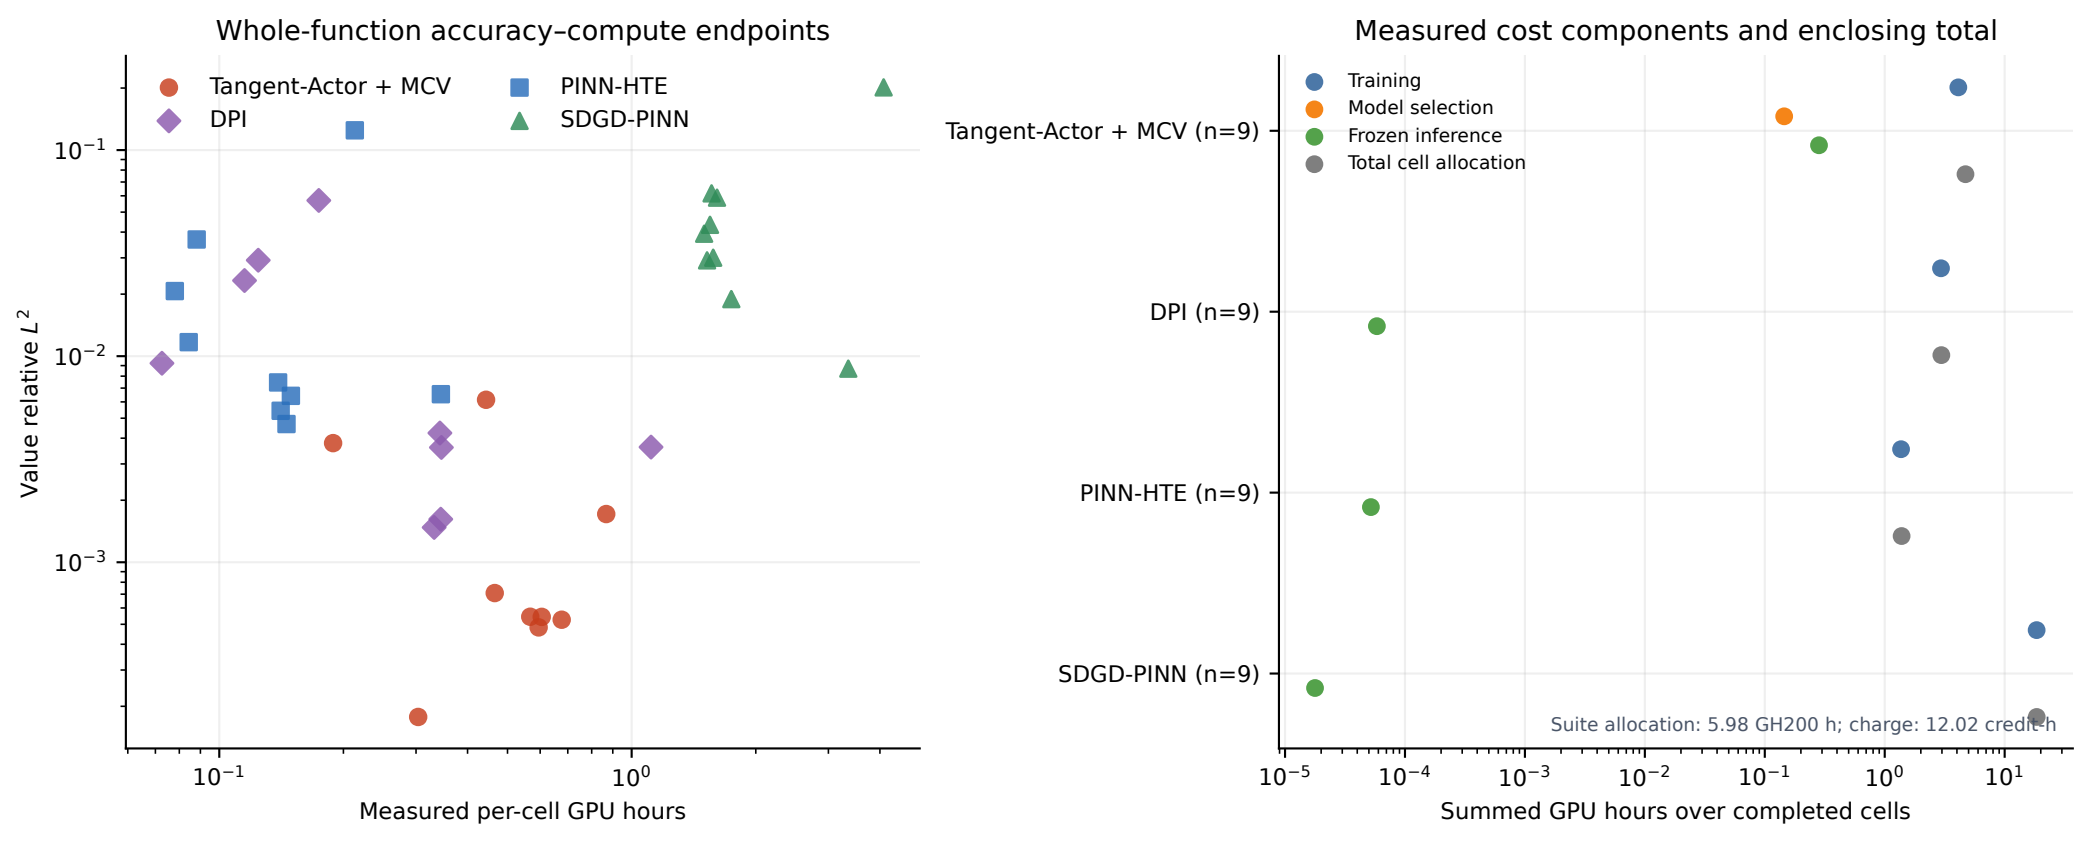
Whole-function accuracy–compute endpoints
Tangent-Actor + MCV
DPI
PINN-HTE
SDGD-PINN
Value relative L^2
10^{-1}
10^{-2}
10^{-3}
10^{-1}
10^{0}
Measured per-cell GPU hours
Measured cost components and enclosing total
Training
Model selection
Frozen inference
Total cell allocation
Tangent-Actor + MCV (n=9)
DPI (n=9)
PINN-HTE (n=9)
SDGD-PINN (n=9)
Suite allocation: 5.98 GH200 h; charge: 12.02 credit-h
10^{-5}
10^{-4}
10^{-3}
10^{-2}
10^{-1}
10^{0}
10^{1}
Summed GPU hours over completed cells