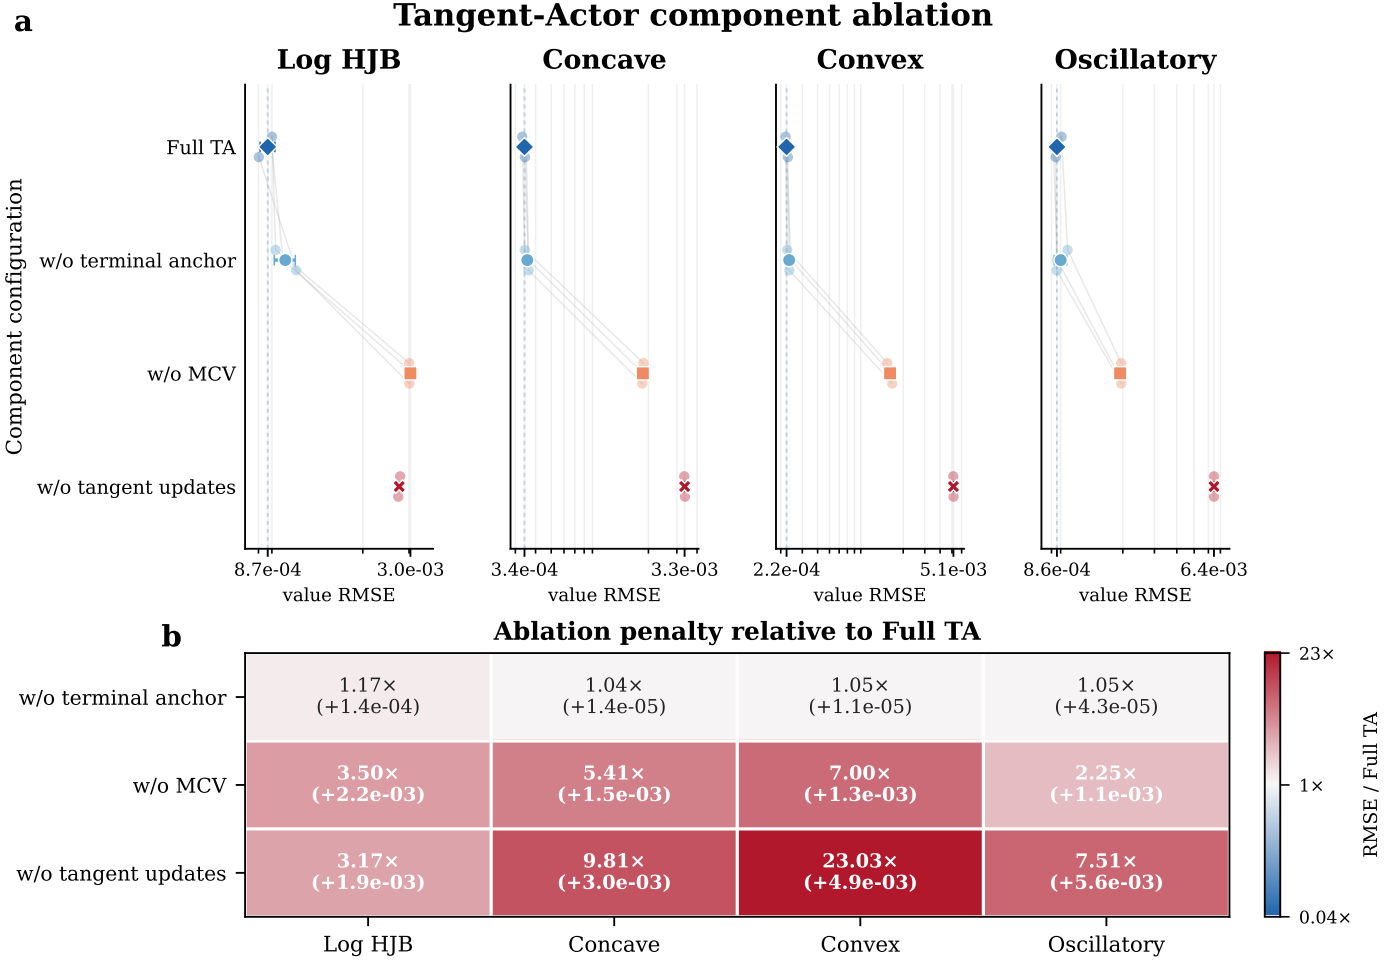

Small points: training seeds (A0–A2); fixed-A_0 uses two inference replicates. Heatmap annotations: RMSE ratio and absolute change.