

MECAFF - tools

Multiline External Console And Fullscreen Facility - Tools

for VM/370 R6 SixPack 1.2

User Manual

Version 1.2.0

Dr. Hans-Walter Latz

WARNINGS:

This software is delivered as-is with no promise or commitment to be usable for any particular purpose.

Use it at your own risks!

The MECAFF software and documentation has been written by a hobbyist for hobbyists and should not be used for any important or even critical tasks.

MECAFF is work in progress and its current implementation may differ from this documentation.

Contents

1	Overview	3
2	Fullscreen MECAFF tools for CMS	5
2.1	Handling disconnect and reconnect	31
2.1.1	Reconnecting to a MECAFF-console with CONS-style connection	32
2.1.2	Reconnecting to a MECAFF-console with GRAF-style connection	32
2.1.3	Reconnecting with a directly connected 3270 terminal	32
2.2	Handling of file identifications in EE, FSLIST and FSVIEW	5
2.3	EE – Fullscreen editor	6
2.3.1	Introduction.....	6
2.3.2	Choosing the “ideal” terminal size for the LRECL edited	6
2.3.3	Opening binary files for edit.....	8
2.3.4	Editing multiple files and mode transitions.....	8
2.3.5	Prefix commands	8
2.3.6	Commands.....	10
2.3.7	Customizing with SYSPROF EE and PROFILE EE	22
2.3.8	Rescue mode	23
2.4	FSLIST – Fullscreen file list	23
2.5	FSVIEW – Fullscreen file browser	27
2.6	FSHELP – Fullscreen help	29
3	MECAFF-tools utilities for CMS	31
3.1	FSQRY – Query Informations	33
3.2	FSCTL – setup the MECAFF-console	35
3.3	IND\$FILE – File transfer	37
4	Known restrictions / problems.....	40
4.1	EE – Implementation limitations	40
4.2	IND\$FILE	40
5	Possible extensions and improvements	42
5.1	EE	42
5.2	FSLIST	42

1 Overview

The MECAFF tools were initially developed with the MECAFF modification-free non-invasive extension to VM/370 R6 providing full screen capabilities and a serial-style console on 3270 terminals. MECAFF originally required an external (Java-) program providing fullscreen support as a kind of additional external facility.

With the availability of the DIAG58 CP extension for VM/370R6, the fullscreen-based programs of MECAFF were ported to the now native fullscreen support. These programs no longer require an external supporting Java program, but can be used in a pure “VM/370-only” environment.

The external Java-program is now an *optional* feature called MECAFF-console. It can be installed and used if a more line-oriented console with advanced features (colored and pageable output history, deeper command recall) is preferred over the standard page-oriented CP console for 3270 terminals. The MECAFF-console is a requirement only if the MECAFF-tools are to be used on a VM/370 system where the DIAG58 modification is not installed.

The MECAFF-tools now support both variants of fullscreen support for VM/370R6, the same programs can be used with a 3270 terminal directly connected to Hercules (then using DIAG58) or connected through the MECAFF-console , with only marginal differences due to the basic technical differences of both fullscreen infrastructures. Invoking a MECAFF fullscreen program in version 1.2.0 will work on a 3270 terminal provided

- the DIAG58 modification (version 1.07 or later) is installed in VM/370
- or
- the terminal is connected through the MECAFF-console (version 1.2.0 or later preferred).

It is of course possible to concurrently use the MECAFF-tools with 3270 terminals connected directly (via DIAG58) and indirectly (via a MECAFF-console) to VM/370.

The MECAFF tools suite consists of the following programs:

- **EE**
fullscreen editor allowing to edit multiple files simultaneously
- **FSLIST**
fullscreen file lister
- **FSVIEW**
fullscreen file viewer
- **FSHELP**
fullscreen online help viewer
- **FSQRY**
tool to inquiry characteristics of the 3270 terminal and MECAFF-console (in present)
- **FSCTL**
tool to control some functionalities of the MECAFF-console (if present)
- **IND\$FILE**
host side file transfer support (CUT-mode only)

The fullscreen tools EE, FSLIST, FSVIEW and FSHELP support (almost) arbitrary screen sizes of the connected 3270 terminal emulator. The screen size is defined by the emulated model type:

- Model 2 (IBM-3278-2-E, IBM-3279-2-E, IBM-3278-2, IBM-3279-2)
→ 80 cols x 24 lines
- Model 3 (IBM-3278-3-E, IBM-3279-3-E, IBM-3278-3, IBM-3279-3)
→ 80 cols x 32 lines
- Model 4 (IBM-3278-4-E, IBM-3279-4-E, IBM-3278-4, IBM-3279-4)
→ 80 cols x 43 lines
- Model 5 (IBM-3278-5-E, IBM-3279-5-E, IBM-3278-5, IBM-3279-5)
→ 132 cols x 27 rows
- Dynamic /oversize [naming emulator dependent] (IBM-DYNAMIC)
→ arbitrary screen geometry within the 14-bit buffer addressing range (16384 character cells) with at least 24 rows and 80 columns (theoretically allowing screen sizes between 80 cols x 204 rows and 682 cols x 24 rows)

The following sections describe the functionality and usage of the MECAFF tools. The installation as well as considerations specific to a fullscreen infrastructure (MECAFF-console or DIAG58) is described in separate documents.

2 Fullscreen MECAFF tools for CMS

The fullscreen tools EE (editor), FSLIST (filelist viewer) and FSVIEW (file browser) are in fact integrated into a single program to allow the navigation between basic functional modes EE, FSLIST and FSVIEW. Depending on how it is invoked from CMS, the program starts in one the EE, FSLIST or FSVIEW modes, allowing different transitions between the functional modes depending on the initial mode. For this reason, the modes EE, FSLIST and FSVIEW will be described as separate items (as if they were separate programs).

The program FSHELP displays the CMS help topic files of VM/370 SixPack 1.2 in fullscreen mode, also providing an overview menu page and navigation to other help topics.

2.1 Handling of file identifications in EE, FSLIST and FSVIEW

The MECAFF tools EE, FSLIST and FSVIEW allow specifying file identifications with 2 alternative conventions:

- with the “traditional” CMS convention with the components *filename*, *filetype* and (optionally) *filemode* separated with white space (one or more blanks):
fn ft [fm]
- with the dot-convention used by many other OSes, separating the 3 components with a dot, joining them to a single character string:
fn.ft[.fm]

Both conventions can even be mixed, so the following identifications specify the same file:

```
PROFILE EXEC A
PROFILE.EXEC.A
PROFILE EXEC.A
PROFILE.EXEC A
```

When specifying a new file identification in EE or a new file pattern in FSLIST, it is possible to reference components from the context (the current file identification or pattern) by giving the equal sign (=) for the corresponding components. For example:

- while editing the file: FOO C A1
specifying: = h
will open the file: FOO H A1
- having the pattern: X* MODULE S
in FLIST and giving: = . = . a
will list the files: X* MODULE A

As a single file identification in dot-notation may be more than 8 characters in length, it can be used for invoking one of the commands EE, FSLIST or FSVIEW only if the extended parameter list is available.

See suite-specific manual for the installation options to ensure that the dot-notation can be used on the command line by all MECAFF fullscreen programs.

2.2 EE – Fullscreen editor

2.2.1 Introduction

EE is a MECAFF-based fullscreen editor allowing to edit files with a LRECL up to 255. Usage and screen layout resemble to other 3270 fullscreen editors and supports editing several files in parallel.

The editor EE is invoked from CMS with

```
EE  fn ft [ fm ]
```

or

```
EE  fn.ft[.fm]
```

If the CMS file *fn ft [fm]* does not exist, the characteristics (RECFM, LRECL, case handling) for the new file are taken from the FTDEFAULTS command (see 2.2.6.4) for the file type (specified in one of EE's profiles, see 2.2.7).

2.2.2 Choosing the “ideal” terminal size for the LRECL edited

Unlike other editors, when editing files with the LRECL larger as the screen is wide (less the prefix zone), EE does not provide “shift left” or “shift right” functionality. Instead, the lines of the file are wrapped at the screen boundaries, each line having a single input field with full LRECL length spanning 2 or more lines on the screen. For an easier orientation, the gap from the end of a line input field to the next border (screen border or the prefix zone if placed at the right) can be marked with fill chars. With DOT as fillchar (see command GAPFill), editing a file with LRECL 80 on a standard 3270 terminal (3279-2 with 80x24 screen size) will have a screen setup similar to the following:

```
File: MEMCHECK C      A1 RECFM: V LRECL: 80(80) Lines: 37 Current: 25
===== ptr = newBlock(root);
===== int count = 0;
===== while(ptr) {
+....8 .....1.....2.....3.....4.....5.....6.....7.....
===== count++;
===== root = ptr;
===== ptr = newBlock(root);
===== }
=====
====>
02=RNxt 03=Quit 04=Srch 06=Sp1tJ 07=PgUp 08=PgDown 10=PInput 11=C1ear 12=Recall
Unchanged                                     EE V1.2.0, 1 File(s)
```

As EE supports non-standard terminal screen sizes, it is possible to choose the terminal size according to the most used LRECL. For example for LRECL 80 files, a terminal with 87 columns is suitable to edit these files in a “natural” way:

```

File: MEMCHECK C      A1      RECFM: V LRECL:  80(80) Lines:   37 Current:   25

=====
===== int main() {
=====     BlockPtr ptr;
=====     BlockPtr root = NULL;
=====
=====     ptr = newBlock(root);
=====     int count = 0;
=====     while(ptr) {
=====         .....1.....+.....2.....+.....3.....+.....4.....+.....5.....+.....6.....+.....7.....+.....8
=====         count++;
=====         root = ptr;
=====         ptr = newBlock(root);
=====     }
=====
=====     printf("allocated %d blocks -> %d bytes\n", count, count*sizeof(Block));
=====
=====     while(root) {
=====         ptr = root->next;
=====         free(root);
=====     }
=====
=====>
02=RNxt 03=Quit 04=Srch 06=Sp1tJ 07=PgUp 08=PgDown 10=PInput 11=C1ear 12=Recall
Unchanged                                     EE V1.2.0,  1 File(s)

```

For some type of files, only the first characters up to a fixed column of a larger LRECL are relevant for using the file. For example only the first 72 columns are significant for ASSEMBLER, COBOL, PL/1 or FORTRAN files, where columns 73 to 80 only contain line numbering data. For such file types, it is possible to restrict displaying and editing the file to the first relevant columns with the command `WORKLRECL`. The default working line width for a file type can be predefined with the `FTDEFAULTS` command in the profile files of EE. If the working width specified for a file allows to completely display the editable line subset including the prefix zone in a screen width. Files with up to 73 significant columns will be editable in a “natural” way on a standard terminal screen size like 80x24 (model 2), 80x32 (model 3) or 80x43 (model 4). The following screen shows the same editing situation as the first screen (3279-2 with 80x24 screen size) after issuing the command `WORKLRECL 72`:

```

File: MEMCHECK C      A1      RECFM: V LRECL:  72(80) Lines:   37 Current:   25
Working LRECL changed to 72
=====
===== int main() {
=====     BlockPtr ptr;
=====     BlockPtr root = NULL;
=====
=====     ptr = newBlock(root);
=====     int count = 0;
=====     while(ptr) {
=====         .....1.....+.....2.....+.....3.....+.....4.....+.....5.....+.....6.....+.....7..
=====         count++;
=====         root = ptr;
=====         ptr = newBlock(root);
=====     }
=====
=====     printf("allocated %d blocks -> %d bytes\n", count, count*sizeof(Block))
=====
=====     while(root) {
=====         ptr = root->next;
=====         free(root);
=====     }
=====
=====>
02=RNxt 03=Quit 04=Srch 06=Sp1tJ 07=PgUp 08=PgDown 10=PInput 11=C1ear 12=Recall
Unchanged                                     EE V1.2.0,  1 File(s)

```

However, setting the `WORKLRECL` smaller than the significant line width may result in truncated lines if lines already having content in the hidden part of the line are edited. This is the case in the above example of a C file where the `printf` statement will be crippled if modified, so setting the `WORKLRECL` should only be used if the file type really allows it.

2.2.3 Opening binary files for edit


If a file loaded into EE contains binary characters (codes 0x00 to 0x3F or 0xFF), these characters are replaced with a dot (‘.’) in the file buffer, the file is marked as binary and EE will prevent all write operations to the original disk file. If necessary, this protection can be removed (see UNBINARY).

2.2.4 Editing multiple files and mode transitions

EE allows editing more than one file at a time. After starting EE with the first file, more files can be opened for editing or created with the EE subcommand or by selecting a file for editing from the FSLIST or the FSVIEW modes.

All files opened for editing are held in a ring, from which one file is the currently edited. The commands RINGNext or RINGPrev switch the currently edited file by stepping through the ring of files loaded.

The following diagram shows the transitions between the modes of the EE program to start or end editing files, also showing with the commands (CMD) or PF keys (**PFxx**) to change from mode to mode:

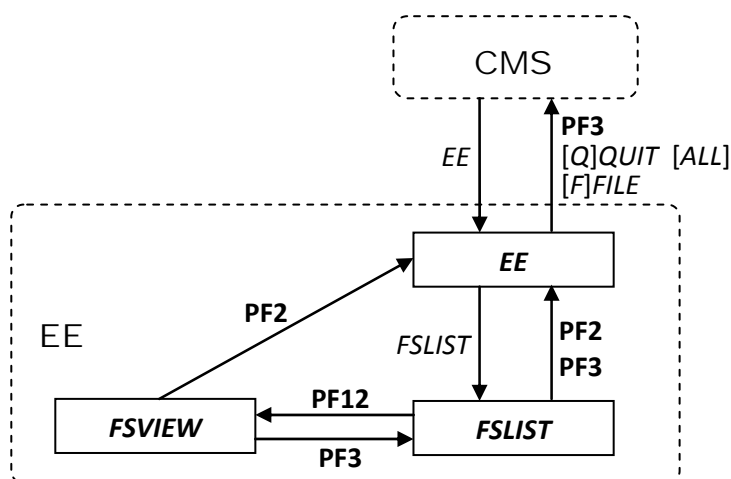

2.2.5 Prefix commands

EE supports the following (case insensitive) commands in the prefix area:

- / → set this line to be the current line
- .c → set the line mark c on this line, replacing a possible existing mark with the same name;
line mark names consist of a single letter A .. Z, so up to 26 line marks can be defined per file in an EE session.
- @ → ignore and discard modifications made to this line in the file area on the screen
- I[n] → insert an empty line after this line; if the optional repetition-count *n* is given, *n* lines will be inserted
- D[n] → delete this line; if the optional repetition-count *n* is given, up to *n* lines will be deleted, but deleting at most the lines up to (before) the next prefix command on the screen
- DD → mark one of the boundaries of a line block to be deleted

"[<i>n</i>]	→	duplicate this line; if the optional repetition-count <i>n</i> is given, the block of <i>n</i> lines (including the line with the prefix command) will be duplicated
" "	→	mark one of the boundaries of a line block to be duplicated
*[<i>n</i>]	→	duplicate this line; if the optional repetition-count <i>n</i> is given, this line is duplicated <i>n</i> times (i.e. repeated <i>n</i> times)
<[<i>n</i>][<i>o</i>]	→	shift this line to the left (see below for the optional parameters)
<<[<i>n</i>][<i>o</i>]	→	mark one of the boundaries of a line block to be shifted to the left (see below for the optional parameters)
<[<i>n</i>][<i>o</i>]	→	shift this line to the right (see below for optional parameters)
>>[<i>n</i>][<i>o</i>]	→	mark one of the boundaries of a line block to be shifted to the right (see below for optional parameters)
M	→	move this (single) line to the target specified by either a F or a P prefix command
MM	→	mark one of the boundaries of a line block to be moved to the target specified by either a F or a P prefix command
C	→	move this (single) line to the target specified by either a F or a P prefix command
CC	→	mark one of the boundaries of a line block to be copied to the target specified by either a F or a P prefix command
F	→	place the line(s) to copy or move after (following) this line
P	→	place the line(s) to copy or move before (preceding) this line

The optional repetition-count *n* for the prefix commands I D " and * can take the values 1..9999.

The shifting prefix commands support the following optional parameters (which can be specified on any of the boundaries for block shifting prefix commands):

- *n* : the number of character positions to shift by. This must be a single digit from 1 to 9, with the default specified with the `SHIFTCONF` command if *n* is not specified.
- *o* : the shiftmode for handling shifting beyond the left or right file border, overriding the default given with the `SHIFTCONF` command. This must be one of the following characters identifying one of the shiftmodes (see the command `SHIFTCONF` in 2.2.6.4):
 - ? → CHECKall
 - : → MINimal
 - # → LIMit
 - ! → TRUNCate

If a line block needing a target position (MM .. MM or CC .. CC) is not specified at once on the same screen, the target position (F or P) must be specified after both boundaries of the block are selected (or together with the second boundary). If the block is defined but the target is not, the selected block (both the prefix and the file zones) will be made read-only until the command is finalized by giving the target.

Prefix move and copy operations can be performed between files edited in EE by specifying the source (M, C, MM .. CC or CC .. CC) and target (F resp. P) of the operation in different files (see `RINGNext` / `RINGPrev`).

As long as prefix commands do not conflict, more than one single line command and possibly one line range command can be issued on one screen input. Single line commands are processed before a possibly given block command and target position.

If EE cannot ensure a meaningful execution, all prefix commands on the screen are ignored and removed.

After executing prefix commands, EE will try to place the cursor at a meaningful place in the file area. The placement line depends on the prefix command (e.g. the line inserted with the I-prefix command, but the line after the deletion for D/DD-operation). If this line is displayed on the screen, the cursor will be placed at the current indentation (of the last previous non-blank line) for the I-command resp. on the first non-blank character of the line. If the line for the cursor placement is not visible (for example a prefix command was entered but the file content was also scrolled with a PF key), the cursor is placed at the command prompt. If more than one prefix command is given, the cursor is placed by the first (top most) command.

2.2.6 Commands

Commands can be entered at the command prompt arrow with a total command length of 120 characters.

The command and parameter keywords may be abbreviated, the minimal part of the keywords is given in the following descriptions in uppercase.

If the text given on the input prompt is not recognized as a valid command, the input will be treated as a location target (see command `Locate`) if the first token starts with a digit or one of the characters + - . : or /

2.2.6.1 Default PF settings

For the fullscreen editing mode, the meaning of the PF keys can be freely defined by assigning a command to a PF key with the command `PF` (see 2.2.6.4), either in the profiles for EE (see 2.2.7) or on the EE command prompt. EE uses the following default PF key assignments:

PF01	:	TABFORWARD
PF02	:	RINGNEXT
PF03	:	QUIT
PF04	:	SEARCHNEXT
PF06	:	SPLTJOIN
PF07	:	PGUP
PF08	:	PGDOWN
PF09	:	MOVEHERE
PF10	:	PINPUT
PF11	:	CLRCMD
PF12	:	RECALL
PF13	:	TABBACKWARD
PF16	:	REVSEARCHNEXT
PF19	:	PGUP 66
PF20	:	PGDOWN 66

For the input-mode and the programmers-input-mode, the PF key command assignments are fixed (see the description of these modes in 2.2.6.2).

2.2.6.2 Editing and scrolling commands

BOttom

Move the current line to be the last line of the file.

Change */string1/string2/* [CONFirm] [*count1* [*count2*]]

Replace occurrences of *string1* by *string2*.

The parameter *count1* specifies how many occurrences in each line are to be replaced. If *count1* is omitted, the value 1 is assumed, i.e. only the first occurrence of *string1* is replaced. Specifying * as *count1* replaces all occurrences on *string1*.

The parameter *count2* specifies how many lines from (and including) the current line are to be processed. If *count2* is omitted, the value 1 is assumed, i.e. only the current line is processed. Specifying * as *count2* processes the current and all remaining lines of the file.

As separator character for *string1* and *string2*, any non-alphanumeric and non-blank character may be used (with / being the traditional separator character).

If the optional parameter CONFirm is given, each match found is displayed and the substitution must be accepted or denied. For each match:

- the screen changes into read-only mode with the scale and the current line centered
- the cursor is placed on the start of the matched string,
- the position of the match on the current line is marked on the scale by a sequence of #-characters
- the action to be taken for each match is given with one of the following PF keys:
 - PF12: execute the substitution and search for the next match
 - PF04: skip this match and search for the next match
 - PF03: terminate the change operation prematurely at this point

DELeTe [*count*]

Delete *count* lines beginning with the current line. If *count* is omitted, 1 line is deleted.

GET [*fn* [*ft* [*fm*]]]
[*fn*[.*ft*[.*fm*]]]

Read the specified file and insert its lines after the current line. If the file inserted contains binary characters (codes 0x00 to 0x3F or 0xFF), these characters are replaced with a dot ('.') in the file buffer, the current file is marked as binary and EE will prevent all write operations of the edited file to the original disk file. If necessary, this protection can be removed (see UNBINARY).

The default filetype is EE\$BUF. If *fm* is omitted, the filemode A is assumed. When no file-id is given, the file PUT EE\$BUF A is read.

GETD [*fn* [*ft* [*fm*]]]
[*fn*[.*ft*[.*fm*]]]

Like the GET command, but additionally deleting the file after inserting its content.

Input [*line-text*]

If a *line-text* is given, a new line with *line-text* is inserted after current line and this new line becomes the new current line.

If no text is given after the command, EE enters input-mode, allowing multiple lines to be entered after current line by displaying a free space below the current line. When pressing ENTER after entering lines, EE makes the last entered line to the new current and stays in input-mode, allowing for more lines to be entered. The input-mode is terminated either by pressing the ENTER key without a change of the file content or by pressing the PF03 key.

The input-mode has the following fixed command assignments to PF keys:

PF01	:	TABFORWARD
PF03	:	QUIT (leave input-mode)
PF13	:	TABBACKWARD
PF15	:	QUIT (leave input-mode)

Except for changes in the file zone of the editor, no further operations are possible while in input-mode (no commands, no PF keys others than described above, no prefix commands).

`Locate target1 [target2 [...]]`

Move the current line to be the line specified by the sequence of targets. In most cases, only one target will be used, but several targets may be used instead of consecutive `Locate` commands. Relative and absolute moves are bounded to the begin resp. the end of the file. The current line is only moved if the whole target sequence can be executed, i.e. if given line-marks exist and the given search strings are found.

The following move targets are supported:

`n, +n, -n`

→ relative move of the current line by the specified number of lines, giving a positive value (without sign or explicitly with a + character) moves toward the file end, giving a negative value moves to the file begin.

`:n`

→ absolute move to line `n`.

`.c`

→ move to line mark `c`.

`/string/`

→ move to the next line in direction to the file end containing *string*. Instead of `/`, any non-alphanumeric character different from blank and the target-introducing characters (+ - : .) can be used as separator for the search *string*.

`-/string/`

→ move to the next line in direction to the file start containing *string*. Instead of `/`, any non-alphanumeric character different from blank and the target-introducing characters (+ - : .) can be used as separator for the search *string*.

`MARK .c`

`MARK CLear .c | * | ALL`

Set (or replace) the specified line-mark `c` resp. remove the specified line-mark or all line-mark(s).

MOVEHere

If the cursor is in the file area, the line under the cursor will be made the current line, with the cursor being moved with this line and staying at the position inside the line.

Next [*count*]

Move the current line down by *count* lines (in direction to the file end) if *count* is positive, or up (to file start) if *count* is negative. If no *count* is given, the current line is moved by 1 line.

PGDown [*pct* | *lesscount*] [MOVEHere]

Move the current line one page height down (in direction to the file end). The page height is the number of the visible file lines on the screen.

If a *pct* in the value range 33..100 is given, scrolling will occur for this percentage of the visible file line count.

If a negative value *lesscount* is given, the number of lines scrolled will be the visible file line count minus the number of lines specified (absolute value of *lesscount*). However, scrolling will be done at least by a 1/3 screen height.

If the optional parameter `MOVEHere` is specified and the cursor is in the file area when the command is issued, the line under the cursor will be made the current line, with the cursor being moved with this line and staying at the position inside the line.

PInput

Enter programmers-input-mode. If the cursor is currently in the file area or the prefix area, the cursor's line is made the current line before the programmers-input-mode is entered. The `PInput` command is assigned to PF10 per default, allowing to start programmers-input-mode directly from the file area.

In programmers-input-mode, a single empty line is inserted after the current line and this line is made current. All file lines on the screen are editable and the `SPLTJOIN` functionality is available through PF06/PF18.

A new input line is automatically inserted with the ENTER key when text was entered on the input line or when the cursor is on the input line. When inserting the new input line, the cursor is placed at the indentation of the (first non-empty) line preceding the input line, allowing to enter program text in a natural way when working with nested blocks.

Pressing ENTER when no text was entered on the input line and the cursor was moved away from this line simply places the cursor back to the input line at the indentation column without creating a new input line.

The programmers-input-mode can be left with the PF03 or PF15 keys. If the current input line was left unchanged, it is removed when programmers-input-mode ends. If possible, the cursor will be placed in the file area, preferably leaving the cursor at the current position or if this not in the file area by placing it on the same or the last inserted line at the first non-blank column.

The programmers-input-mode has the following fixed command assignments to PF keys:

PF01	:	TABFORWARD
PF03	:	QUIT (leave programmers-input-mode)

PF06 : SPLTJOIN
 PF10 : PINPUT (move programmers-input-mode to the line after the cursor's line)

PF13 : TABBACKWARD
 PF15 : QUIT (leave programmers-input-mode)
 PF18 : SPLTJOIN FORCE

Except for changes in the file zone of the editor, no further operations are possible while in programmers-input-mode (no commands, no PF keys others than described above, no prefix commands).

PGUP [*pct* | *lesscount*]

Move the current line one page height up (in direction to the file start). The page height is the number of the visible file lines on the screen.

If a *pct* in the value range 33..100 is given, scrolling will occur for this percentage of the visible file line count.

If a negative value *lesscount* is given, the number of lines scrolled will be the visible file line count minus the number of lines specified (absolute value of *lesscount*). However, scrolling will be done at least by a 1/3 screen height.

If the optional parameter *MOVEhere* is specified and the cursor is in the file area when the command is issued, the line under the cursor will be made the current line, with the cursor being moved with this line and staying at the position inside the line.

Previous [*count*]

Move the current line up by *count* lines (in direction to the file start) if *count* is positive, or down (to file end) if *count* is negative. If no *count* is given, the current line is moved by 1 line.

```
PUT [ count [ fn [ ft [ fm ] ] ] ]
    [ count [fn[.ft[.fm]]] ]
PPUT [ count [ fn [ ft [ fm ] ] ] ]
      [ count [fn[.ft[.fm]]] ]
```

Write *count* lines beginning with the current line to the specified file. If no *count* is given, one line is written.

The default filetype is *EE\$BUF*. If *fm* is omitted, the filemode *A1* is assumed. When no file-id is given, the file *PUT EE\$BUF A1* is written.

When using PUT for an existing target file, it will be only be overwritten when the filetype and the filemode are defaulted (or the default values *EE\$BUF A1* are explicitly given). Overwriting an existing file with arbitrary filetype or filemode is forced by using the command PPUT.

```
PUTD [ count [ fn [ ft [ fm ] ] ] ]
      [ count [fn[.ft[.fm]]] ]
PPUTD [ count [ fn [ ft [ fm ] ] ] ]
       [ count [fn[.ft[.fm]]] ]
```

Like the PUT resp. PPUT commands, but the lines written are additionally deleted from the file edited if writing the target file was successful.

RESet

Ignore and remove all prefix commands on the screen, also cancel any pending prefix block command. This command is typically assigned to a PF key.

REVSEArchnext

RSEArchnext

-/

If the last `Locate` command entered had exactly one target and this target was a search pattern, then the search direction (down or up) is inversed and the previous text search is repeated in the new search direction. The command `REVSEArchnext` is assigned to PF16 per default.

The single token `-/` (without any further characters on the command line) is a shortcut for `REVSEArchnext`. Giving any character (even a blank) after the `-/` will start a new `Locate` with this text as search pattern.

SEArchnext

/

If the last `Locate` command entered had exactly one target and this target was a search pattern, then the previous text search is repeated in the last search direction (down or up) used. The command `SEArchnext` is assigned to PF04 per default.

The single token `/` (without any further characters on the command line) is a shortcut for `SEArchnext`. Giving any character (even a blank) after the `/` will start a new `Locate` with this text as search pattern.

SHIFT [*by*] Left|Right [*count* | *:line* | *.mark*] [*shiftmode*]

Shift the content of the current line or a block of lines to the left by removing characters or to the right by inserting spaces at the beginning of the line. The direction of indentation shifting must be explicitly given as parameter.

The amount of the indentation shifting is specified by the optional parameter *by*, defaulted by the value specified with the `SHIFTCONFig` command resp. shifting by 2 characters if no `SHIFTCONFig` command was given.

If more than only the current line is to be shifted, a block of lines starting or ending with the current line can be specified by either with a

- relative line *count*
the count gives the number of additional lines before (negative value) or after (positive value) the current line are to be shifted; the count 0 shifts only the current line;
- or absolute line number (*:line*) or a line mark (*.mark*)
the lines between and including the current and the specified line will be shifted.

How shifting is handled if non-space characters would be lost (moved beyond the left or right file border) is controlled by the default behavior defined with the `SHIFTCONFig` command, which can be overridden if the optional *shiftmode* is specified on the `SHIFT` command. See the `SHIFTCONFig` command (in 2.2.6.4) for the possible shift behaviors when shifting beyond a border. If neither a `SHIFTCONFig` command was given nor the *shiftmode* parameter for `SHIFT` is specified, the shiftmode `LIMit` will be used.

SPLTJoin [Force]

If the cursor is placed in a file line, the line is

- splitted at the cursor position if the cursor is placed before the end of the line, with the new line starting with the character under the cursor; the new line will have the same indentation as the original line;
- joined with the next line if the cursor is placed after the last non-whitespace character of the line, the first non-space character of the next line being placed under the cursor and the gap from the old line end to this position being filled with blanks.

If the resulting line would be truncated, the join will not happen, unless the parameter `Force` is given.

TABforward

If invoked while the cursor is in the file area (usually via the assigned PF-key), the cursor is moved to the next defined tab following the current cursor position. If no tab position is defined on the right of the current position, the cursor is not moved.

If the `TABforward` is invoked while the cursor is in the command line, EE attempts to move the cursor to the file line and cursor position on that line where the cursor was last known to be before it was placed on the command line. If this “last known position” is visible on the current screen, the cursor is placed there. If the screen has been scrolled away from this last known position or this file line has been deleted, then the cursor is placed in the file area on the first column of the current line.

The command `TABforward` is assigned to PF01 per default.

TABbackward

If invoked while the cursor is in the file area (usually via the assigned PF-key), the cursor is moved to the next defined tab preceding the current cursor position. If no tab position is defined on the left of the current position, the cursor is moved to the first column (left file border).

The command `TABbackward` is assigned to PF13 per default.

TOp

Move the current line before the first line of the file.

2.2.6.3 File control commands

CASe U | M | R

Set the case handling for the file, with the following options:

- U : Uppercase
→ convert all input to the file in upper case, string searches (commands `Locate`, `Change`) are case insensitive.
- M : Mixed case
→ do not convert case for text entered to the file, but do case insensitive searches.
- R : Mixed case, respect case for searches
→ do not convert case for text entered to the file, doing exact (case sensitive) searches.


```
EEdit  fn [ ft [ fm ] ]  
       fn[.ft[.fm]]
```

Start editing another file in EE. If *ft* or *fm* are omitted, the filetype resp. filemode of the current file are used.

The specified file edited becomes the current file edited. If the file specified is already loaded in EE, this file becomes the current file without re-loading the file content from disk.

EXIt

Save all modified files (see SAVE) and terminate EE, returning control directly to CMS, even if editing was started from FSLIST or FSVIEW.

```
FILE  [ fn [ ft [ fm ] ] ]  
      [ fn[.ft[.fm]] ]  
FFILE [ fn [ ft [ fm ] ] ]  
      [ fn[.ft[.fm]] ]
```

Save the file and terminate editing it (removing from the ring) if the file was successfully saved. If no filename is given, the file is saved with filename originally loaded resp. the last filename previously given to a SAVE/SSAVE command.

If a filename is given and a file with this name exists, using FILE will not save the file, but FFILE will force overwriting the file with the editor's content.

If the current file is the last file edited, the EE session itself is terminated, returning control to the environment from where the EE session was started, i.e. returning to FSLIST if editing was started from a FSLIST (or FSVIEW) screen or else to CMS.

Writing the file is done in the following steps:

- Write the new file with the filetype EE\$TMP.
- If present, rename the current file to the filetype EE\$OLD.
- Rename the new file from the filetype EE\$TMP to the intended filetype.
- Delete the old file with the file type EE\$OLD.

(should the editor crash, there are chances to find one of the files mentioned to retrieve at least one of the file states)

```
FSLIST [ pattern ]
```

Open a FSLIST view to browse and view files, allowing to select a file for editing in EE (see 2.3).

```
LRECL lrecl
```

Change the logical record length of the file to *lrecl*, but limited to 255, values lower than 1 will be ignored. If the file currently has a larger record length, the file content may be truncated.

Quit

```
QQuit [ ALL ]
```

If prefix commands are present on the current screen or are currently pending from a previous screen: cancel these prefix commands. In this case [Q]Quit works as the command RESet.

In the normal case with no prefix commands on the screen or pending: terminate editing the current file without writing the file content back to disk. If the file was modified, Quit will not be executed. In this case, terminate editing without saving the file can be forced with QQuit.

If the current file is the last file edited, the EE session itself is terminated, returning control to the environment from where the EE session was started, i.e. returning to FSLIST if editing was started from a FSLIST (or FSVIEW) screen or else to CMS.

If the parameter ALL is given to QQuit, all files currently edited are closed without saving and control returns directly to CMS, even if editing was started from FSLIST or FSVIEW.

RECFM V | F

Change the record format to variable (V) or fixed (F) line length.

RINGNext

RN

Switch to the next file in the ring as current edited file. This command has no effect if only one file currently loaded in EE.

RINGPrev

RP

Switch to the previous file in the ring as current edited file. This command has no effect if only one file currently loaded in EE.

SAVe [*fn* [*ft* [*fm*]]]]

[*fn*[*.ft*[*.fm*]]]

SSAVe [*fn* [*ft* [*fm*]]]]

[*fn*[*.ft*[*.fm*]]]

Save the current file (but do not terminate editing this file). If no filename is given, the file is saved with filename originally loaded resp. the last filename previously given to a SAVE/SSAVE command.

If a filename is given and a file with this name exists, using SAVE will not save the file, but SSAVE will force overwriting the file with the editor's content.

(see the command File on how the file new file content is created)

UNBINARY

When loading the file, non-printable characters (code 0xFF and codes lower than 0x40 = blank) are replaced by a dot character and the file is supposed to be a binary file, preventing it from being saved to avoid data loss.

This command resets the internal binary flag, allowing to overwrite the file.

2.2.6.4 Configuration commands

ATTR *screen-object* *color* [HILight]

Define the text rendering attributes for the screen element types of the screen setup. Besides the color, passing HILight allows to specify the highlighted display on monochrome displays. These attributes are used for all functional modes (EE, FSLIST, FSVIEW) of the program.

The following parameters can be given as *screen-object*:

FILE	the file content (not being the current line)
CURRline	the current file line
PREFix	the prefix zone
GAPFill	the gap between the file part and the prefix resp. the screen border

CMDline	the command line input area
CMDARRow	the arrow before the command line area
MSGlines	the messages lines (one line, dynamically up to 3 lines)
INFOLines	the info lines set with command INFOLines
HEADline	the title line (top line) on the screen
FOOTline	the footer line (bottom line) in the screen
SCALEline	the scale line

The following *color* values can be given:

BLUe , REd , PInk , GREen , TURquoise , YELlow , WHItE ,
MOnO (default color for color displays)

`CMDLine TOP | BOTtom`

Define the placement of the command line on the screen.

`CURRLine Top | MIddle`

Define the placement of the current line of the file on the screen.

`FTDEFaults ft recfm lrecl casemode [worklrecl]`

Define the default record format and the logical record length to use when creating a new file with the given file type, also defining the default case setting when opening a file with this file type. Optionally the default working LRECL for the filetype can be specified (also used for editing existing files, see also command WORKLRECL).

This command can be used repeatedly, a command for an already defined filetype overwrites the previous settings.

As this information is needed when opening a file, the FTDEFaults commands must be given in the profile files for the editor.

The following values can be given:

recfm: V | F

lrecl: 1 .. 255

casemode: U | M | R

worklrecl: 1 .. 255 (with *lrecl* being the effective max. value), default: *lrecl*

`FTTABDEFaults ft tabpos1 [tabpos2 [...]]`

Define the default tab positions for the specified file type. The tab positions must be integer values in the range 1..255. Up to 16 tab positions can be given. It is not necessary to specify a tab position for column 1, as the line start is an implicit tab position for TABBackward.

As this information is used when opening a file, the FTTABDEFaults commands must be given in the profile files for the editor. If no FTTABDEFaults is present for the file type of a file being opened, then no tabs will be defined for that file.

`GAPFill NONE | DOT | DASH | CROSS`

Define the character to fill the gap between each input field for a file line and the right border (screen boundary or prefix zone placed on the right).

```
INFOLines  Off | TOP | BOTtom
INFOLines  [target] CLEAR
INFOLines  [target] ADD infoline-text
```

Control the permanently displayed information lines, usually describing the PF key settings.

The optional parameter *target* must be one of *EE*, *FSLIST*, *FSVIEW* or *FSHELP* and specifies which of the MECAFF-tools is to be configured, with *EE* being the default if no *target* is given (see sections 2.3, 2.4 resp. 2.5 for targets *FSLIST*, *FSVIEW*, *FSHELP*).

OFF will remove the infolines from screen, TOP will display the lines in the head area of the screen, BOTTOM will display them on the footer area of the screen.

EE can display up to 2 infolines with max. 80 characters, Defining a new infoline with ADD appends a new infoline, dropping the current first infoline if there already are 2 lines. CLEAR resets the infolines (although not set to OFF, no infoline will be displayed).

The other targets of the command support 1 infoline, which is set resp. replaced with ADD and emptied with CLEAR.

```
MSGLines  TOP | BOTtom
```

Set the placement of the message lines. TOP will display the message lines in the head area of the screen, BOTTOM will display it on the footer area of the screen.

EE displays at least one (possibly empty) message line, dynamically growing up to 3 lines.

```
NULls  ON | OFF
```

Control how the editable space after the last non-blank character of the file lines is rendered. ON will write NUL characters (default), OFF will use blanks characters to fill the space.

```
NUMbers  ON | OFF
```

Control how the prefix zone is rendered. ON will display the prefix command zone with the line number of the corresponding line, OFF will display all prefix command zones filled with 'equal' characters.

```
PF  [target] pfno command [ parameters ... ]
PF  [target] CLEAR pfno
```

Set or clear the command issued by a PF key. The *pfno* must be a number from 1 to 24, the maximal command length is 120 characters.

The optional parameter *target* must be one of *EE*, *FSLIST*, *FSVIEW* or *FSHELP* and specifies which of the MECAFF-tools is to be configured, with *EE* being the default if no *target* is given.

```
PREFIX  [target] OFF | ON | Left | Right
```

Control the display and position of the prefix zone. ON or LEFT will place the prefix command zone on the left side of the screen, RIGHT will place it on the right of the screen. OFF will remove the prefix zone from the screen.

The optional parameter *target* must be one of *EE* or *FSLIST* and specifies which of the MECAFF-tools is to be configured, with *EE* being the default if no *target* is given. If the target is *FSLIST*, the parameters ON, LEFT and RIGHT are synonyms and always place a 1 character wide prefix zone on the left.

SCALE OFF | TOP | ABOVE | BELOW

Control the display and position of the column scale on the screen. Besides giving an orientation on the column position of the edited text, the scale also indicates the tab positions currently defined for the file with a | (pipe character).

TOP will display it before the first displayed file line, ABOVE will place the scale on the line before the current line, BELOW on the line following the current line. OFF will hide the scale.

SHIFTCONFig CHECKall | MINimal | LIMit | TRUNCate [shiftBy]

Define the default behavior for the SHIFT command or the shift prefix commands (<, >, <<..<<, >>..>>) when the shifted texts reaches a line border, i.e. if non-space content would be lost by shifting the text to the left beyond the first column or to the right beyond the last column (at LRECL).

The shift commands support the following options when this situation occurs:

- **CHECKall**
if text loss would happen for any of the lines to be shifted, the text will not be shifted and the shifting command is aborted.
- **MINimal**
the shift-by count applied to all lines will be reduced if necessary to avoid text loss for any of the shifted lines. This ensures that the relative indentation among the lines to be shifted will be preserved.
This is the default if no SHIFTCONFig command is given.
- **LIMit**
each line will be shifted at most until the border is reached, limiting shifting for each line separately.
- **TRUNCate**
the lines are shifted by the shift-by count specified, with text shifted beyond the corresponding border being truncated.

The optional second parameter specifies the default shift character count for the shift subcommand and prefix commands. This value must be in the range 1..9.

If not predefined with a SHIFTCONFig command, the default shift mode MINimal and the default shift count 2 will be used.

The configured shift defaults can be overridden for each shift (prefix) command by specifying the shift count and shift mode options.

TABSet [tabpos1 [tabpos2 [...]]]

Define the tab positions for the current file. The tab position must be integer values in the range 1.255. Up to 16 tab positions can be given. If no tab positions are given, all currently defined tab positions will be removed. It is not necessary to specify a tab position for column 1, as the line start is an implicit tab position for TABBackward.

WORKLrecl *length*

Change the working record length for displaying and editing the file content to *length*, but limited to LRECL, values lower than 1 will interpreted as *length* = 1.

Displaying the file content and all editing operations are restricted to the first *length* bytes of a line. Anything line content beyond *length* will be not displayed and will be dropped if the line is modified in any way.

2.2.6.5 Miscellaneous commands

CMS [*cmscommand* ...]

Enter CMS Subset or execute a CMS command.

If invoked without a command, EE temporarily leaves the fullscreen mode and the CMS Subset level is entered on the MECAFF console. This allows entering CMS subset compatible commands until the CMS Subset command RETURN is entered, which will leave the CMS subset and restore fullscreen EE editing mode.

If a command is given, EE attempts to execute it. As an invoked program may overwrite the memory used by EE, the first token of *cmscommand* is checked and command names not on a list of explicitly allowed commands will not be executed.

Allowed CMS or CP commands are: ACCess, CLOSE, DETACH, ERASE, LINK, Listfile, PRint, PUnch, Query, READcard, RElease, Rename, SET, STATEw, TAPE, Type.

However, if an EXEC with the name of an allowed command is present, this EXEC will be executed, possibly executing programs that overwrite EE's data structures und preventing the proper continuation of EE, leading to the loss of all file changes not saved!

CLRCMD

Clear the command line. This command is intended for a PF-Key setting (assigned to PF11 as default).

Help

Show the top-level help for EE.

RECALL

Place the previous command in the command history. EE has a history of the last 32 commands issued on the command line. This command is intended for a PF-Key setting (assigned to PF12 as default).

2.2.7 Customizing with SYSPROF EE and PROFILE EE

The EE program reads 2 configuration files on startup before the file to be edited is read.

If found in one of the accessed disks, the SYSPROF EE is processed first, then PROFILE EE. For each of these files, the first file found in the search order of the minidisks is used.

However, the file SYSPROF EE is intended to be on a system disk, providing the system-wide defaults (as the FTDEFAULTS and FTTABDEFAULTS for the file types). The file PROFILE EE is intended to provide the user preferences.

Only configuration commands (see 2.2.6.4) can be used in these files, as no file is opened when they are processed (commands requiring a file are ignored). The commands in the profiles are executed as if they were given in the command area, with the following extensions:

- A star (*) as first non-whitespace character introduces a comment line, the whole line is ignored.

- If a line ends with a backslash as last non-whitespace character, the next line will be concatenated to the line at the position of the backslash (however leading whitespace of the next line is removed). Several lines in the profile can be concatenated up to a total length of 512 characters.

2.2.8 Rescue mode

When the terminal is disconnected while editing files with EE, reconnecting to the VM with a terminal not supporting the same type of fullscreen sessions (with a standard terminal connection after using the MECAFF-version or a 3215-type terminal after using the DIAG58 version of the tools) will prevent EE from re-establishing a fullscreen mode to continue editing.

In this case, EE will enter a command line loop called “rescue mode” after leaving CP (with command BEGIN) and confirming the absence of the expected environment by pressing ENTER, for example:

```
LOG CMSUSER
ENTER PASSWORD:

RECONNECTED AT 19:28:18 GMT FRIDAY 08/19/11
BEGIN

<{>}T Please press ENTER to cancel fullscreen operation

** Unable to re-establish a fullscreen session after disconnect
** Error message:
No fullscreen support present (MECAFF:::__qtrm() -> rc = 1)

EE Rescue command loop entered
Enter EE Rescue command
quit all

All files closed, leaving EE Rescue command loop
Ready; T=0.49/0.73 19:33:41

VM READ
```

The rescue mode supports the following EE commands: EXIt, FFILe, FILe, QQuit, Quit, RINGNext, RINGPrev.

Additionally, the rescue mode command RINGList (or RL) lists all files currently in the ring.

2.3 FSLIST – Fullscreen file list

A fullscreen file list can be displayed from CMS with

```
FSLIST file-pattern
```

or

```
EE file-pattern ( FSLIST
```

where *file-pattern* is a file specification which can contain the following wildcard characters at any position of the pattern for filename or filetype:

- ? → matches any single character
- * → matches 0..n arbitrary characters

Multiple wildcards can be placed at any place in the filename/filetype and are normalized before being applied, so the following are valid patterns:

```
*327?  
?*xx  
1*2**3*?
```

For the filemode, the disk-letter and access-digit can both be given as * to match any accessed minidisk or access type, so the following are valid patterns for filemode: *2, C* .

The file pattern can be given with the standard CMS convention (components separated with whitespace) or the dot-notation (see 2.1). The EE editor provides a FSLIST subcommand with the same functionality.

FSLIST can optionally add a 1 character wide prefix zone on the left of the file list area, which has no specific function¹, allowing to navigate to a line in the list with the *tab* or *newline* keys. The prefix zone can be added in the profiles for EE (SYSPROF EE or PROFILE EE) or with the FSLIST command PREFIX.

The following commands are accepted on the subcommand prompt of FSLIST:

Listfile *file-pattern*

Change the search pattern for the file list. If a sort command was given before, the file list will sorted as specified previously.

```
Sort column-spec [ [ column-spec ] ... ]  
Sort OFF
```

Sort the file list by the specified columns of the list or switch off sorting if OFF is given. A *column-spec* consists of one of the after-mentioned keywords, optionally preceded by the sort order character, with - for descending order and + for ascending order (and ascending order being the default), for example: sort -ts +type

The following single and combined columns of the file list can be used to sort the list:

NAme	→ filename
TYpe	→ filetype
MOde	→ filemode
RECFm	→ record format
LRecl	→ logical record length
Format	→ record format and record length
RECS	→ record count
BLocks	→ block count
DAte	→ file write date
TIme	→ file write time
TS	→ file write timestamp (date and time)
LAbeL	→ disk label

/text/

Search forward for *text* in the current help page

¹ This prefix zone may be used in some later version supporting CMS commands on files to select the files to operate on.

`- /text /`

Search backward for *text* in the current help page

`/`

Repeat the last search in the search direction last used (also PF04)

`- /`

Reverse the search direction and repeat the last search in the new search direction (also PF16)

`BOTtom`

Scroll to the top of the list.

`PGDown [SHORT]`

Scroll down the file list by one page height. If the option `SHORT` is given, scrolling is done only by $\frac{2}{3}$ page height.

If the cursor is in the list area, `PGDOWN` will attempt to center the cursor's column vertically.

`PGUP [SHORT]`

Scroll up the file list by one page height. If the option `SHORT` is given, scrolling is done only by $\frac{2}{3}$ page height.

If the cursor is in the list area, `PGUP` will attempt to center the cursor's column vertically.

`TOp`

Scroll to the bottom of the list.

`CENTer`

Center the cursor's position:

if the cursor is in the file list area, `CENTER` will attempt to vertically center the character under the cursor on the screen;

if the cursor is on the command line, the cursor will be placed in the file area as near as possible to the middle of the screen.

`Quit`

Leave `FSLIST`.

`EE`

If the cursor is placed on a line in the file list: open this file with `EE` for editing.

`FSView`

If the cursor is placed on a line in the file list: open this file with `FSVIEW` for browsing.

`Help`

Show the help topic for `FSLIST`.

`PREFIX ON | OFF`

Control the presence of a 1 character wide prefix zone on the left of the file list.

This prefix zone currently has no function², but allows to navigate in the list with the *tab* or *newline* keys.

The prefix is `OFF` by default.

² This prefix zone may be used in some later version supporting CMS commands on files to select the files to operate on.

Browsing or editing the content of a file in the list can be started by moving the cursor to the line with the filename and

- pressing PF02 to edit the file with EE,
- pressing PF12 to view the file content with FSVIEW.

Browsing through the file list and leaving FSLIST is typically controlled with the PF-keys. The commands assigned to PF keys can be customized in the EE profiles, FSHELP has the following default assignments (summarized the screen bottom line of the screen):

- PF01 : CENTER
- PF02 : EE
- PF03 : QUIT
- PF04 : /
- PF05 : TOP
- PF06 : PGUP
- PF07 : PGUP SHORT
- PF08 : PGDOWN SHORT
- PF09 : PGDOWN
- PF10 : BOTTOM
- PF12 : FSVIEW
- PF15 : QUIT
- PF16 : -/

FSLIST can be customized with the following commands in the EE profiles (PROFILE EE or SYSPROF EE):

```
PF FSLIST pfno command [ parameters ... ]
PF FSLIST CLEAR pfno
```

Set or clear the command issued by a PF key. The *pfno* must be a number from 1 to 24, the maximal command length is 120 characters.


```
INFOLines FSLIST CLEAR
INFOLines FSLIST ADD infoline-text
```

Control the information line at the bottom of the screens, usually describing the PF key settings. FSLIST supports only one configurable information line. CLEAR will display an empty line, ADD will display the text passed.

```
PREFIX FSLIST ON | OFF
```

Control the presence of the prefix zone in FSLIST, the value ON (or LEFT or RIGHT) will show the prefix zone, the value OFF will hide it (OFF is the default).

The following diagram shows the transitions between the modes available from FSLIST, also showing with the commands (CMD) or PF keys (PFxx) to change from mode to mode:

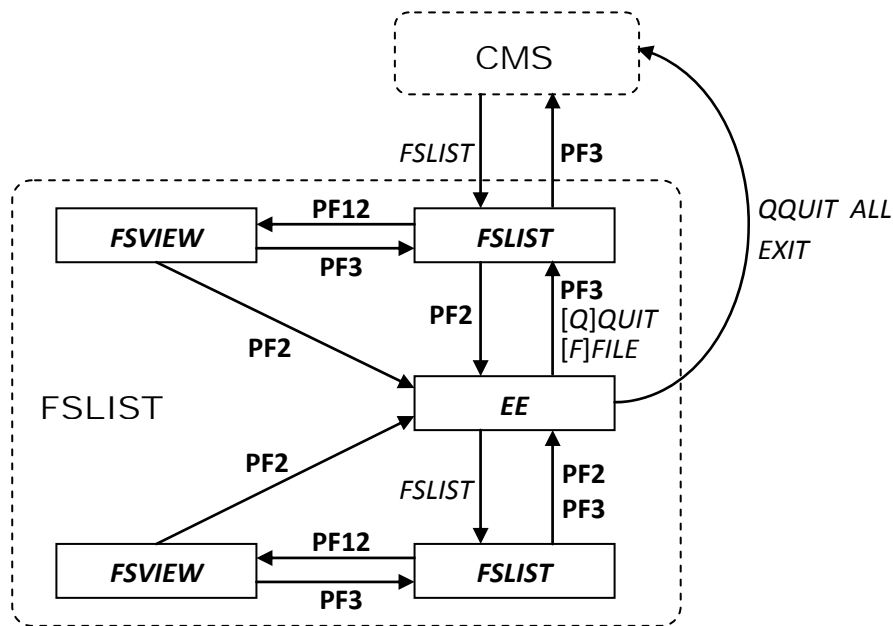

2.4 FSVIEW – Fullscreen file browser

A CMS can be browsed from CMS with FSVIEW with

```
FSVIEW fn fm [ ft ]
      fn.ft[.fm]
```

or

```
EE fn fm [ ft ] ( FSVIEW
  fn.ft[.fm] ( FSVIEW
```

If a file loaded into FSVIEW contains binary characters (codes 0x00 to 0x3F or 0xFF), these characters are replaced with a dot ('.') in the file buffer.

The following commands are supported on the subcommand prompt of FSVIEW:

Help

Show the help topic for FSVIEW

CENTER

Center the cursor's position:

if the cursor is in the file area, CENTER will attempt to center the character under the cursor on the screen (scrolling both vertically and horizontally);

if the cursor is on the command line, the cursor will be placed in the file area as near as possible to the middle of the screen.

BOTTOM

Scroll to the top of the file.

PGDOWN [SHORT]

Scroll down the text of the file by one page height. If the option SHORT is given, scrolling is done only by $\frac{2}{3}$ page height.

If the cursor is in the file area, PGDOWN will attempt to center the cursor's column vertically.

PGUP [SHORT]

Scroll up the text of the file by one page height. If the option SHORT is given, scrolling is done

only by $\frac{2}{3}$ page height.

If the cursor is in the file area, PGUP will attempt to center the cursor's column vertically.

TOp

Scroll to the bottom of the file.

LEft [SHORT]

Shift the visible horizontal portion of the file to the left, i.e. move the first displayed column of the file by 20 positions to the left resp. 10 positions if SHORT is specified, up to the first column of the file;

if the cursor is in the file area, LEFT will attempt to center the cursor's column horizontally.

RIght [SHORT]

Shift the visible horizontal portion of the file to the right, i.e. move the first displayed column of the file by 20 positions to the right resp. 10 positions if SHORT is specified, up to the last column of the file being displayed at the border of the screen;

if the cursor is in the file area, RIGHT will attempt to center the cursor's column horizontally.

Ee

Open the file displayed in FSVIEW with EE for editing (FSVIEW is fact replaced with EE, so leaving EE will not return to FSVIEW).

Quit

RETurn

Terminate FSVIEW

/text/

Search forward for *text* in the current file

-/text/

Search backward for *text* in the current file

/

Repeat the last search in the search direction last used

-/

Reverse the search direction and repeat the last search in the new search direction

Browsing through the file content and leaving FSVIEW is typically controlled with the PF-keys. The commands assigned to PF keys can be customized in the EE profiles, FSHELP has the following default assignments (summarized the screen bottom line of the screen):

- PF01 : CENTER
- PF02 : EE
- PF03 : QUIT
- PF04 : /
- PF05 : TOP
- PF06 : PGUP
- PF07 : PGUP SHORT
- PF08 : PGDOWN SHORT
- PF09 : PGDOWN

- PF10 : BOTTOM
- PF11 : LEFT
- PF12 : RIGHT
- PF15 : QUIT
- PF16 : -/
- PF23 : LEFT SHORT
- PF24 : RIGHT SHORT

FSVIEW can be customized with the following commands in the EE profiles (PROFILE EE or SYSPROF EE):


```
PF FSVIEW pfno command [ parameters ... ]
PF FSVIEW CLEAR pfno
```

Set or clear the command issued by a PF key. The *pfno* must be a number from 1 to 24, the maximal command length is 120 characters.

```
INFOLines FSVIEW CLEAR
INFOLines FSVIEW ADD info-line-text
```

Control the information line at the bottom of the screens, usually describing the PF key settings. FSVIEW supports only one configurable information line. CLEAR will display an empty line, ADD will display the text passed.

The following diagram shows the transitions between the modes available from FSVIEW, also showing with the commands (CMD) or PF keys (PFxx) to change from mode to mode:

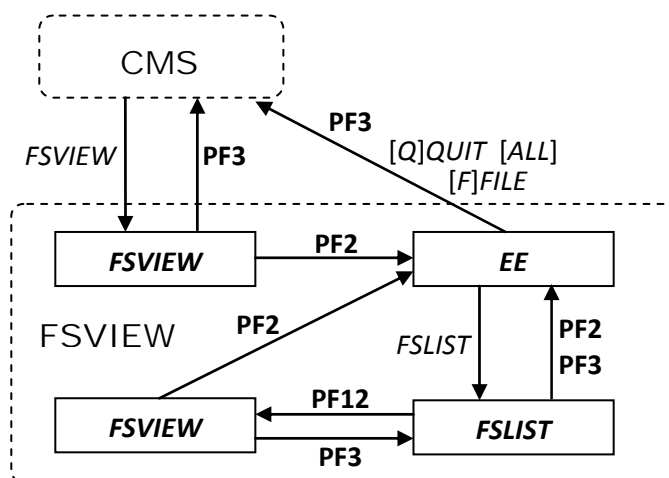

2.5 FSHELP – Fullscreen help

The fullscreen display of a standard HELP topic is invoked from CMS with

```
FSHELP topic
```

This first looks for a file *topic* HELPxxx on all accessed disks (with xxx one of CMD, DBG, EE, EDT, EXC or REX) and displays the first topic file found. If the additional help file exists (*topic* HELPxxx2 on the same disk), it is appended to the displayed content. If a HELPxxx file is not found, a file *topic* HELP is searched on all access disks.

FSHELP allows to navigate to other help topics either with the subcommand `Help topic` or by placing the cursor in a word of the displayed help text and pressing the PF01 key. The topics opened are stacked in a last-in-first-out manner: closing the current topic with PF03 displays the previous one and so on until closing the first (initial) topic terminates FSHELP, returning to the CMS prompt.

When invoked without a topic, FSHELP looks for a file `MENU FSHELP` on all accessed disks and displays this file as top level menu. If this file is not found, the help menu is build based on the help files found on all accessed disks (with filetypes `HELPxxx` or `HELP`, see above), grouping the topics by the command types CMS, CP, EE, EDIT, DEBUG, EXEC. This help file is automatically saved in the file `MENU FSHELP A2`. If necessary (for example to include new help topics), this menu help file can be regenerated on disk A by invoking FSHELP with only the option REBUILD:

```
FSHELP ( REBUILD
```

The following commands are supported on the subcommand prompt of FSHELP:

`Help topic`

Navigate to the specified help topic, pushing the current topic onto the stack.

`Goto`

Navigate to the topic identified by the word where the cursor is in the help text (the cursor must be in the help text area).

If no such topic exists, an error message is displayed and the cursor stays at the current place in the help text.

`Back`

Close the current topic and display its predecessor in the help topic stack. If the initial topic is currently displayed, FSHELP is terminated.

`BOTtom`

Scroll to the top of the help topic.

`PGDown [SHORT]`

Scroll down the text of the help topic by one page height. If the option SHORT is given, scrolling is done only by $\frac{2}{3}$ page height.

`PGUP [SHORT]`

Scroll up the text of the help topic by one page height. If the option SHORT is given, scrolling is done only by $\frac{2}{3}$ page height.

`TOp`

Scroll to the bottom of the help topic.

`Quit`

Terminate FSHELP

`/text/`

Search forward for *text* in the current help page

`-/text/`

Search backward for *text* in the current help page

/

Repeat the last search in the search direction last used

-/

Reverse the search direction and repeat the last search in the new search direction

Browsing through the help information, navigating to other topics and leaving FSHELP is typically controlled with the PF-keys. The commands assigned to PF keys can be customized in the EE profiles, FSHELP has the following default assignments (summarized the screen bottom line of the screen):

- PF01 : GOTO
- PF02 : GOTO
- PF03 : BACK
- PF04 : /
- PF05 : TOP
- PF06 : PGUP
- PF07 : PGUP SHORT
- PF08 : PGDOWN SHORT
- PF09 : PGDOWN
- PF10 : BOTTOM
- PF12 : GOTO
- PF15 : QUIT
- PF16 : -/

FSHELP can be customized with the following commands in the EE profiles (PROFILE EE or SYSPROF EE):

```
PF  FSHELP  pfno  command  [ parameters ... ]
PF  FSHELP  CLEAR  pfno
```

Set or clear the command issued by a PF key. The *pfno* must be a number from 1 to 24, the maximal command length is 120 characters.

```
INFOLines  FSHELP  CLEAR
INFOLines  FSHELP  ADD  infoline-text
```

Control the information line at the bottom of the screens, usually describing the PF key settings. FSHELP supports only one configurable information line. CLEAR will display an empty line, ADD will display the text passed.

2.6 Handling disconnect and reconnect

When the terminal connection is lost (the terminal window is closed inadvertently or the MECAFF process is terminated), the VM session is disconnected. If a fullscreen MECAFF tool was running, it will stay in the fullscreen read state until a 3270 terminal is reconnected to the VM.

The MECAFF program will try to re-establish the fullscreen session when the user reconnects to the VM with a 3270 terminal. When entering the BEGIN command on the CP level after the reconnect, the EE, FSLIST, FSVIEW and FSHELP programs will continue to work and try to restart the fullscreen interaction depending on the fullscreen infrastructure used (if reconnecting with a non-3270-terminal, re-establishing a fullscreen session is not possible).

If a fullscreen interaction cannot be restored, EE will enter the so-called rescue mode allowing to

save modified files, although no editing is supported (see 2.2.8), the other fullscreen tools will terminate with an appropriate error message.

2.6.1 Reconnecting to a MECAFF-console with CONS-style connection

Reconnecting to a MECAFF-console with a 3215-style (CONS) connection to VM/370 automatically re-queries the terminal characteristics after entering the BEGIN command (and possibly doing an additional ENTER), allowing to proceed with fullscreen mode after leaving the “More...” state. However, the editing changes made on the last EE screen before disconnection will be lost.

2.6.2 Reconnecting to a MECAFF-console with GRAF-style connection

When reconnecting to a MECAFF-console with a 3270-style (GRAF) connection to VM/370, entering the BEGIN command at CP level and possibly 1 or 2 more ENTER, the state depends on the connection type for the previously terminal when the connection was lost:

- If the previous terminal was connected to a MECAFF-console, re-establishing the fullscreen session will succeed automatically, allowing to proceed with fullscreen mode after leaving the “More...” state.
- If the previous terminal was directly connected to VM/370, the screen content will be displayed as plain output; in this case, ENTER should be pressed until the “More...” state is left and then **PA3** at the Running state: this will make the terminal characteristics to be re-queried and fullscreen mode should be entered.

However, the editing changes made on the last EE screen before disconnection will be lost.

2.6.3 Reconnecting with a directly connected 3270 terminal

When reconnecting with a directly connected 3270 terminal, re-establishing the fullscreen session will normally succeed. However, the editing changes made on the last EE screen before disconnection will be lost.

In some situations, the visible appearance of the 3270 screen may not be as expected, depending on the terminal characteristics after reconnect:

- If the disconnected terminal was a model-2 type terminal (80x24), reconnecting to an arbitrary 3270 terminal will also work, however only the top-left 80x24 screen part may be used.
- Disconnecting from a standard 3279 terminal (80 columns) and reconnecting with a non-standard screen size with more columns with same or more lines may result in a scrambled screen after entering the BEGIN CP-command to proceed in the fullscreen program and pressing ENTER to redraw the screen, for example:

```

                                     'params':
the parameter string of the command .....
g to which to copy infos/warnings/errors ..... 'msg': the message string
                                     returns: terminate processing of the current file ?
                                     =====
                                     =====
                                     Routines implementing this function pointer type are named 'CmdXXXX'
' with .....
== XXXX being the EE command implemented. ....
                                     ===== */
                                     ===== typedef bool (*CmdImpl)(ScreenPtr scr, char *params, char *msg);
4.....+.....5.....+.....6.....+.....7.....+.....8
                                     .....
                                     .....
```



```

..... ===== static void checkNoParams(char *params, char *msg) {
===== if (!params) { return; }
*params == ' ' || *params == '\t' { params++; }
===== while(
===== if (*params) {
===== if (*msg) { strcat(msg, "\n"); }
===== strcat(msg, "Extra parameters ignored!");
===== }
.. ===== }
=====
===== ==>
02=RNxt 03=Quit 04=Srch 06
=Sp1tJ 07=PgUp 08=PgDown 10=PInput 11=Clear 12=Recall Unchanged
EE V1.2.0, 1 File(s) File: EECMDS C A1 RECFM: V LRE
CL: 80(80) Lines: 2357 Current: 69

```

- In some other cases, the screen may simply stay blank instead of displaying the file content.

In all cases, pressing **PA3** will force the program to re-query the screen characteristics and rebuild the screen layout according to the new screen geometry, provided it is a 3270 terminal.

3 MECAFF-tools utilities for CMS

The program FSQRY allows to query terminal characteristics, however some options meaningful only for the MECAFF-console are unsupported if the 3270 terminal is directly connected. The program FSCTL allows to set some characteristics of the MECAFF-console and can only be used for terminal sessions using the MECAFF-console.

The program IND\$FILE allows file transfers between the VM inside VM/370 and the computer running the 3270 terminal emulator. Only the CUT-mode of the IND\$FILE protocol is supported by the MECAFF-tool IND\$FILE.

3.1 FSQRY – Query Informations

The CMS command FSQRY (or FS-QRY) lists the characteristics of the 3270 terminal emulator connected to the VM, the current display attributes for visual elements and the current PF settings of the MECAFF-console.

The command has the following parameters to specify which information to display (optional parts of parameters are given in lower case):

VERsions

→ list the version information of the MECAFF-process and –API

→ if the terminal is directly connected, the versions for the emulated level are returned

```

fsqry versions
Version information for MECAFF:
MECAFF process version : 1.2.0
MECAFF API version ... : 1.2.0
Ready; T=0.01/0.01 21:43:20
Running >>

```

TErm

→ list the characteristics of the 3270 terminal emulator connected

```

fsqry term
Characteristics of attached 3270 terminal:
Terminal type .... : 'IBM-DYNAMIC'
Alt-Screen ..... : yes
Colors ..... : yes
Extended Highlight : yes
Max. Screensize .. : 87 cols x 50 rows
SessionMode ..... : 3270

Ready; T=0.01/0.02 21:14:50
Running >> █

```

The meaning of the lines issued by FSQRY should be obvious and simply verbalize the corresponding fields of the MECAFF-API. The line “Max. Screensize” will tell the size of the alternate screen if the terminal “Alt-Screen” is “yes” or 80 x 24 if the terminal is a model -2 not supporting an alternate screen.

The terminal type is either the type information delivered by the emulation itself (if the terminal is connected to a MECAFF-console) or the equivalent name reconstructed using the known technical data of the terminal (screen size, color support). Reconstructed names have the ~ (tilde) instead of the – (dash) as separator (i.e. IBM-3279-2 is a terminal on a MECAFF-console, IBM~3279~2 is a directly connected terminal).

The session mode identifies the connection mode for the terminal with the following values:

- 1058 : directly connected and DIAG58 version 1.07 or later available
- 3277 : connected with a MECAFF-console in GRAF-style connection
- 3215 : connected with a MECAFF-console in CONS-style connection

ATtrs

→ list the display attributes for visual elements of the MECAFF-console, these elements are:

- OutNormal: output lines from VM/370
- OutEchoInput: commands entered on the MECAFF command prompt displayed in the output area
- OutFsBg: output lines from VM/370 received while the terminal is owned by the CMS program in fullscreen mode (temporary attribute used to highlight these lines while in More... state)
- ConsoleState: state indicator in front of the input prompt of the MECAFF console.
- CmdInput: the input prompt of the MECAFF console.

→ the attributes consist of an optional Highlight indicator (relevant for monochrome 3270 terminals) and the color specification (Default, Blue, Red, Pink, Green, Turquoise, Yellow, White)

```

fsqry attrs
Settings of MECAFF console:
OutNormal ..... : Blue
OutEchoInput .... : Turquoise Highlight
OutFsBg ..... : Pink
ConsoleState .... : Yellow
CmdInput ..... : Turquoise

Ready; T=0.01/0.04 22:01:15
Running >> █

```

PFkeys

→ list the settings of the PF-keys of the MECAFF console

→ internal MECAFF-commands assignable to PF-keys start with an exclamation mark:

```

fsqry pfkeys

PF-Key settings of MECAFF console:
PF01 : FSHELP
PF02 not set
PF03 : !CMDCLR
PF04 not set
PF05 not set
PF06 : !TOP
PF07 : !PAGEUP
PF08 : !PAGEDOWN
PF09 : !BOTTOM
PF10 not set
PF11 : !CMDNEXT
PF12 : !CMDPREV
PF13 not set
PF14 not set
PF15 not set
PF16 not set
PF17 not set
PF18 not set
PF19 not set
PF20 not set
PF21 not set
PF22 not set
PF23 not set
PF24 not set

Ready; T=0.02/0.06 22:08:35
Running >> █

```

ALl

→ list all the information above.

STATe

→ check if the terminal connected is supported by the MECAFF-API for fullscreen operations (either with DIAG58 or the MECAFF-console) and set the return code accordingly:

RC = 0 : fullscreen support is available for the 3270 terminal connected

RC != 0 : no fullscreen support available for the terminal, the MECAFF tools won't work

→ no output is written to the screen.

QRYType

→ check if the terminal connected is supported by the MECAFF-API for fullscreen operations (either with DIAG58 or the MECAFF-console) and return the connection type in the returncode:

RC = 1058 : directly connected and DIAG58 version 1.07 or later

RC = 3277 : connected with a MECAFF-console in GRAF-style connection

RC = 3215 : connected with a MECAFF-console in CONS-style connection

RC = -1 : unknown or none of the supported fullscreen infrastructures recognized

→ no output is written to the screen.

3.2 FSCTL – setup the MECAFF-console

The CMS command FSCTL (or FS-CTL) allows to set the display attributes for the visual elements of the MECAFF-console as well as the functionality bound to the PF keys when the terminal is owned by the MECAFF-console.

It also allows to control the flow mode of the MECAFF console, allowing to continuously output data on the console without entering the "More..." state.

The command has the following syntax (optional parts of command tokens are given in lower case):

```

FSCTL  ATTR elem color [ HIGHLIGHT ] [elem color [ HIGHLIGHT ] ...]
FS-CTL PF pfno [ cmd-text ]
        FLOWmode [ ON | OFF ]

```

Using the subcommand `ATTR` sets the color and optionally the highlighting for the elements of the MECAFF console, where *elem* can be:

- `NORMAL`: output lines from VM/370
- `ECHOinput`: commands entered on the MECAFF command prompt displayed in the output area
- `FSBG`: output lines from VM/370 received while the terminal is owned by the CMS program in fullscreen mode (temporary attribute used to highlight these lines while in More... state)
- `CONSOLEstate`: state indicator in front of the input prompt of the MECAFF console.
- `CMDInput`: the input prompt of the MECAFF console.

The *color* can be one of: Default, Blue, Red, Pink, Green, Turquoise, Yellow, White. Several visual elements can be set with one `FSCTL` command, when specifying the same elements more than once only the last setting will be use.

Example:

```
FSCTL ATTR  NORMAL GREEN  ECHO WHITE HIGHLIGHT  FSBG RED
```

The subcommand `PF` sets the command issued by MECAFF when the corresponding key is pressed while the screen is owned by the MECAFF console. The command bound to a PF key can be either an internal MECAFF command or a command string that will be sent to the VM as if it had been given on the command line.

The following internal commands can be bound to PF keys (with the PF key they are assigned per default):

<code>!CMDCLR</code>	→ clear input area of the console (PF03)
<code>!TOP</code>	→ scroll the output area to the start of the buffered lines (PF06)
<code>!BOTTOM</code>	→ scroll the output area to the end of the buffered lines (PF09)
<code>!PAGEUP</code>	→ scroll the output area one page towards the start of the buffered lines (PF08)
<code>!PAGEDOWN</code>	→ scroll the output area one page towards the end of the buffered lines (PF07)
<code>!CMDPREV</code>	→ step the input prompt back in input history (PF12)
<code>!CMDNEXT</code>	→ step the input prompt forward in input history (PF11)

A command text to be sent to VM can be up to 60 characters long, longer command strings will be truncated. If no command is given, the command currently bound to the PF key will be removed.

Examples:

```
FSCTL PF 2 FSLIST * C
(set PF 02 to send the command "FSLIST * C" to CMS)
```

```
FSCTL PF 1 !CMDPREV
(set PF 01 to retrieve the previous entry of the command history into the prompt area)
```

```
FSCTL PF 12
(remove the command bound to PF 12)
```

The subcommand `FLOWMODE` activates (parameter `ON` or missing parameter) or deactivates (parameter `OFF`) the flow mode. While the flow mode is active, output from the VM is written

continuously to the console without entering the "More..." state. The flow mode is automatically deactivated the next time a MECAFF fullscreen program is started.

3.3 IND\$FILE – File transfer

The command IND\$FILE implements the host side of the IND\$FILE 3270 file transfer protocol using the CUT-mode. It allows file transfer for VM/370:

- as upload (terminal → host) and download (host → terminal)
- for files with LRECL up to 255
- in ASCII or in binary mode

The IND\$FILE command is invoked automatically by the 3270 terminal emulation when file transfer is initiated through the means of the emulation (local command or GUI dialog). It supports the command line parameters required to allow to above transfer options.

MECAFF's IND\$FILE was tested against the WC3270 and VISTA TN3270 (Trial Copy) terminal emulators. IND\$FILE also works with the PC3270 terminal emulator, provided the CUT-mode file transfer is activated by adding the line:

```
CUTprotocol=Y
```

to the [Transfer] section in the .ws profile configuration file of PC3270.

There is currently no experience with other emulators allowing file transfers based on the IND\$FILE protocol.

To perform file transfers, it is required that the CMS environment is able to execute the IND\$FILE command, i.e. no other CMS and no other fullscreen (EE, FSHELP etc.) is currently active and the console is not in the *More...* state.

When transferring data in ASCII mode, character mapping is an important issue as several consecutive character set mappings are involved at different levels of the complete host+terminal environment. As different character sets (and corresponding translations) may be involved when displaying a file on the terminal's screen and when transferring the same file, the transferred file contents on the PC side and the original content host side may differ.

The initial character mapping setup of IND\$FILE is based on the defaults

- of the SixPack-configuration (option CODEPAGE 819/1047)
- and the open-source WC3270 terminal emulation (Bracket = charset 037)

To support differing character sets, IND\$FILE allows to specify remapping tables for data transfer in ASCII mode. Remapping tables are files with the filetype IND\$MAP. IND\$FILE can optionally use up to 2 remapping files, which are looked for in the search order of the accessed minidisks:

- `DEFAULT IND$MAP *`
this file gives the default mappings; using this file is useful if the terminal emulation does not allow to specify arbitrary command line options for the host IND\$FILE command
- `fn IND$MAP *`
with *fn* given by the command line option
`MAP fn`
for the IND\$FILE command; the mappings in this file are applied after those in DEFAULT IND\$MAP (if available)

Remapping is defined as additional character translation applied onto the *direct mapping* before the transfer host→terminal resp. after the transfer terminal→host. The *direct mapping* specifies the character mapping that occurs through the participating components and the characters set used there.

This direct mapping can be made visible by transferring the file EBCDIC MEMO delivered with MECAFF to the PC. This file contains all displayable EBCDIC characters spanned in a hexadecimal matrix. Transferring this file to the PC through the terminal emulation with IND\$FILE (and no additional remapping of course) will show which EBCDIC code positions directly result in which characters on the PC side.

A character position showing a different visible representation on the terminal and the PC file can be considered a “wrong” mapping in this file transfer scenario. Wrong mappings can be corrected through remapping with IND\$MAP file(s) specific to the involved components and charsets.

IND\$MAP files have the following format:

- blank lines and lines starting with a * are ignored
- a single mapping is defined by a line with 2 hexadecimal codes
 - the first code defines the visible EBCDIC character on the host side (as displayed on the 3270 terminal) which is wrongly mapped;
this hexadecimal code can be determined using the EBCDIC MEMO file displayed on the host side with the 3270 terminal emulation;
 - the second code defines the EBCDIC character position which results in the expected visible character on the PC side (i.e. the position of the direct mapping giving the expected character on the PC);
this hexadecimal code can be determined by locating the wrongly mapped character in the transferred EBCDIC MEMO opened on the PC side.

If necessary, the following step can be taken to create an IND\$MAP file for a given 3270 terminal emulator:

- download the file EBCDIC MEMO of the MECAFF distribution with IND\$FILE in ASCII mode without a mapping file using the terminal emulation configured with the settings (character sets or the like) that will be used subsequently when ASCII data transfers will be done.
- compare both files and identify character codes wrongly mapped;
for this, open the file EBCDIC MEMO with FSVIEW using the terminal emulation on the CMS side and the downloaded file with a text editor (for example NOTEPAD in a Win32 platform) on the outside of VM/370:
 - in a correct mapping, the displayed characters at a given byte code point (row and column of the file) are the same
 - for each byte code position having a different displayed character, find the expected character in the downloaded file and add a new line to the IND\$FILE with:
 - the first hexadecimal code being the byte code of the character wrongly mapped (the code can be identified from the row/column in the file EBCDIC MEMO)
 - the second hexadecimal code being the byte code of the located display-character in the downloaded file.

The file `VISTA IND$MAP` delivered with MECAFF is an example of a mapping file, correcting the charset translations for the *VISTA TN3270 Trial Copy* emulator with all default settings:

- SixPack configuration: `CODEPAGE 819/1047`
- VISTA TN3270:
 - *Windows (ANSI 1252)* (for 'File Transfer Setting')
 - *United States* (for 'Screen Code Page')

4 Known restrictions / problems

4.1 EE – Implementation limitations

EE currently has no reliable checks for running out of memory, so editing very large files may lead to ABENDs and the loss of file modifications. Assuming 14M of available memory (for a 15M VM) and an edited file with LRECL 255 (the max. value supported by EE), this allows roughly for 50.000 lines (including internal overhead).

EE is implemented in C using the native C library (GCCLIB). Probably due to misunderstandings of (or wrongly using) the native C API resp. to limitations of the underlying CMS, the following problems occur in the current implementation for saving files with variable record length (RECFM V):

- Writing an empty line (line length = 0) with `CMSwriteFile` results in return code 8 and no line is written, leading to a file where all empty lines disappeared (if rc 8 is ignored).
- Trying to write a file with a given LRECL but with its widest line not reaching this LRECL, the value passed to `CMSfileOpen` as buffer length is not used as LRECL for the file written, ending with the LRECL being the length of the widest line written to the file (e.g. LRECL is to be 80 but the widest line is only 60 chars long, the LRECL of the file will be 60 instead of the intended 80).

A similar problem to empty lines with RECFM V exists for empty files (for both RECFMs), as “not writing a line into a new file between open and close” results in “no file on minidisk”.

The current implementation in EE copes with these problems in the following way:

- Empty lines in the edited file with RECFM V are written with a single blank to the file. This should not be a problem for plain text files.
- Saving an empty file writes a single empty line.
- When opening a file with RECFM V, the file width used for editing is the maximum of the LRECL of the file and the LRECL value of the FTDEFAULTS command for the filetype. If no matching FTDEFAULTS is given, the terminal width (minus 7 characters for prefix zone including control positions) is taken as potential line width.

4.2 IND\$FILE

As no formal specification of the IND\$FILE transfer protocol was found (neither for the CUT-mode nor the DFT-mode), the MECAFF version of IND\$FILE was implemented for the CUT-mode transmission based

- on the open source WC3270 terminal emulation sources,
- on the analysis of the 3270 data streams as used by the MVS version as well as the GCIC version of IND\$FILE (using the `trace data` feature of WC3270)
- and some information found in the Internet, mainly [IND\\$FILE Technical Reference](http://www3.rocketsoftware.com/bluezone/help/v50/en/bz/DISPLAY/IND$FILE/IND$FILE_Technical_Reference.htm) ([http://www3.rocketsoftware.com/bluezone/help/v50/en/bz/DISPLAY/IND\\$FILE/IND\\$FILE_Technical_Reference.htm](http://www3.rocketsoftware.com/bluezone/help/v50/en/bz/DISPLAY/IND$FILE/IND$FILE_Technical_Reference.htm)).

So it cannot be ensured that MECAFF’s IND\$FILE will have a protocol conforming behavior, specifically in “non-straight-forward” situations.

Furthermore, MECAFF's IND\$FILE was tested against the *WC3270*, *VISTA TN3270 (Trial Copy)* and *PC3270* terminal emulators. There is currently no experience with other emulators allowing file transfers based on the IND\$FILE protocol.

Regarding *WC3270*, using version 3.3.10ga5 sometimes duplicates data blocks transmitted into a downloaded file (host → terminal), leading to varying (PC-)file lengths when downloading the same host file. This problem does not occur when using a current version (3.3.12ga7 or newer) of *WC3270*.

Limitations of MECAFF's IND\$FILE in ASCII transfer mode:

- TAB-characters are currently mapped to a single blank;
- non-displayable characters (0x00..0x3F and 0xFF) are transmitted as dot-character (".");
- double-byte character sets (DBCS) are not supported.

5 Possible extensions and improvements

The MECAFF package is work in progress. The following are just ideas on what could be done, with no particular priority...

5.1 EE

- Scripting/macro capabilities (control structures and programmability capabilities for command files), possibly using BREXX (if it can be figured out on how to interface it for passing variable values, invoking REXX scripts and invoking EE commands from scripts)

5.2 FSLIST

- Extend the file list to allow specifying arbitrary commands to be applied to the files. This requires to find a way to invoke CMS user area commands (like COPYFILE) from a program (EE/FSLIST) already running in user area memory.