
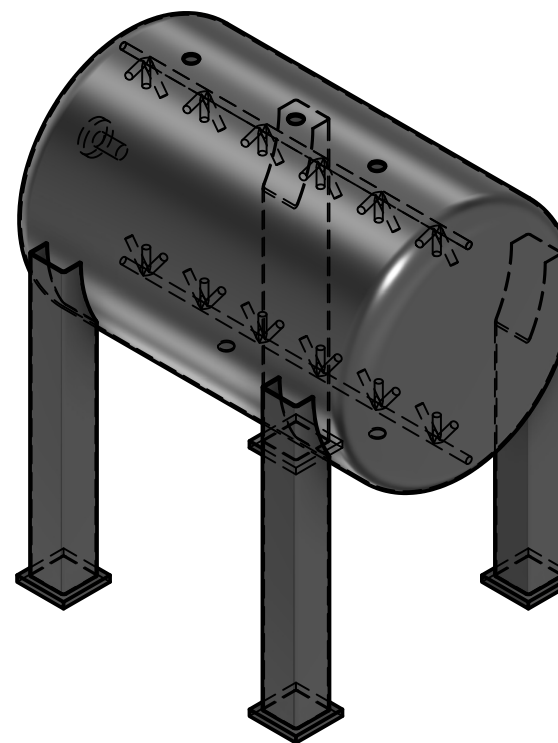
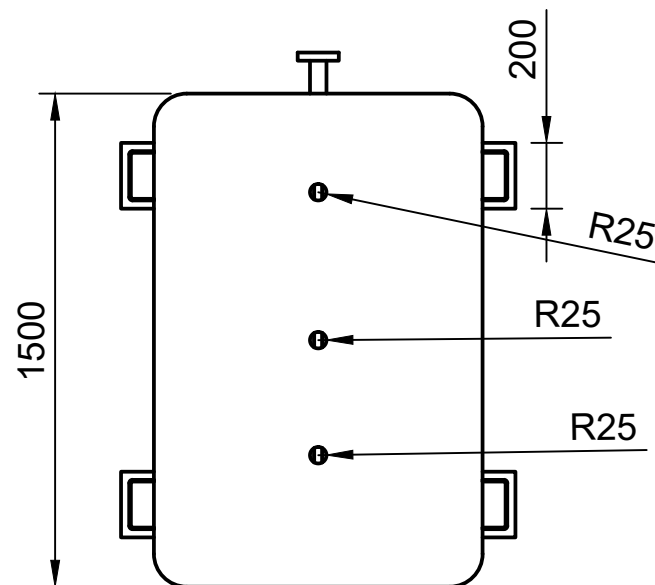
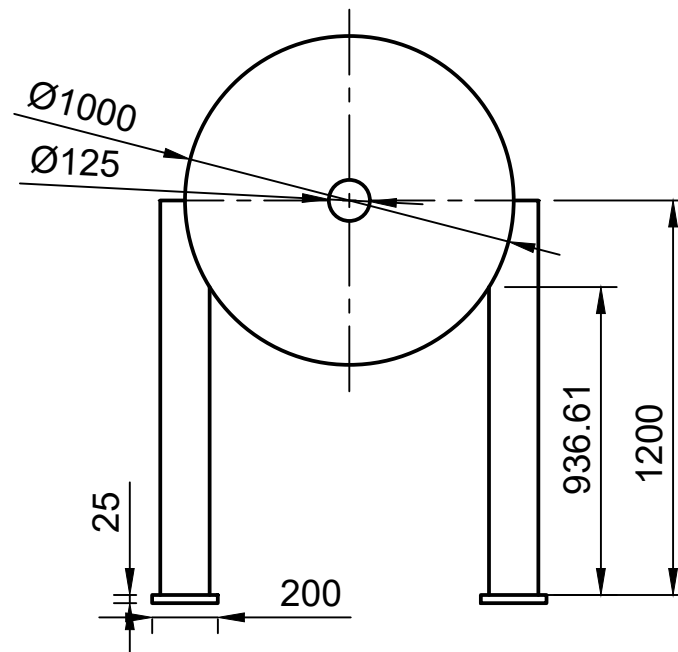


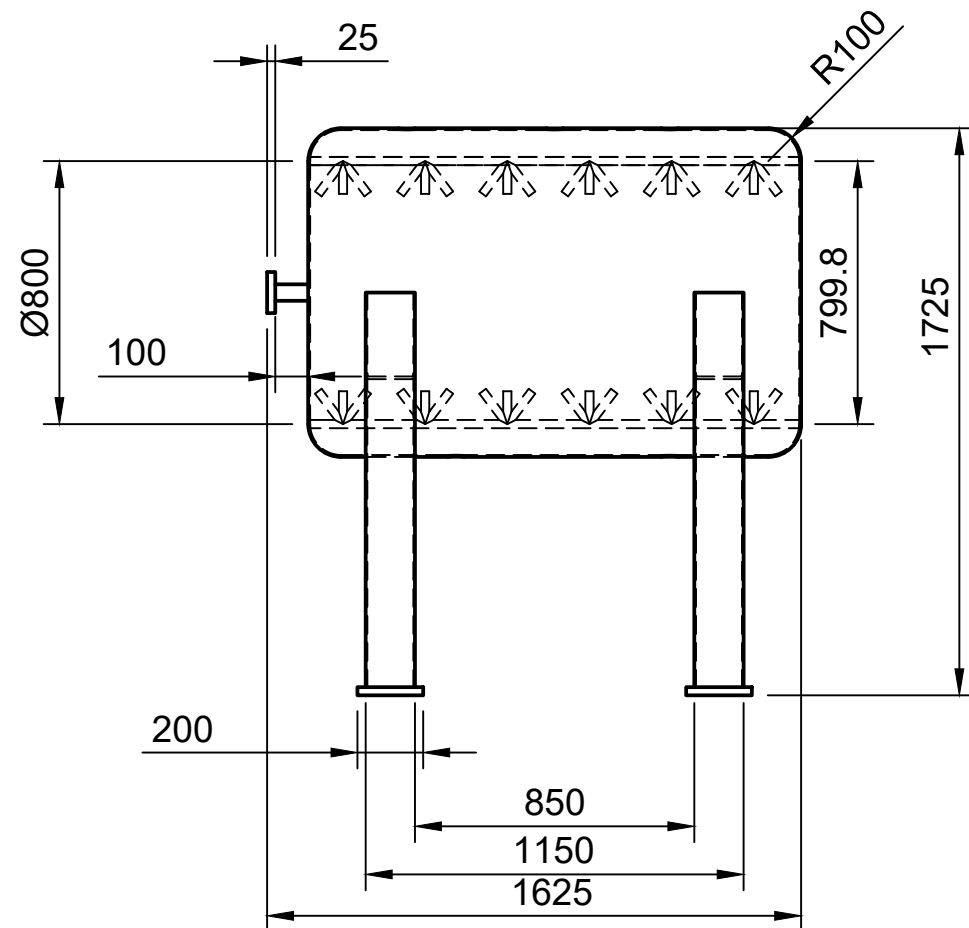

ITEM	DESCRIPTION	QTY	MATERIAL	REMARK
1.	Inner Shell	1	SS304L	
2.	Top & Bottom Heads	2	SS304L	
3.	Outer Shell	1	SS304	
4.	Support Legs	4	SS304	
5.	Outer Heads	2	SS304	

GENERAL INSTRUCTIONS

- ALL DIMENSION ARE IN MM UNLESS SPECIFIED OTHERWISE.
- ALL BUTT WELD SHALL BE 100% DP TESTED.
- FLANGE FACING FINISH SHALL BE 125-250 AARH.
- INSIDE SURFACE & WELDED SURFACE OF THE VENTURI WILL BE SMOOTHLY CLEAN BY VENDOR.
- DEGREE 37°30' SHALL BE PROVIDED FOR FULL PENETRATION WELD JOINTS.
- SURFACE FINISH: INSIDE AND OUTSIDE – ACID CLEANED.
- TRANSPORT: BLANK THE FLANGE OPENING WITH WOODEN SHEET / METAL SHEET.
- TOLERANCE AS PER STANDARD UNLESS OTHERWISE SPECIFIED.
- DO NOT SCALE THE DRAWING.
- REMOVE ALL SHARP CORNERS.
- MATERIAL DESCRIPTION SIZE PER ASTM/ASME AS APPLICABLE.

REFERENCE STANDARDS

- ASME Y14.100 - Engineering Drawing Practices
- ASME BPVC Section II Part A - Ferrous Material Specifications
- ASME BPVC Section II Part D - Material Properties
- ASME BPVC Section V - Non-Destructive Examination (NDT)
- ASME B31.3 - Process Piping
- ASME B16.5 - Pipe Flanges and Flanged Fittings
- ASTM A182 - Forged Stainless Steel Flanges and Fittings
- ASTM A403 - Stainless Steel Butt-Welding Pipe Fittings
- ISO 21009-1 - Cryogenic Vessels – Static Vacuum Insulated Vessels

 UNNIC LNG SOLUTIONS Cryogenic Engineering LNG Consultancy Maritime & Energy Solutions Office No. 150, 1st Floor, A Wing, Balaji Bhavan, Plot No. 42A, Sector 11, CBD Belapur, Navi Mumbai – 400614 M : +91 75066 77660 E : info@unniclcs.com W : www.unnicgroup.com	REV.	DESC.	BY	DATE	DRAWN BY	SS	TOLERANCES (Unless Specified) X ±1.0 mm X.X ±0.5 mm X.XX ±0.2 mm ANGULAR ±1° FABRICATION: ASME STANDARD	TITLE: LNG STORAGE TANK			
	0	FINAL DRAFT	SS		CHECKED BY	MC		DRAWING NO: LNG-BS-ST-003			REV.0
					APPROVED BY	MC		SHEET	SCALE	UNITS	FORMAT
								1 OF 1	1:1	mm	A3