PRODUCT BLUEPRINT / 01

Visual Website Builder Admin Panel

Complete UX flow, interface specification, control inventory, interaction rules, publishing lifecycle, quality checks and implementation prompt.

CORE IDEA

Select on the canvas. Configure on the right. See every change immediately. Save safely. Publish deliberately.

Prepared: 15 October 2026
Purpose: handoff-ready product and engineering specification

01. Product objective and design principles

This document defines the intended product behavior, not just the appearance of the admin screen.

Build a no-code visual website editor for an admin who needs to control the website end to end: page structure, sections, logos, images, dimensions, typography, colors, buttons, prebuilt themes, animation presets, responsive behavior and publishing.

The editor should feel like one connected workspace. The canvas is the visual truth; the right-hand inspector is the precise control surface; the top bar handles undo/redo, preview, save and publish; the left rail handles pages, layers, assets, themes and reusable components.

Product principles

Principle	Required behavior
Direct manipulation	Click a visible element to select it. Its outline, selection label and settings panel update together.
Immediate feedback	Every supported edit appears in the canvas without a full page reload. Use a short, subtle transition where appropriate.
Safe publishing	Editing changes a draft. The live site changes only after an explicit publish action and confirmation.
Progressive disclosure	Show the common controls first. Place advanced controls in expandable groups so the panel remains scannable.
Reusable design	Themes, buttons, sections, typography and animation presets can be saved and reused.
Responsive by design	Desktop, tablet and mobile previews are first-class modes, not a final afterthought.
Reversible actions	Undo/redo, reset-to-default, unsaved-change warnings and recoverable publishing failures are mandatory.


Scope boundary

This specification describes a design-editor product. It does not assume the current website uses a particular framework or CMS. Implementation must first map the existing site into editable components and a stored page schema rather than replacing the site with an unrelated template.

Success means the admin can make normal design changes without developer help, can preview them safely, and can identify exactly what will be published.

02. Information architecture and editor shell

A predictable layout keeps the controls discoverable as the feature set grows.

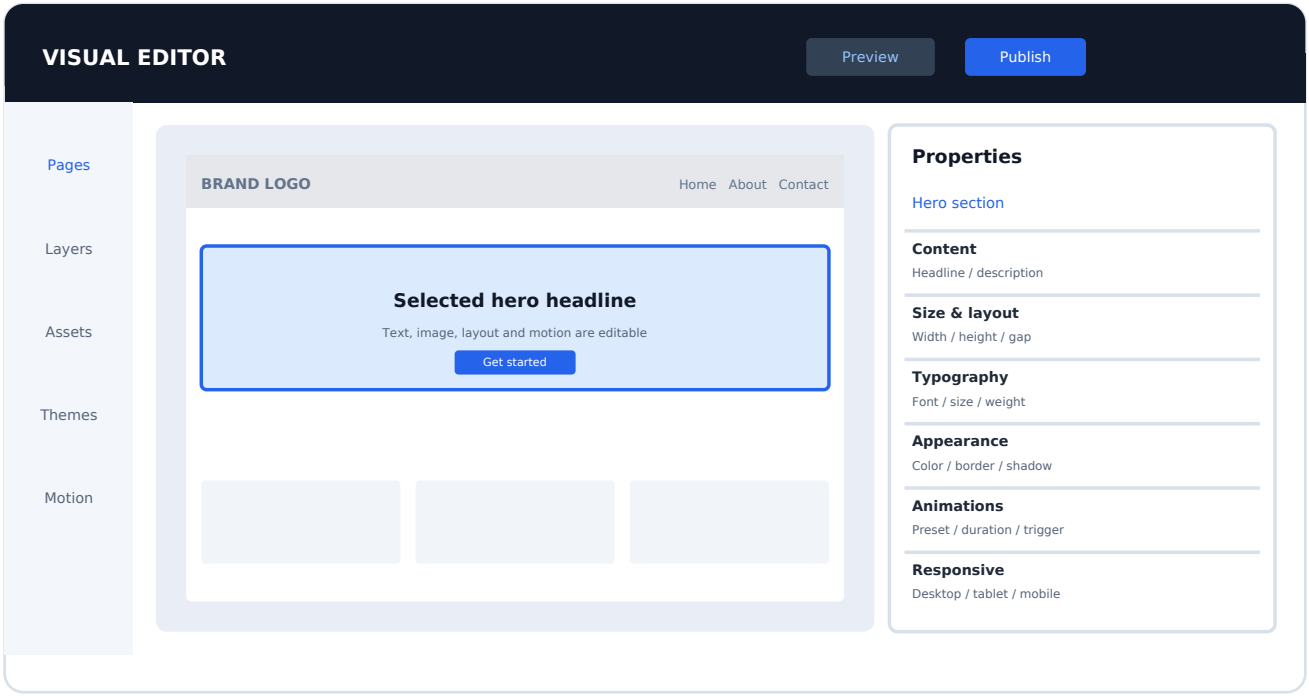

Area	Responsibilities	Primary controls
A. Top toolbar	Current site/page, viewport mode, undo/redo, preview and publishing status.	Site selector, page selector, Undo, Redo, Preview, Save status, Publish
B. Left navigation rail	Switch between content and site-wide resources.	Pages, Layers, Assets, Themes, Components, Animations, Settings
C. Live canvas	Render the actual page draft and allow click-to-select and drag/reorder where safe.	Selection outline, inline text editing, resize handles, section insertion points
D. Right inspector	Expose controls for the currently selected object.	Content, Layout, Typography, Appearance, Motion, Responsive, Advanced
E. Status/feedback layer	Confirm saves, surface validation and errors, avoid silent failures.	Toast, inline error, save indicator, publish confirmation, recovery message

Responsive workspace rules


• At desktop width, keep the left rail, canvas and right inspector visible at once. Allow the inspector to collapse if the canvas needs more room.

• On smaller editor screens, collapse the left rail into a drawer and make the inspector a slide-over panel. Do not make the actual website mobile preview behave like the admin shell.

• The selected element must be visually identifiable on the canvas and named in the inspector header, for example “Hero section / Headline”.

03. End-to-end admin workflow

From opening a website to safely publishing changes.

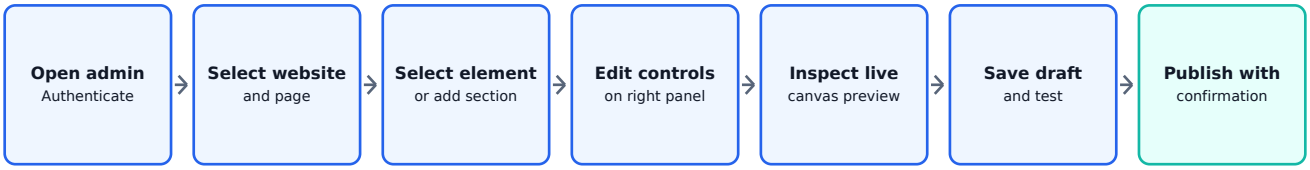

Step	Admin action	System response / rule
1. Open	Sign in and select a site.	Load user permissions, site configuration, pages, current draft and publish status.
2. Choose page	Open a page from the page manager or top-bar selector.	Render the selected page, mark active page, restore the last saved draft state.
3. Select	Click a logo, headline, image, button, section or layer.	Highlight selection, show breadcrumb/path, populate matching settings in the inspector.
4. Customize	Change dimensions, text, font, colors, image, alignment or motion.	Update the draft preview immediately; validate values and keep edits reversible.
5. Test	Switch desktop/tablet/mobile; interact with buttons and links in preview mode.	Check overflow, clipping, stacking and responsive overrides. Preview interactions must not accidentally navigate away while editing.
6. Save	Save draft or rely on clearly indicated autosave.	Persist page schema and asset references. Show saving, saved, or error states with retry.
7. Publish	Review summary and confirm publishing.	Validate publish readiness, publish the intended draft version, then show success or actionable failure.

Critical separation

Draft editing and live publishing are different states. Never publish every keystroke. Autosave protects the draft; Publish deliberately moves a reviewed draft to the live site.

04. Interaction model: select, edit, preview

The same predictable interaction contract must work for every supported element.



Selection behaviors

Interaction	Expected behavior	Failure / edge behavior
Click element	Select the nearest editable object and reveal its inspector.	If nested objects overlap, prioritize the visible target; provide an explicit Layers panel to select parent/child.
Click empty canvas	Clear selection or select the page/section background.	Do not discard edits. Keep the current panel state only if that is an intentional product rule.
Breadcrumb click	Select the corresponding parent, such as Page > Hero > Button.	Update outline and inspector together.
Double-click text	Enter inline text editing.	Escape cancels; Enter or clicking outside commits where appropriate. Multi-line text must remain editable.
Drag section handle	Reorder a section only when a valid drop target appears.	Show insertion marker; block invalid nesting and explain unavailable moves.
Resize handle / numeric control	Update width or height with visible feedback.	Use min/max limits and prevent negative or invalid dimensions.
Keyboard navigation	Tab between controls; Enter/Space activates; Escape closes overlays.	Focus must remain visible and not become trapped in a closed panel.
Delete / duplicate	Confirm destructive removal when appropriate; duplicate with a unique ID.	Never silently delete child content or shared components; explain consequences.

Required editor states

• No selection: show page-level settings and a concise hint: “Select an element on the canvas to edit it.”

• Selected element: show element name, parent breadcrumb, editable groups and a context menu for duplicate, copy styles, reset and delete.

• Loading / save error: retain the last usable canvas state; do not clear the editor or lose local changes.

• Preview mode: disable selection overlays and editor controls, but offer an obvious “Back to editor” action.

05. Right inspector: complete control inventory

Only show controls that make sense for the selected type. Common groups should remain in a consistent order.

Group	Controls to expose	Applies to
Inspector header	Element name/type, breadcrumb, status, more menu.	All selected objects
Content	Text fields, rich text, alt text, links, button label, destination/action.	Text, button, image, link, form, section
Size & layout	Width, max-width, min-width, height, min/max-height, padding, margin, gap, alignment, position, display, overflow, z-index.	Sections, containers, media, buttons, cards, text
Typography	Font family, font size, weight, line height, letter spacing, text alignment, text transform, text color, decoration.	Headings, body text, navigation, buttons
Appearance	Text/background colors, gradient, border color/width/style, radius, shadow, opacity, overlay and hover state.	Most visual elements
Media	Asset picker, upload/replace, crop, focal point, object-fit, object-position, background position, alt text.	Images, logos, video and background sections
Animations	Preset, trigger, direction, duration, delay, easing, distance/intensity, stagger, reduced-motion override, preview/replay.	Elements, sections and page transitions
Responsive	Device-specific override switch, width/height, typography, spacing, alignment, visibility/order.	Any responsive element
Advanced	CSS class or approved token reference, HTML anchor/ID, visibility rules, component binding, reset.	Permission-gated advanced settings
Actions	Duplicate, copy/paste styles, reset group, hide, lock, move to layer, delete.	Selected object or section

Control behavior convention

Every numeric field needs a label, unit, sensible range, step size and reset behavior. Pair slider controls with a numeric input. Every color field should support a picker plus a readable HEX value. Every dropdown needs a searchable or clearly named list when the list is long.

06. Visual controls and their exact behavior

These rules make the editor feel coherent rather than a collection of unrelated settings.

Dimensions and spacing

Control	Specification
Width / height	Support px and % where appropriate; support auto and content-fit only where meaningful. Provide lock-aspect-ratio for image/logo controls. Show the measured box on canvas during resize.
Padding / margin	Expose top, right, bottom and left values; allow linked/unlinked sides. Distinguish inside spacing (padding) from outside spacing (margin).
Alignment	Use labeled icons for left, center, right, top, middle, bottom, space-between and stretch when supported. Include text alignment separately from container alignment.
Position / layer	Prefer normal document flow by default. Advanced absolute/fixed positioning and z-index should be explicit and warned when likely to break responsive layout.
Layout mode	Offer simple presets such as Stack, Row, Grid and Overlay; reveal relevant controls based on selected mode.

Typography and content

Control	Specification
Font family	Provide curated font families with live sample text; show font loading state and fallback. Allow site-wide font tokens and local overrides.
Font sizing	Support px/rem or a documented scale; use responsive values at each breakpoint. Do not use a slider without the current numeric value.
Headlines	Edit text, heading level, width, alignment, line breaks, color and responsive scale. Warn when the heading hierarchy becomes invalid.
Rich text	Support safe bold/italic/underline, links, lists and paragraph formatting. Avoid unrestricted arbitrary HTML input in the normal editing flow.
Buttons	Label, destination, action type, visual style, width, height, padding, font, colors, hover/focus/disabled states, radius, border and icon position.

Colors and visual themes

• Include a global palette with named tokens such as Primary, Secondary, Accent, Background, Surface, Text, Muted and Border. Each token is editable once and updates linked elements.

• Include curated light, dark, minimal, editorial, bold and luxury presets; applying a theme should preview the result before commit.

• Support gradients, opacity and overlays with accessible contrast checks. Preserve manual overrides unless the admin explicitly chooses “Replace all linked styles”.

07. Assets and media library

Uploads should be reusable, searchable and safe. Uploading a file is not the same as applying it to the selected element.



Feature	Required behavior
Asset browser	Search, filter by image/video/logo/icon, sort by recent/name and show thumbnail, filename, dimensions, format and upload date.
Upload	Support drag-and-drop and file picker. Show progress, file type/size rules, duplicate detection and a clear retry state after failure.
Replace media	Offer replace-in-place for this instance, and a separate clearly confirmed option to update all references where that is intended.
Image settings	Alt text, crop, focal point, fit mode (cover/contain/fill where valid), position and responsive source behavior.
Logo settings	Width and height, lock ratio, clear space if supported, dark/light variants, mobile logo variant and header-specific sizing.
Video settings	Poster image, autoplay/muted/loop controls where supported, fallback for reduced motion, mobile behavior and loading constraints.
Asset deletion	Show where an asset is used. Block deletion when in use unless the admin intentionally replaces/removes references.
Accessibility	Require or strongly prompt for meaningful alt text on informative images; allow empty alt for decorative images.

Explicit interaction rule

After upload, the selected asset appears in the library. The admin must then choose “Use this image” or drag/drop it onto an element. Do not display an empty or blank upload result; show the file thumbnail, state and next action.

08. Page manager, section library and global design system

Support both blank-page freedom and quick-start structures built from reusable blocks.

Area	Controls and behavior
Page manager	Create page, duplicate, rename, delete, reorder, set homepage, edit slug/path, set page title/description, hide from navigation, preview and publish status.
Create page dialog	Offer Blank page, Template, Duplicate existing. Require a page name; validate slug; show final URL; allow cancel without side effects.
Section library	Browse hero, feature grid, service list, testimonial, pricing, gallery, FAQ, contact, CTA, footer and blank sections. Include thumbnail, responsive notes and “Insert section”.
Layer tree	Show page > section > container > component hierarchy. Allow select, rename, reorder, hide, lock and duplicate. Clearly mark shared/global components.
Reusable components	Save selection as component; define whether changes update every instance or only one detached copy. Display component usage count.
Global header/footer	Edit once and reuse across selected pages. Preview all pages affected before publishing changes.
Theme presets	Apply a whole theme, page theme or selected-section theme. Preview first; support undo and “restore previous theme”.
Design tokens	Central values for fonts, colors, spacing, radii, shadows and breakpoints. Linked elements respond to token updates; manual overrides are clearly marked.

Theme application options

• Apply to entire site: update linked global tokens and components; preview a list of affected pages.

• Apply to this page: only update selected page-level tokens/sections.

• Apply to selection: change only the selected element or chosen section.


• Do not silently overwrite manual styles. Show a concise change summary and allow Undo immediately after application.

09. Animation and effects library

Animations are reusable presets with clear scopes, triggers and safe defaults.

Preset category	Example presets	Controls
Entrance	Fade in, fade up, slide in, scale in, reveal, stagger children.	Direction, distance, duration, delay, easing, stagger.
Scroll	Reveal on scroll, parallax, sticky reveal, progress-based reveal.	Trigger threshold, start/end, intensity, offset, mobile fallback.
Hover	Lift, scale, underline sweep, glow, color shift, image zoom.	Duration, easing, transform amount, shadow/color variation.
Text	Word reveal, character reveal, line reveal, type-on, highlight wipe.	Split type, stagger, duration, delay, overflow and replay.
Transitions	Fade, slide, scale, crossfade between page/section states.	Trigger, duration, easing, direction and fallback.
Background / decorative	Gradient movement, subtle floating shape, background drift.	Speed, intensity, direction and performance limits.
Micro-interactions	Button press, menu open, accordion expand, tab change, toast.	State, timing, easing, reduced-motion fallback.

Animation workflow

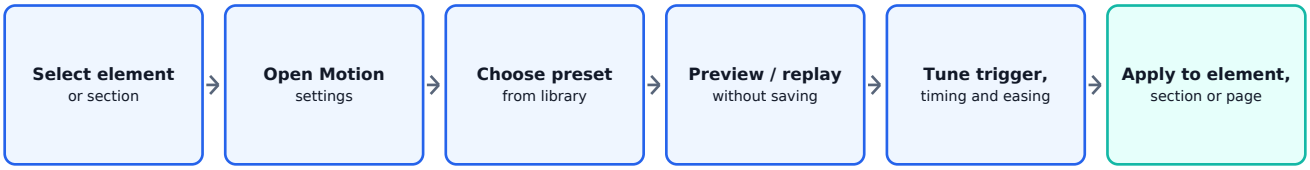

• Each animation card must show its name, short description, thumbnail or preview, trigger type and whether it is safe for mobile. Include a Preview button before Apply.

• “Apply to page” must state whether it applies to all eligible elements, all sections, or only selected elements. Never attach a heavy scroll animation to every element without previewing performance consequences.

• Respect prefers-reduced-motion. Provide a global reduced-motion setting and a fallback for unsupported or low-performance devices.

• Avoid simultaneous motion on too many elements, scroll hijacking, automatic audio and effects that obscure content or block interaction.

10. Responsive editing, accessibility and preview modes

A desktop-perfect design that breaks on phones is not complete.

Feature	Required specification
Viewport switcher	Desktop, tablet and mobile presets with displayed viewport dimensions. Support custom width for QA if practical.
Override strategy	Show whether a value is inherited from a larger breakpoint or overridden locally. Offer “Reset to inherited” for each responsive value.
Visibility	Allow hide on desktop/tablet/mobile independently. Warn when important content or navigation is hidden across all views.
Responsive controls	Size, spacing, alignment, typography, grid columns, order, visibility and image crop can vary by breakpoint.
Overflow checks	Detect horizontal overflow, clipped text, overlapping elements, out-of-bounds fixed content and undersized tap targets.
Keyboard accessibility	Full editor navigation by keyboard, visible focus, logical tab order, descriptive labels and escape-to-close dialogs.
Contrast and text	Check text/background contrast; identify small text; do not rely on color alone to indicate state.
Motion accessibility	Honor reduced-motion preference in site output and preview; provide static fallback for movement-dependent content.
Semantics	Meaningful heading order, alt text, button/link distinction, form labels and accessible status announcements.

Preview modes

Editor mode displays selection outlines and editing controls. Preview mode shows the site as a visitor would see it. Published/live mode is the deployed version. Label these states clearly so screenshots and reviews are not mistaken for live content.

11. Save, preview, publish and rollback lifecycle

The editor must preserve drafts and make publication status unmistakable.



Control/state	Exact behavior
Undo / Redo	Undo every reversible editor operation: text edits, property changes, reordering, preset application and deletion. Batch rapid keystrokes sensibly.
Autosave indicator	States: Unsaved changes, Saving..., Saved at [time], Save failed. A failed save keeps local changes and provides Retry.
Save draft	Explicitly persist current draft and show success/failure. Do not mark the draft saved before the server confirms persistence.
Preview	Open an isolated preview of current draft at selected viewport. Editing mode remains recoverable in another tab or clear return route.
Publish	Open a confirmation panel showing target site/environment, changed pages, warnings and the draft version to publish.
Validation	Block critical issues such as missing required page configuration or broken required asset. Warnings such as low contrast may allow override with acknowledgement.
Publish result	Show clear success, timestamp/version, public link and any cache/deployment propagation status supported by the system.
Publish failure	Show reason, whether live site remains unchanged, retry action and a retained draft. Never imply the site updated if publication failed.
Version history	Keep prior published versions and allow restore/rollback according to retention policy. Confirm rollback and record who initiated it.
Unsaved navigation	Warn before leaving or switching pages if changes are not saved. Offer Save and continue, Discard, or Cancel.

12. Permissions, guardrails and error states

A professional editor explains what happened and preserves the admin’s work.

Scenario	Expected UI response
No permission to publish	Disable Publish with a short explanation; permit draft edits only if the role allows them.
Invalid value	Keep focus on the field, state the allowed range/unit and do not silently coerce a surprising value.
Broken image / failed upload	Show placeholder, failed status, retry and alternative asset selection. Keep the existing published asset untouched.
Network interruption	Show offline/disconnected state, retain local unsaved state where supported and retry persistence when connection returns.
Conflict from another editor	Detect version mismatch; offer reload/compare or safe conflict resolution. Do not overwrite newer work silently.
Delete used asset/component	List affected pages/instances and require explicit confirmation, or block deletion until references are resolved.
Unsupported animation	Show unsupported-device/browser note and static fallback. Do not break page rendering.
Missing page content	Provide helpful empty states with actions: Add section, Choose template, Upload media or Edit page settings.
Publish blocked	List blocking items with direct links to the relevant field/section. Preserve the exact draft.
Unsaved changes	Show a clear choice before route changes or closing editor: Save, Discard or Stay.

Suggested roles

Role	Permissions
Owner/Admin	All site settings, user/role management, assets, drafts, themes and publish/rollback.
Designer/Editor	Edit pages, upload assets, create components and save drafts; publishing configurable by policy.
Reviewer	View preview, comment/approve and inspect change summaries; no direct content edits unless granted.
Viewer	Read-only preview and page structure.

Security notes: enforce permissions on the server as well as in the interface; validate uploads; sanitize rich text; protect publish endpoints; keep an audit trail for publish, rollback, deletion and role changes.

13. Implementation model and data boundaries

Use a structured editable page schema so editor controls map to real website properties instead of brittle visual hacks.

Entity	Essential fields / purpose
Site	id, name, domain, theme_id, global_tokens, default_breakpoints, current_published_version, settings.
Page	id, site_id, name, slug, metadata, draft_schema, published_schema/version, navigation_visibility, sort_order, status.
Element / node	id, type, parent_id, order, properties, responsive_overrides, style_tokens, animation_config, visibility, locked, component_ref.
Asset	id, site_id, storage_path, filename, media_type, width, height, alt_text, metadata, usage_count, upload_status.
Theme / tokens	id, site_id, name, tokens for colors/fonts/spacing/radius/shadows, preset source, created_by.
Reusable component	id, name, schema, version, shared/detached behavior, instance references.
Animation preset	id, name, category, supported element types, defaults, reduced_motion_fallback, performance classification.
Draft/version	id, site_id, page/version references, schema snapshot or diff, author, created_at, publish status.
Audit event	actor, action, target, timestamp, version, result, optional reason.

Implementation logic requirements

• Use stable element IDs; do not use screen position or DOM order as the only identity for an element.

• Separate global design tokens from local style overrides. In the UI, mark inherited token values versus explicit overrides.

• Keep asset binaries in an appropriate storage service and reference them by stable asset IDs/URLs in the page schema.

• Use versioned drafts and validated publish operations. Publishing a page must not mutate the editable draft in place in a way that destroys rollback data.

• Make the editor compatible with the existing website architecture. If the site contains custom-coded sections, define a registered component adapter or explicitly mark unsupported controls rather than pretending those sections are fully editable.

14. Acceptance criteria and test checklist

The build is not complete until the following behaviors have been demonstrated, not just drawn in a mockup.

ID	Acceptance criterion	Priority
AC-01	Clicking each supported visible element selects the correct element and loads the matching inspector.	P0
AC-02	Changing an element width/height or logo size visibly updates the preview instantly.	P0
AC-03	Text, image, button link, typography, colors, spacing and border settings persist after reload.	P0
AC-04	Page can be created, renamed, duplicated, reordered and deleted with correct slug/navigation behavior.	P0
AC-05	Image/logo/video upload includes progress, completion, error handling and a clear apply action.	P0
AC-06	Animation preset can be previewed, applied to a selected scope and removed/reset.	P0
AC-07	Undo/redo correctly reverses supported changes without corrupting page schema.	P0
AC-08	Draft save indicates actual server persistence; a failure preserves local work and exposes retry.	P0
AC-09	Publishing has a summary and explicit confirmation; failure never falsely reports success.	P0
AC-10	Desktop/tablet/mobile previews expose inherited vs overridden responsive settings.	P0
AC-11	Theme/token changes update linked styles, preserve overrides by default and are undoable.	P1
AC-12	Keyboard users can select controls, operate dialogs, see focus and escape from overlays.	P1
AC-13	Asset deletion shows all known references; unused assets can be removed safely.	P1
AC-14	Version history can restore a prior published version under permitted roles.	P1
AC-15	Empty, loading, saving, failed, unauthorized and conflict states all have explicit UI.	P1

Recommended QA passes

• Visual QA: compare editor preview against published output for representative pages and breakpoints.

• Functional QA: exercise every control, preset, undo/redo, upload, save, publish and rollback flow.

• Responsive QA: test long headings, large logos, multi-column layouts, tall images, hidden elements and navigation on narrow screens.

• Failure QA: disconnect network during upload/save/publish, attempt invalid input, and simulate permission denial/version conflict.

• Accessibility QA: keyboard-only, screen reader labels, contrast, focus order, reduced motion and alt text.

15. Recommended build sequence

Build the hard, foundational editor behavior before adding a giant animation catalog. Otherwise the UI becomes an expensive costume over unreliable editing.

Phase	Scope	Exit condition
Phase 1: Foundation	Map current site sections to editable schema; site/page shell; selection model; basic text/image/button inspector.	Supported elements select correctly and edits persist to draft.
Phase 2: Layout and style	Dimensions, spacing, typography, palette, borders, buttons, global tokens and responsive overrides.	Core design changes are reflected in all supported breakpoints.
Phase 3: Page building	Page manager, section library, layer tree, duplicate/reorder, reusable components.	Admin can build a coherent page without editing source code.
Phase 4: Assets and presets	Asset library, theme presets, component presets and animation library with previews.	Assets and presets can be previewed, applied, replaced, reverted and reused.
Phase 5: Publishing safety	Draft persistence, validations, publish confirmation, version history, rollback, audit trail and role permissions.	No silent data loss; live updates are explicit and recoverable.
Phase 6: Hardening	Accessibility, responsive QA, performance checks, failure states, cross-browser tests and polish.	Acceptance criteria AC-01 through AC-15 pass.

Recommended product decision

Do not expose unrestricted arbitrary CSS/HTML as the main customization mechanism. Keep structured controls as the default, with an optional permission-gated Advanced section for expert overrides. That keeps the editor usable and the generated website maintainable.

16. Copy-ready master implementation prompt

Use this as the primary prompt for an engineering agent or coding model. It is intentionally specific so the implementation does not drift into a generic dashboard.

```
ROLE
Act as a senior product designer, UX architect and full-stack engineer. Build a production-minded no-code visual website builder admin panel for an existing website. The outcome must be a working editor that changes real website content and styling, not a static screenshot and not an unrelated sample website. First inspect the existing repository, identify its framework, routing, page structure, styling system, deployment model and existing data store. Preserve current site functionality and branding unless explicitly instructed to change them. Do not replace the website with a toy template.

CORE PRODUCT
Create a visual editor with a central live page canvas, a left navigation rail and a right contextual properties panel. The admin clicks a visible element in the canvas; the matching properties open on the right; changing a control immediately updates the draft preview. The editor must support pages, sections, logos, images, headlines, body text, buttons, cards, navigation, background styles, spacing, fonts, colors, themes, responsive overrides and animation presets.

WORKSPACE
Top bar: site/page selector, undo, redo, viewport switcher (desktop/tablet/mobile), Preview, save status, Save Draft and Publish. Left rail: Pages, Layers, Assets, Themes, Components, Animations and Site Settings. Center: editable website canvas with selection outlines, insertion markers and sensible zoom/fit behavior. Right inspector: Content, Size & Layout, Typography, Appearance, Media, Animations, Responsive and Advanced. Add a visible breadcrumb for selected element path and a context menu for duplicate, copy styles, reset, hide/lock and delete. Keep the layout responsive; on narrow editor screens use drawers/slide-overs instead of crushing the canvas.

SELECT-EDIT RULES
Every supported element has a stable ID and type. Clicking an element selects the correct nearest target and updates both the canvas outline and inspector. Nested targets must be selectable through the Layers tree. Double-click text enables safe inline editing; Escape cancels and commit actions are clear. Clear selection shows page-level controls and a useful hint. Do not reload the whole page for routine property changes. All supported changes are reversible using Undo/Redo. Never silently discard draft changes.
```

17. Master prompt, continued: controls and systems

Continue the same prompt without weakening or omitting the behavioral requirements.

```
PROPERTY CONTROLS
Content: editable text/rich text, link/action destination, image alt text and button label. Size & Layout:
width, max/min width, height, min/max height, padding/margin per side, gaps, alignment, layout mode,
position, overflow and layer order when valid. Pair sliders with numeric fields, show units and limits,
and provide reset-to-inherited/default. Typography: searchable font families with samples, size, weight,
line height, letter spacing, transform, alignment, text color and decoration. Appearance: palette/token
selector, HEX color picker, gradients, opacity, borders, radius, shadows, overlays, hover/focus/disabled
states. Media: searchable asset library, upload/replace, crop, fit, focal point, position and responsive
image behavior. Provide correct controls only for the selected object type.

PAGES AND REUSABLE CONTENT
Create, rename, duplicate, reorder, delete, preview and publish pages. Edit slug, page title/description,
homepage status and navigation visibility. Offer blank page, template and duplicate-page creation routes.
Provide a layer tree and section library for hero, feature grid, services, testimonials, pricing, gallery,
FAQ, contact, CTA and footer. Support reusable components with explicit shared-versus-detached behavior.
Show all pages affected by global header/footer or shared component edits. Validate page slugs and ask
before destructive actions.

THEMES AND DESIGN TOKENS
Provide editable site-wide tokens for primary/secondary/accent/background/surface/text/muted/border
colors, fonts, spacing, border radius and shadows. Include professionally curated light, dark, minimal,
editorial, bold and luxury theme presets, plus reusable button/section presets. Theme cards need a visual
sample, concise description, Preview and Apply. Applying a theme must allow scope selection (whole site,
current page, selected section/element), show a change summary, preserve local overrides by default, and
be immediately undoable. Clearly distinguish inherited token values from local overrides.

ANIMATION LIBRARY
Provide prebuilt entrance, scroll, hover, text reveal, page/section transition, background/decorative and
micro-interaction presets. Each preset card shows its name, category, trigger, thumbnail/sample and
Preview/Apply actions. Support duration, delay, easing, direction, distance/intensity, trigger threshold
and stagger only when relevant. Applying animation must specify the scope (selected element, selected
section, page or eligible elements). Include replay, remove/reset, reduced-motion fallback and
mobile/performance notes. Respect prefers-reduced-motion. Do not create scroll hijacking, audio autoplay
or high-motion defaults. Animation preview must not save automatically.
```

18. Master prompt, continued: persistence, safety and output

This final prompt section specifies reliability and delivery expectations.

```
RESPONSIVE EDITING AND ACCESSIBILITY
Provide desktop, tablet and mobile viewport presets, plus a custom viewport if practical. Each responsive control indicates whether it inherits or overrides a value. Include reset-to-inherited. Support responsive spacing, typography, width, grid columns, order, visibility and image crop. Detect overflow, clipped text, overlapping content and undersized tap targets where practical. Implement keyboard navigation, visible focus, accessible labels, logical tab order, dialog Escape handling, contrast hints, semantic elements, appropriate alt text and reduced-motion behavior.

DRAFT, SAVE AND PUBLISH
Editing changes a draft, never the live site automatically. Implement undo/redo, draft saving, clear status states (Unsaved, Saving, Saved with time, Save failed), retry, unsaved-navigation confirmation, preview mode and a publish summary with target, changed pages and validation warnings. Require explicit Publish confirmation. On success, show the published version/time and live link. On failure, preserve the draft and accurately state whether live content changed. Maintain prior published versions and a permitted rollback flow. Validate required fields/assets before publishing. Do not claim saved/published until the persistence/deployment operation confirms success.

ASSETS, PERMISSIONS AND SECURITY
Asset library supports search/filter, thumbnails, file metadata, progress, validation, duplicate detection, retry, usage references and safe deletion. Preserve old content if upload/replace fails. Enforce roles on the server: owner/admin, editor, reviewer and viewer. Validate uploaded types and sizes, sanitize rich text, protect publish endpoints, log publish/rollback/delete/role changes, and handle concurrent editing/version conflicts without silent overwrite.

IMPLEMENTATION AND QUALITY
Use the repository's existing compatible stack and patterns; do not assume a framework before inspecting the code. Define a structured versioned page schema with stable IDs, component types, properties, responsive overrides, token references, animation configuration and asset references. Keep assets in the current or appropriate storage layer. Implement only controls that are truly connected to persisted website properties; do not create decorative, nonfunctional controls. Custom-coded areas must either receive an adapter or be labeled unsupported rather than pretending they are editable. Include clear loading, empty, error, offline, unauthorized and conflict states.

DELIVERABLES
Provide the working admin interface, schema/persistence integration, responsive preview behavior, a small but extensible preset catalog, validation, draft/publish workflow, and tests covering selection, editing, page creation, assets, animation application, undo/redo, responsive overrides, save failures, publish failures, permissions and rollback. Before finishing, inspect the live preview at desktop/tablet/mobile sizes, fix layout overflow and verify that refreshing retains saved draft state. Report what is implemented, what is intentionally unsupported, how to run it, and which tests passed. Do not claim a feature works if it is only a visual mockup.
```

Definition of done

An admin can select an element, adjust its real properties, see the preview update immediately, save a draft, review all breakpoints, publish intentionally, and recover from common errors without losing work. Every visible button has a real action, a disabled state when unavailable, and feedback that truthfully reflects the result.