

Text file to create

We need to set red words

The blue part can be omitted

■ Neural network setting 「NET.txt」

CrossEntropy BATCH_SIZE 50 EPOCH 10 LAMBDA 0.000000 EPS 0.001000 OPTIMIZER Adam VALIDATION_NUM 100 ERROR_PLOT_STEP 10 TEST_SAMPLE 10	Square or CrossEntropy Mini batch size Epoch number Load decay (weight decay) Learning rate Optimizer Number of Validation data Graph data output interval(gnuplot format) Number of test data samples ※optimizer solver is listed on the final page
---	---

~~* Leave the setting of LAMBDA to 0 (there is a problem)~~

■ Layer setting 「LAYER.txt」

LAYER 4 1 [28 , 28] <i>Each layer setting</i> <i>See layer description</i> END	Number of layers Input feature map from left, input unit width, input unit height ※ Width and height are numbers when input units are regarded as a matrix
--	--

■ Describing layers

Fully Connected layer

LAYER_TYPE_FullyConnected/ layerName 1 [7 , 7] -> [1 , 10] Softmax	From the left, input of feature map, output unit width, output unit height, start function ※ The width and height are the numbers when looking at the input device as a matrix ※ Activation function described on final page
--	--

Convolutional layer

LAYER_TYPE_Convolutional/ layerName 20 [28 , 28] -> (5 , 5) -> [28 , 28] st 1 ReLU	From the left, input feature map, convolution width, convolution height, stride, activation function
---	--

maxPooling layer

LAYER_TYPE_maxPooling/ layerName 20 [28 , 28] -> (4 , 4) -> [7 , 7] st 4 Identity	From the left, input feature map, convolution width, convolution height, stride, activation function
--	--


Dropout layer

LAYER_TYPE_Dropout/ layerName 0.5 Identity	From the left, 0.5 is the dropout rate, activation function
--	---

■ Activation function can use


Identity

$$h(x) = x$$

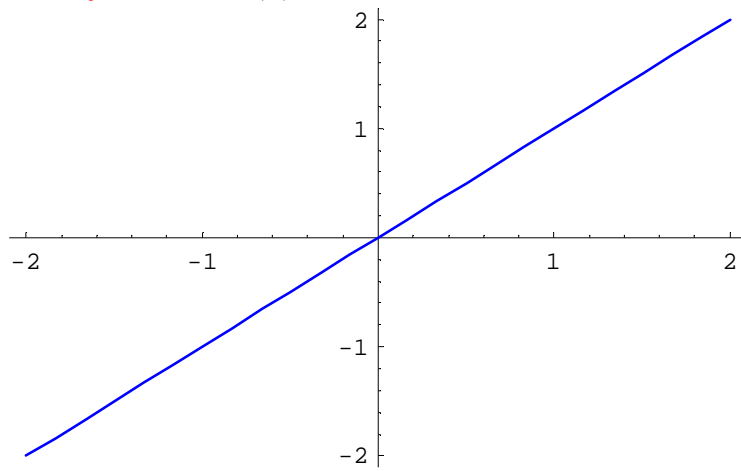


ReLU

$$h(x) = \max(0, x)$$

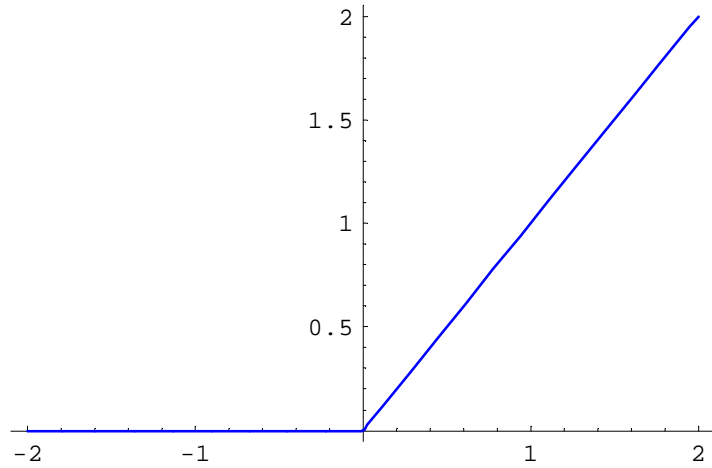


Sigmoid

$$h(x) = \frac{1}{1 + e^{-x}} = \frac{\tanh(x/2) + 1}{2}$$

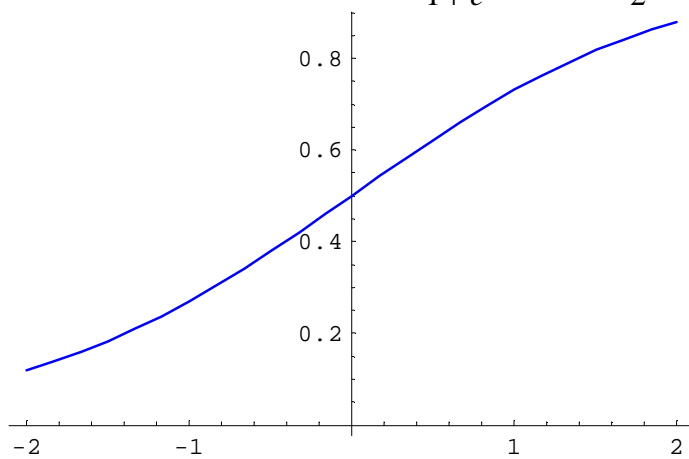


Tanh

$$h(x) = \tanh(x)$$

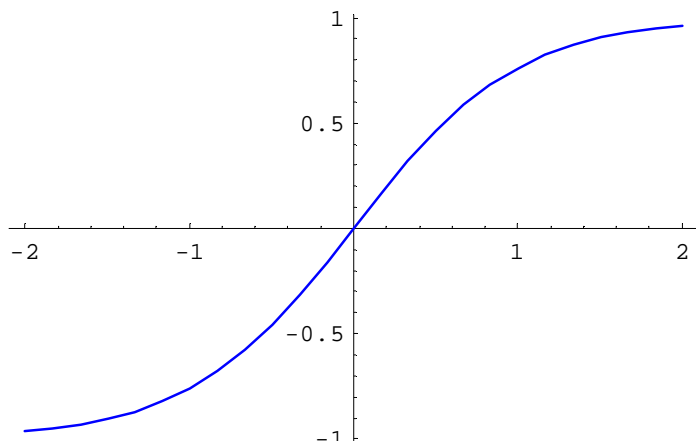


Abs

$$h(x) = |x|$$

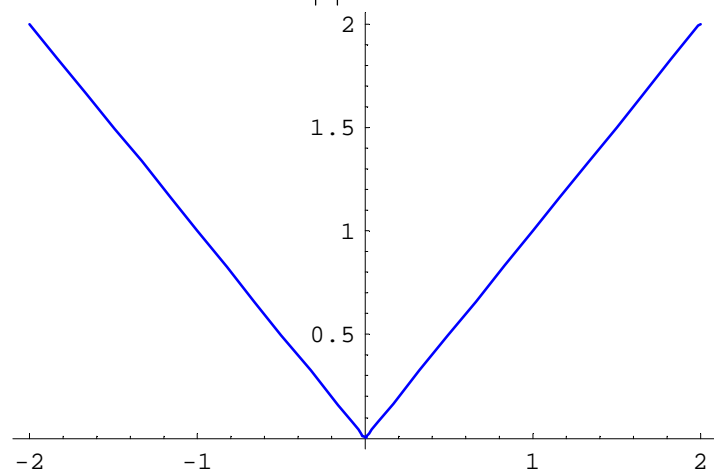


Softsign

$$h(x) = \frac{x}{1 + |x|}$$

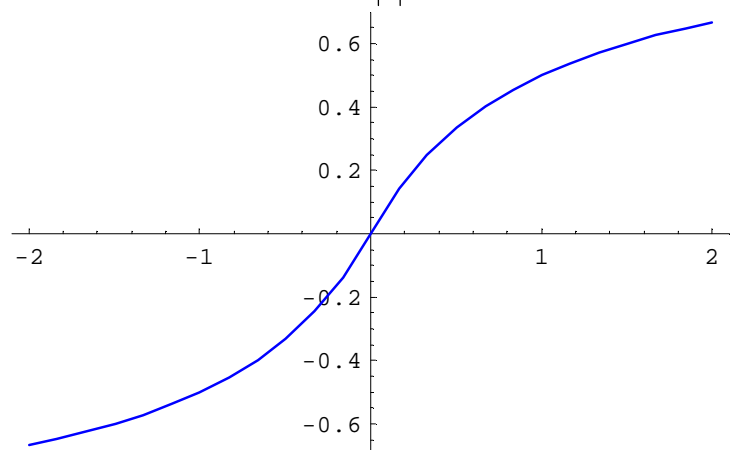


Softplus

$$h(x) = \log(1 + e^x)$$

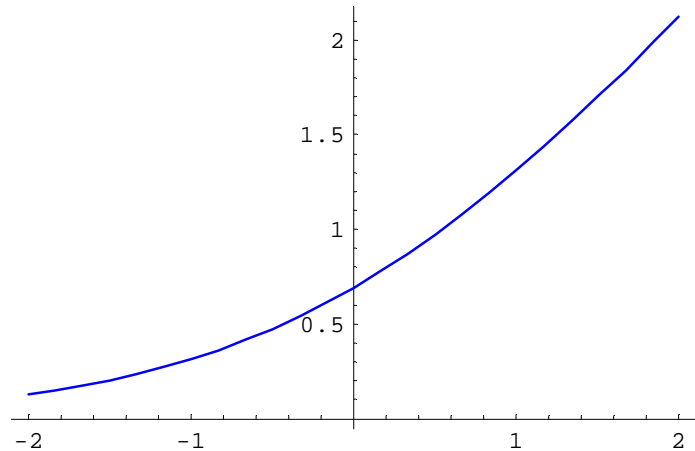


LReLU

$$h(x) = \max(0.01x, x)$$

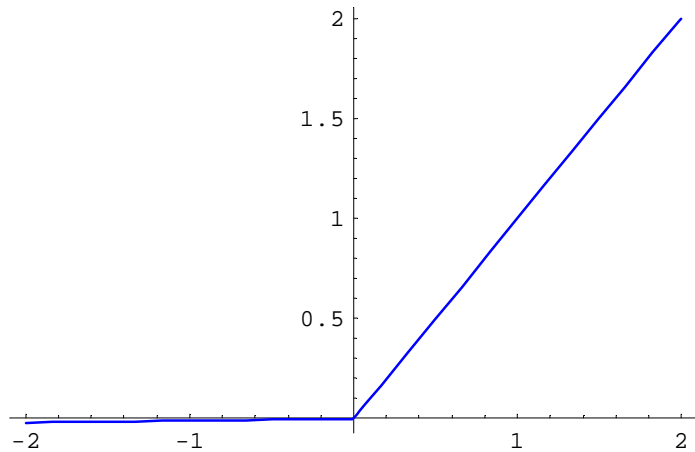

ELU

$$h(x) = \begin{cases} e^x - 1 & x < 0 \\ x & x \geq 0 \end{cases}$$

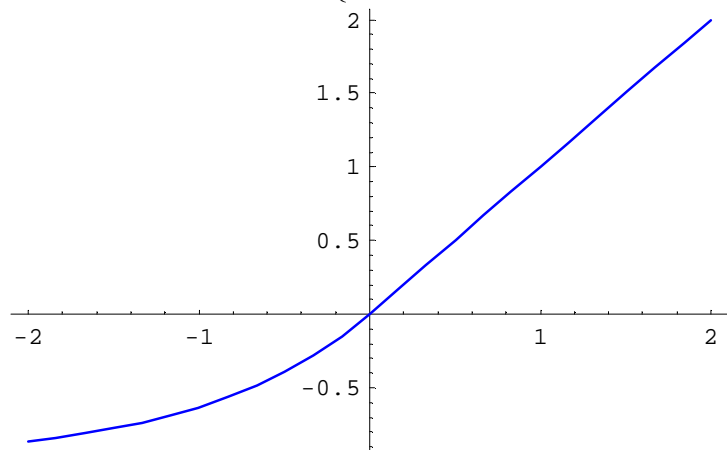

■Optimizer solver

Adam

$$\begin{aligned}m_{t+1} &= \beta_1 m_t + (1 - \beta_1) \nabla E(\mathbf{w}^t) \\v_{t+1} &= \beta_2 v_t + (1 - \beta_2) \nabla E(\mathbf{w}^t)^2 \\ \hat{m} &= \frac{m_{t+1}}{1 - \beta_1^t} \\ \hat{v} &= \frac{v_{t+1}}{1 - \beta_2^t} \\ \mathbf{w}^{t+1} &= \mathbf{w}^t - \alpha \frac{\hat{m}}{\sqrt{\hat{v}} + \epsilon}\end{aligned}$$

$$\alpha=0.001, \beta_1=0.9, \beta_2=0.999, \epsilon=10E-8$$

AdaGrad

$$\begin{aligned}h_0 &= \epsilon \\h_t &= h_{t-1} + \nabla E(\mathbf{w}^t)^2 \\ \eta_t &= \frac{\eta_0}{\sqrt{h_t}} \\ \mathbf{w}^{t+1} &= \mathbf{w}^t - \eta_t \nabla E(\mathbf{w}^t)\end{aligned}$$

$$\epsilon=10E-8, \eta_0=0.001$$

RMSprop

$$\begin{aligned}h_t &= \alpha h_{t-1} + (1 - \alpha) \nabla E(\mathbf{w}^t)^2 \\ \eta_t &= \frac{\eta_0}{\sqrt{h_t} + \epsilon} \\ \mathbf{w}^{t+1} &= \mathbf{w}^t - \eta_t \nabla E(\mathbf{w}^t)\end{aligned}$$

$$\alpha=0.99, \epsilon=10E-8, \eta_0=0.01$$

AdaDelta

$$\begin{aligned}h_t &= \rho h_{t-1} + (1 - \rho) \nabla E(\mathbf{w}^t)^2 \\ v_t &= \frac{\sqrt{s_t + \epsilon}}{\sqrt{h_t + \epsilon}} \nabla E(\mathbf{w}^t) \\ s_{t+1} &= \rho s_t + (1 - \rho) v_t^2 \\ \mathbf{w}^{t+1} &= \mathbf{w}^t - v_t\end{aligned}$$

$$\rho=0.95, \epsilon=10E-6$$

SGD

$$\mathbf{w}^{t+1} \leftarrow \mathbf{w}^t - \eta \frac{\partial E(\mathbf{w}^t)}{\partial \mathbf{w}^t}$$

$$\eta=0.01$$