

Image processing & Machine Vision

Assignment Report

Assignment - I

MPSM Pathirana

D/ENG/22/0061/EE

Department of Electrical, Electronic and Telecommunication Engineering

Content

1. Question 01
2. Question 02
3. Question 03
4. Question 04
5. Question 05
6. Question 06
7. Question 07
8. Question 08
9. GitHub link

Question 01

```
import cv2 as cv
import numpy as np
import matplotlib.pyplot as plt

c = np.array([(220, 175), (220, 210), (255, 240)])

t1 = np.linspace(0, c[0, 1], c[0, 0]+1).astype('uint8')
print(len(t1))
t2 = np.linspace(c[0, 1] + 1, c[1, 0]-c[0, 0], c[1, 0]-c[0, 0]).astype('uint8')
print(len(t2))
t3 = np.linspace(c[1, 1] + 1, 240, 255 - c[1, 0]).astype('uint8')
print(len(t3))



transform = np.concatenate((t1, t2, t3), axis=0).astype('uint8')
print(len(transform))

fig, ax = plt.subplots()
ax.plot(transform)
ax.set_xlabel(r'Input intensity')
ax.set_ylabel('Output intensity')
ax.set_xlim(0, 255)
ax.set_ylim(0, 255)
ax.set_aspect('equal')
plt.show()

img_orig = cv.imread('margot_golden_gray.jpg', cv.IMREAD_GRAYSCALE)
image_transformed = cv.LUT(img_orig, transform)

fig, ax = plt.subplots(1, 2, figsize=(10, 20))
ax[0].imshow(img_orig, cmap="gray")
ax[0].set_title("Original")
ax[1].imshow(image_transformed, cmap="gray")
ax[1].set_title("Transformed")
plt.show()
```

221
0
35
256

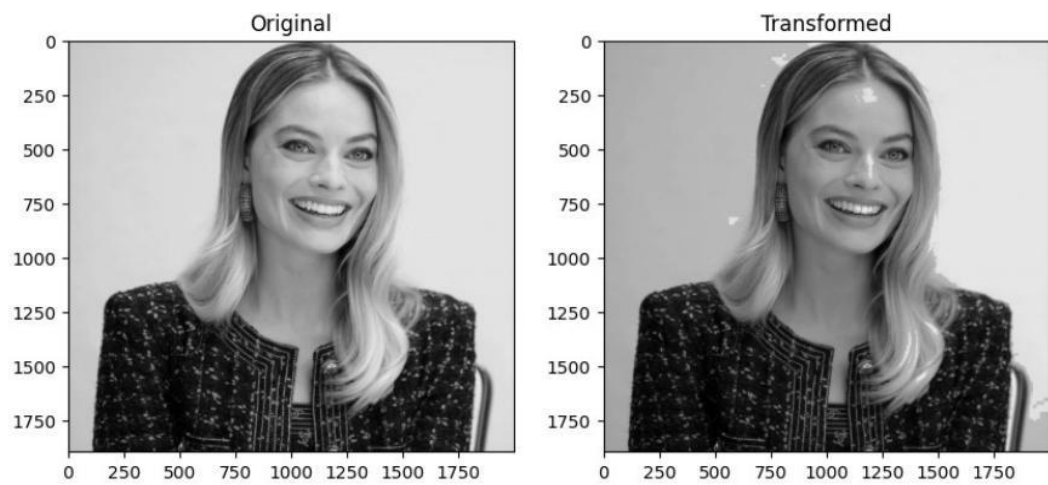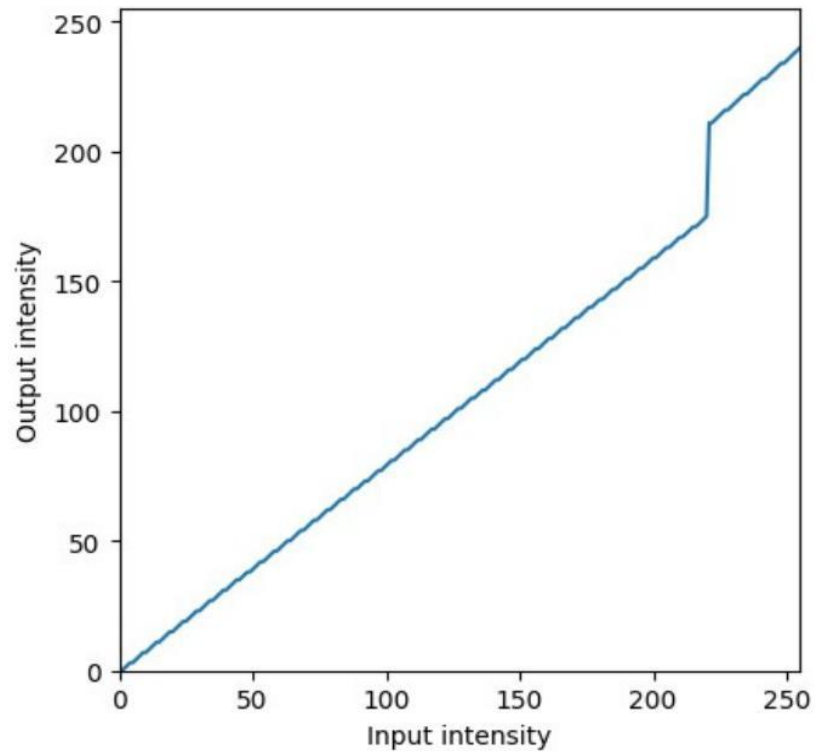

Question 02

a.

```
import cv2 as cv
import numpy as np
import matplotlib.pyplot as plt

img_orig = cv.imread('highlights_and_shadows.jpg', cv.IMREAD_COLOR)


gamma = .5

table = np.array(
    [(i/255.0)**(gamma)*255.0 for i in np.arange(0,
256)]).astype('uint8')

img_gamma = cv.LUT(img_orig, table)
img_orig = cv.cvtColor(img_orig, cv.COLOR_BGR2RGB)
img_gamma = cv.cvtColor(img_gamma, cv.COLOR_BGR2RGB)

f, axarr = plt.subplots(1, 2)
axarr[0].imshow(img_orig)
axarr[0].set_title('Original')
axarr[1].imshow(img_gamma)
axarr[1].set_title('Gamma Corrected')

Text(0.5, 1.0, 'Gamma Corrected')
```

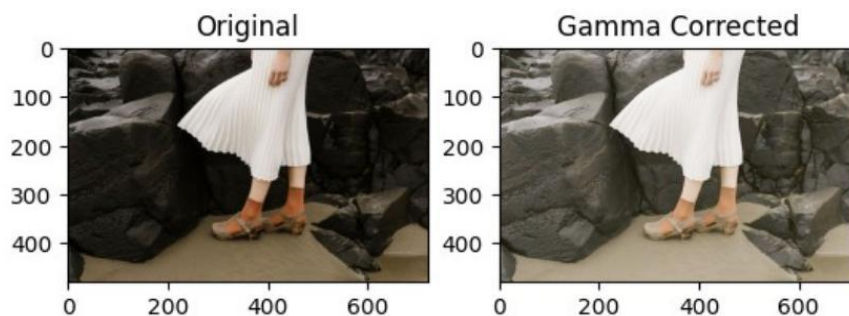

```
import cv2 as cv
import numpy as np
import matplotlib.pyplot as plt

img_orig = cv.imread('highlights_and_shadows.jpg', cv.IMREAD_COLOR)

gamma = .5

table = np.array(
    [(i/255.0)**(gamma)*255.0 for i in np.arange(0,
256)]).astype('uint8')

img_gamma = cv.LUT(img_orig, table)
```


```

img_orig = cv.cvtColor(img_orig, cv.COLOR_BGR2RGB)
img_gamma = cv.cvtColor(img_gamma, cv.COLOR_BGR2RGB)

fig, axarr = plt.subplots()
axarr.plot(table)
axarr.set_xlim(0, 255)
axarr.set_ylim(0, 255)
axarr.set_aspect('equal')

plt.suptitle("Gamma correction Value Curve")
plt.show()

```

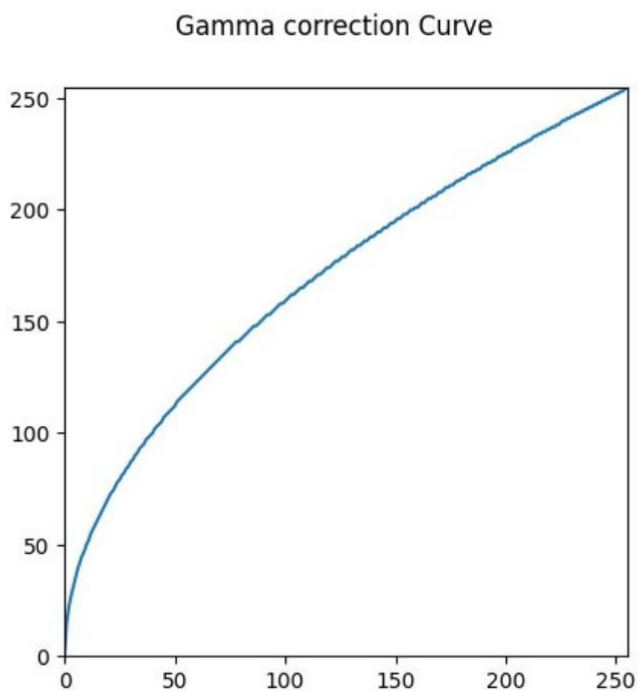

b.

```

import cv2 as cv
import numpy as np
import matplotlib.pyplot as plt

img = cv.imread('highlights_and_shadows.jpg', cv.IMREAD_COLOR)

gamma = .5

table = np.array(
    [(i/255.0)**(gamma)*255.0 for i in np.arange(0,
256)]).astype('uint8')

```


```

img_gamma = cv.LUT(img_orig, table)
img_orig = cv.cvtColor(img_orig, cv.COLOR_BGR2RGB)
img_gamma = cv.cvtColor(img_gamma, cv.COLOR_BGR2RGB)

f, axarr = plt.subplots(1, 2)
color = ('b', 'g', 'r')

for i, c in enumerate(color):
    hist_orig = cv.calcHist([img_orig], [i], None, [256], [0, 256])
    axarr[0].plot(hist_orig, color=c)
    axarr[0].set_title('Original Histogram')
    hist_gamma = cv.calcHist([img_gamma], [i], None, [256], [0, 256])
    axarr[1].plot(hist_gamma, color=c)
    axarr[1].set_title('Gamma Corrected Histogram')

```

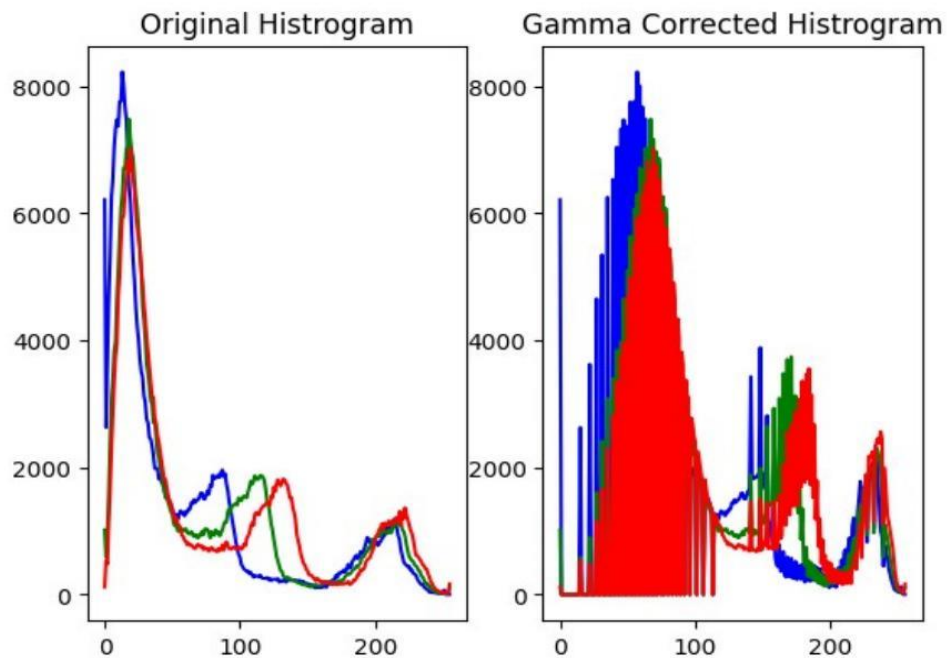

Question 03

a.

```
import cv as cv
import numpy as np
import matplotlib.pyplot as plt

def f(x, a, sigma):
    return np.minimum(x + a * 128 * np.exp(-(x - 128) ** 2 / (2 *
sigma ** 2)), 255)

image = cv.imread("spider.png")
hsv_image = cv.cvtColor(image, cv.COLOR_BGR2HSV)

saturation_plane = hsv_image[:, :, 1]

a = 0.5
sigma = 70

modified_saturation = f(saturation_plane, a, sigma)

hsv_image[:, :, 1] = modified_saturation.astype(np.uint8)
modified_image = cv.cvtColor(hsv_image, cv.COLOR_HSV2BGR)
hue_plane, saturation_plane, value_plane =
cv.split(cv.cvtColor(modified_image, cv.COLOR_BGR2HSV))

fig, ax = plt.subplots(1, 3, figsize=(10,5), sharey = True)

ax[0].imshow(hue_plane, cmap='gray')
ax[0].set_title('Hue Plane')
ax[0].axis('off')

ax[1].imshow(saturation_plane, cmap='gray')
ax[1].set_title('Saturation Plane')
ax[1].axis('off')

ax[2].imshow(value_plane, cmap='gray')
ax[2].set_title('Value Plane')
ax[2].axis('off')

(-0.5, 779.5, 437.5, -0.5)
```



b.

```
import cv as cv
import numpy as np
```



```

import matplotlib.pyplot as plt

def f(x, a, sigma):
    return np.minimum(x + a * 128 * np.exp(-(x - 128) ** 2 / (2 *
sigma ** 2)), 255)

image = cv.imread("spider.png")

hsv_image = cv.cvtColor(image, cv.COLOR_BGR2HSV)
saturation_plane = hsv_image[:, :, 1]

a = 0.5
sigma = 70

modified_saturation = f(saturation_plane, a, sigma)

hsv_image[:, :, 1] = modified_saturation.astype(np.uint8)
modified_image = cv.cvtColor(hsv_image, cv.COLOR_HSV2BGR)

fig, ax = plt.subplots(1, 2, figsize=(10, 20))
ax[0].imshow(cv.cvtColor(image, cv.COLOR_BGR2RGB))
ax[0].set_title('Original Image')
ax[0].axis('off')
ax[1].imshow(cv.cvtColor(modified_image, cv.COLOR_BGR2RGB))
ax[1].set_title('Modified Image')
ax[1].axis('off')
plt.show()

```

Original Image



Modified Image



C.

```

import cv as cv
import numpy as np
import matplotlib.pyplot as plt

def f(x, a, sigma):
    return np.minimum(x + a * 128 * np.exp(-(x - 128) ** 2 / (2 *
sigma ** 2)), 255)

image = cv.imread("spider.png")

```

```

hsv_image[:, :, 1] = modified_saturation.astype(np.uint8)
modified_image = cv.merge([hue_plane, hsv_image[:, :, 1],
value_plane])
final_modified_image = cv.cvtColor(modified_image, cv.COLOR_HSV2BGR)

fig, ax = plt.subplots(1, 2, figsize=(10, 20))
ax[0].imshow(cv.cvtColor(image, cv.COLOR_BGR2RGB))
ax[0].set_title('Original Image')
ax[0].axis('off')
ax[1].imshow(cv.cvtColor(final_modified_image, cv.COLOR_BGR2RGB))
ax[1].set_title(f'Final Modified Image (a={a})')
ax[1].axis('off')
plt.show()

```



d.

```

import cv2 as cv
import numpy as np
import matplotlib.pyplot as plt

def f(x, a, sigma):
    return np.minimum(x + a * 128 * np.exp(-(x - 128) ** 2 / (2 *
sigma ** 2)), 255)

original_image = cv.imread("spider.png")

hsv_image = cv.cvtColor(original_image, cv.COLOR_BGR2HSV)

saturation_plane = hsv_image[:, :, 1]

vibrance_factor = 1.5
vibrance_enhanced_image = original_image.copy()
vibrance_enhanced_image[:, :, 1] = np.clip(vibrance_factor *
saturation_plane, 0, 255)

a = 0.5
sigma = 70

modified_saturation = f(saturation_plane, a, sigma)
hsv_image[:, :, 1] = modified_saturation.astype(np.uint8)

```

```
intensity_transformed_image = cv.cvtColor(hsv_image, cv.COLOR_HSV2BGR)

fig, ax = plt.subplots(1, 3, figsize=(10,5), sharey = True)

ax[0].imshow(cv.cvtColor(original_image, cv.COLOR_BGR2RGB))
ax[0].set_title('Original Image')
ax[0].axis('off')

ax[1].imshow(cv.cvtColor(vibrance_enhanced_image, cv.COLOR_BGR2RGB))
ax[1].set_title('Vibrance Enhanced')
ax[1].axis('off')

ax[2].imshow(cv.cvtColor(intensity_transformed_image,
cv.COLOR_BGR2RGB)),
ax[2].set_title('Intensity Transformed')
ax[2].axis('off')
plt.show()
```

Original Image



Vibrance Enhanced



Intensity Transformed



Question 04

```
import cv2 as cv
import matplotlib.pyplot as plt
import numpy as np


#not changed
im = cv.imread('shells.tif', cv.IMREAD_GRAYSCALE)
assert im is not None

plt.figure(figsize = [10, 5])
plt.subplot(1, 2, 1)
plt.gca().set_title('Original Histogram')
h = np.zeros(256)
h = [np.sum(im==i) for i in range (256)]
plt.bar(range(256), h)


plt.subplot(1, 2, 2)
plt.gca().set_title('Equalized Histogram')
eh = cv.equalizeHist(im)
plt.hist(eh)
plt.show()

fig, ax= plt.subplots(1,2, figsize=(10,20))
ax[0].imshow(im, cmap="gray")
ax[0].set_title('Original')
ax[0].axis('off')

ax[1].imshow(eh, cmap="gray")
ax[1].set_title('Transformed')
ax[1].axis('off')
plt.show()
```

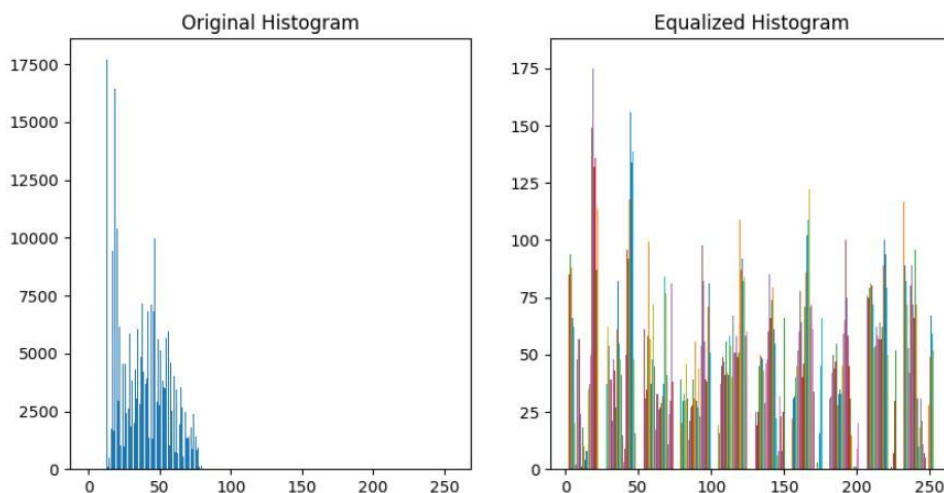

Original

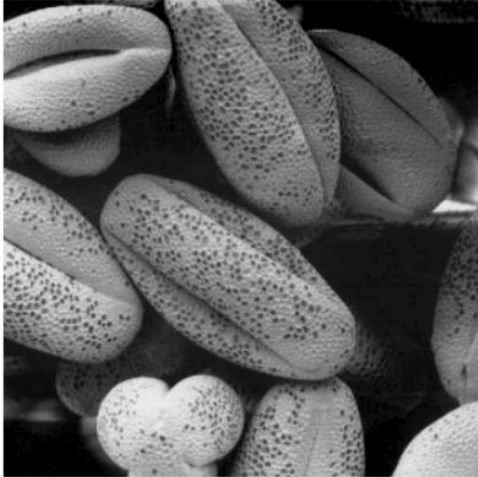

Transformed




Question 05

- a. `import cv2 as cv`
`import matplotlib.pyplot as plt`
`import numpy as np`

```
image = cv.imread("rice_gaussian_noise.png")
```

```
dst = cv.fastNlMeansDenoisingColored(image, None, 20, 20, 7, 15)
```

```
fig, ax = plt.subplots(1, 2, figsize=(10, 20))  
ax[0].imshow(image, cmap="gray")  
ax[0].set_title("Original")  
ax[1].imshow(dst, cmap="gray")  
ax[1].set_title("Noice Removed")  
plt.show()
```

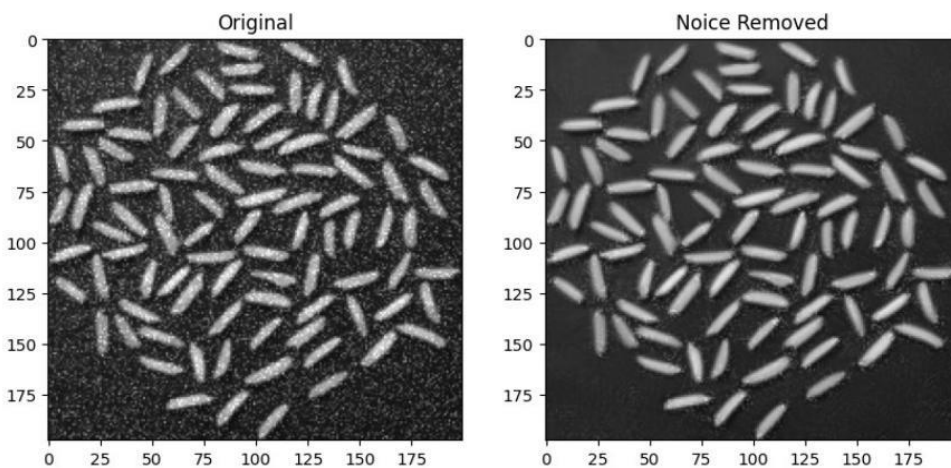


- b. `import cv2 as cv`
`import matplotlib.pyplot as plt`
`import numpy as np`

```
image = cv.imread("rice_salt_pepper_noise.png")
```

```
dst = cv.fastNlMeansDenoisingColored(image, None, 20, 20, 7, 15)
```

```
fig, ax = plt.subplots(1, 2, figsize=(10, 20))  
ax[0].imshow(image, cmap="gray")  
ax[0].set_title("Original")  
ax[1].imshow(dst, cmap="gray")  
ax[1].set_title("Noice Removed")  
plt.show()
```

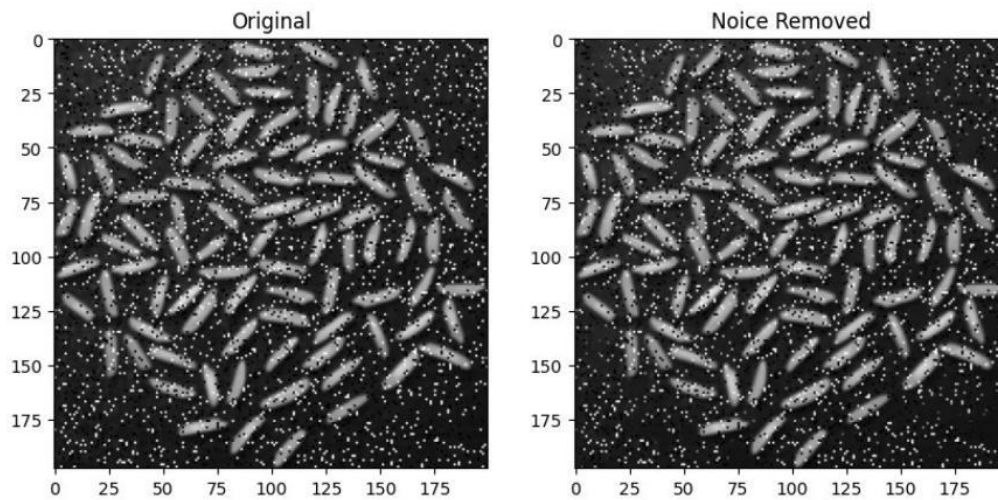


```
c. import cv2 as cv
import matplotlib.pyplot as plt

# Read the grayscale image
image = cv.imread("rice_salt_pepper_noise.png", cv.IMREAD_GRAYSCALE)

# Apply Otsu's thresholding
_, binary_image = cv.threshold(image, 0, 255, cv.THRESH_BINARY +
cv.THRESH_OTSU)

# Display the original and segmented images
plt.subplot(121), plt.imshow(image, cmap='gray'), plt.title('Original
Image')
plt.subplot(122), plt.imshow(binary_image, cmap='gray'),
plt.title('Segmented Image (Otsu)')
plt.show()
```

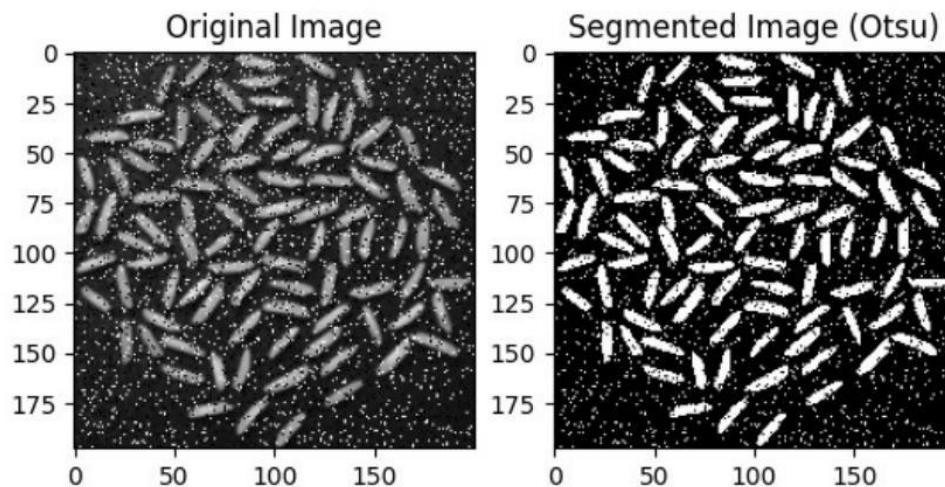

d.

```

import cv2 as cv
import matplotlib.pyplot as plt
import numpy as np


# Read the binary image
image = cv.imread("rice_salt_pepper_noise.png", cv.IMREAD_GRAYSCALE)

# Apply morphological operations to remove small objects (opening)
kernel_open = np.ones((5, 5), np.uint8)
image_opened = cv.morphologyEx(image, cv.MORPH_OPEN, kernel_open,
iterations=2)

# Apply morphological operations to fill holes (closing)
kernel_close = np.ones((5, 5), np.uint8)
image_closed = cv.morphologyEx(image_opened, cv.MORPH_CLOSE,
kernel_close, iterations=10)

# Display the original, opened, and closed images
plt.subplot(131), plt.imshow(image, cmap='gray'), plt.title('Original
Image')
plt.subplot(132), plt.imshow(image_opened, cmap='gray'),
plt.title('Opened Image')
plt.subplot(133), plt.imshow(image_closed, cmap='gray'),
plt.title('Closed Image')
plt.show()

```

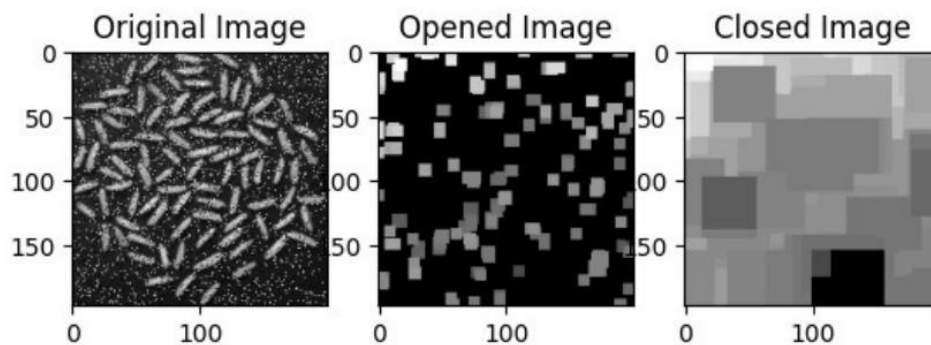

e.

```

import cv2 as cv
import numpy as np
import matplotlib.pyplot as plt

im = cv.imread('rice_gaussian_noise.png', cv.IMREAD_GRAYSCALE)

denoised_im = cv.fastNlMeansDenoising(im, None, h=28,
searchWindowSize=10)

_, segmented_image = cv.threshold(denoised_im, 0, 255,
cv.THRESH_BINARY + cv.THRESH_OTSU)

```



```
kernel = cv.getStructuringElement(cv.MORPH_ELLIPSE, (5, 5))  
closed_image = cv.morphologyEx(segmented_image, cv.MORPH_CLOSE,  
kernel)  
opened_image = cv.morphologyEx(closed_image, cv.MORPH_OPEN, kernel)  
num_labels, labels = cv.connectedComponents(opened_image)  
num_rice_grains = num_labels - 1  
print("Number of rice grains:", num_rice_grains)  
Number of rice grains: 68
```

Question 06

```
a. import cv as cv
import numpy as np
from matplotlib import pyplot as plt

img = cv.imread('einstein.png', cv.IMREAD_GRAYSCALE)

kernal = np.ones((11,11),np.float32)/121
imgc =cv. filter2D(img,-1,kernal)

sobel_kernel_x = np.array([[ -1,  0,  1], [ -2,  0,  2], [ -1,  0,  1]],
dtype=np.float32)
sobel_kernel_y = np.array([[ -1, -2, -1], [ 0,  0,  0], [ 1,  2,  1]],
dtype=np.float32)


sobel_x = cv.filter2D(img, cv.CV_64F, sobel_kernel_x)
sobel_y = cv.filter2D(img, cv.CV_64F, sobel_kernel_y)

fig,axes = plt.subplots(1,3, sharex='all', sharey='all',
figsize=(18,18))
axes[0].imshow(img, cmap='gray')
axes[0].set_title('Original')
axes[0].set_xticks([]), axes[0].set_yticks([])

axes[1].imshow(sobel_x, cmap='gray')
axes[1].set_title('Sobrl Vertical')
axes[1].set_xticks([]), axes[1].set_yticks([])

axes[2].imshow(sobel_y, cmap='gray')
axes[2].set_title('Sobrl Horizontal')
axes[2].set_xticks([]), axes[0].set_yticks([])

([], [])
```

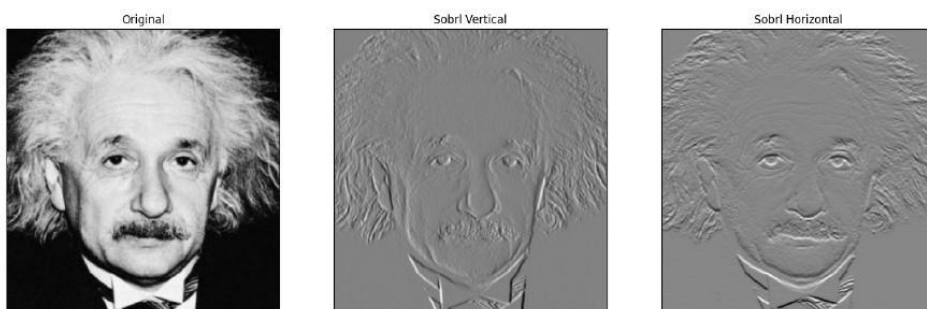

```
b. import cv2 as cv
import numpy as np
```

```

# Load an image from file
image = cv.imread('einstein.png', cv.IMREAD_GRAYSCALE)

# Check if the image is loaded successfully
if image is None:
    print("Error: Unable to load the image.")
    exit()

# Define the Sobel filter kernels
sobel_kernel_x = np.array([[ -1,  0,  1], [-2,  0,  2], [-1,  0,  1]],
dtype=np.float32)
sobel_kernel_y = np.array([[ -1, -2, -1], [ 0,  0,  0], [ 1,  2,  1]],
dtype=np.float32)

# Apply the Sobel filters using filter2D
sobel_x = cv.filter2D(image, cv.CV_64F, sobel_kernel_x)
sobel_y = cv.filter2D(image, cv.CV_64F, sobel_kernel_y)

# Convert the results to uint8 for visualization
sobel_x = cv.convertScaleAbs(sobel_x)
sobel_y = cv.convertScaleAbs(sobel_y)


fig, axes = plt.subplots(1, 3, sharex='all', sharey='all',
figsize=(18, 18))
axes[0].imshow(image, cmap='gray')
axes[0].set_title('Original')
axes[0].set_xticks([]), axes[0].set_yticks([])

axes[1].imshow(sobel_x, cmap='gray')
axes[1].set_title('Sobel Vertical')
axes[1].set_xticks([]), axes[1].set_yticks([])

axes[2].imshow(sobel_y, cmap='gray')
axes[2].set_title('Sobel Horizontal')
axes[2].set_xticks([]), axes[0].set_yticks([])

([], [])

```

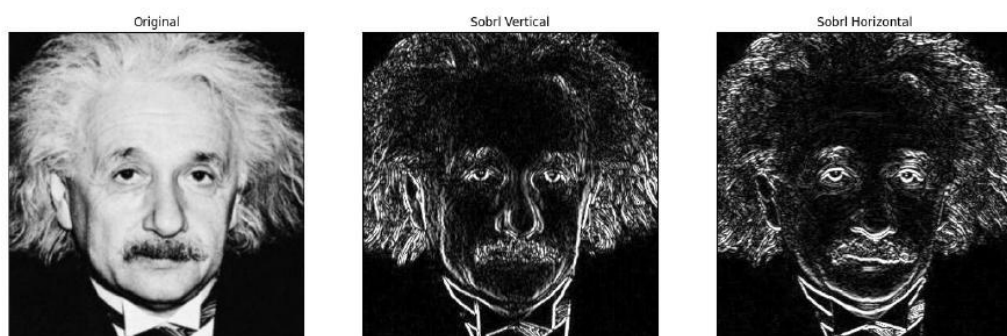

```

c. import cv2 as cv
import numpy as np
import matplotlib.pyplot as plt

def sobel_filter(image):

    sobel_kernel_x = np.array([[ -1,  0,  1], [ -2,  0,  2], [ -1,  0,  1]])
    sobel_kernel_y = np.array([[ -1, -2, -1], [ 0,  0,  0], [ 1,  2,  1]])

    sobel_x = convolve2d(image, sobel_kernel_x)
    sobel_y = convolve2d(image, sobel_kernel_y)

    gradient_magnitude = np.sqrt(sobel_x**2 + sobel_y**2)
    sobel_x = np.abs(sobel_x).astype(np.uint8)
    sobel_y = np.abs(sobel_y).astype(np.uint8)
    gradient_magnitude = gradient_magnitude.astype(np.uint8)

    return sobel_x, sobel_y, gradient_magnitude

def convolve2d(image, kernel):
    height, width = image.shape
    k_height, k_width = kernel.shape

    pad_height = k_height // 2
    pad_width = k_width // 2
    padded_image = np.pad(image, ((pad_height, pad_height),
    (pad_width, pad_width)), mode='edge')

    result = np.zeros_like(image)
    for i in range(height):
        for j in range(width):
            result[i, j] = np.sum(padded_image[i:i+k_height,
    j:j+k_width] * kernel)

    return result

image = cv.imread('einstein.png', cv.IMREAD_GRAYSCALE)

if len(image.shape) > 2:
    image = cv.cvtColor(image, cv.COLOR_BGR2GRAY)

sobel_x, sobel_y, gradient_magnitude = sobel_filter(image)



fig, axes = plt.subplots(1, 3, sharex='all', sharey='all',
figsize=(18, 18))
axes[0].imshow(image, cmap='gray')
axes[0].set_title('Original')
axes[0].axis('off')

```

```
axes[1].imshow(sobel_x, cmap='gray')  
axes[1].set_title('Sobel Vertical')  
axes[1].axis('off')
```

```
axes[2].imshow(sobel_y, cmap='gray')  
axes[2].set_title('Sobel Horizontal')  
axes[2].axis('off')
```

```
(-0.5, 363.5, 379.5, -0.5)
```



Question 07

```
import cv2 as cv
import numpy as np
import matplotlib.pyplot as plt

img = cv.imread('im01small.png')

scale = 4
rows = int(img.shape[0] * scale)
cols = int(img.shape[1] * scale)

zoomed = np.zeros((rows, cols, img.shape[2]), dtype=np.uint8)
for i in range(0, rows):
    for j in range(0, cols):
        zoomed[i, j] = img[int(i/scale), int(j/scale)]

fig, ax = plt.subplots(1, 2)
ax[0].imshow(cv.cvtColor(img, cv.COLOR_BGR2RGB))
ax[0].set_title('Original')
ax[1].imshow(cv.cvtColor(zoomed, cv.COLOR_BGR2RGB))
ax[1].set_title('Zoomed')

Text(0.5, 1.0, 'Zoomed')
```



```
import cv2 as cv
import numpy as np
import matplotlib.pyplot as plt


img = cv.imread('im02small.png')

scale = 2
rows = int(img.shape[0] * scale)
cols = int(img.shape[1] * scale)

zoomed = np.zeros((rows, cols, img.shape[2]), dtype=np.uint8)
for i in range(0, rows):
    for j in range(0, cols):
        zoomed[i, j] = img[int(i/scale), int(j/scale)]

fig, ax = plt.subplots(1, 2)
ax[0].imshow(cv.cvtColor(img, cv.COLOR_BGR2RGB))
ax[0].set_title('Original')
ax[1].imshow(cv.cvtColor(zoomed, cv.COLOR_BGR2RGB))
ax[1].set_title('Zoomed')

Text(0.5, 1.0, 'Zoomed')
```

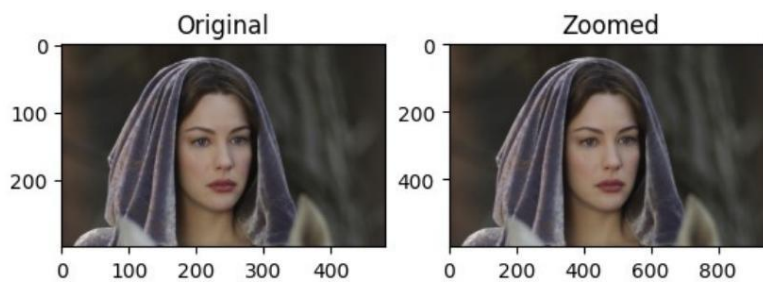

```
import cv2 as cv
import numpy as np
import matplotlib.pyplot as plt

img = cv.imread('im03small.png')

scale = 3
rows = int(img.shape[0] * scale)
cols = int(img.shape[1] * scale)

zoomed = np.zeros((rows, cols, img.shape[2]), dtype=np.uint8)
for i in range(0, rows):
    for j in range(0, cols):
        zoomed[i, j] = img[int(i/scale), int(j/scale)]

fig, ax = plt.subplots(1, 2)
ax[0].imshow(cv.cvtColor(img, cv.COLOR_BGR2RGB))
ax[0].set_title('Original')
ax[1].imshow(cv.cvtColor(zoomed, cv.COLOR_BGR2RGB))
ax[1].set_title('Zoomed')
Text(0.5, 1.0, 'Zoomed')
```



Question 08

a.

```
import cv2 as cv
import numpy as np
import matplotlib.pyplot as plt

image = cv.imread('daisy.jpg')

mask = np.zeros(image.shape[:2], np.uint8)
background = np.zeros((1,65), np.float64)

rect = (20, 20, 550, 550)

cv.grabCut(image, mask, rect, None, None, 5, cv.GC_INIT_WITH_RECT)

mask2 = np.where((mask == cv.GC_FGD) | (mask == cv.GC_PR_FGD), 1,
0).astype('uint8')

foreground = cv.bitwise_and(image, image, mask=mask2)
background = cv.bitwise_and(image, image, mask=1 - mask2)

segmentation_mask = np.where(mask2[:, :, np.newaxis] == 1, 255,
0).astype('uint8')

fig, ax = plt.subplots(1, 4, figsize=(10,10), sharey = True)

ax[0].imshow(image[:, :, ::-1]),
ax[0].set_title('Original Image')
ax[0].axis('off')

ax[1].imshow(mask)
ax[1].set_title('Segmentation Mask')
ax[1].axis('off')

ax[2].imshow(background[:, :, ::-1]),
ax[2].set_title('Background Image')
ax[2].axis('off')

ax[3].imshow(foreground[:, :, ::-1])
ax[3].set_title('Foreground Image')
ax[3].axis('off')

(-0.5, 560.5, 840.5, -0.5)
```




b. `import cv2 as cv`
`import numpy as np`
`import matplotlib.pyplot as plt`

`image = cv.imread('daisy.jpg')`

`mask = np.zeros(image.shape[:2], np.uint8)`
`background = np.zeros((1,65), np.float64)`

`rect = (20, 20, 550, 550)`

`cv.grabCut(image, mask, rect, None, None, 5, cv.GC_INIT_WITH_RECT)`

`mask2 = np.where((mask == cv.GC_FGD) | (mask == cv.GC_PR_FGD), 1, 0).astype('uint8')`

`foreground = cv.bitwise_and(image, image, mask=mask2)`
`background = cv.bitwise_and(image, image, mask=1 - mask2)`
`segmentation_mask = np.where(mask2[:, :, np.newaxis] == 1, 255, 0).astype('uint8')`

`blurred_bg = cv.GaussianBlur(background, (31, 31), 0)`
`enhanced_img = cv.addWeighted(foreground, 1, blurred_bg, 0.8, 0)`

`fig, ax = plt.subplots(1, 2, figsize=(12,6), sharey = True)`

`ax[0].imshow(image[:, :, ::-1])`
`ax[0].set_title('Original Image')`
`ax[0].axis('off')`

`ax[1].imshow(enhanced_img[:, :, ::-1])`
`ax[1].set_title('Enhanced Image')`
`ax[1].axis('off')`

`(-0.5, 560.5, 840.5, -0.5)`

Original Image



Enhanced Image



- c. The improved image's darker backdrop, which extends over the margin of the flower, is mostly the outcome of a Gaussian blur applied to the background. The image is first divided into foreground (flower) and background using Grab Cut. The background is then smoothed using a Gaussian blur with a (15, 15) kernel. The backdrop appears darker because of this smoothing effect, which averages pixel values. The final improved image is produced by combining the sharp foreground with the blurred backdrop. The degree of blurring and the ensuing darkness in the backdrop can be altered by varying certain parameters, such as the kernel size.

GitHub Link

<https://github.com/Sandeepa0/Image-Processing.git>