

Import libraries

```
In [1]: import numpy as np # linear algebra
import pandas as pd # data processing, CSV file I/O (e.g. pd.read_csv)
import seaborn as sns
sns.set(style="whitegrid")
import matplotlib.pyplot as plt
from collections import Counter
%matplotlib inline

import os
for dirname, _, filenames in os.walk('/kaggle/input'):
    for filename in filenames:
        print(os.path.join(dirname, filename))
```

```
In [2]: # ignore warnings
import warnings
warnings.filterwarnings('ignore')
```

Read dataset:

```
In [5]: fifa19 = pd.read_csv(r'C:\Users\sande\OneDrive\Desktop\naresh it\data science and a
fifa19
```

Out[5]:

	ID	Name	Age	Photo	Nationality
0	158023	L. Messi	31	https://cdn.sofifa.org/players/4/19/158023.png	Argentina
1	20801	Cristiano Ronaldo	33	https://cdn.sofifa.org/players/4/19/20801.png	Portugal
2	190871	Neymar Jr	26	https://cdn.sofifa.org/players/4/19/190871.png	Brazil
3	193080	De Gea	27	https://cdn.sofifa.org/players/4/19/193080.png	Spain
4	192985	K. De Bruyne	27	https://cdn.sofifa.org/players/4/19/192985.png	Belgium
...	...	...	...	...	...
18202	238813	J. Lundstram	19	https://cdn.sofifa.org/players/4/19/238813.png	England
18203	243165	N. Christoffersson	19	https://cdn.sofifa.org/players/4/19/243165.png	Sweden
18204	241638	B. Worman	16	https://cdn.sofifa.org/players/4/19/241638.png	England
18205	246268	D. Walker-Rice	17	https://cdn.sofifa.org/players/4/19/246268.png	England
18206	246269	G. Nugent	16	https://cdn.sofifa.org/players/4/19/246269.png	England

18207 rows × 88 columns



In [6]: `fifa19.head()`

Out[6]:

	ID	Name	Age	Photo	Nationality	
0	158023	L. Messi	31	https://cdn.sofifa.org/players/4/19/158023.png	Argentina	https://cc
1	20801	Cristiano Ronaldo	33	https://cdn.sofifa.org/players/4/19/20801.png	Portugal	https://cc
2	190871	Neymar Jr	26	https://cdn.sofifa.org/players/4/19/190871.png	Brazil	https://cc
3	193080	De Gea	27	https://cdn.sofifa.org/players/4/19/193080.png	Spain	https://cc
4	192985	K. De Bruyne	27	https://cdn.sofifa.org/players/4/19/192985.png	Belgium	https://c

5 rows × 88 columns



View summary of dataset

In [7]: `fifa19.info()`

<class 'pandas.core.frame.DataFrame'>

Index: 18207 entries, 0 to 18206

Data columns (total 88 columns):

#	Column	Non-Null Count	Dtype
0	ID	18207 non-null	int64
1	Name	18207 non-null	object
2	Age	18207 non-null	int64
3	Photo	18207 non-null	object
4	Nationality	18207 non-null	object
5	Flag	18207 non-null	object
6	Overall	18207 non-null	int64
7	Potential	18207 non-null	int64
8	Club	17966 non-null	object
9	Club Logo	18207 non-null	object
10	Value	18207 non-null	object
11	Wage	18207 non-null	object
12	Special	18207 non-null	int64
13	Preferred Foot	18159 non-null	object
14	International Reputation	18159 non-null	float64
15	Weak Foot	18159 non-null	float64
16	Skill Moves	18159 non-null	float64
17	Work Rate	18159 non-null	object
18	Body Type	18159 non-null	object
19	Real Face	18159 non-null	object
20	Position	18147 non-null	object
21	Jersey Number	18147 non-null	float64
22	Joined	16654 non-null	object
23	Loaned From	1264 non-null	object
24	Contract Valid Until	17918 non-null	object
25	Height	18159 non-null	object
26	Weight	18159 non-null	object
27	LS	16122 non-null	object
28	ST	16122 non-null	object
29	RS	16122 non-null	object
30	LW	16122 non-null	object
31	LF	16122 non-null	object
32	CF	16122 non-null	object
33	RF	16122 non-null	object
34	RW	16122 non-null	object
35	LAM	16122 non-null	object
36	CAM	16122 non-null	object
37	RAM	16122 non-null	object
38	LM	16122 non-null	object
39	LCM	16122 non-null	object
40	CM	16122 non-null	object
41	RCM	16122 non-null	object
42	RM	16122 non-null	object
43	LWB	16122 non-null	object
44	LDM	16122 non-null	object
45	CDM	16122 non-null	object
46	RDM	16122 non-null	object
47	RWB	16122 non-null	object
48	LB	16122 non-null	object
49	LCB	16122 non-null	object
50	CB	16122 non-null	object

51	RCB	16122	non-null	object
52	RB	16122	non-null	object
53	Crossing	18159	non-null	float64
54	Finishing	18159	non-null	float64
55	HeadingAccuracy	18159	non-null	float64
56	ShortPassing	18159	non-null	float64
57	Volleys	18159	non-null	float64
58	Dribbling	18159	non-null	float64
59	Curve	18159	non-null	float64
60	FKAccuracy	18159	non-null	float64
61	LongPassing	18159	non-null	float64
62	BallControl	18159	non-null	float64
63	Acceleration	18159	non-null	float64
64	SprintSpeed	18159	non-null	float64
65	Agility	18159	non-null	float64
66	Reactions	18159	non-null	float64
67	Balance	18159	non-null	float64
68	ShotPower	18159	non-null	float64
69	Jumping	18159	non-null	float64
70	Stamina	18159	non-null	float64
71	Strength	18159	non-null	float64
72	LongShots	18159	non-null	float64
73	Aggression	18159	non-null	float64
74	Interceptions	18159	non-null	float64
75	Positioning	18159	non-null	float64
76	Vision	18159	non-null	float64
77	Penalties	18159	non-null	float64
78	Composure	18159	non-null	float64
79	Marking	18159	non-null	float64
80	StandingTackle	18159	non-null	float64
81	SlidingTackle	18159	non-null	float64
82	GKDivining	18159	non-null	float64
83	GKHandling	18159	non-null	float64
84	GKKicking	18159	non-null	float64
85	GKPositioning	18159	non-null	float64
86	GKReflexes	18159	non-null	float64
87	Release Clause	16643	non-null	object

```
dtypes: float64(38), int64(5), object(45)
memory usage: 12.4+ MB
```

```
In [8]: fifa19['Body Type'].value_counts()
```

```
Out[8]: Body Type
Normal      10595
Lean        6417
Stocky      1140
Messi        1
C. Ronaldo  1
Neymar       1
Courtois     1
PLAYER_BODY_TYPE_25  1
Shaqiri      1
Akinfenwa    1
Name: count, dtype: int64
```

Comment


- This dataset contains 89 variables.
- Out of the 89 variables, 44 are numerical variables. 38 are of float64 data type and remaining 6 are of int64 data type.
- The remaining 45 variables are of character data type.
- Let's explore this further.

Explore Age variable:

Visualize distribution of Age variable with Seaborn distplot() function

- Seaborn `distplot()` function flexibly plots a univariate distribution of observations.
- This function combines the matplotlib hist function (with automatic calculation of a good default bin size) with the seaborn `kdeplot()` and `rugplot()` functions.
- - So, let's visualize the distribution of Age variable with Seaborn `distplot()` function.


```
In [9]: f, ax = plt.subplots(figsize=(8,6))
x = fifa19['Age']
ax = sns.distplot(x, bins=10)
plt.show()
```

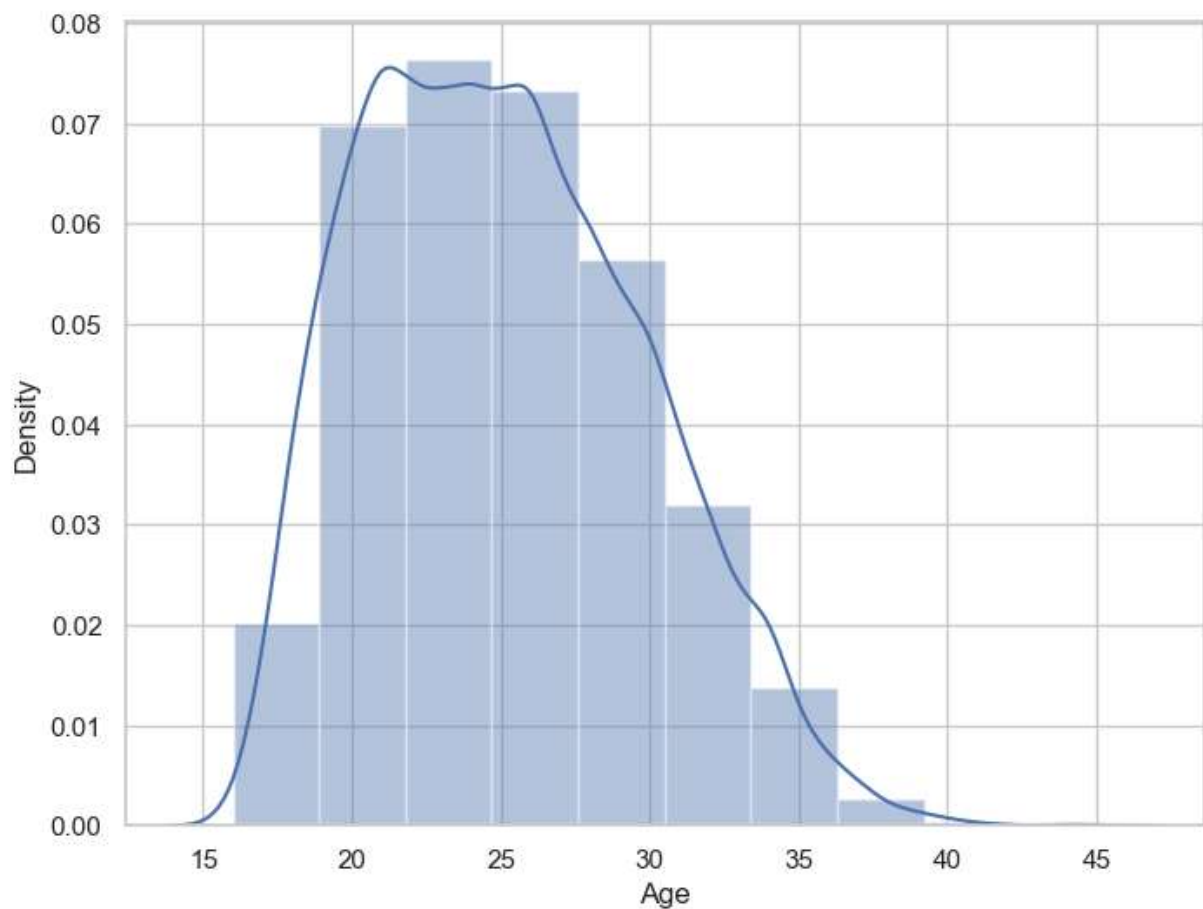


Comment:

- It can be seen that the `Age` variable is slightly positively skewed.

```
In [10]: f, ax = plt.subplots(figsize=(8,6))
x = fifa19['Age']
x = pd.Series(x, name="Age variable")
ax = sns.distplot(x, bins=10)
plt.show()
```

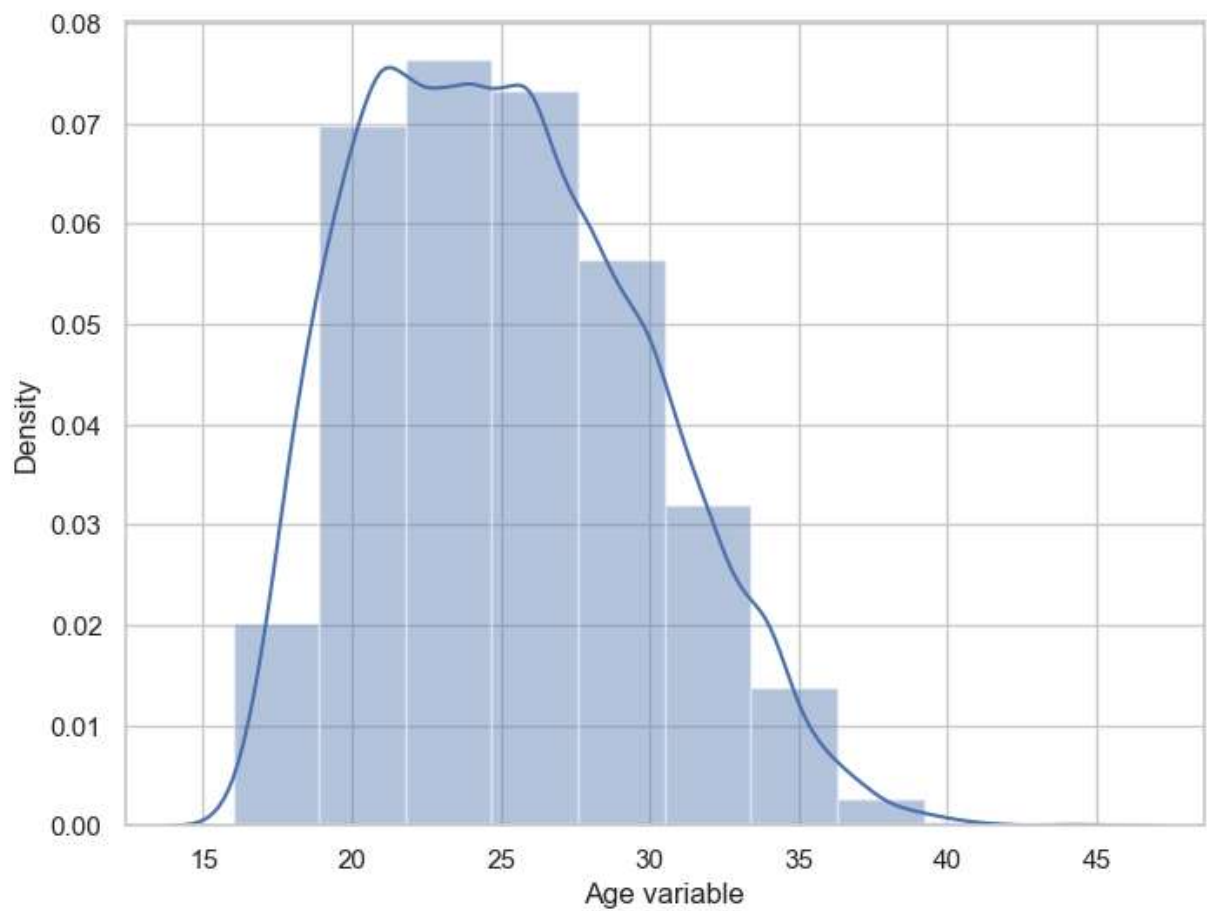


```
In [11]: f, ax = plt.subplots(figsize=(8,6))
x = fifa19['Age']
ax = sns.distplot(x, bins=10, vertical = True)
plt.show()
```

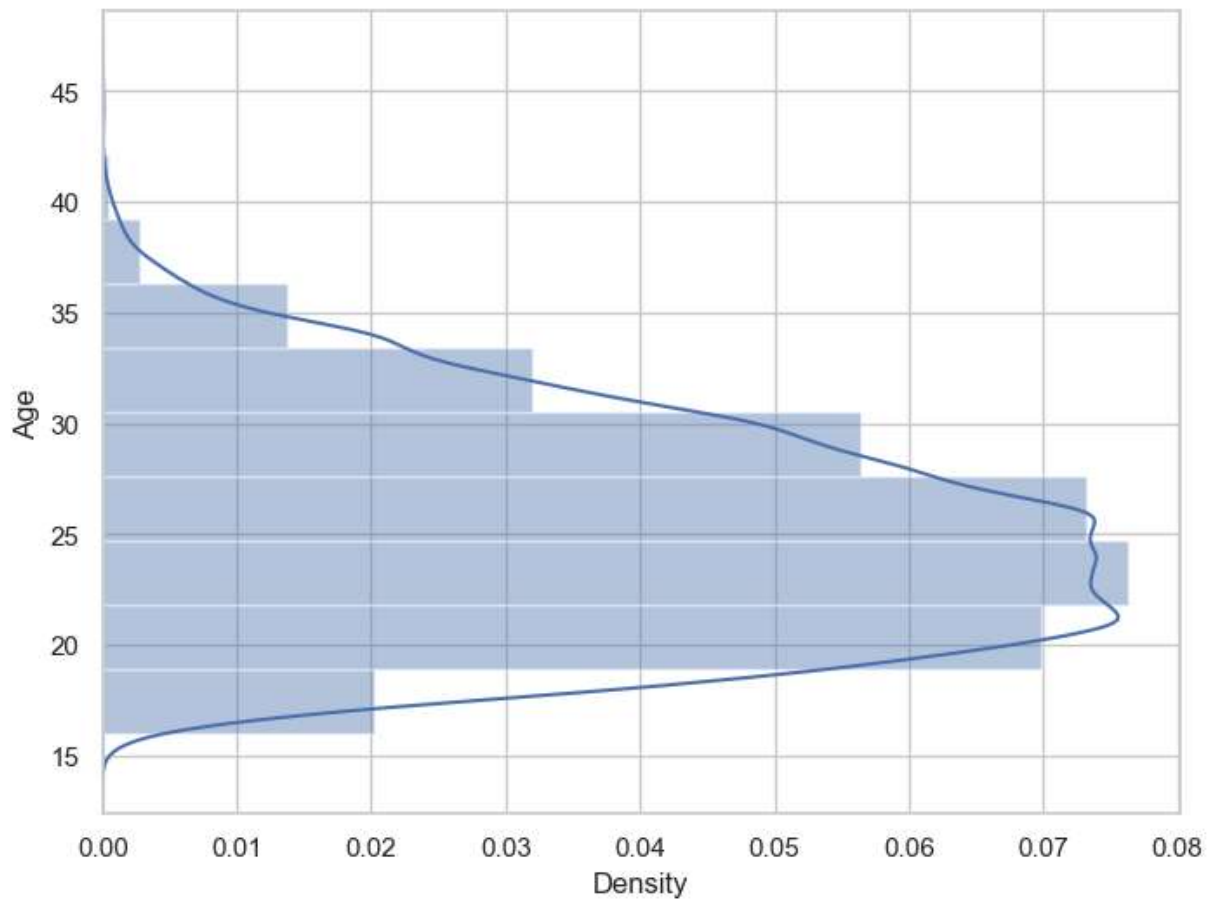


Seaborn Kernel Density Estimation (KDE) Plot

- The kernel density estimate (KDE) plot is a useful tool for plotting the shape of a distribution.
- Seaborn kdeplot is another seaborn plotting function that fits and plot a univariate or bivariate kernel density estimate.
- Like the histogram, the KDE plots encode the density of observations on one axis with height along the other axis.
- We can plot a KDE plot as follows-

```
In [12]: f, ax = plt.subplots(figsize=(8,6))
x = fifa19['Age']
x = pd.Series(x, name="Age variable")
ax = sns.kdeplot(x)
plt.show()
```

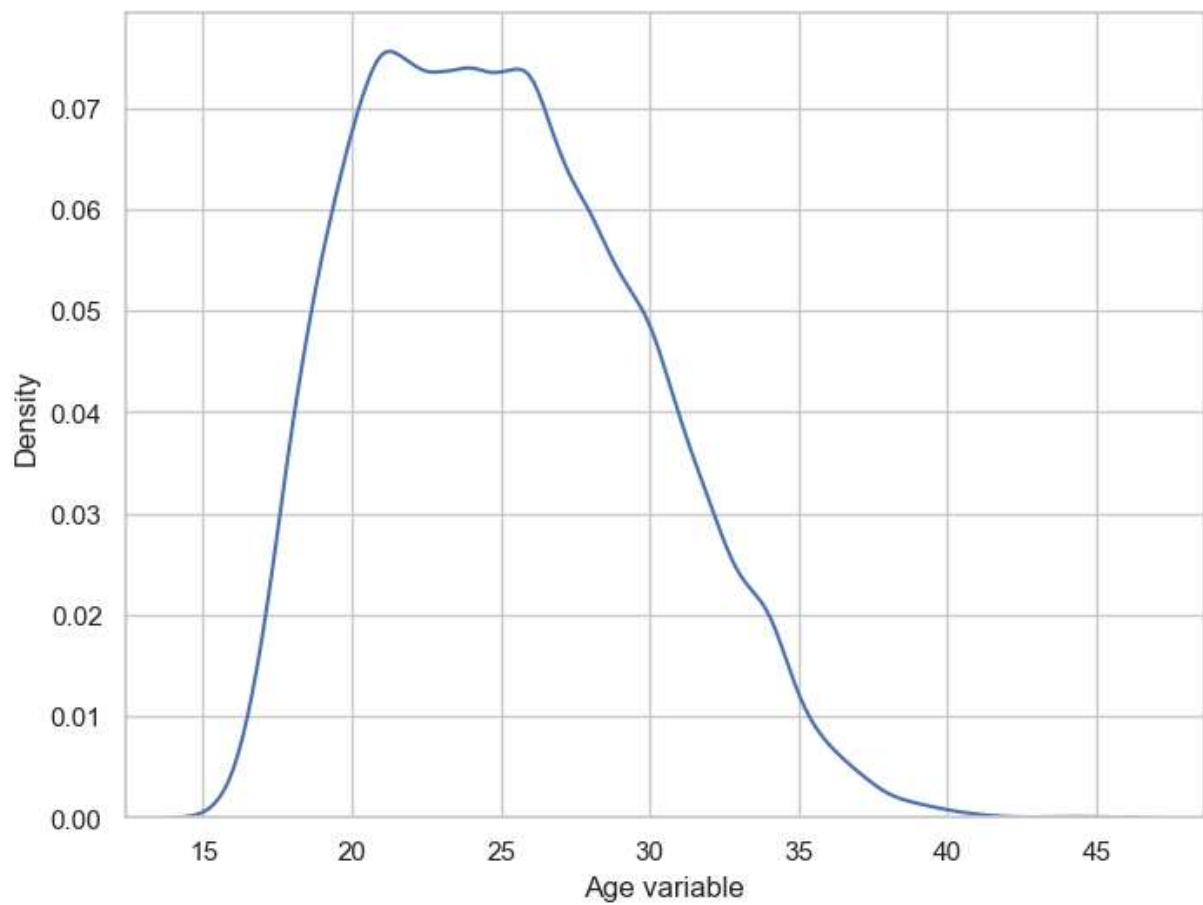


```
In [13]: f, ax = plt.subplots(figsize=(8,6))
x = fifa19['Age']
x = pd.Series(x, name="Age variable")
ax = sns.kdeplot(x, shade=True, color='r')
plt.show()
```

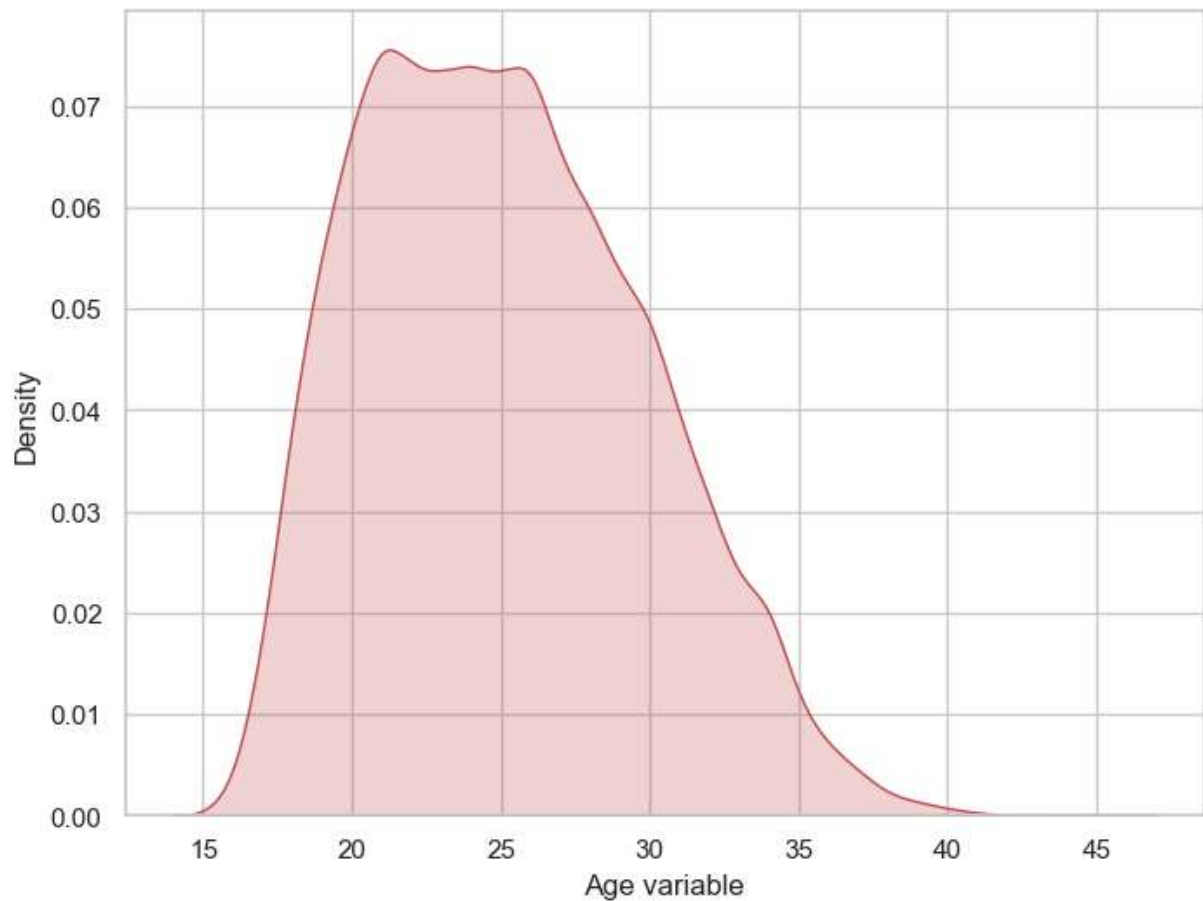


Histograms

- A histogram represents the distribution of data by forming bins along the range of the data and then drawing bars to show the number of observations that fall in each bin.
- A `hist()` function already exists in matplotlib.
- We can use Seaborn to plot a histogram.

```
In [15]: f, ax = plt.subplots(figsize=(8,6))
x = fifa19['Age']
ax = sns.distplot(x, kde=False, rug=True, bins=10)
plt.show()
```

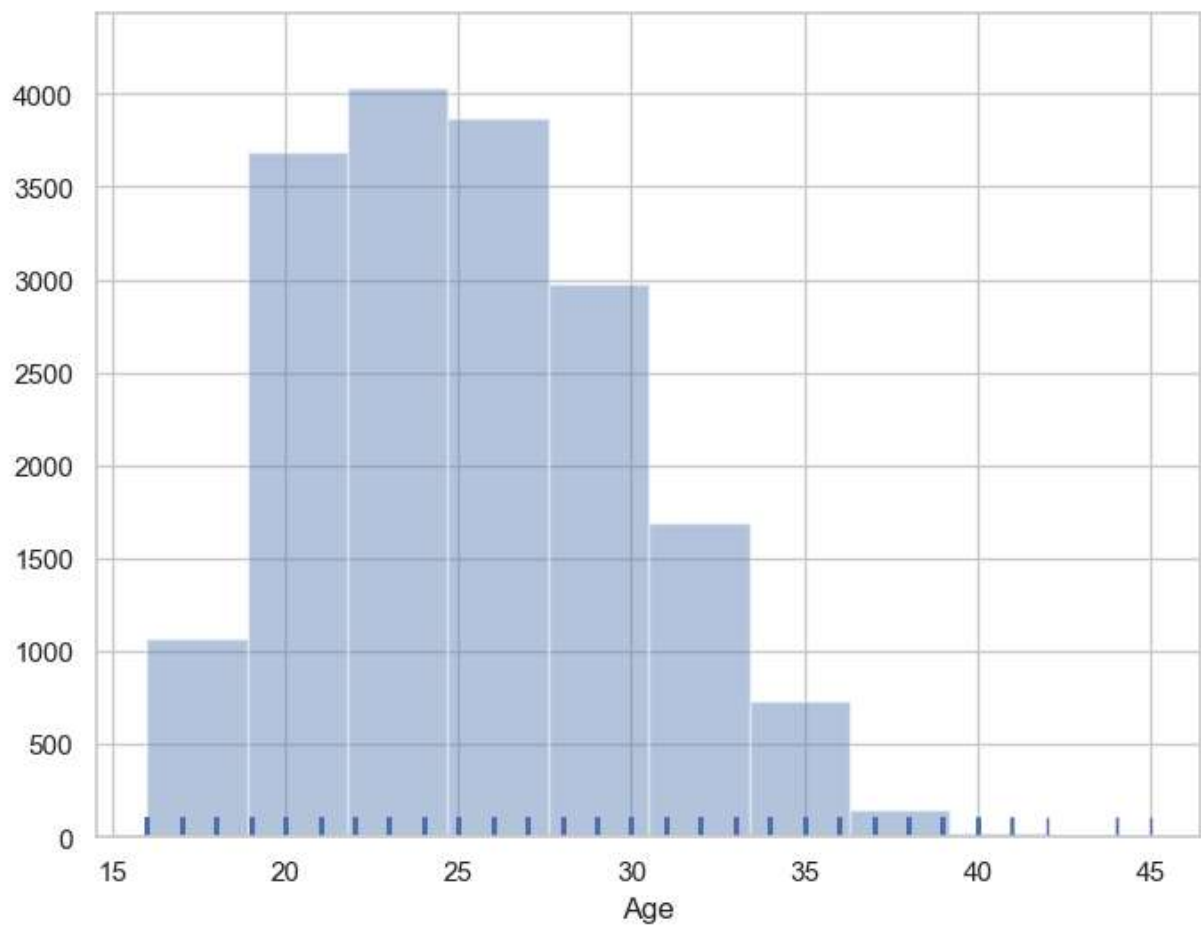

```
In [16]: f, ax = plt.subplots(figsize=(8,6))
x = fifa19['Age']
ax = sns.distplot(x, hist=False, rug=True, bins=10)
plt.show()
```

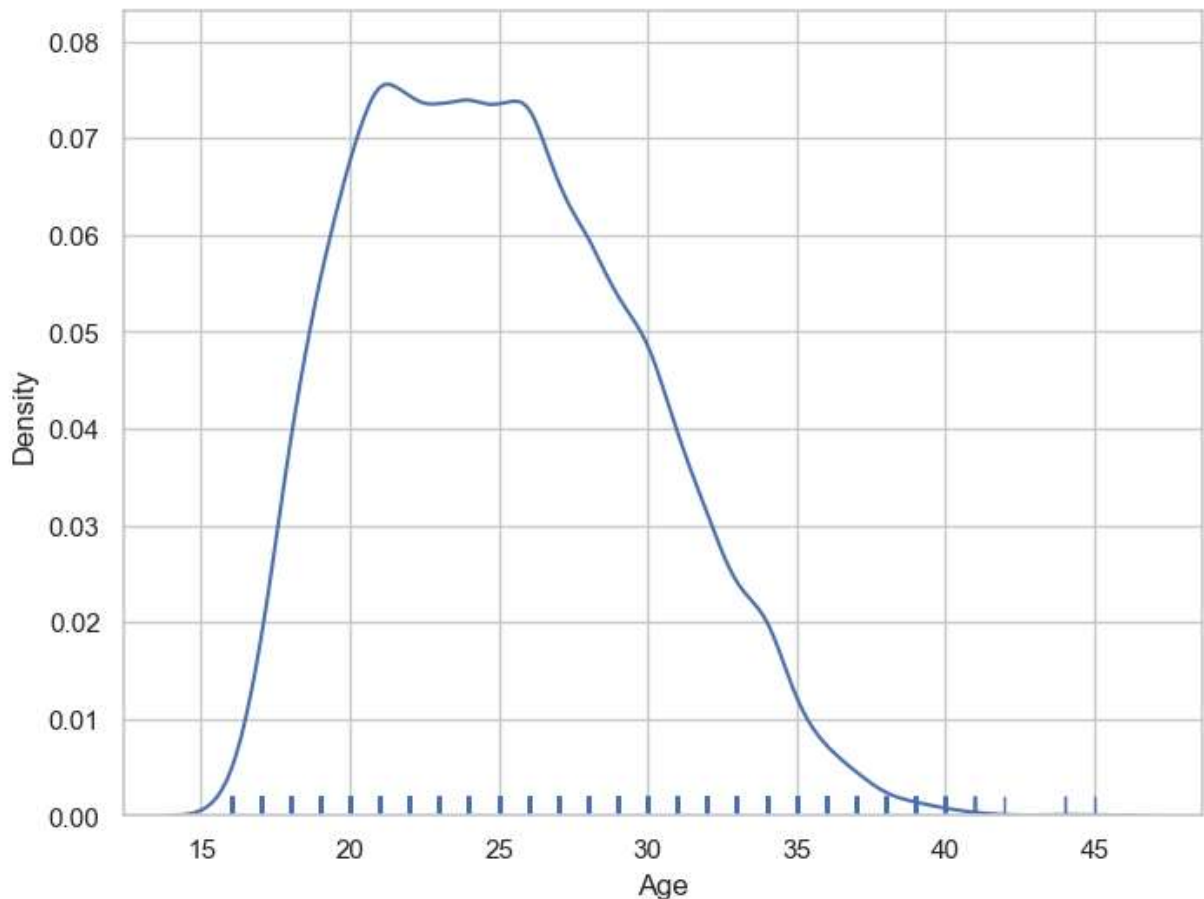

Explore Preferred Foot variable

Check number of unique values in Preferred Foot variable

```
In [18]: fifa19['Preferred Foot'].nunique()
```

```
Out[18]: 2
```

Check frequency distribution of values in Preferred Foot variable

```
In [19]: fifa19['Preferred Foot'].value_counts()
```


```
Out[19]: Preferred Foot
Right    13948
Left     4211
Name: count, dtype: int64
```

The Preferred Foot variable contains two types of values - Right and Left .


Visualize distribution of values with Seaborn countplot() function.

- A countplot shows the counts of observations in each categorical bin using bars.
 - It can be thought of as a histogram across a categorical, instead of quantitative, variable.
 - This function always treats one of the variables as categorical and draws data at ordinal positions (0, 1, ... n) on the relevant axis, even when the data has a numeric or date type.
1. • We can visualize the distribution of values with Seaborn `countplot()` function as follows-


```
In [20]: f, ax = plt.subplots(figsize=(8, 6))
sns.countplot(x="Preferred Foot", data=fifa19, color="c")
plt.show()
```

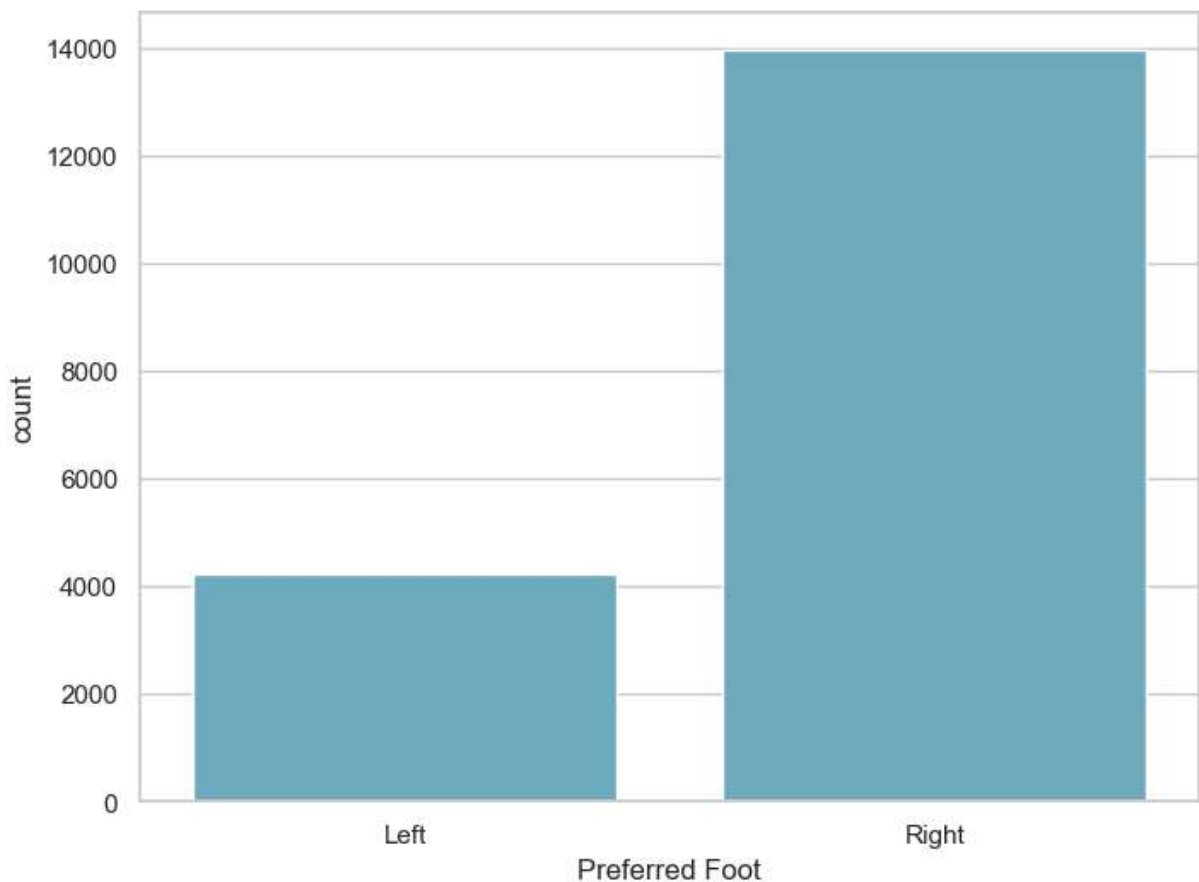

```
In [21]: f, ax = plt.subplots(figsize=(8, 6))
sns.countplot(x="Preferred Foot", hue="Real Face", data=fifa19)
plt.show()
```

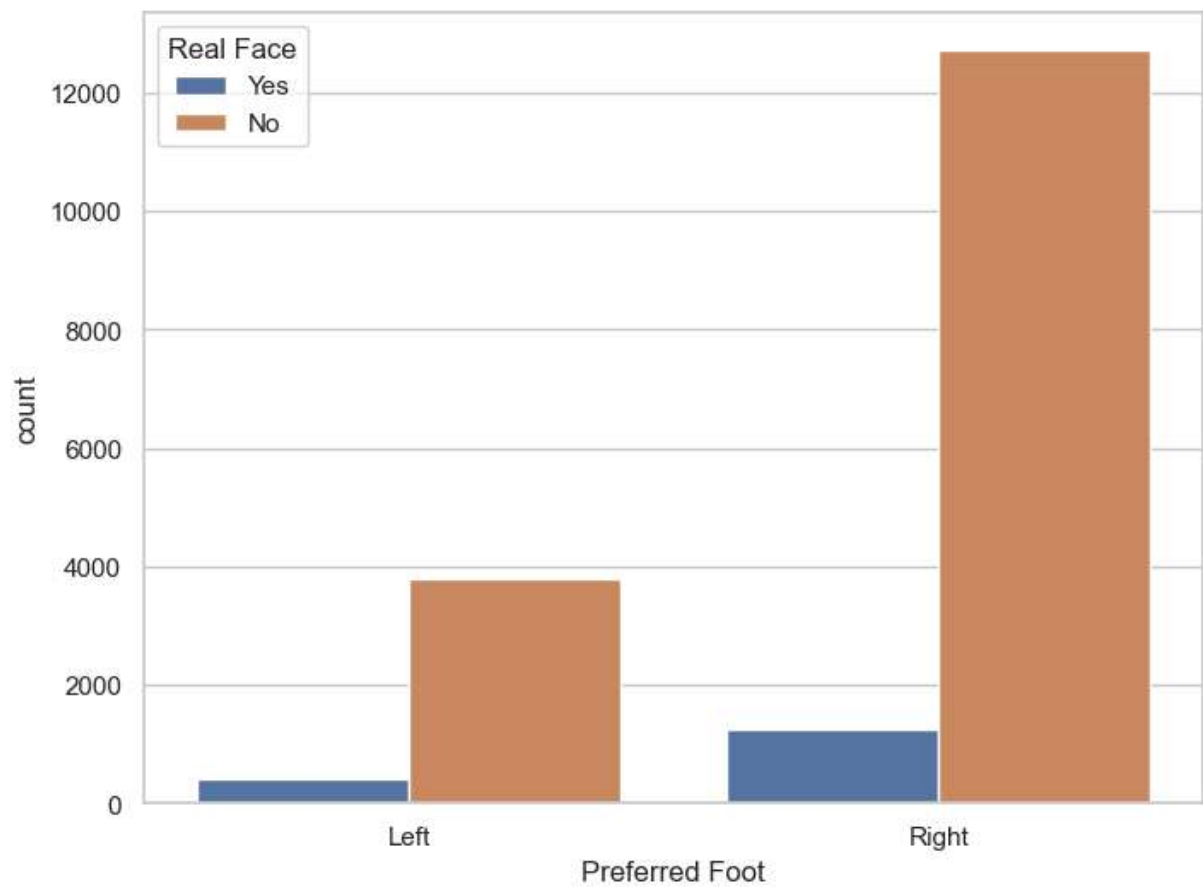


```
In [22]: f, ax = plt.subplots(figsize=(8, 6))
sns.countplot(y="Preferred Foot", data=fifa19, color="c")
plt.show()
```

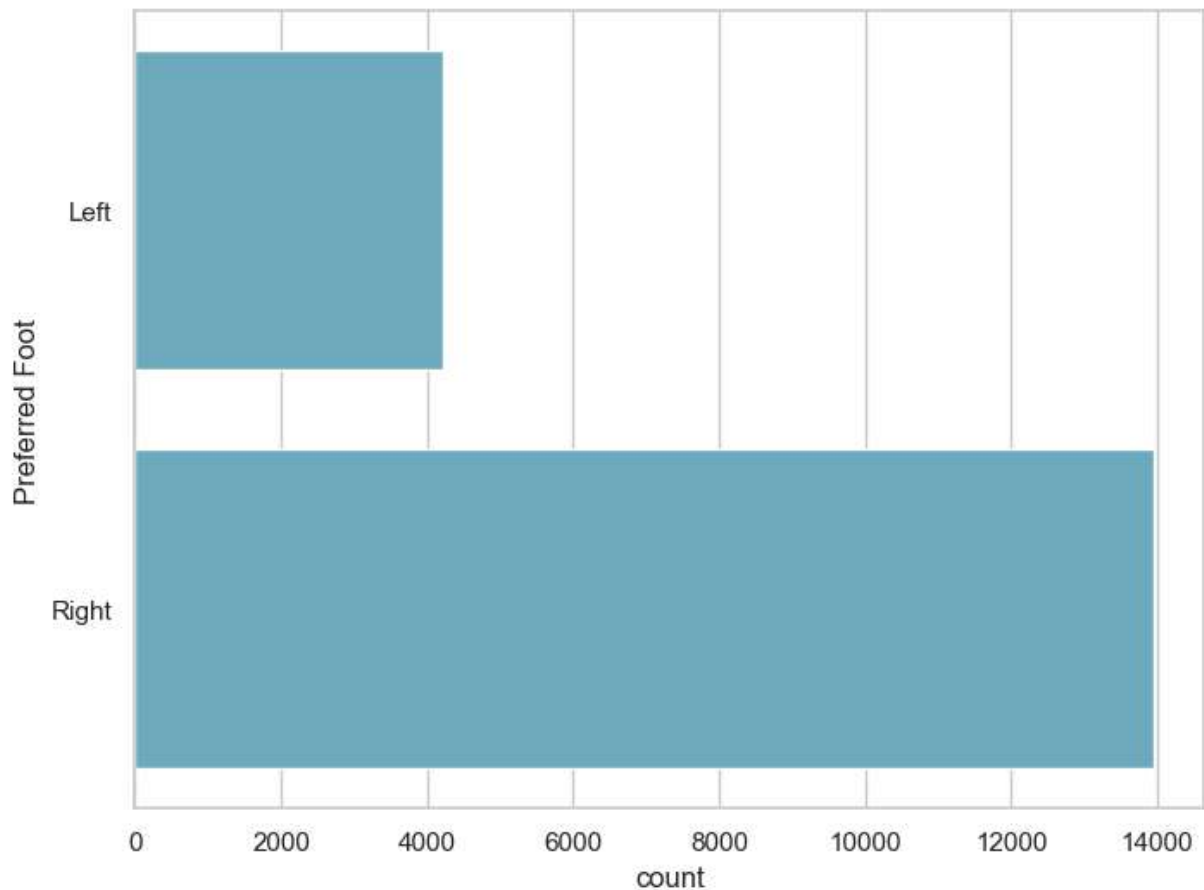

Seaborn `Catplot()` function

- We can use Seaborn `Catplot()` function to plot categorical scatterplots.
- The default representation of the data in `catplot()` uses a scatterplot.
- It helps to draw figure-level interface for drawing categorical plots onto a `facetGrid`.
- This function provides access to several axes-level functions that show the relationship between a numerical and one or more categorical variables using one of several visual representations.
- The `kind` parameter selects the underlying axes-level function to use.

```
In [27]: g = sns.catplot(x="Preferred Foot", kind="count", palette="ch:.25", data=fifa19)
g
plt.show()
```

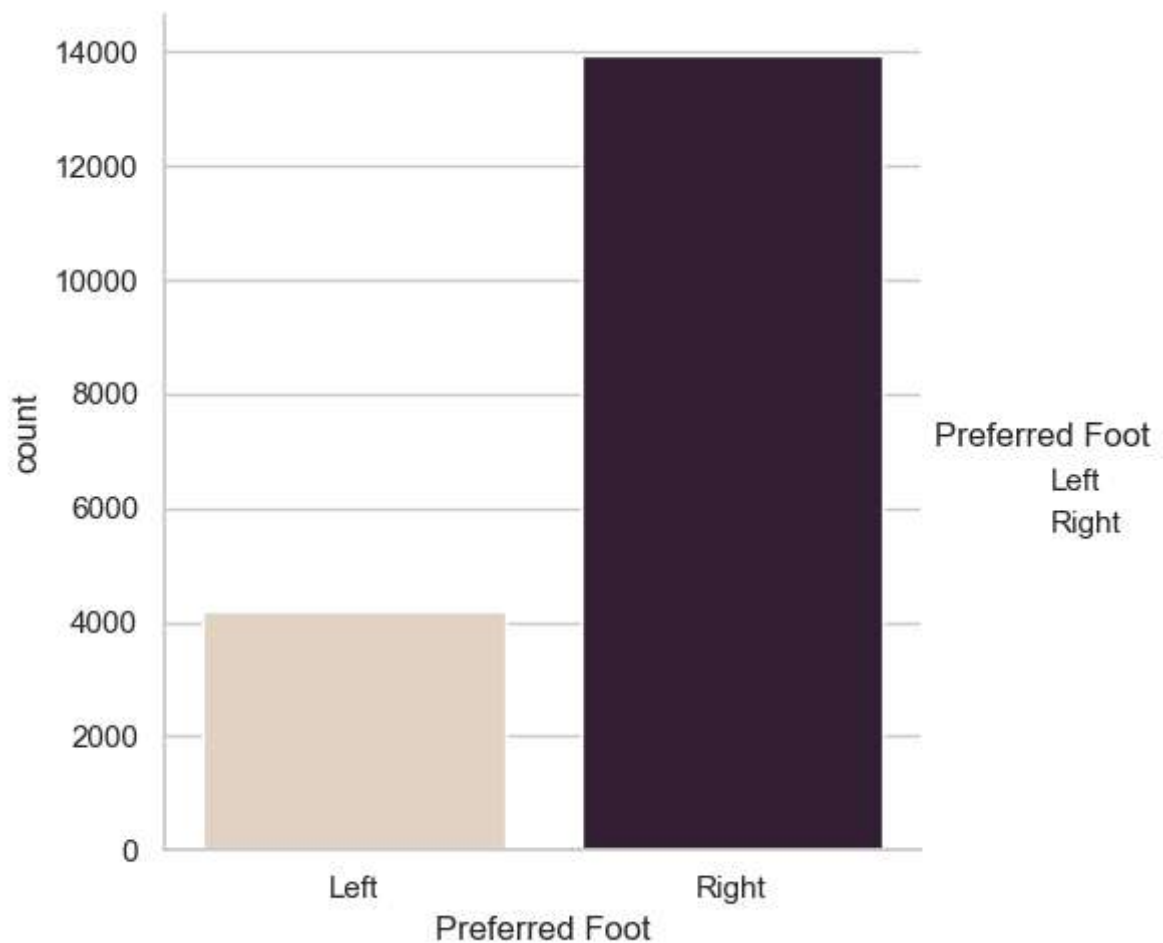

Explore International Reputation variable

Check the number of unique values in International Reputation variable

```
In [28]: fifa19['International Reputation'].nunique()
```

```
Out[28]: 5
```

```
In [29]: fifa19['International Reputation'].value_counts()
```


```
Out[29]: International Reputation
1.0    16532
2.0     1261
3.0      309
4.0       51
5.0        6
Name: count, dtype: int64
```

Seaborn Stripplot() function


- This function draws a scatterplot where one variable is categorical.

- A strip plot can be drawn on its own, but it is also a good complement to a box or violin plot in cases where we want to show all observations along with some representation of the underlying distribution.
- I will plot a stripplot with `International Reputation` as categorical variable and `Potential` as the other variable.


```
In [30]: f, ax = plt.subplots(figsize=(8, 6))
sns.stripplot(x="International Reputation", y="Potential", data=fifa19)
plt.show()
```

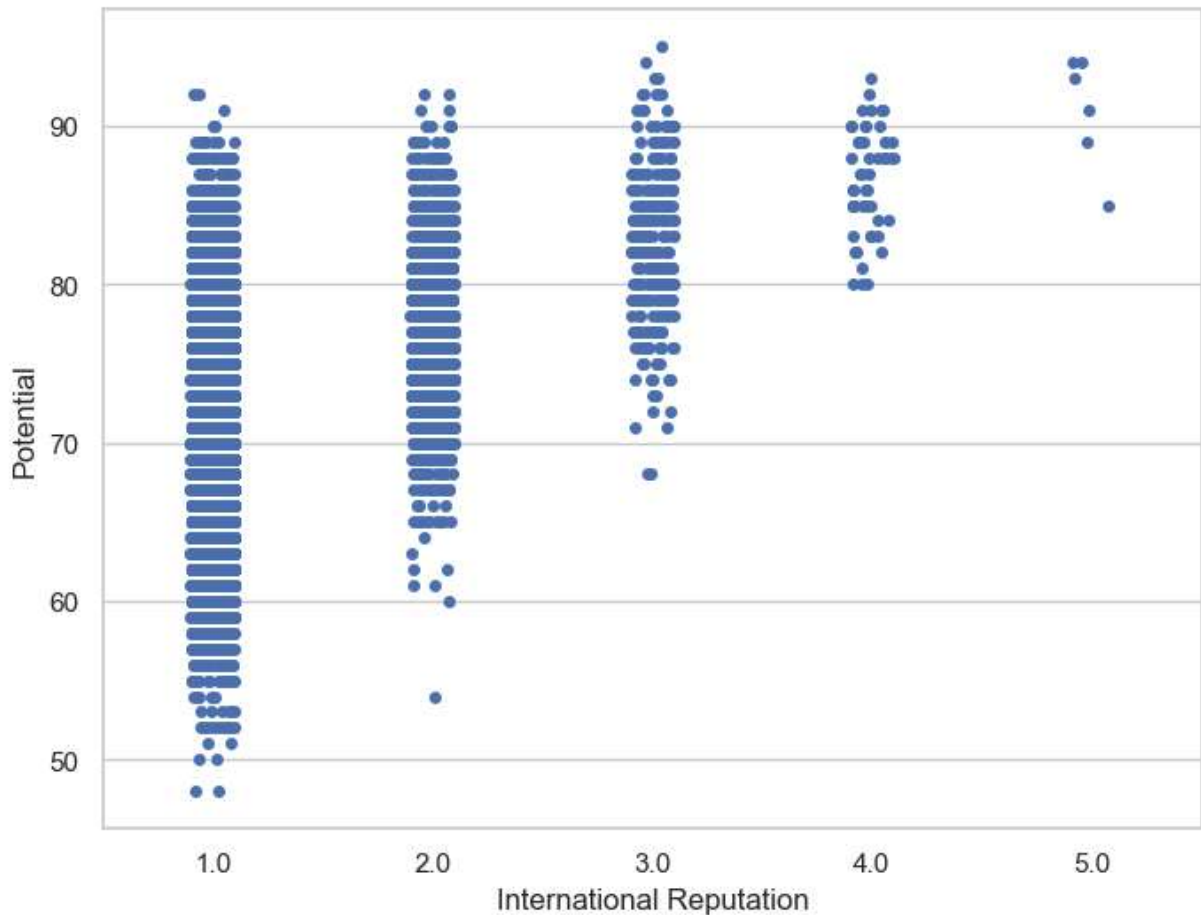


```
In [31]: f, ax = plt.subplots(figsize=(8, 6))
sns.stripplot(x="International Reputation", y="Potential", data=fifa19, jitter=0.01)
plt.show()
```

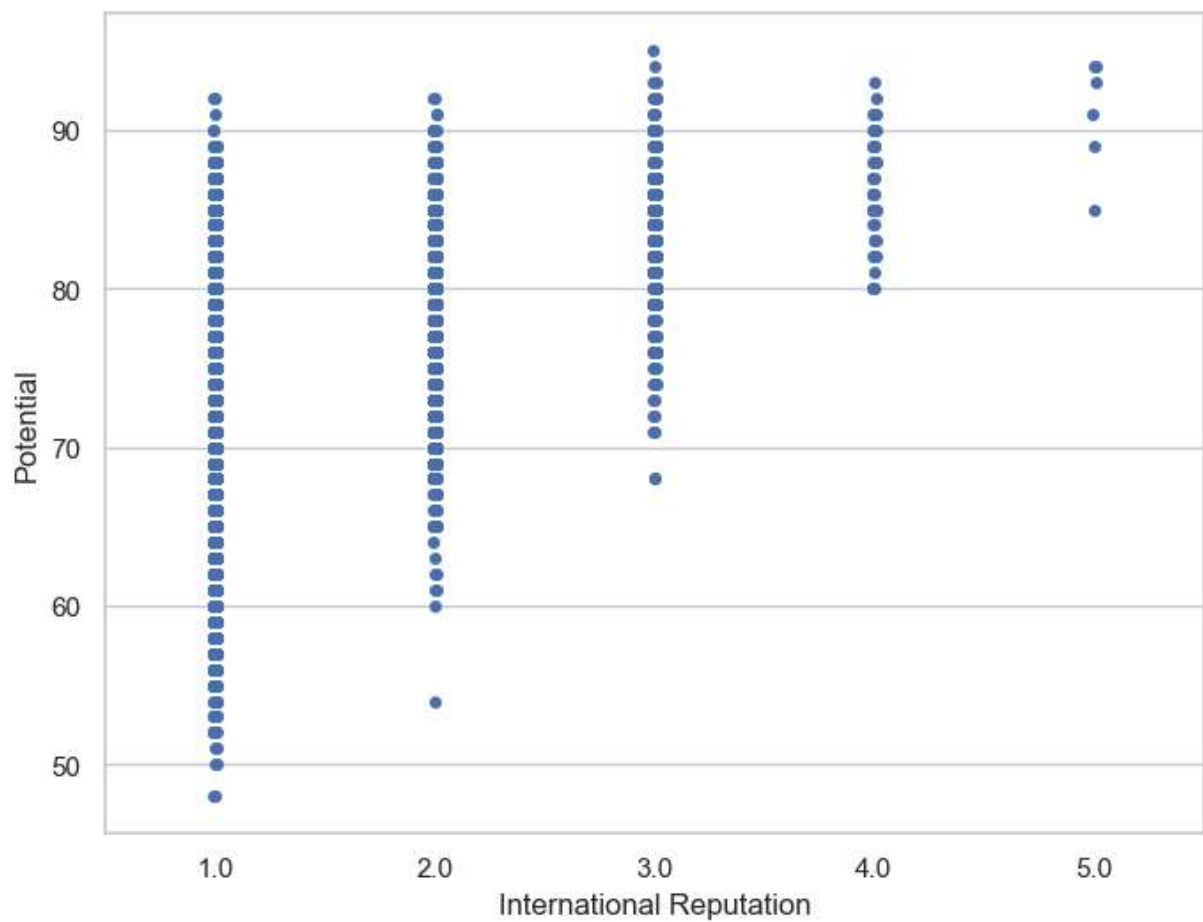

```
In [32]: f, ax = plt.subplots(figsize=(8, 6))
sns.stripplot(x="International Reputation", y="Potential", hue="Preferred Foot",
              data=fifa19, jitter=0.2, palette="Set2", dodge=True)
plt.show()
```

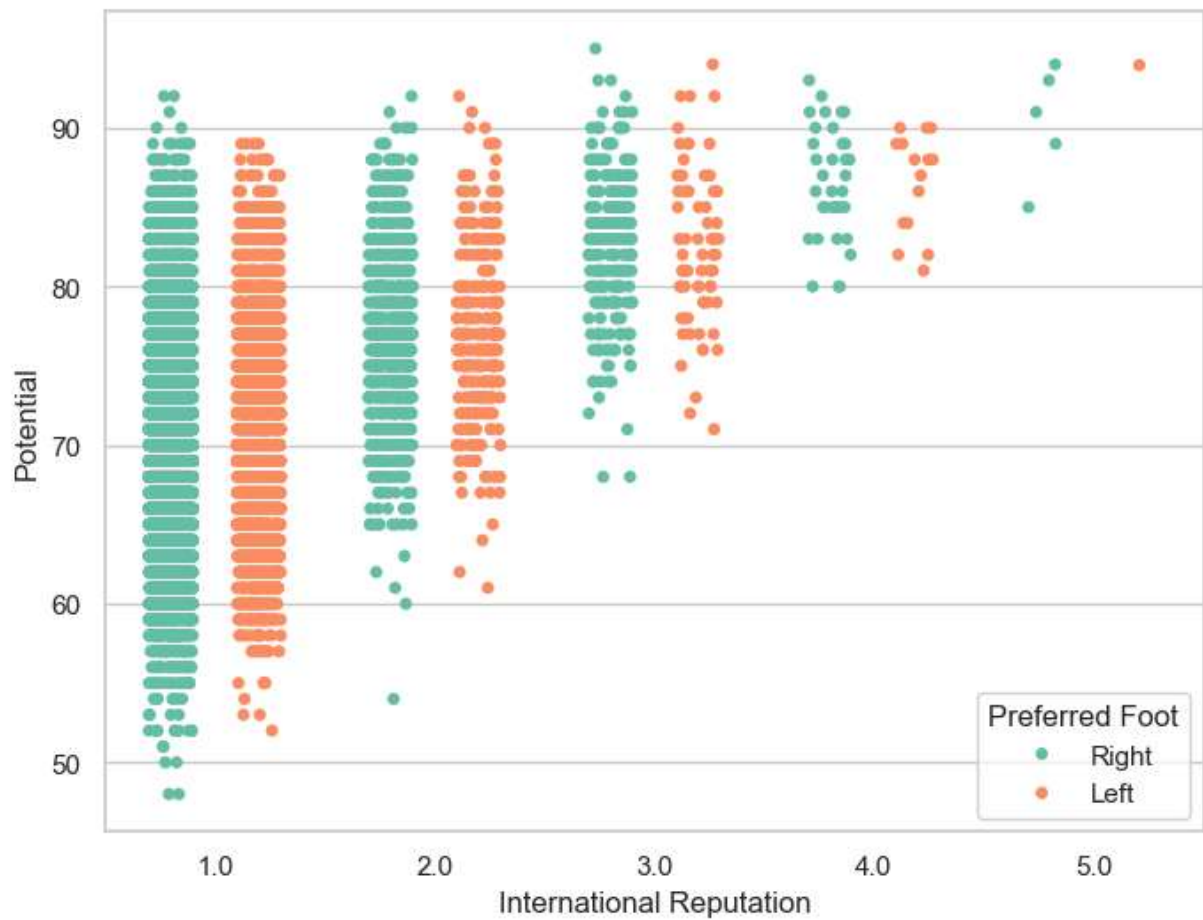


```
In [33]: f, ax = plt.subplots(figsize=(8, 6))
sns.stripplot(x="International Reputation", y="Potential", hue="Preferred Foot",
              data=fifa19, palette="Set2", size=20, marker="D",
              edgecolor="gray", alpha=.25)
plt.show()
```

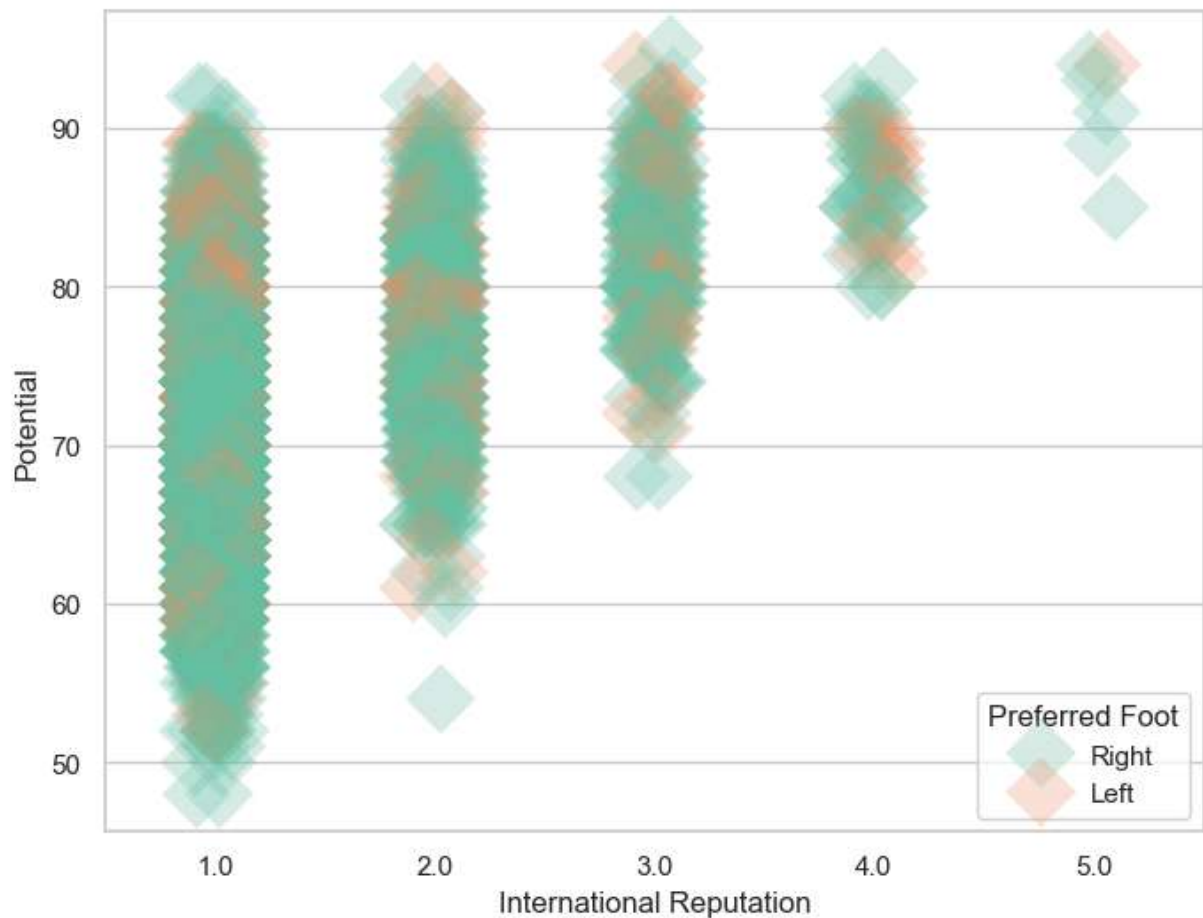


Seaborn `boxplot()` function

- This function draws a box plot to show distributions with respect to categories.
- A box plot (or box-and-whisker plot) shows the distribution of quantitative data in a way that facilitates comparisons between variables or across levels of a categorical variable.
- The box shows the quartiles of the dataset while the whiskers extend to show the rest of the distribution, except for points that are determined to be “outliers” using a method that is a function of the inter-quartile range.
- I will plot the boxplot of the `Potential` variable as follows-


```
In [34]: f, ax = plt.subplots(figsize=(8, 6))
sns.boxplot(x=fifa19["Potential"])
plt.show()
```

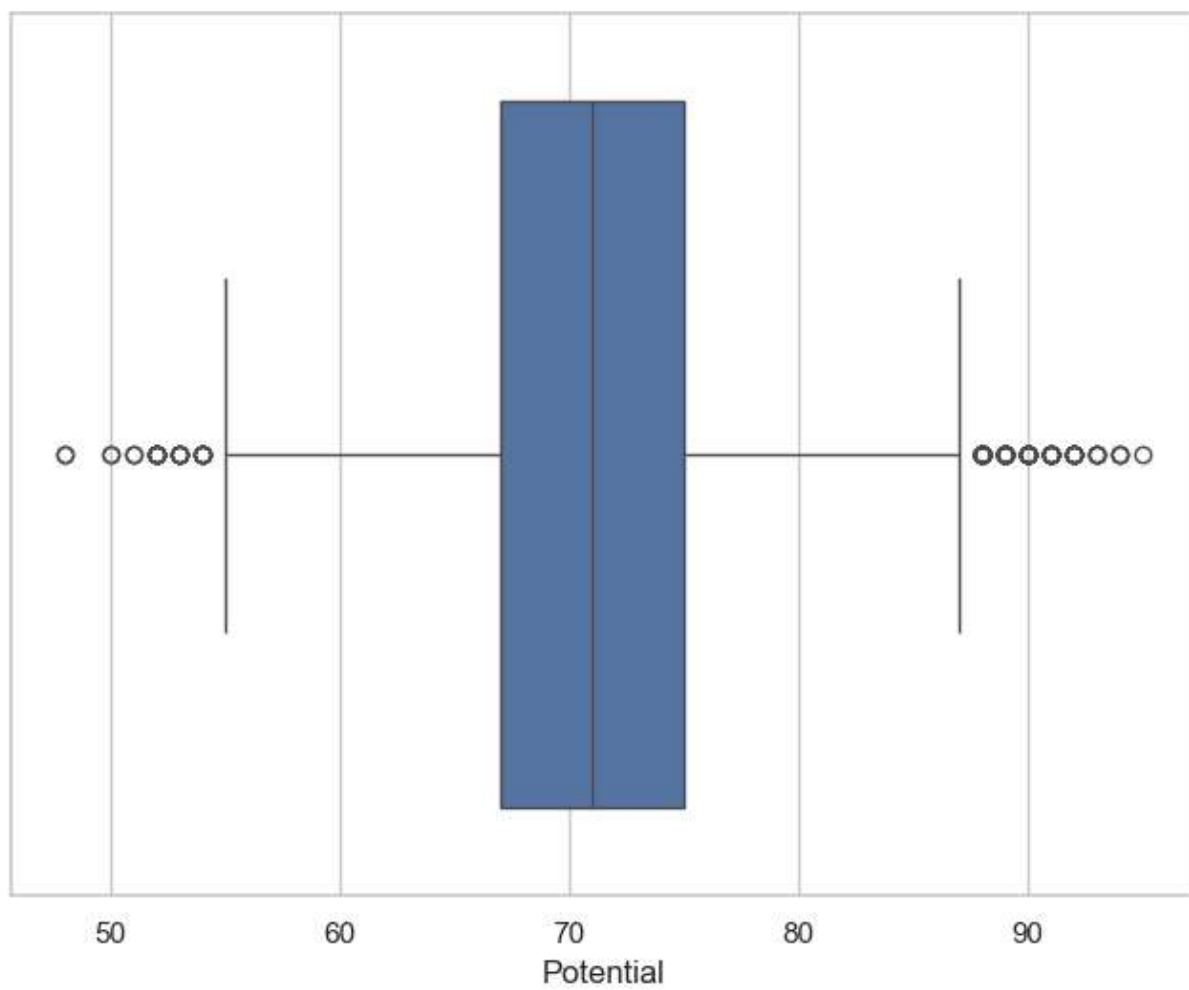

```
In [35]: f, ax = plt.subplots(figsize=(8, 6))
sns.boxplot(x="International Reputation", y="Potential", data=fifa19)
plt.show()
```

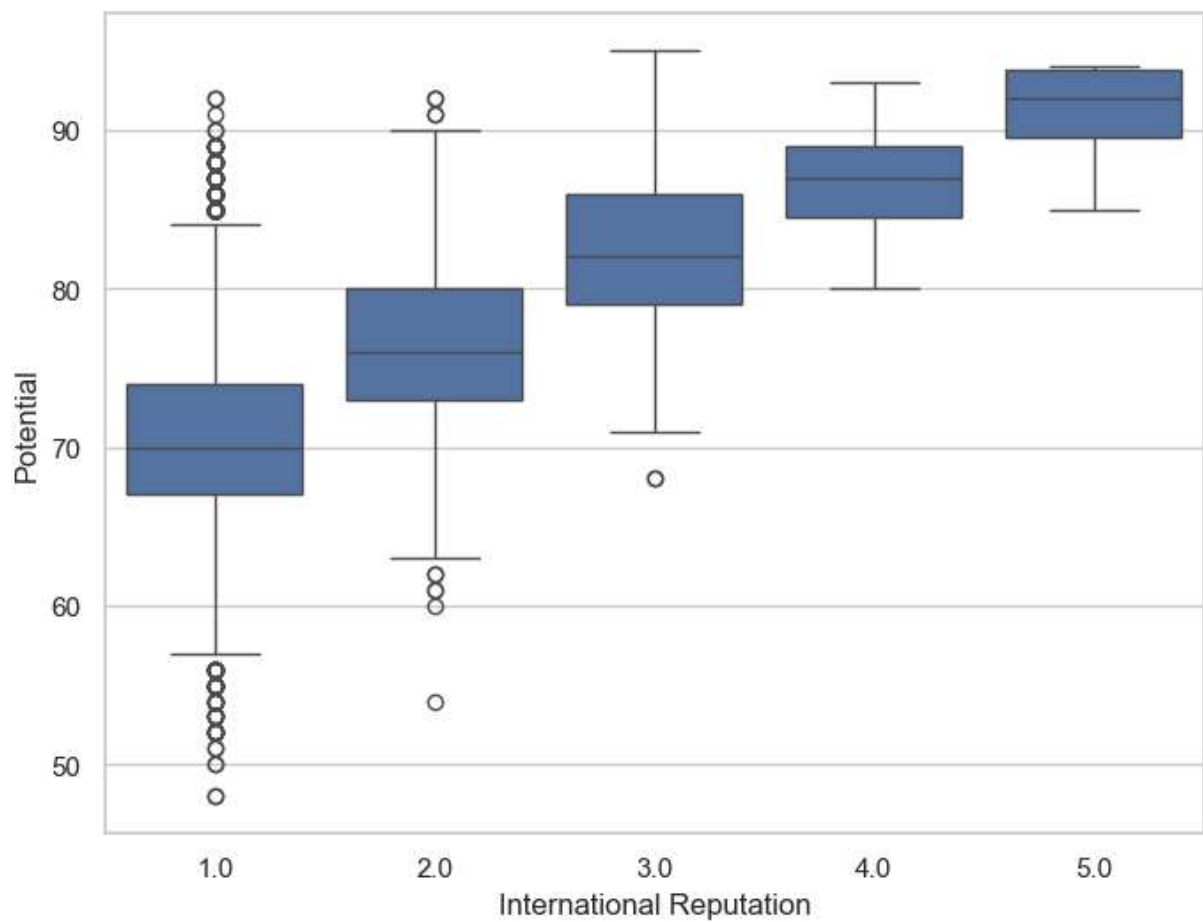


```
In [36]: f, ax = plt.subplots(figsize=(8, 6))
sns.boxplot(x="International Reputation", y="Potential", hue="Preferred Foot", data=
plt.show()
```

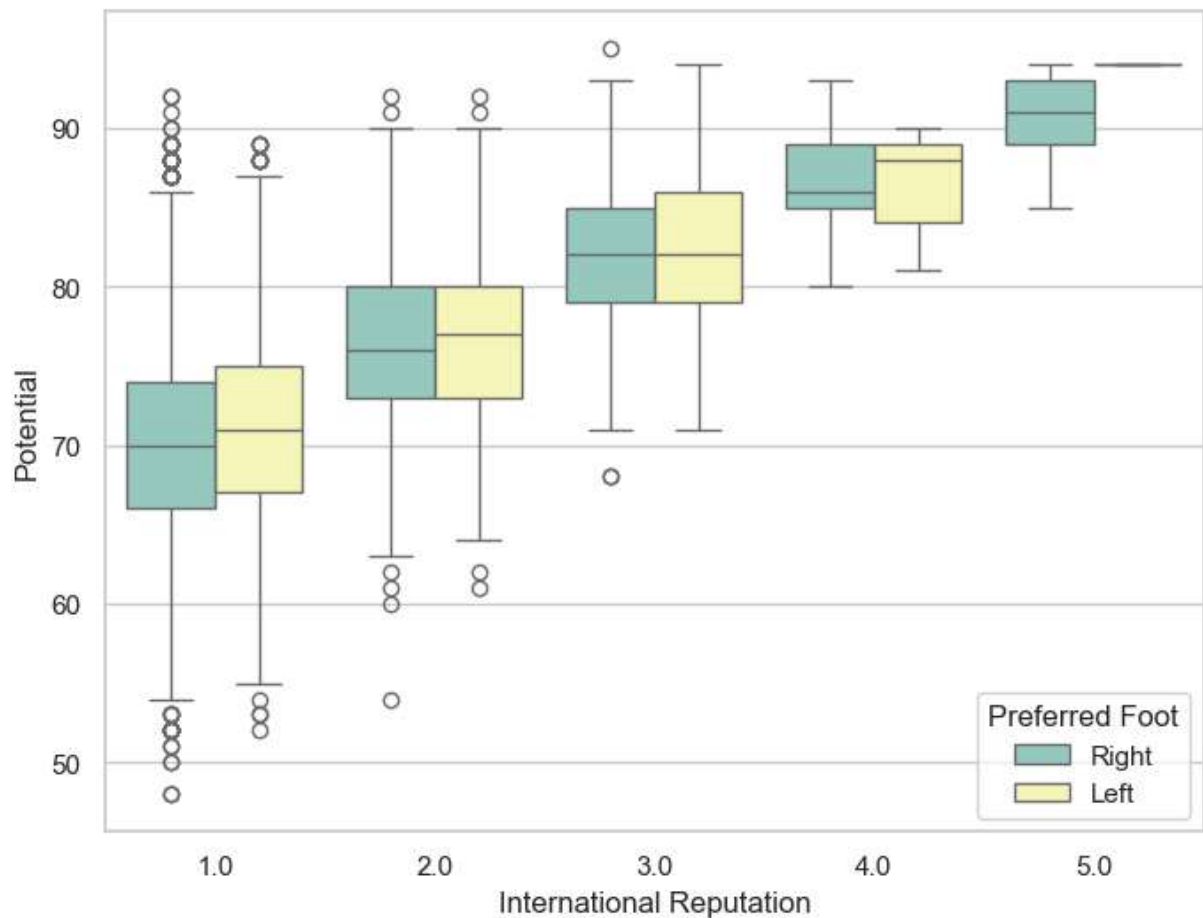


Seaborn violinplot() function

- This function draws a combination of boxplot and kernel density estimate.
- A violin plot plays a similar role as a box and whisker plot.
- It shows the distribution of quantitative data across several levels of one (or more) categorical variables such that those distributions can be compared.
- Unlike a box plot, in which all of the plot components correspond to actual datapoints, the violin plot features a kernel density estimation of the underlying distribution.
- I will plot the violinplot of `Potential` variable as follows-


```
In [37]: f, ax = plt.subplots(figsize=(8, 6))
sns.violinplot(x=fifa19["Potential"])
plt.show()
```

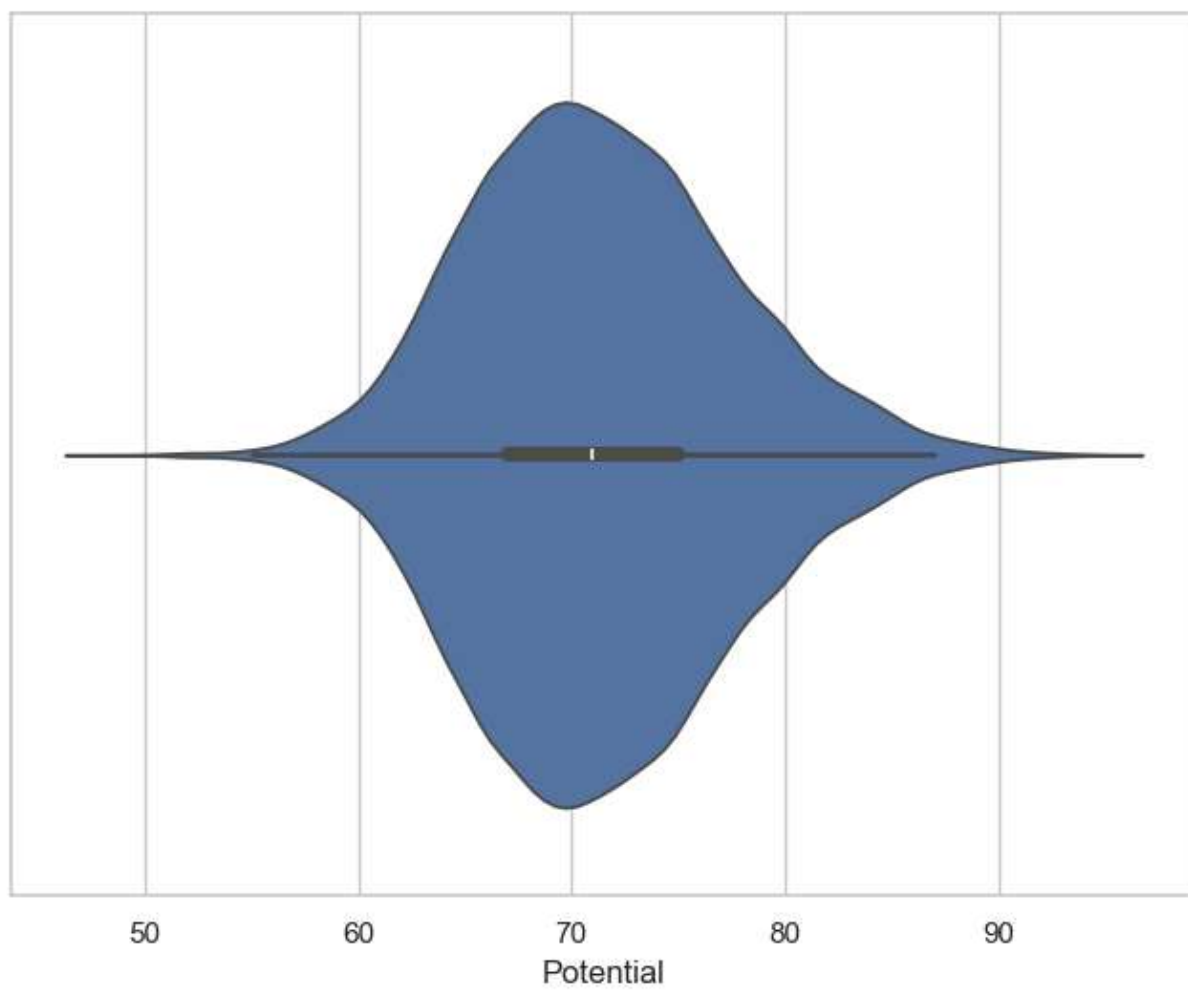


```
In [38]: f, ax = plt.subplots(figsize=(8, 6))
sns.violinplot(x="International Reputation", y="Potential", data=fifa19)
plt.show()
```

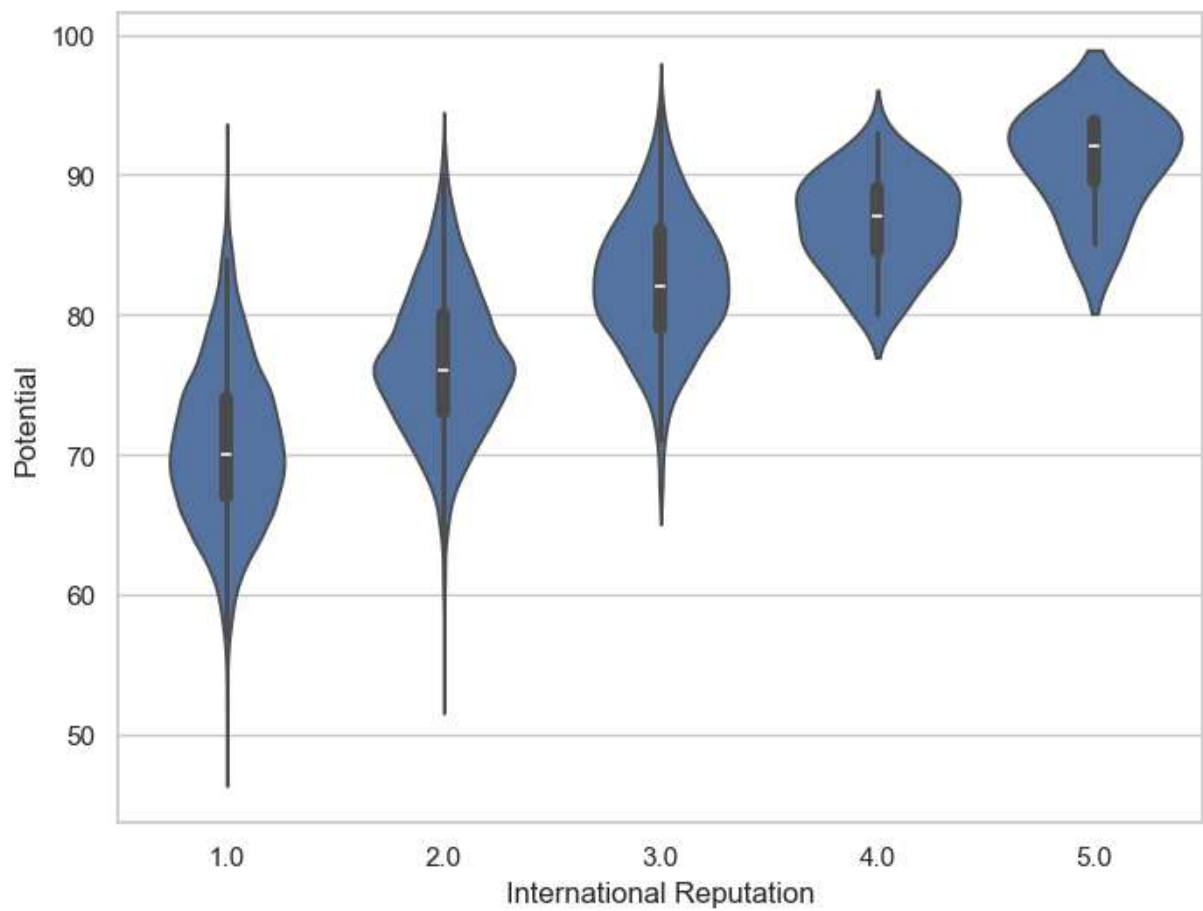

```
In [39]: f, ax = plt.subplots(figsize=(8, 6))
sns.violinplot(x="International Reputation", y="Potential", hue="Preferred Foot", d
plt.show()
```

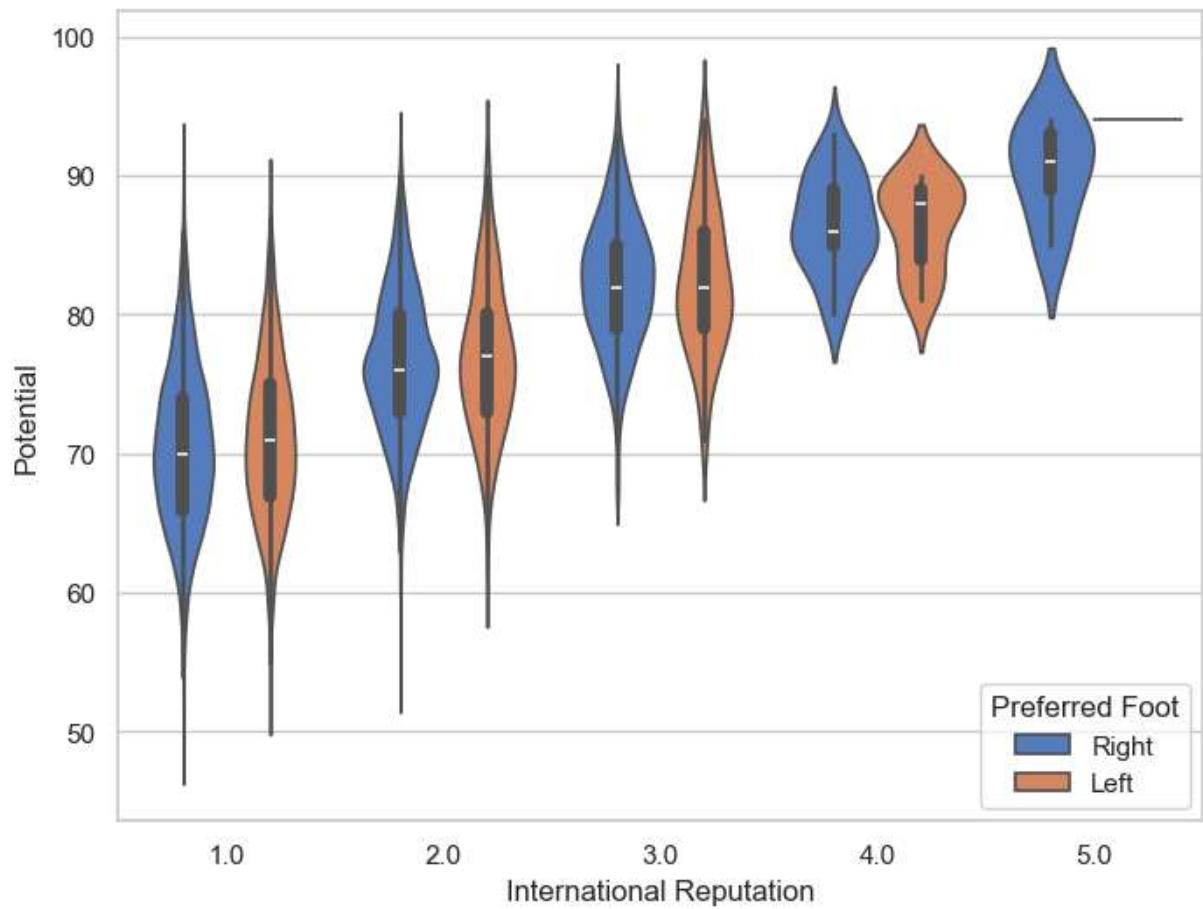


```
In [40]: f, ax = plt.subplots(figsize=(8, 6))
sns.violinplot(x="International Reputation", y="Potential", hue="Preferred Foot",
               data=fifa19, palette="muted", split=True)
plt.show()
```

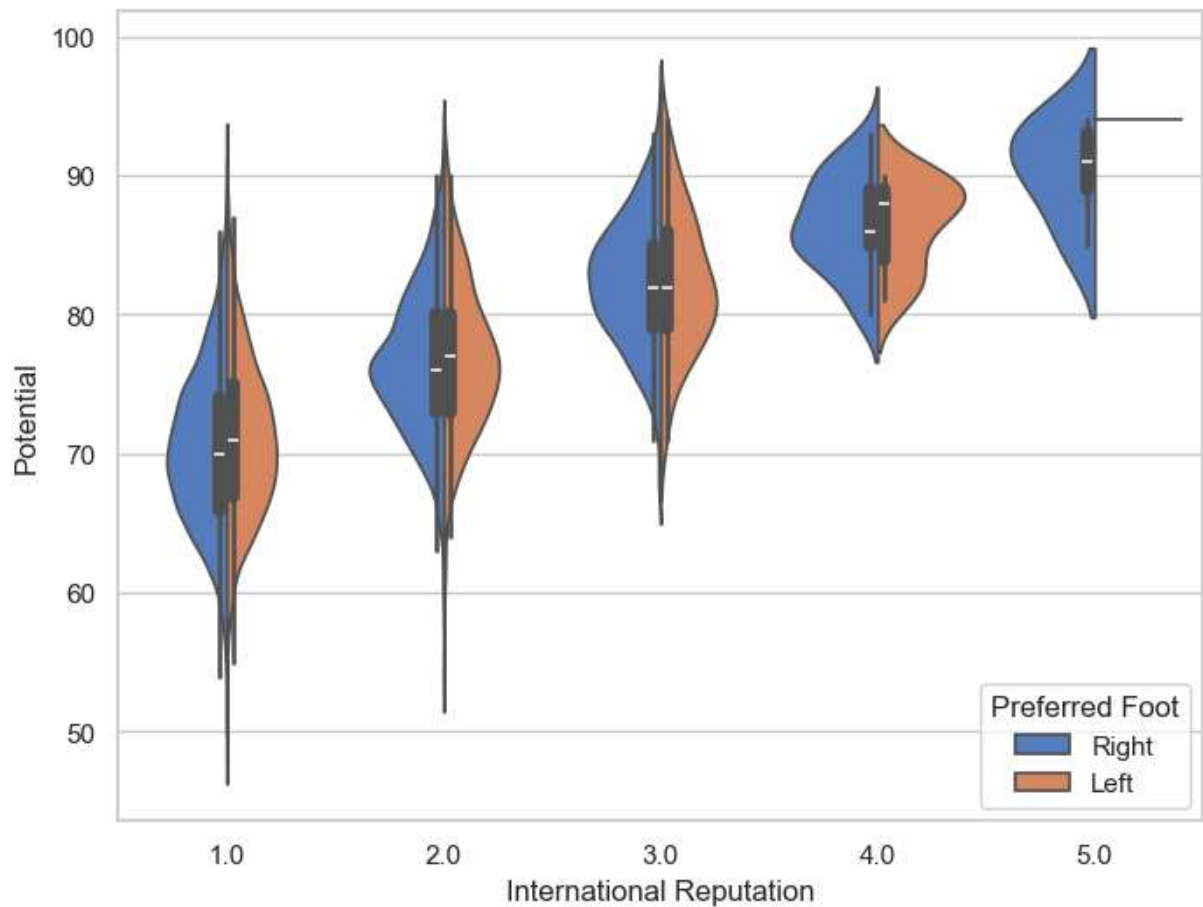


Seaborn pointplot() function

- This function show point estimates and confidence intervals using scatter plot glyphs.
- A point plot represents an estimate of central tendency for a numeric variable by the position of scatter plot points and provides some indication of the uncertainty around that estimate using error bars.


```
In [41]: f, ax = plt.subplots(figsize=(8, 6))
sns.pointplot(x="International Reputation", y="Potential", data=fifa19)
plt.show()
```

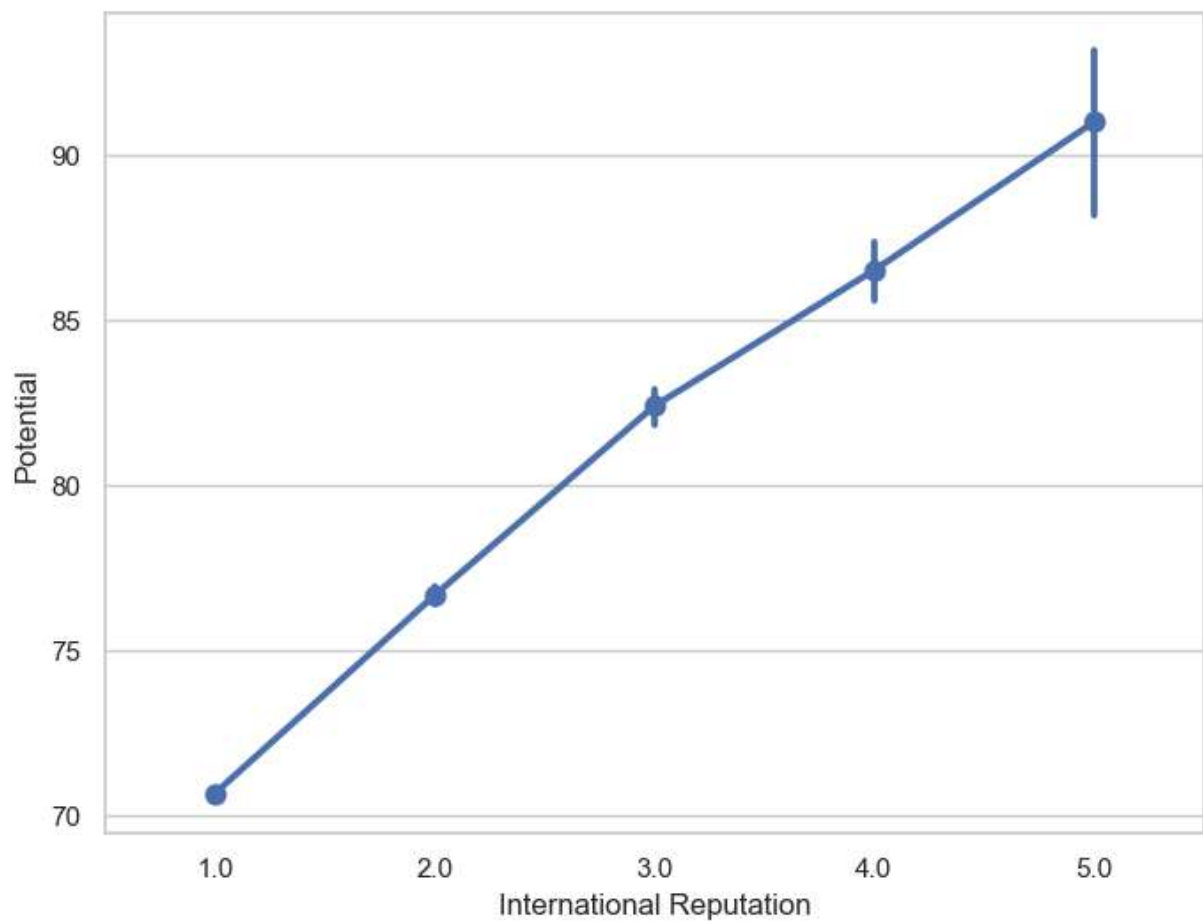


```
In [42]: f, ax = plt.subplots(figsize=(8, 6))
sns.pointplot(x="International Reputation", y="Potential", hue="Preferred Foot", da
plt.show()
```

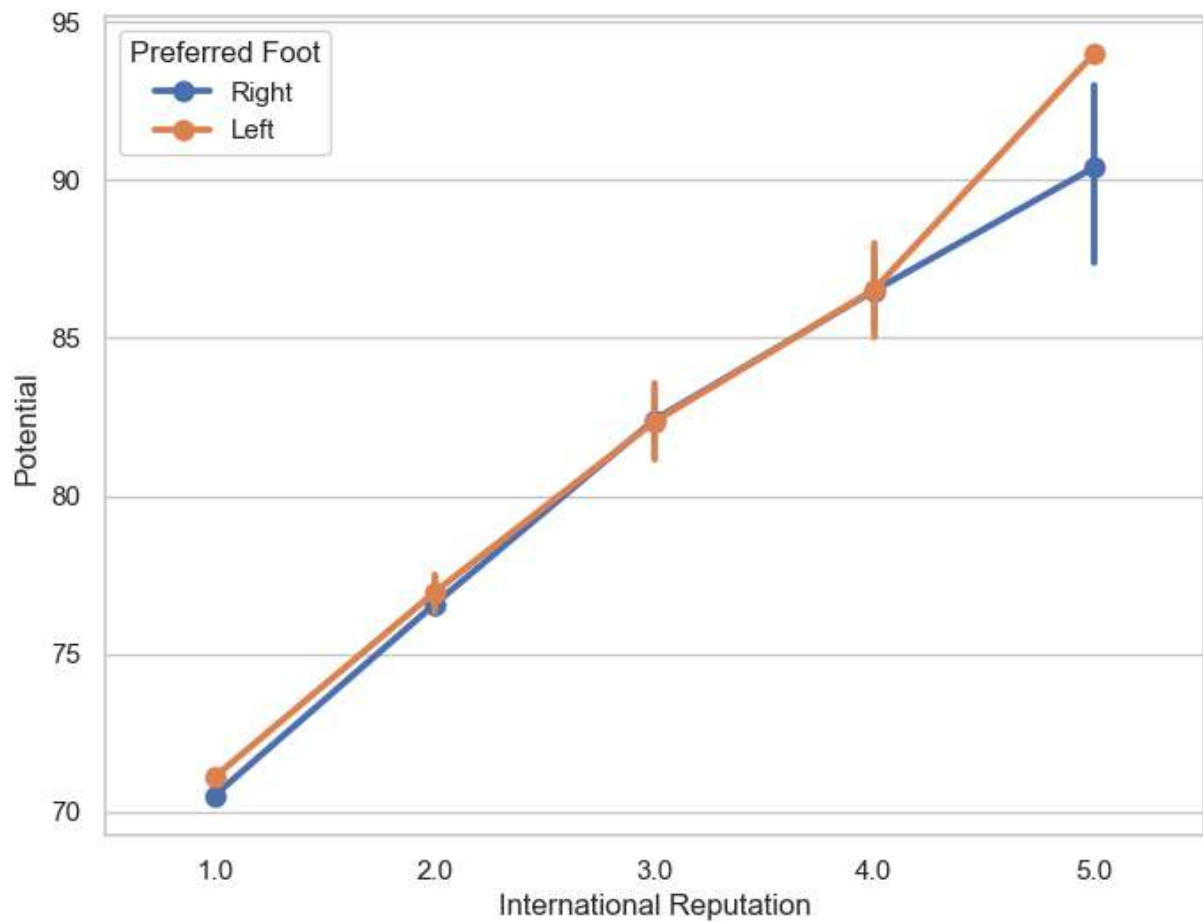

```
In [43]: f, ax = plt.subplots(figsize=(8, 6))
sns.pointplot(x="International Reputation", y="Potential", hue="Preferred Foot", da
plt.show()
```

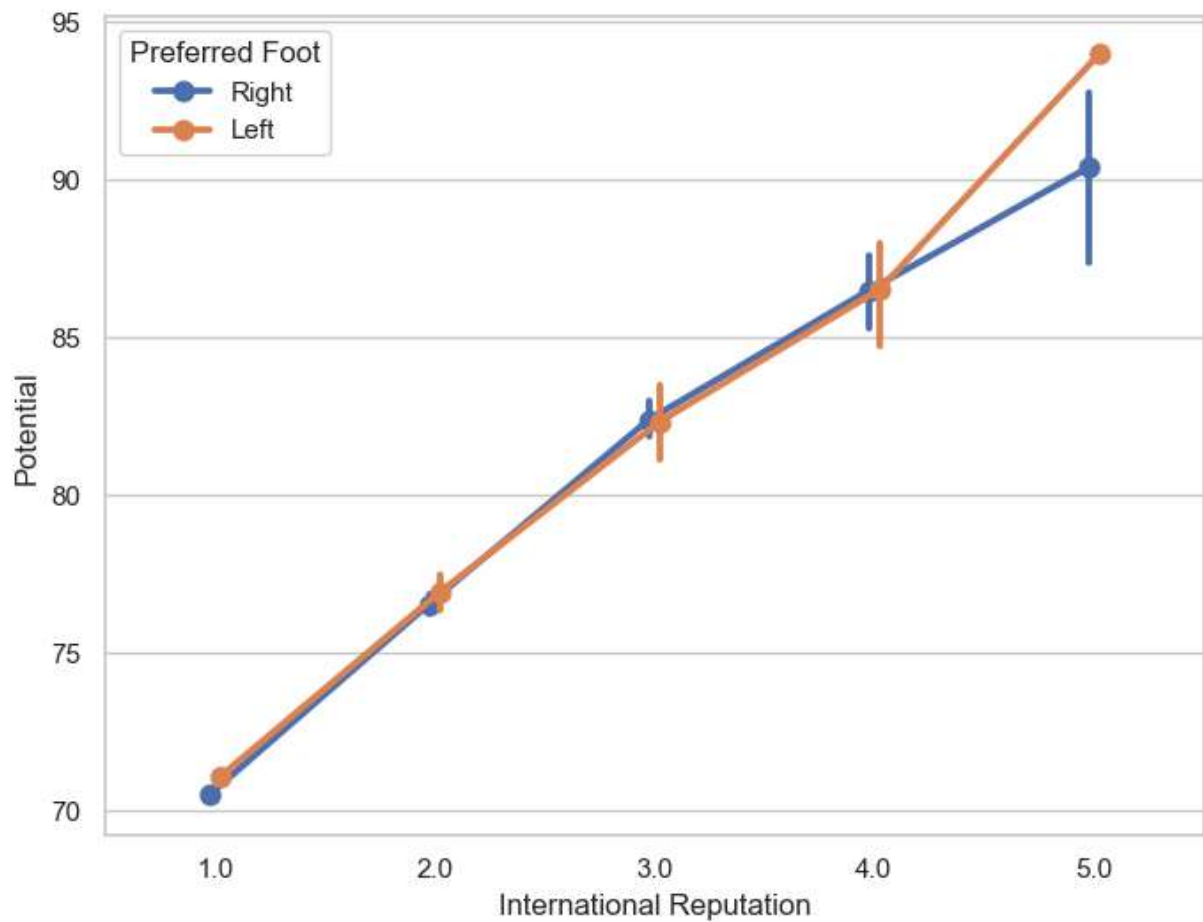


```
In [44]: f, ax = plt.subplots(figsize=(8, 6))
sns.pointplot(x="International Reputation", y="Potential", hue="Preferred Foot",
              data=fifa19, markers=["o", "x"], linestyle=["-", "--"])
plt.show()
```

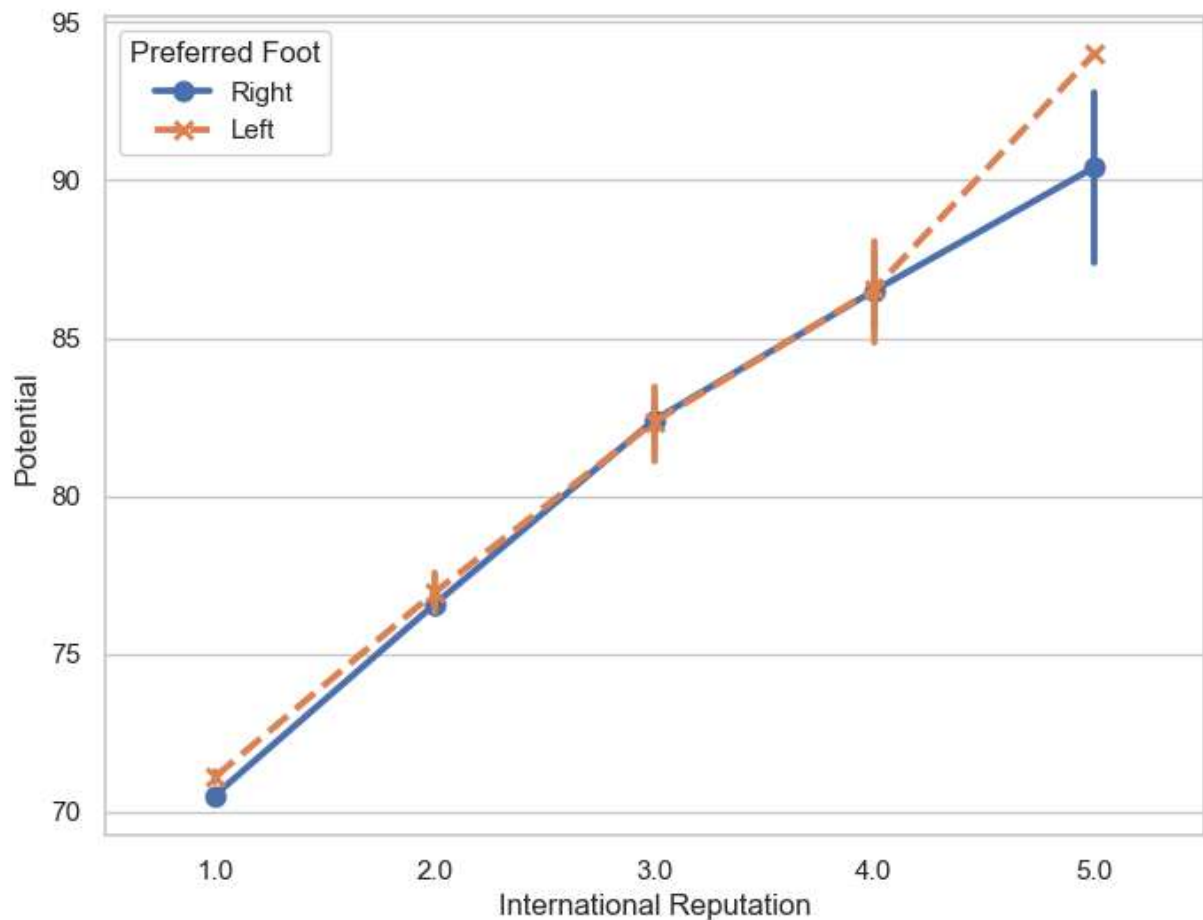


Seaborn `barplot()` function

- This function shows point estimates and confidence intervals as rectangular bars.
- A bar plot represents an estimate of central tendency for a numeric variable with the height of each rectangle and provides some indication of the uncertainty around that estimate using error bars.
- Bar plots include 0 in the quantitative axis range, and they are a good choice when 0 is a meaningful value for the quantitative variable, and you want to make comparisons against it.
- We can plot a barplot as follows-


```
In [45]: f, ax = plt.subplots(figsize=(8, 6))
sns.barplot(x="International Reputation", y="Potential", data=fifa19)
plt.show()
```

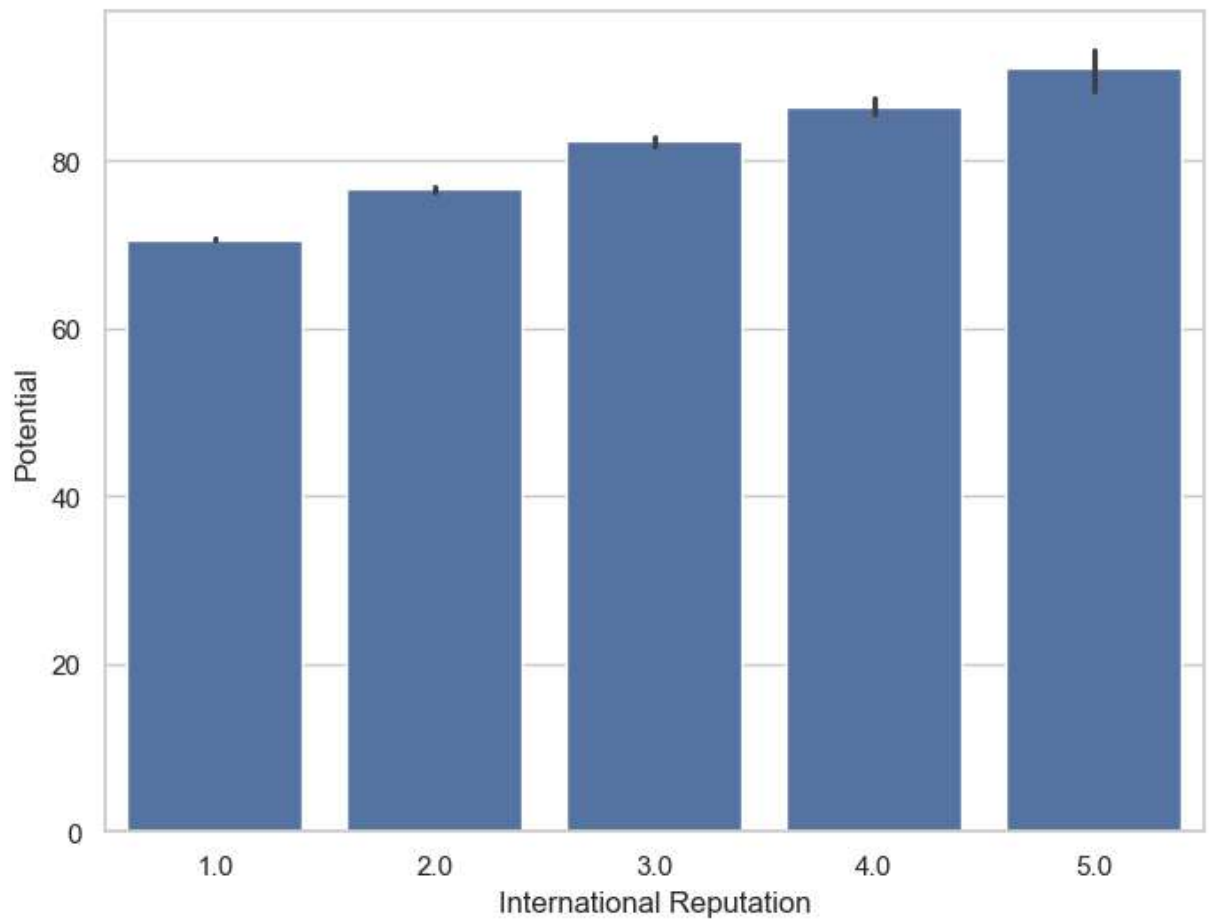


```
In [46]: f, ax = plt.subplots(figsize=(8, 6))
sns.barplot(x="International Reputation", y="Potential", hue="Preferred Foot", data
plt.show()
```

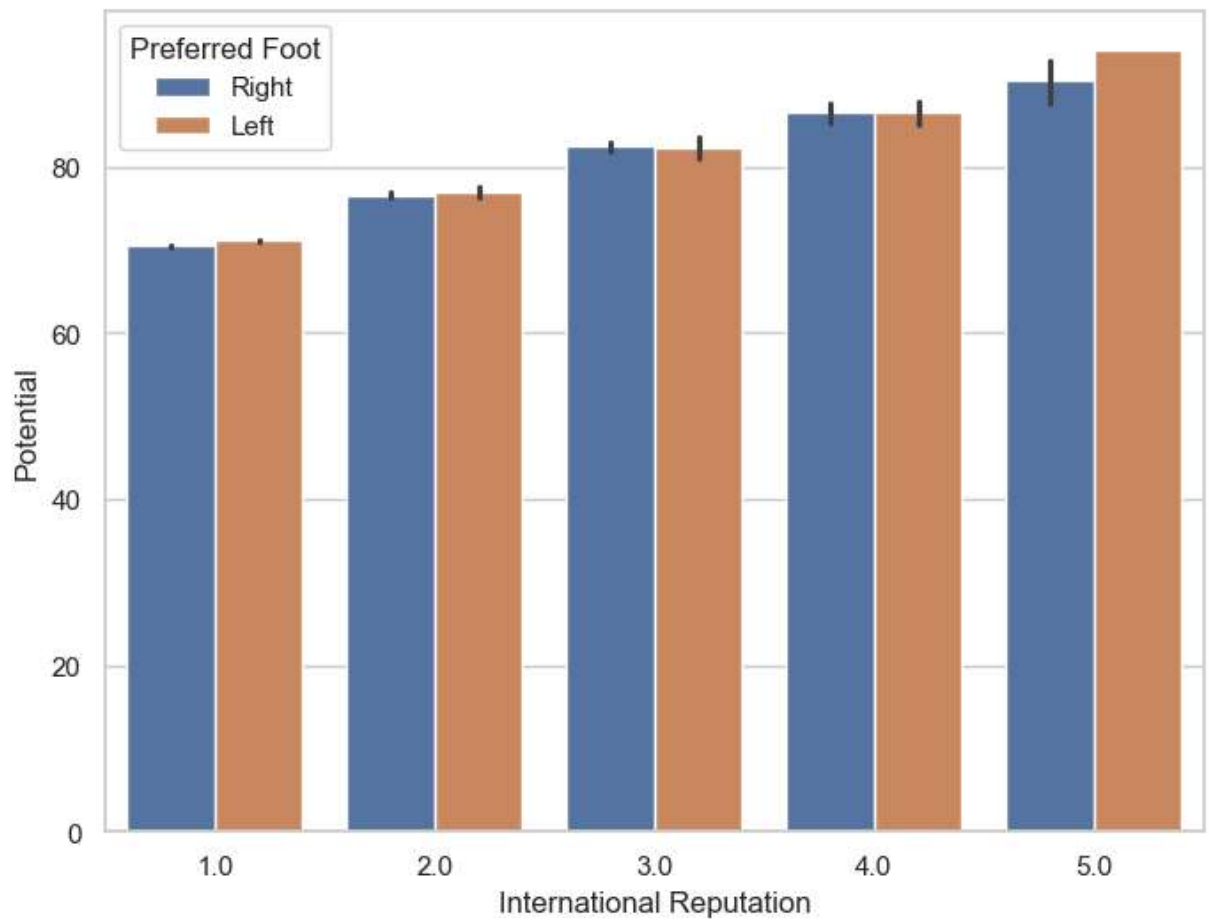


```
In [47]: from numpy import median
f, ax = plt.subplots(figsize=(8, 6))
sns.barplot(x="International Reputation", y="Potential", data=fifa19, estimator=median)
plt.show()
```

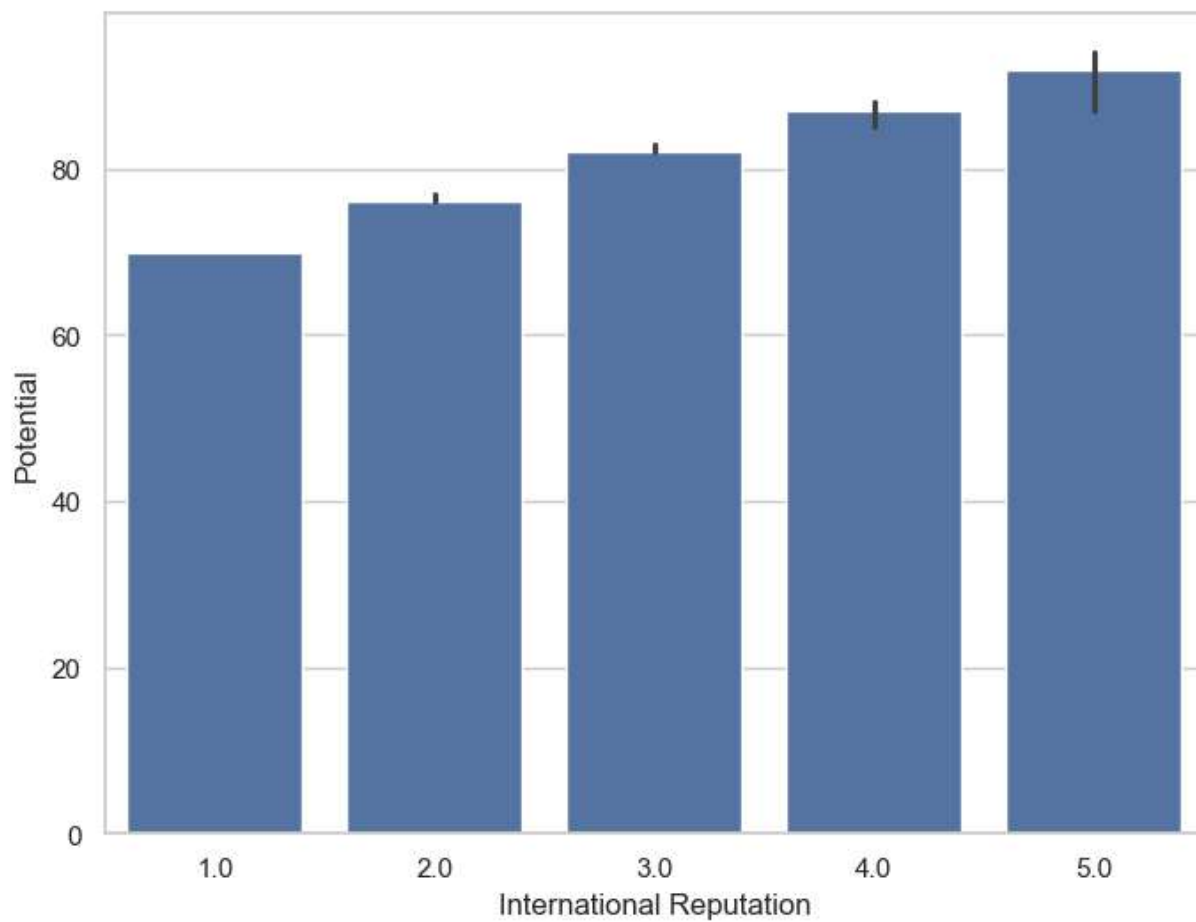


```
In [48]: f, ax = plt.subplots(figsize=(8, 6))  
sns.barplot(x="International Reputation", y="Potential", data=fifa19, ci=68)  
plt.show()
```

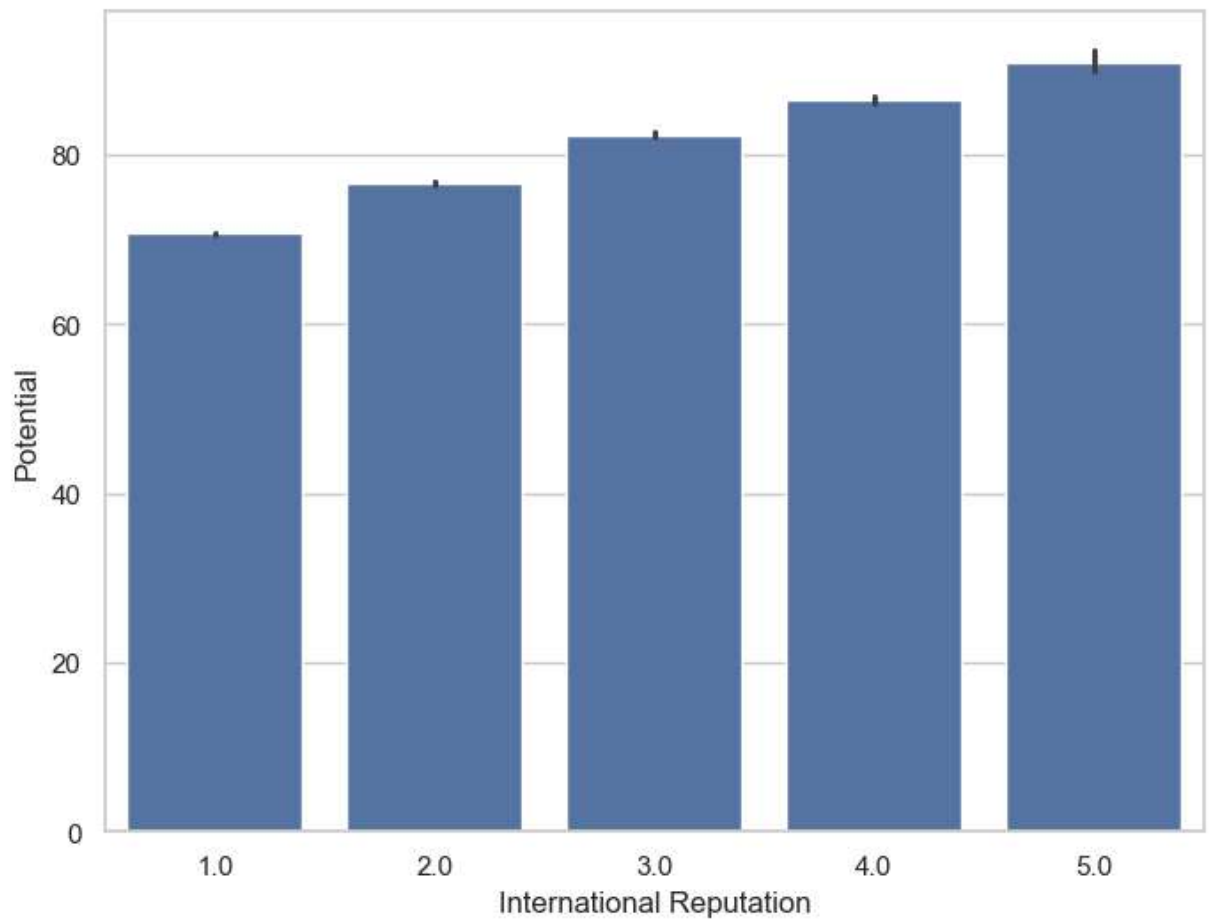

```
In [49]: f, ax = plt.subplots(figsize=(8, 6))
sns.barplot(x="International Reputation", y="Potential", data=fifa19, ci="sd")
plt.show()
```

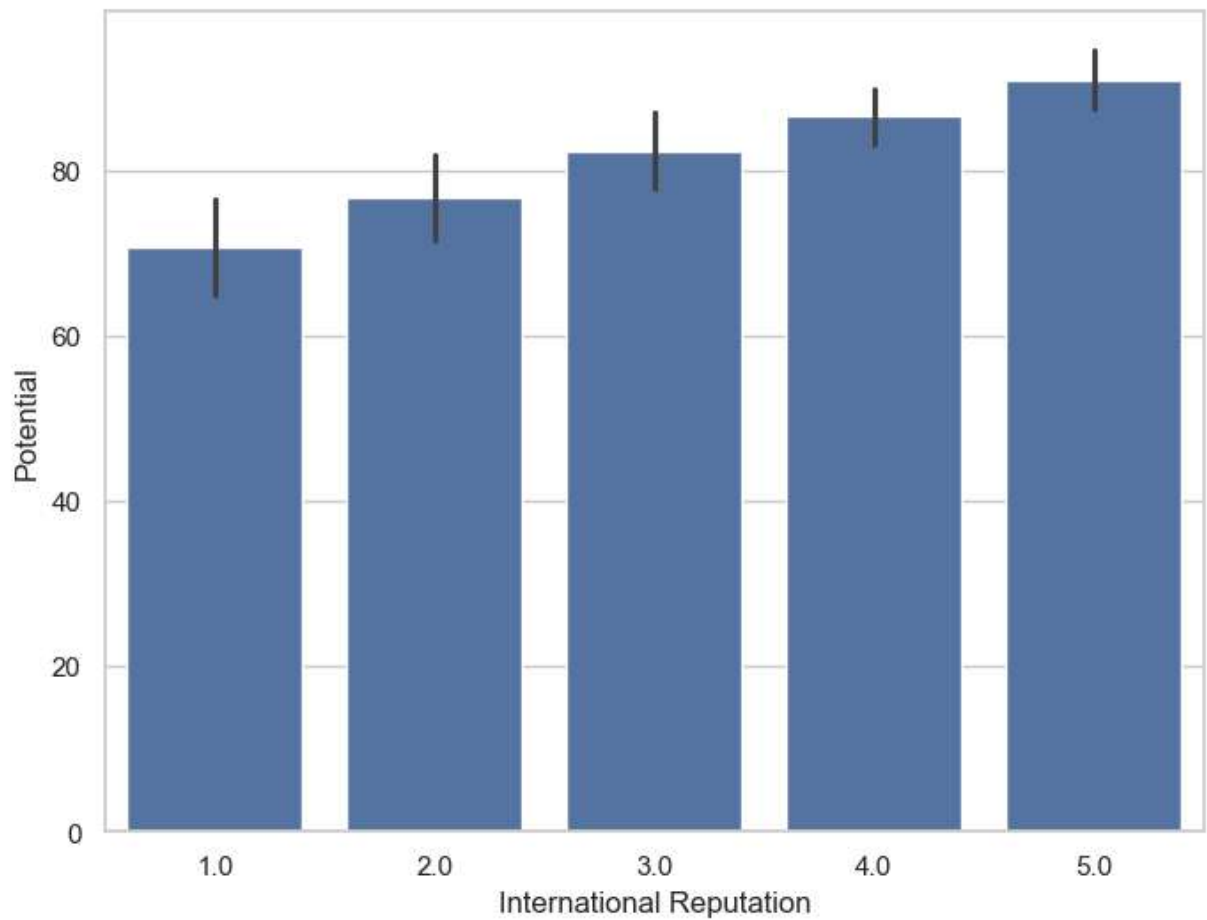

```
In [50]: f, ax = plt.subplots(figsize=(8, 6))
sns.barplot(x="International Reputation", y="Potential", data=fifa19, capsize=0.2)
plt.show()
```

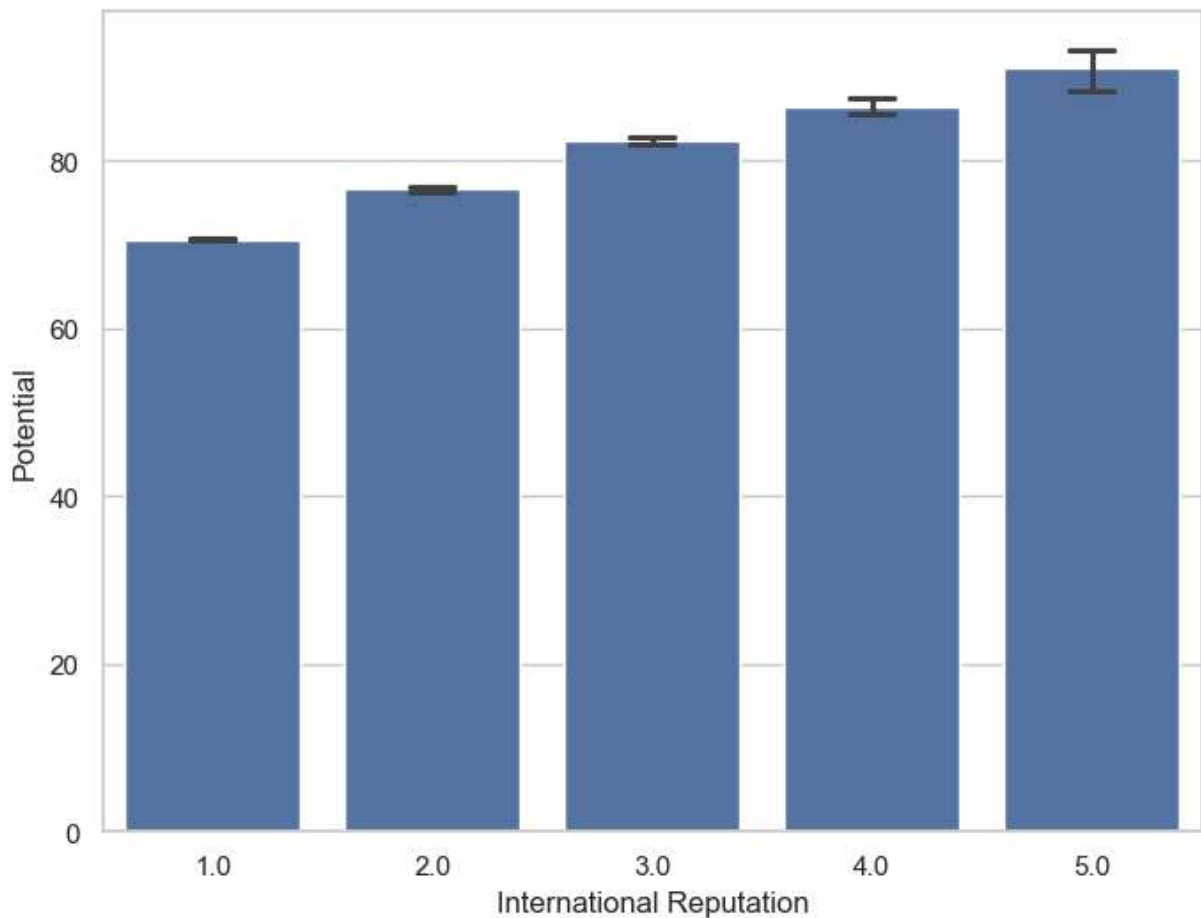


Visualizing statistical relationship with Seaborn `relplot()` function

Seaborn `relplot()` function

- Seaborn `relplot()` function helps us to draw figure-level interface for drawing relational plots onto a FacetGrid.
- This function provides access to several different axes-level functions that show the relationship between two variables with semantic mappings of subsets.
- The `kind` parameter selects the underlying axes-level function to use-
 - `scatterplot()` (with `kind="scatter"`; the default)
 - `lineplot()` (with `kind="line"`)


```
In [56]: g = sns.relplot(x="Overall", y="Potential", data=fifa19)
g
plt.show()
```

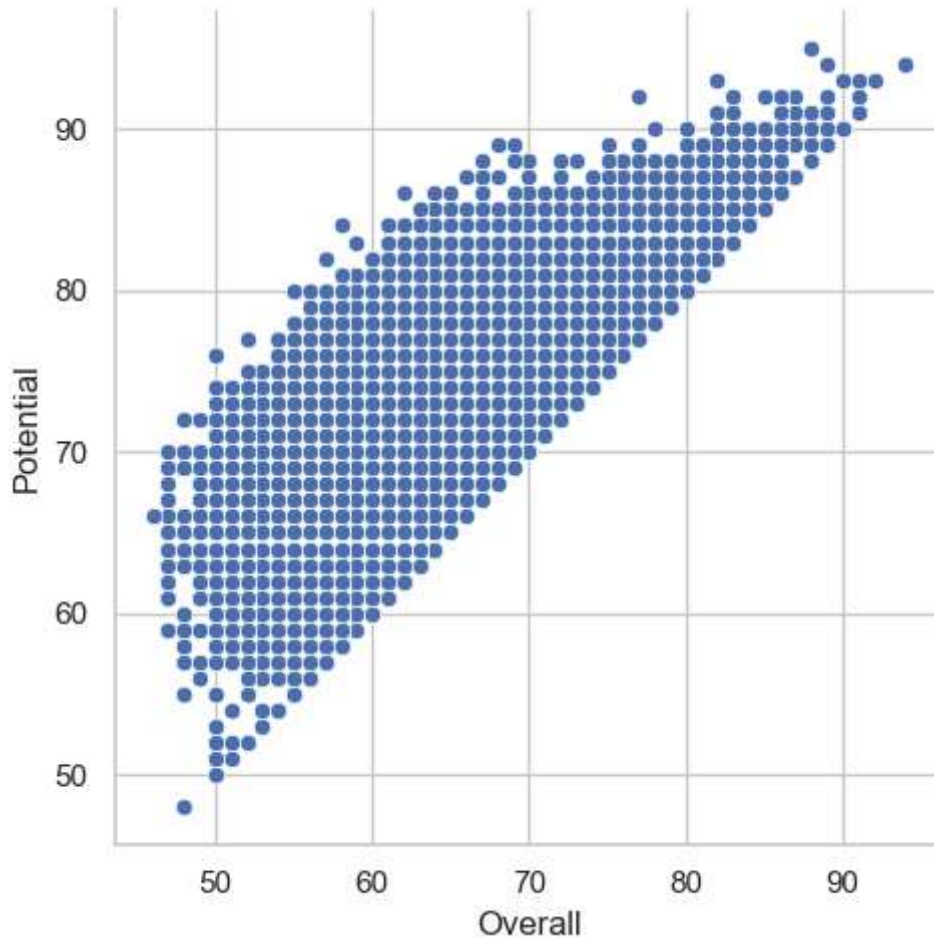

Seaborn `scatterplot()` function

- This function draws a scatter plot with possibility of several semantic groups.
- The relationship between x and y can be shown for different subsets of the data using the `hue`, `size` and `style` parameters.
- These parameters control what visual semantics are used to identify the different subsets.


```
In [57]: f, ax = plt.subplots(figsize=(8, 6))  
sns.scatterplot(x="Height", y="Weight", data=fifa19)  
plt.show()
```

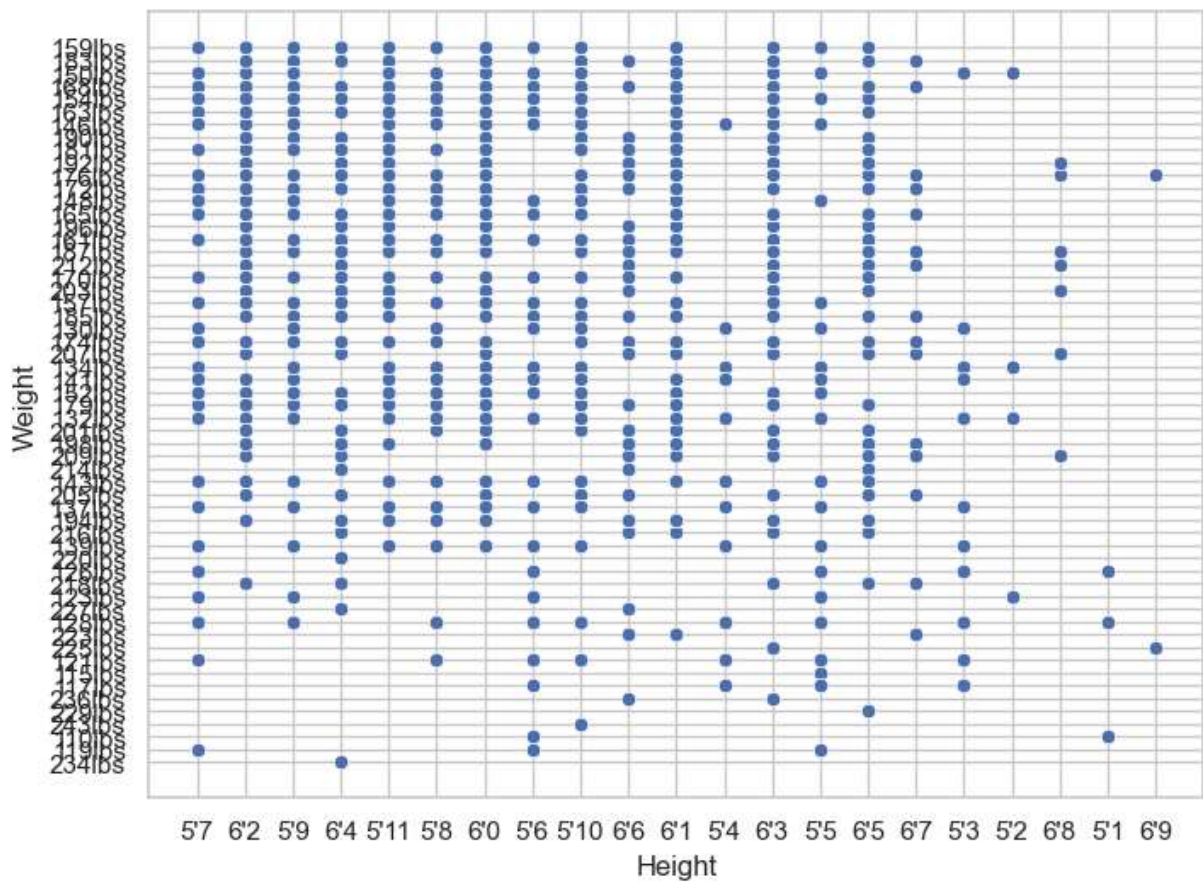

Seaborn `lineplot()` function

- This function draws a line plot with possibility of several semantic groupings.
- The relationship between x and y can be shown for different subsets of the data using the `hue`, `size` and `style` parameters.
- These parameters control what visual semantics are used to identify the different subsets.

```
In [58]: f, ax = plt.subplots(figsize=(8, 6))
ax = sns.lineplot(x="Stamina", y="Strength", data=fifa19)
plt.show()
```

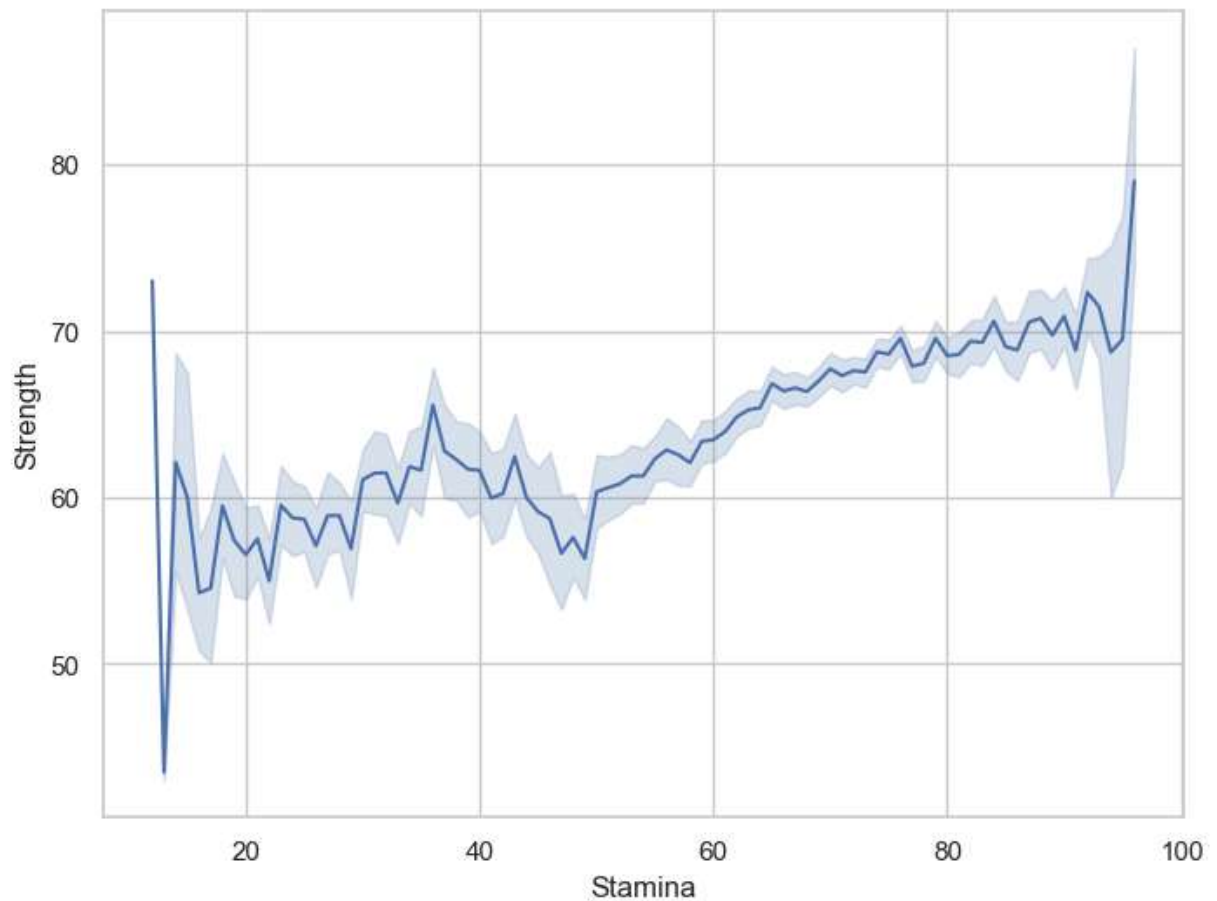


Visualize linear relationship with Seaborn `regplot()` function


Seaborn `regplot()` function

- This function plots data and a linear regression model fit.
- We can plot a linear regression model between `Overall` and `Potential` variable with `regplot()` function as follows-


```
In [59]: f, ax = plt.subplots(figsize=(8, 6))
ax = sns.regplot(x="Overall", y="Potential", data=fifa19)
plt.show()
```

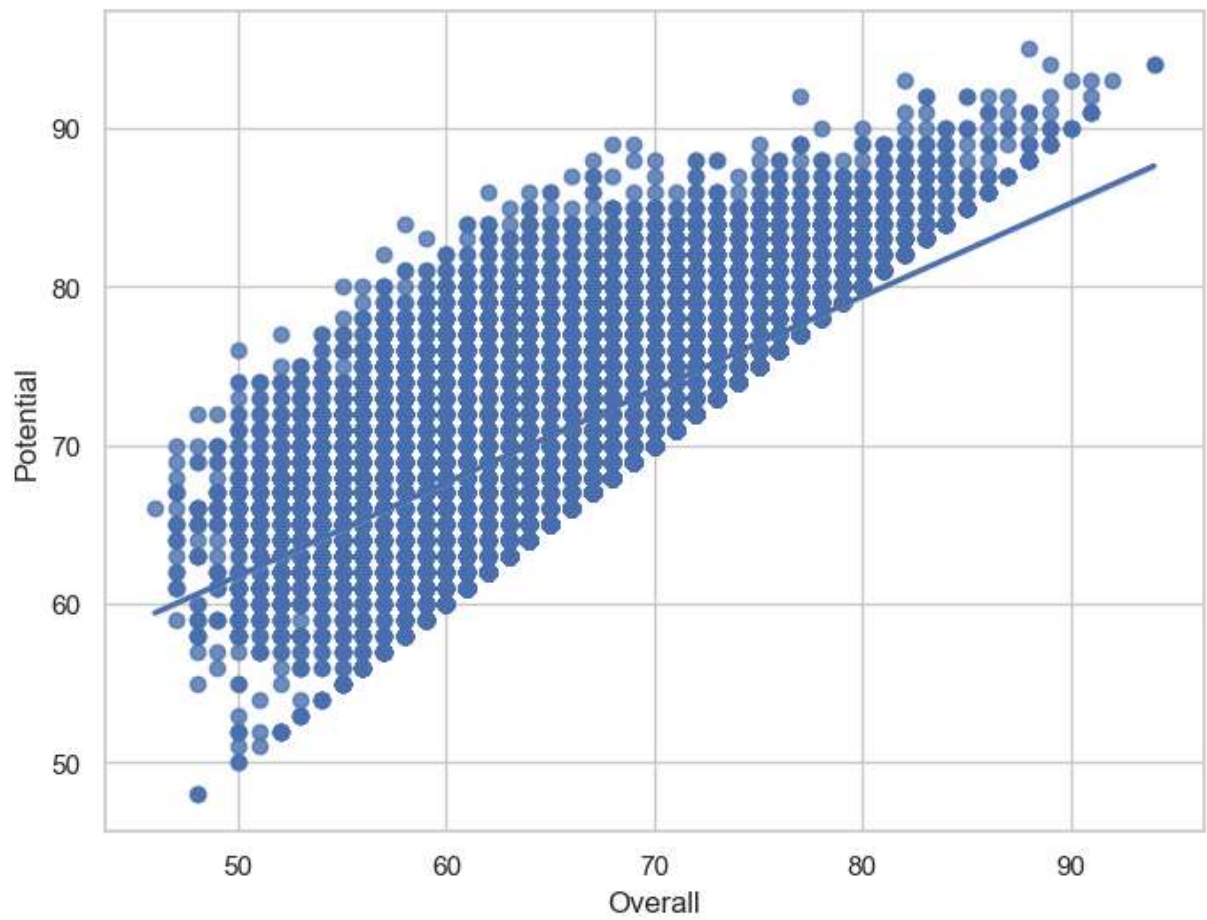

```
In [60]: f, ax = plt.subplots(figsize=(8, 6))
ax = sns.regplot(x="Overall", y="Potential", data=fifa19, color="g", marker="+")
plt.show()
```

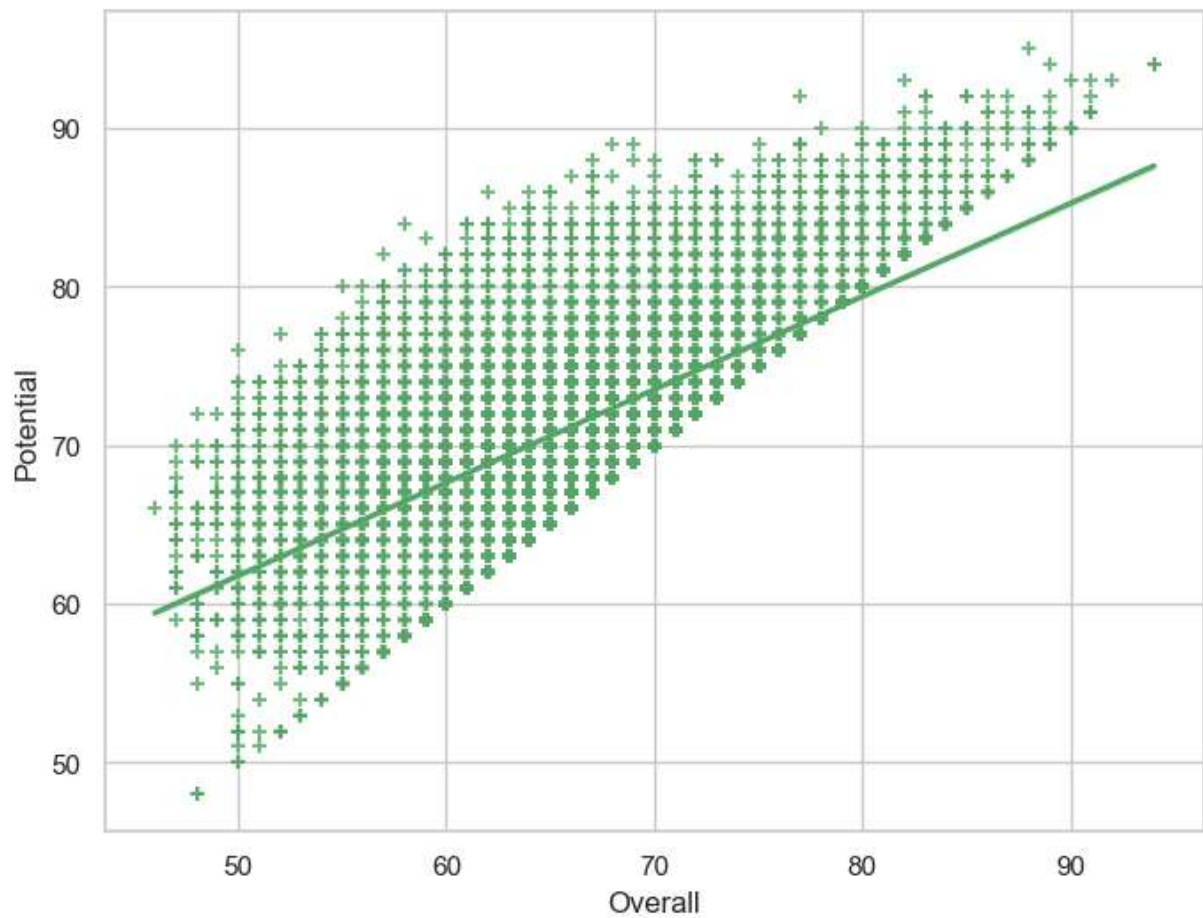


```
In [61]: f, ax = plt.subplots(figsize=(8, 6))
sns.regplot(x="International Reputation", y="Potential", data=fifa19, x_jitter=.01)
plt.show()
```

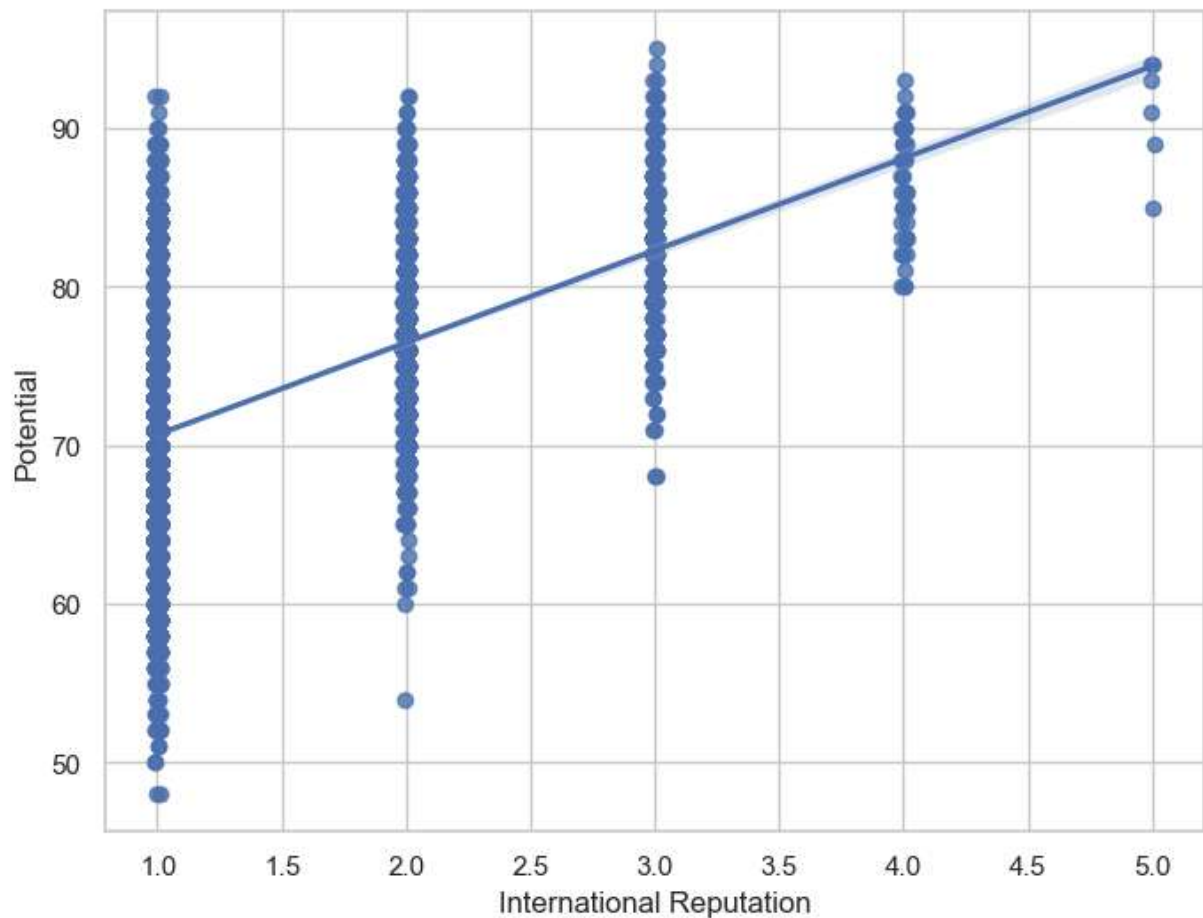


Seaborn `lplot()` function

- This function plots data and regression model fits across a `FacetGrid`.
- This function combines `regplot()` and `FacetGrid`.
- It is intended as a convenient interface to fit regression models across conditional subsets of a dataset.
- We can plot a linear regression model between `Overall` and `Potential` variable with `lplot()` function as follows-


```
In [64]: g = sns.lplot(x="Overall", y="Potential", data=fifa19)
g
plt.show()
```

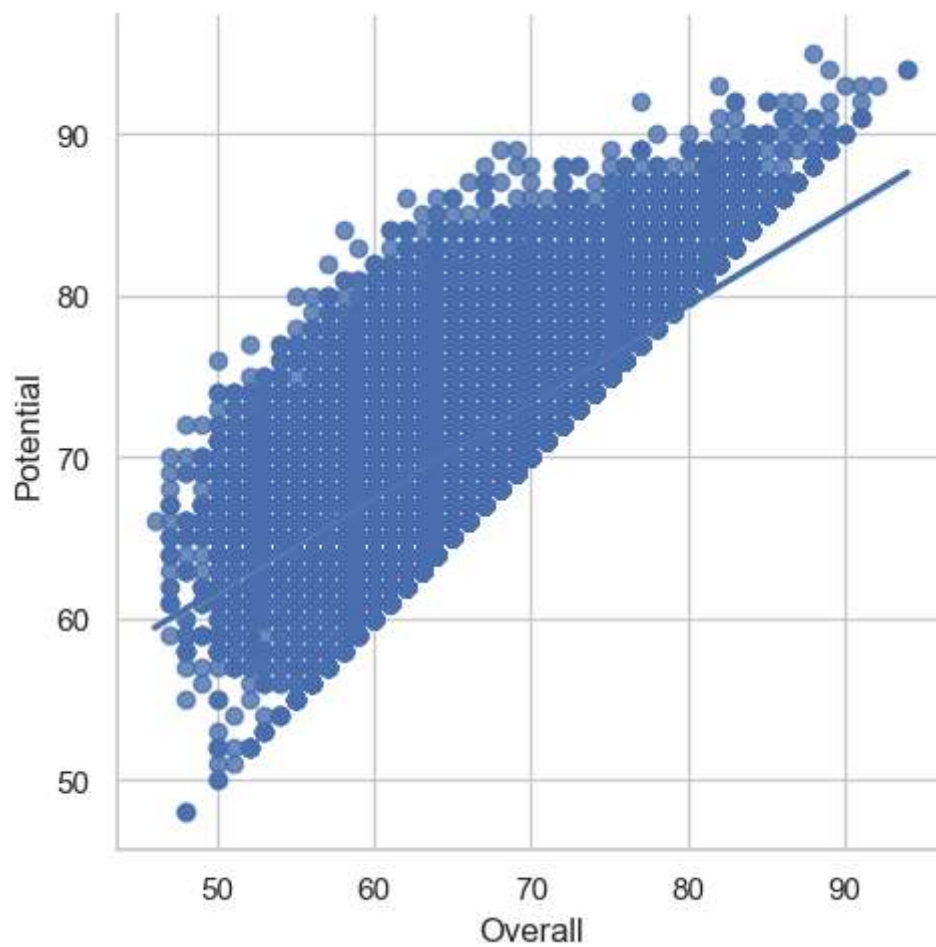


```
In [67]: g = sns.lmplot(x="Overall", y="Potential", hue="Preferred Foot", data=fifa19)
plt.show()
```

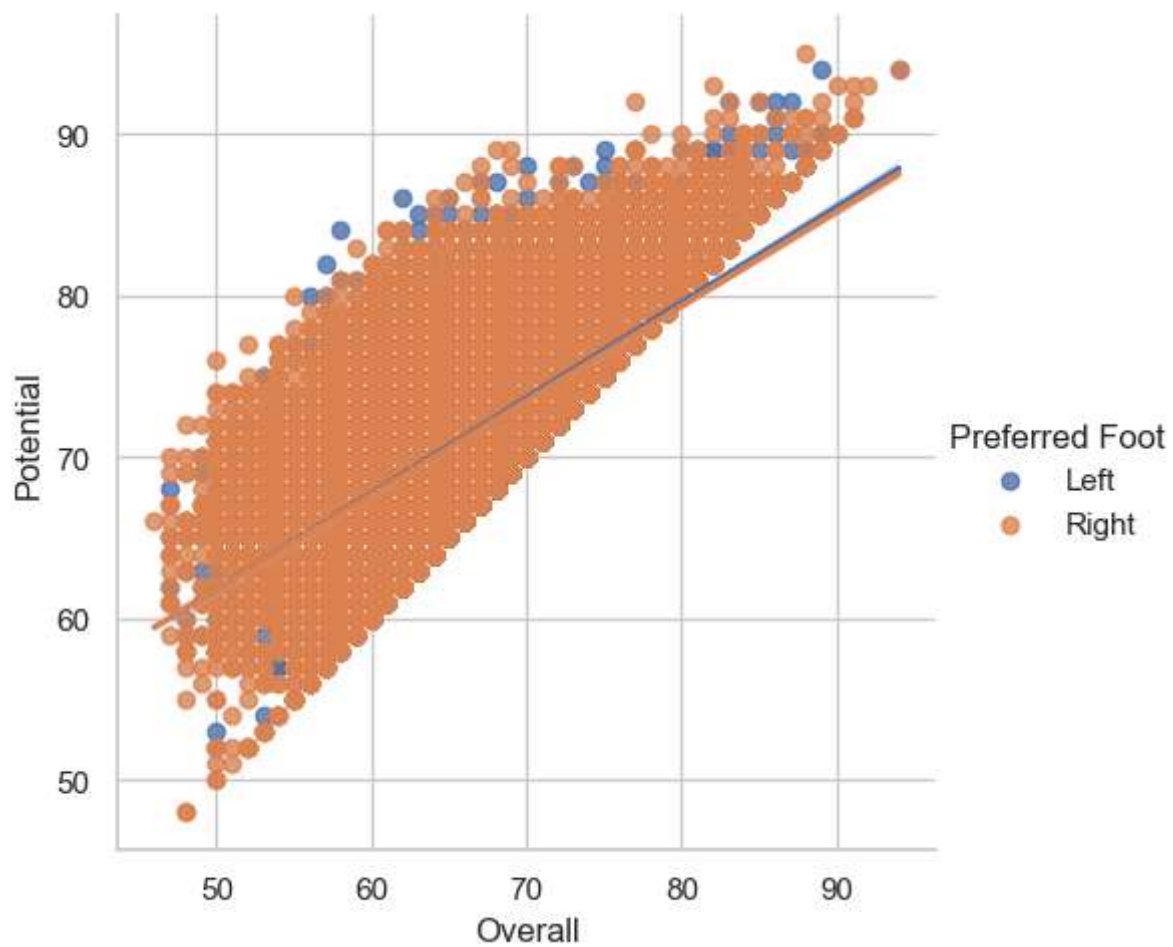

```
In [70]: g = sns.lmplot(x="Overall", y="Potential", hue="Preferred Foot", data=fifa19, palette="m",  
plt.show()
```

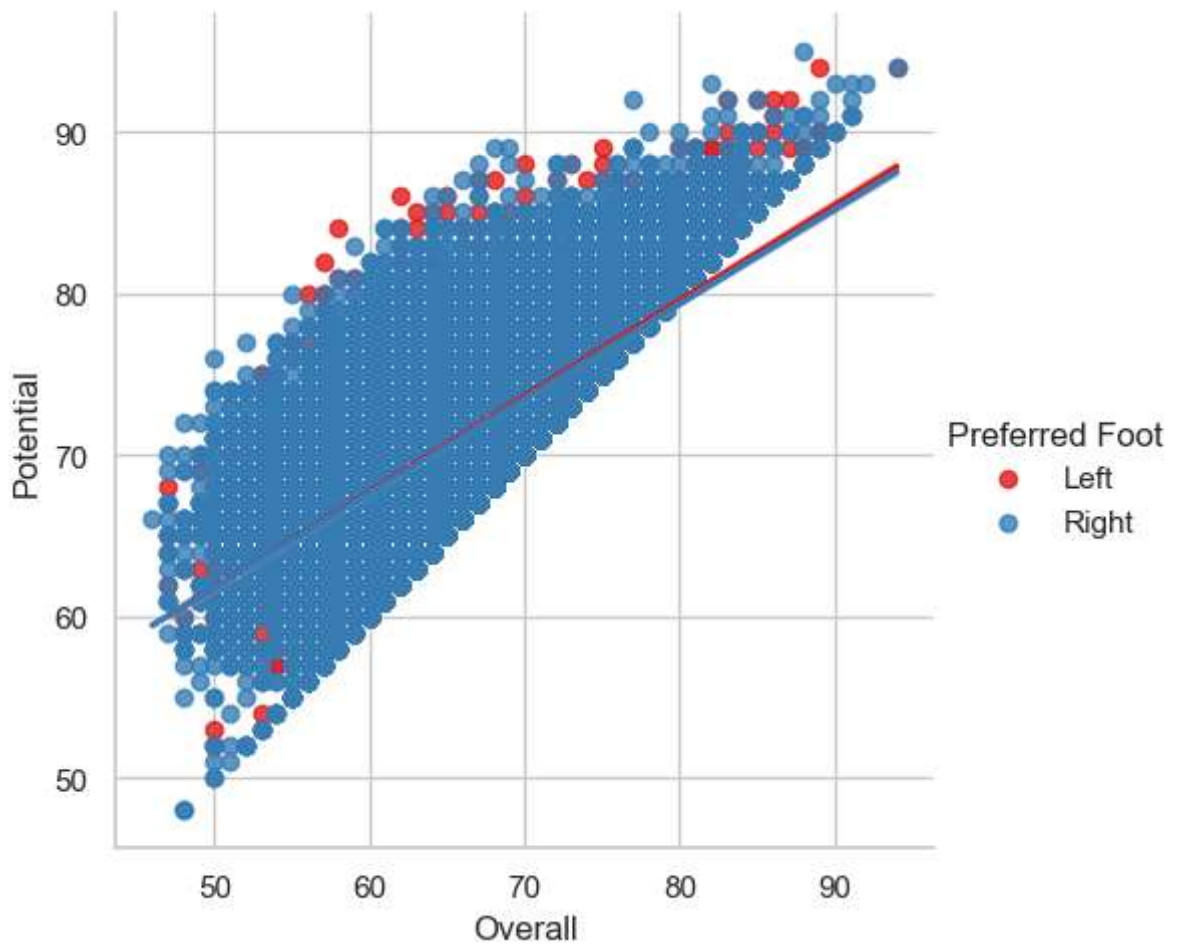

```
In [72]: g = sns.lmplot(x="Overall", y="Potential", col="Preferred Foot", data=fifa19)
plt.show()
```

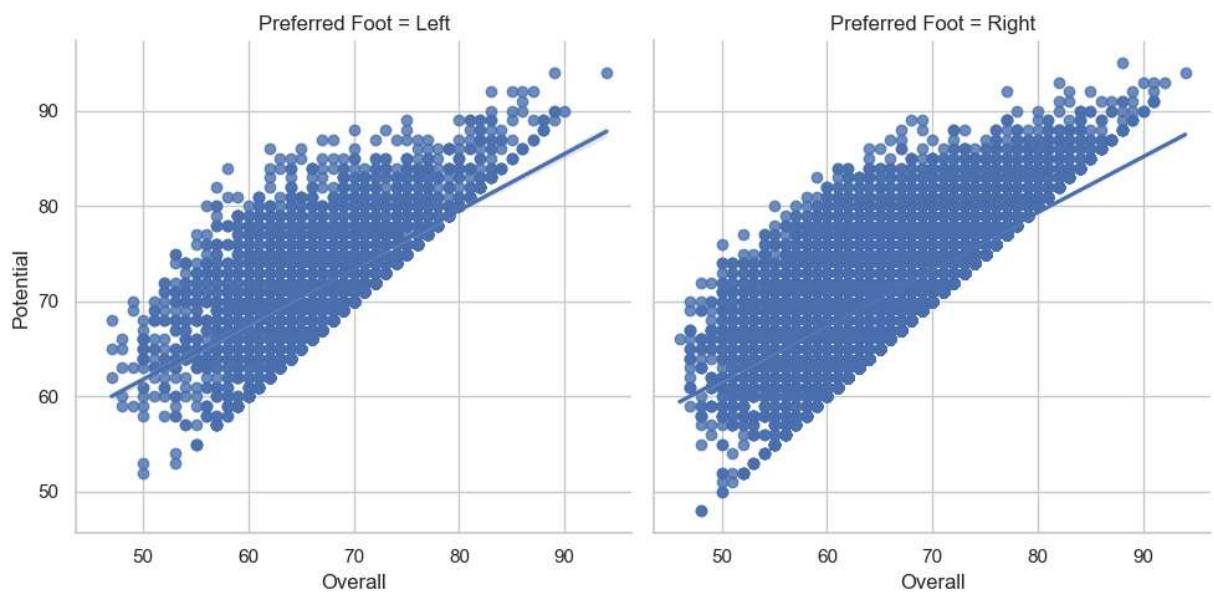


Multi-plot grids


Seaborn `FacetGrid()` function

- The FacetGrid class is useful when you want to visualize the distribution of a variable or the relationship between multiple variables separately within subsets of your dataset.
- A FacetGrid can be drawn with up to three dimensions - `row`, `col` and `hue`. The first two have obvious correspondence with the resulting array of axes - the `hue` variable is a third dimension along a depth axis, where different levels are plotted with different colors.
- The class is used by initializing a FacetGrid object with a dataframe and the names of the variables that will form the `row`, `column` or `hue` dimensions of the grid.
- These variables should be categorical or discrete, and then the data at each level of the variable will be used for a facet along that axis.


```
In [75]: g = sns.FacetGrid(fifa19, col="Preferred Foot")
plt.show()
```

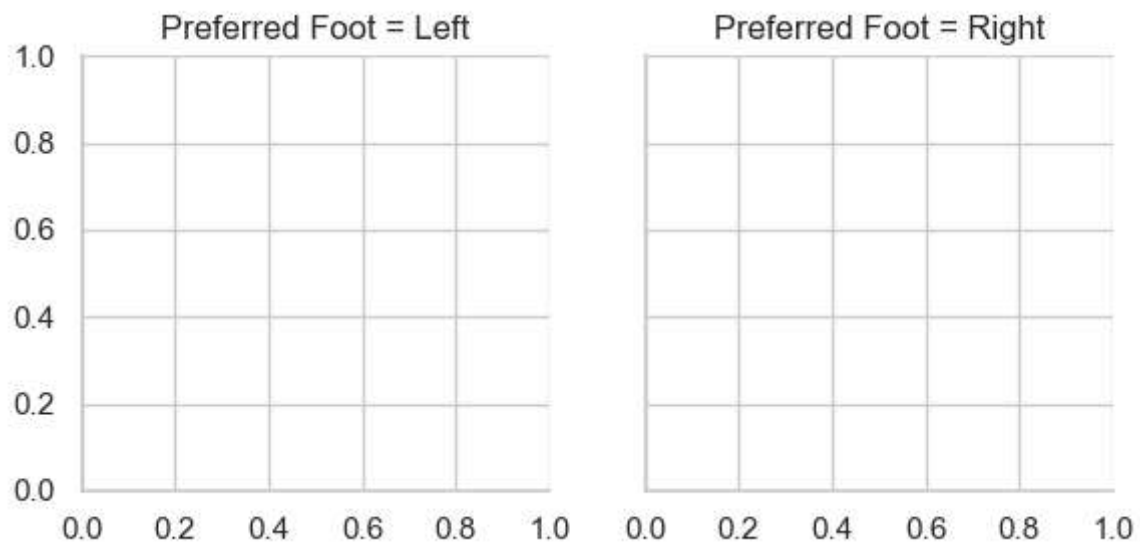


```
In [78]: g = sns.FacetGrid(fifa19, col="Preferred Foot")
g = g.map(plt.hist, "Potential")
plt.show()
```

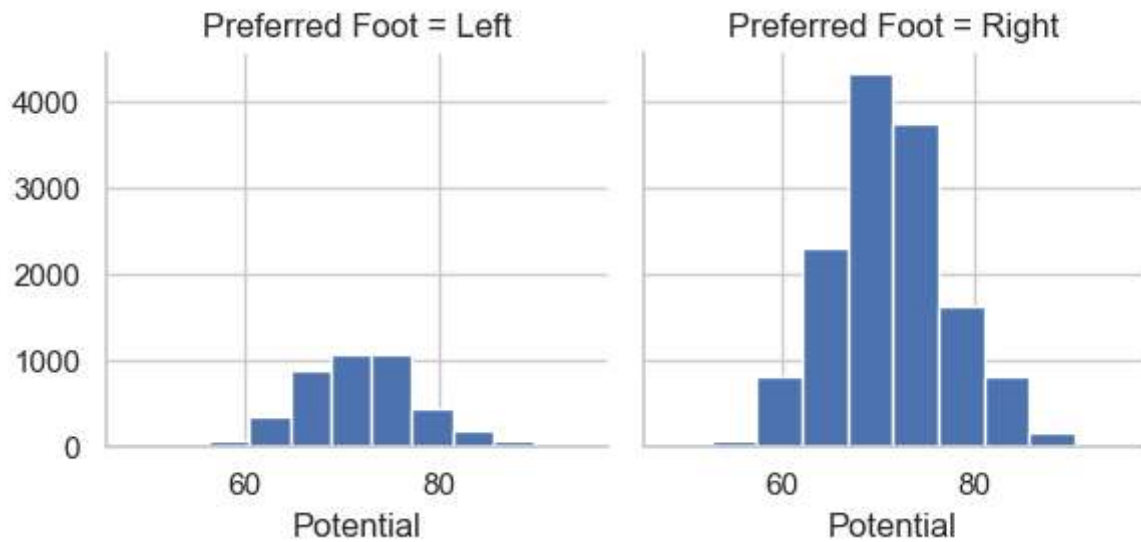


```
In [80]: g = sns.FacetGrid(fifa19, col="Preferred Foot")
g = g.map(plt.hist, "Potential", bins=10, color="r")
plt.show()
```

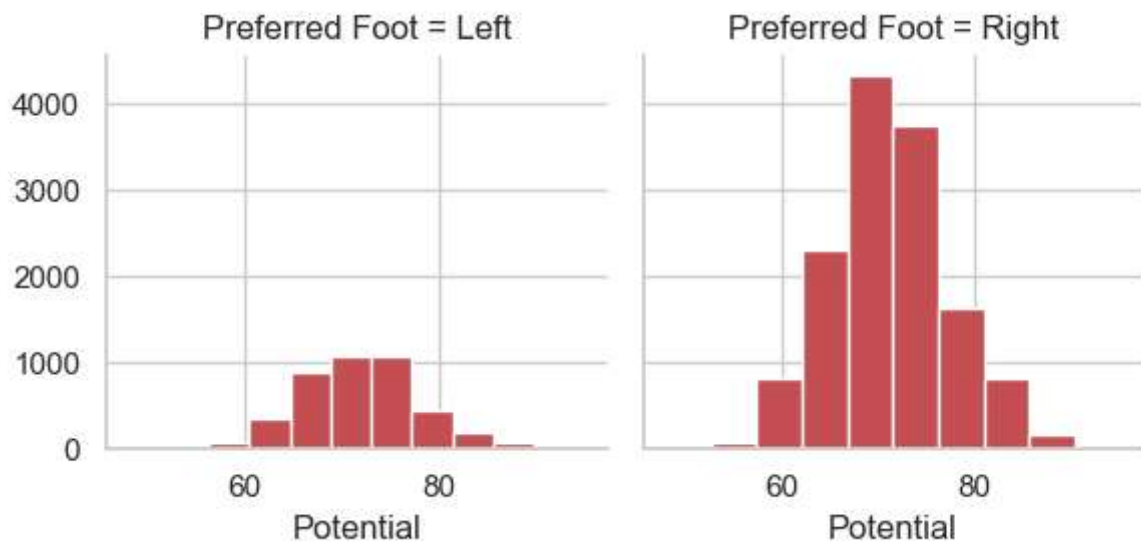

```
In [83]: g = sns.FacetGrid(fifa19, col="Preferred Foot")
g = (g.map(plt.scatter, "Height", "Weight", edgecolor="w").add_legend())
plt.show()
```

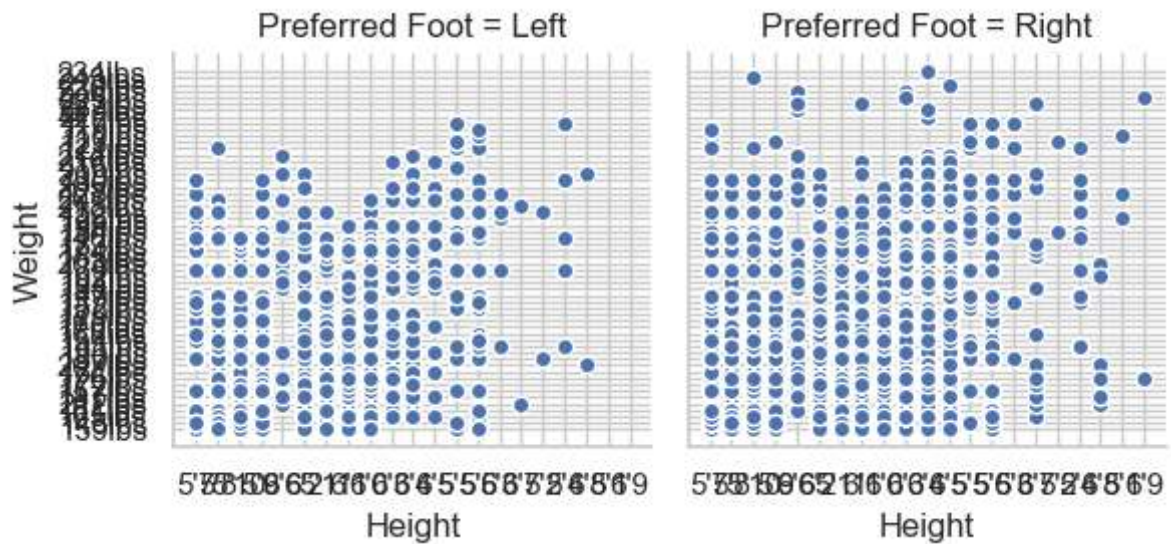

```
In [86]: g = sns.FacetGrid(fifa19, col="Preferred Foot", height=5, aspect=1)
g = g.map(plt.hist, "Potential")
plt.show()
```

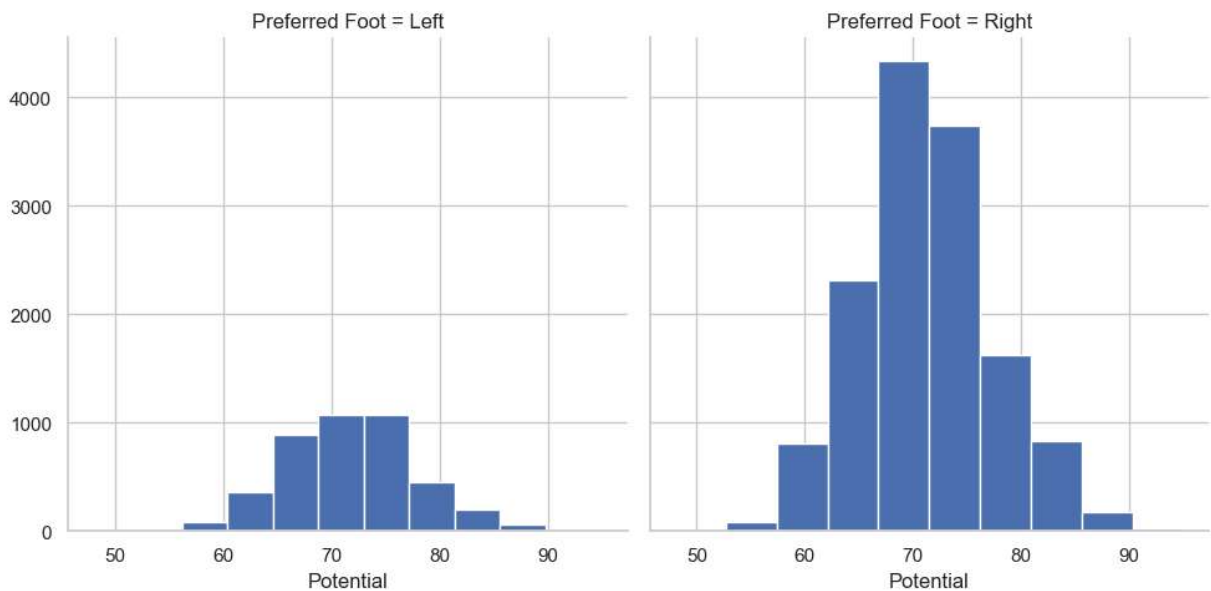


Seaborn Pairgrid() function

- This function plots subplot grid for plotting pairwise relationships in a dataset.
- This class maps each variable in a dataset onto a column and row in a grid of multiple axes.
- Different axes-level plotting functions can be used to draw bivariate plots in the upper and lower triangles, and the the marginal distribution of each variable can be shown on the diagonal.
- It can also represent an additional level of conditionalization with the hue parameter, which plots different subsets of data in different colors.


- This uses color to resolve elements on a third dimension, but only draws subsets on top of each other and will not tailor the hue parameter for the specific visualization the way that axes-level functions that accept hue will.

```
In [90]: fifa19_new = fifa19[['Age', 'Potential', 'Strength', 'Stamina', 'Preferred Foot']]
```


```
In [93]: g = sns.PairGrid(fifa19_new)
g = g.map(plt.scatter)
plt.show()
```

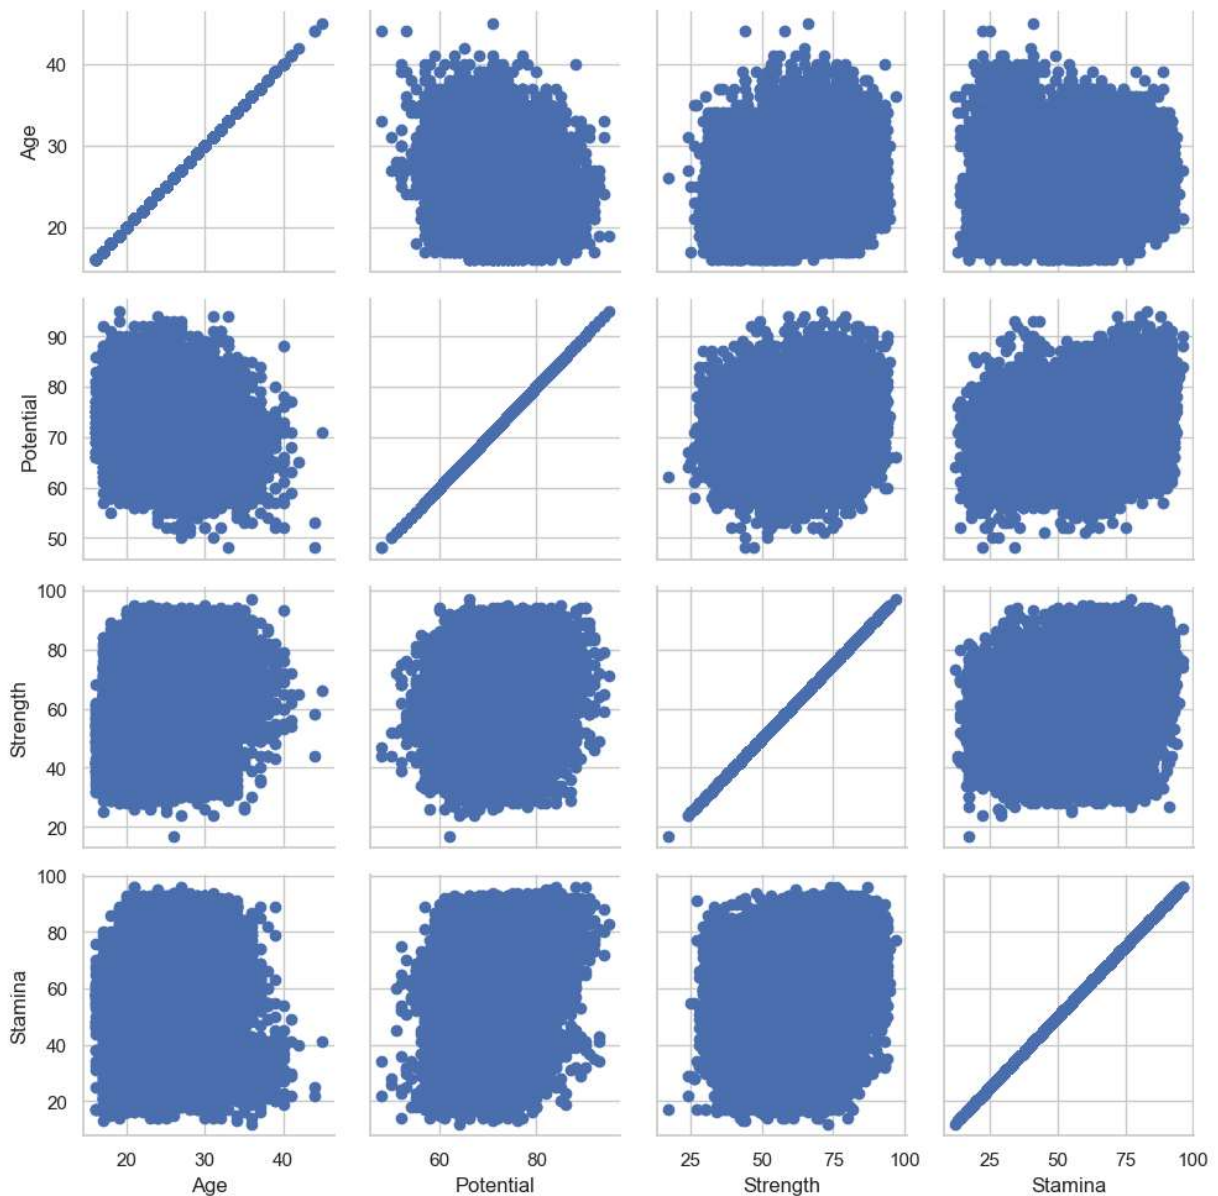

```
In [96]: g = sns.PairGrid(fifa19_new)
g = g.map_diag(plt.hist)
g = g.map_offdiag(plt.scatter)
plt.show()
```

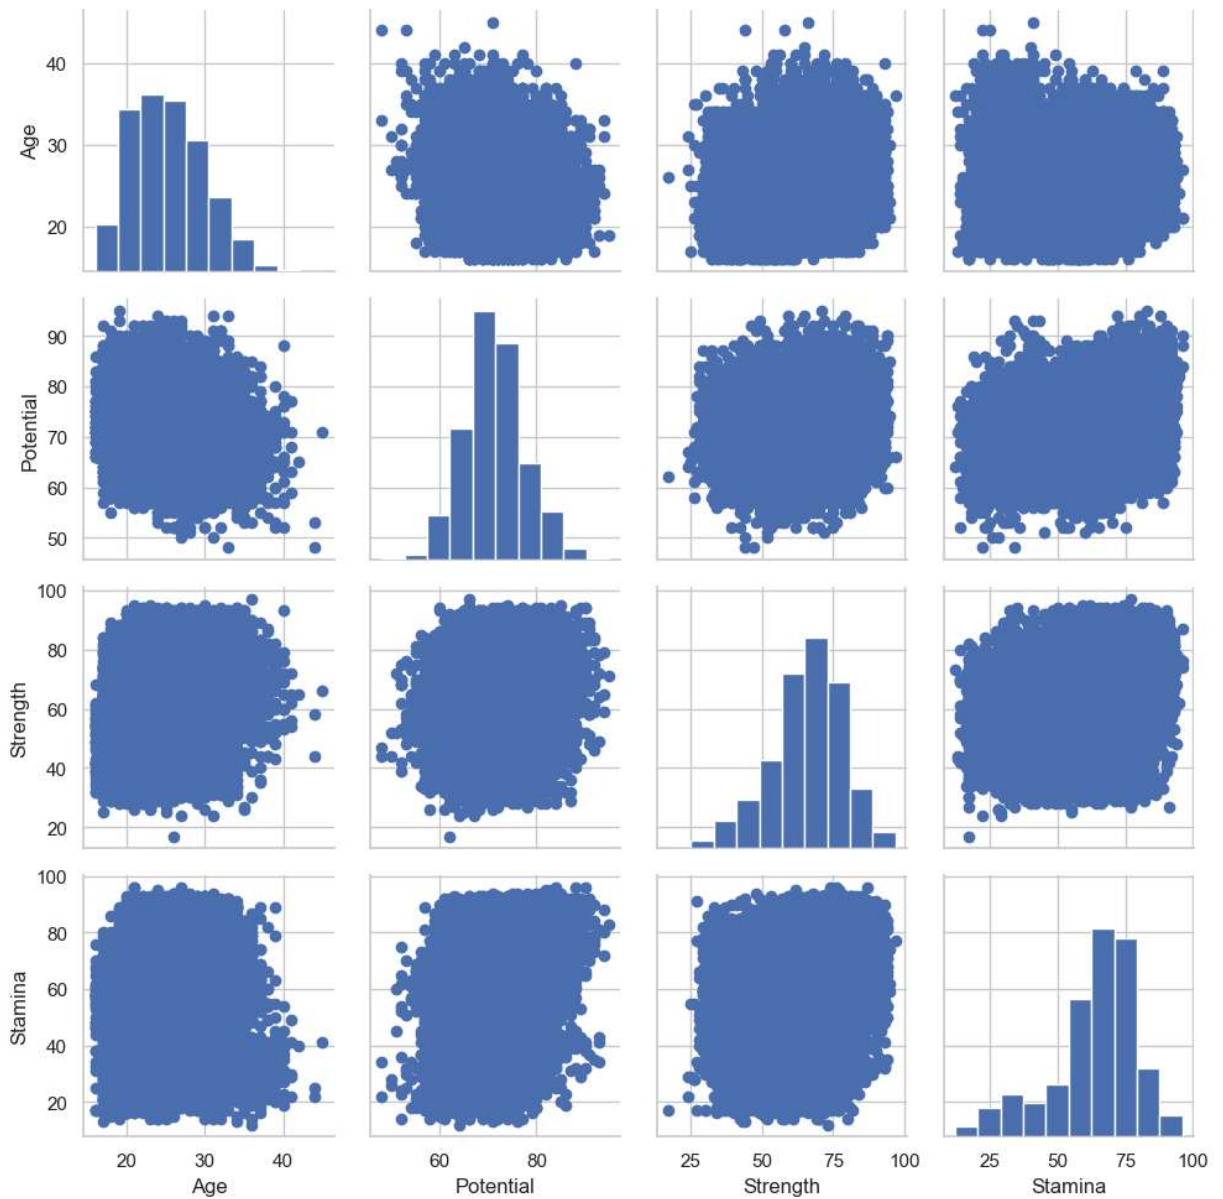


```
In [99]: g = sns.PairGrid(fifa19_new, hue="Preferred Foot")
g = g.map_diag(plt.hist)
g = g.map_offdiag(plt.scatter)
g = g.add_legend()
plt.show()
```

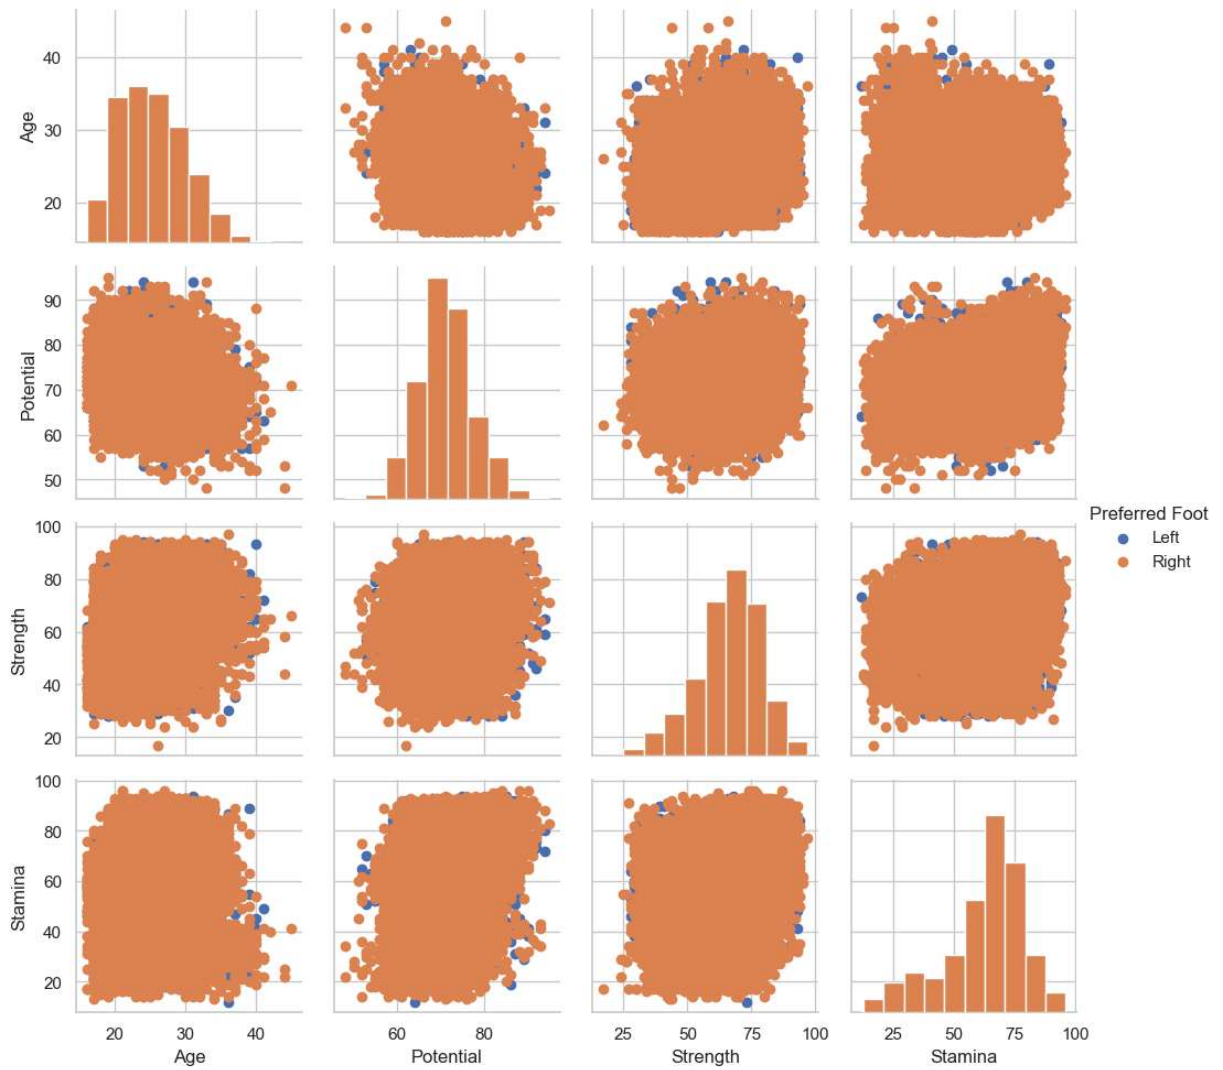


In [100...

```
g = sns.PairGrid(fifa19_new, hue="Preferred Foot")
g = g.map_diag(plt.hist, histtype="step", linewidth=3)
g = g.map_offdiag(plt.scatter)
g = g.add_legend()
plt.show()
```

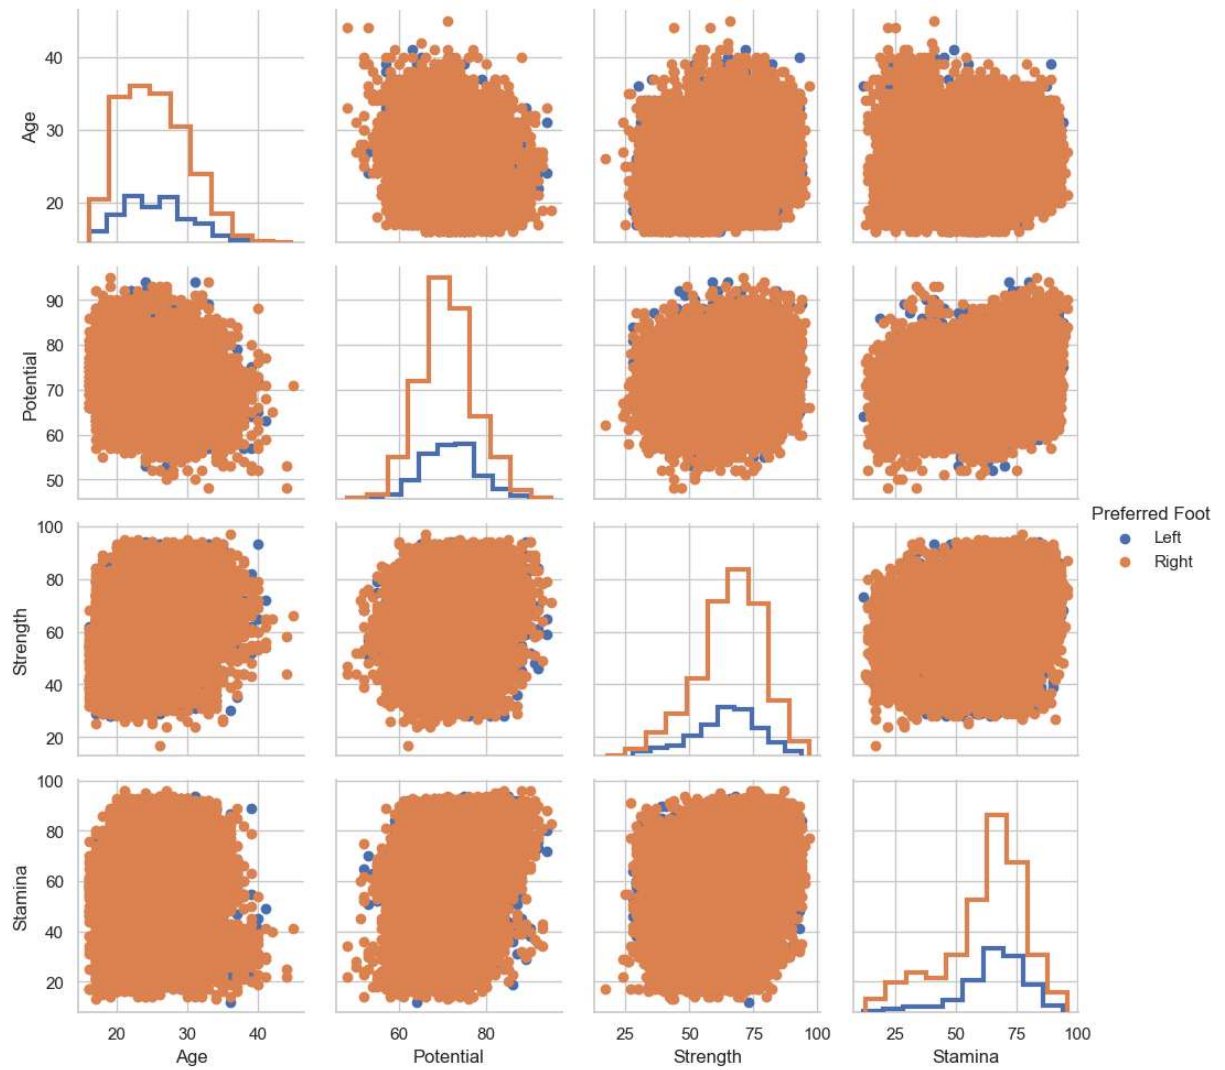


```
In [103... g = sns.PairGrid(fifa19_new, vars=['Age', 'Stamina'])
g = g.map(plt.scatter)
plt.show()
```

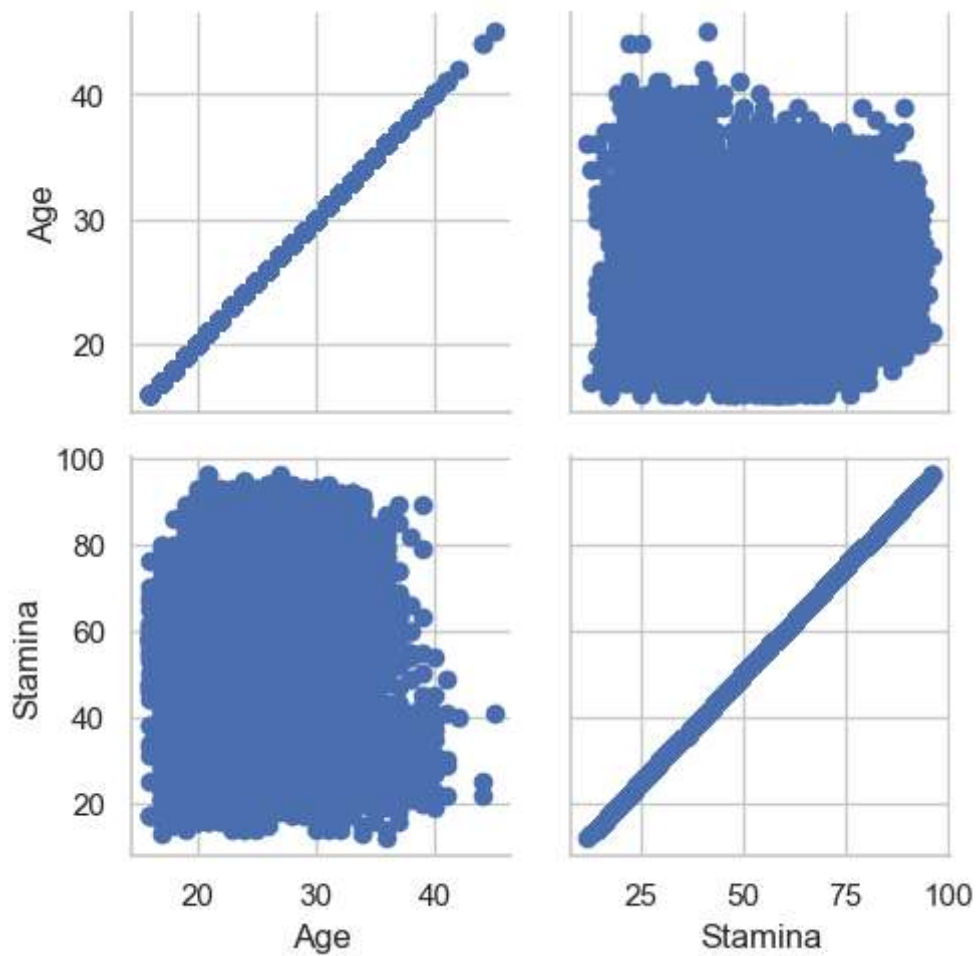

In [108...


```
g = sns.PairGrid(fifa19_new)
g = g.map_upper(plt.scatter)
g = g.map_lower(sns.kdeplot, cmap="Blues_d")
g = g.map_diag(sns.kdeplot, lw=3, legend=False)
plt.show()
```

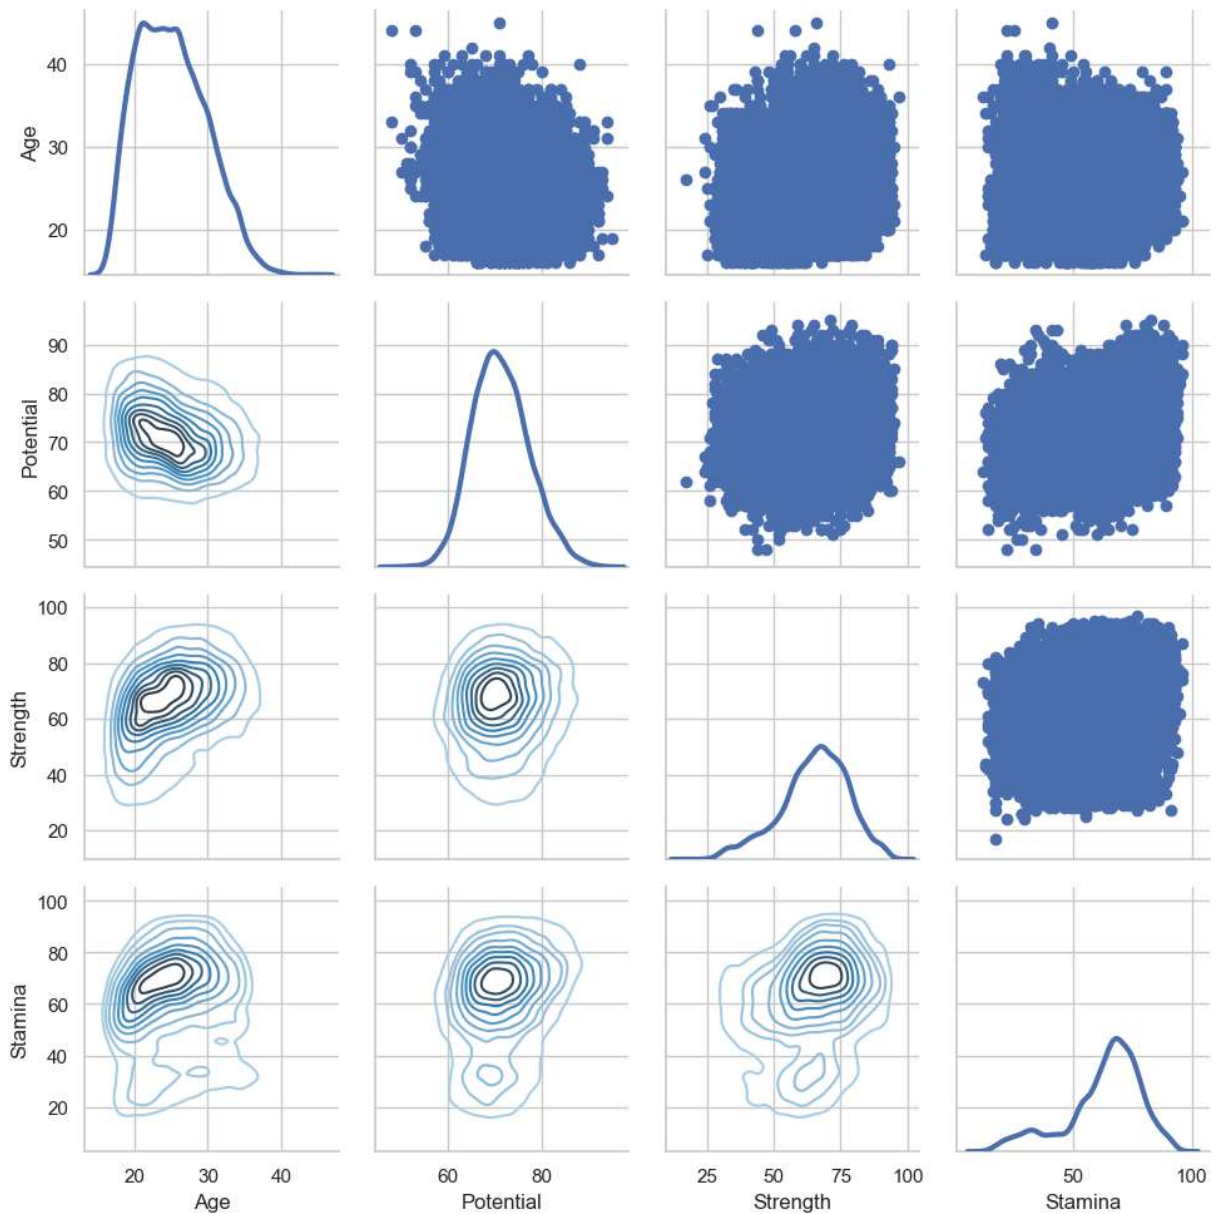

Seaborn Jointgrid() function


- This function provides a grid for drawing a bivariate plot with marginal univariate plots.
- It set up the grid of subplots.

```
In [109... g = sns.JointGrid(x="Overall", y="Potential", data=fifa19)
g = g.plot(sns.regplot, sns.distplot)
plt.show()
```

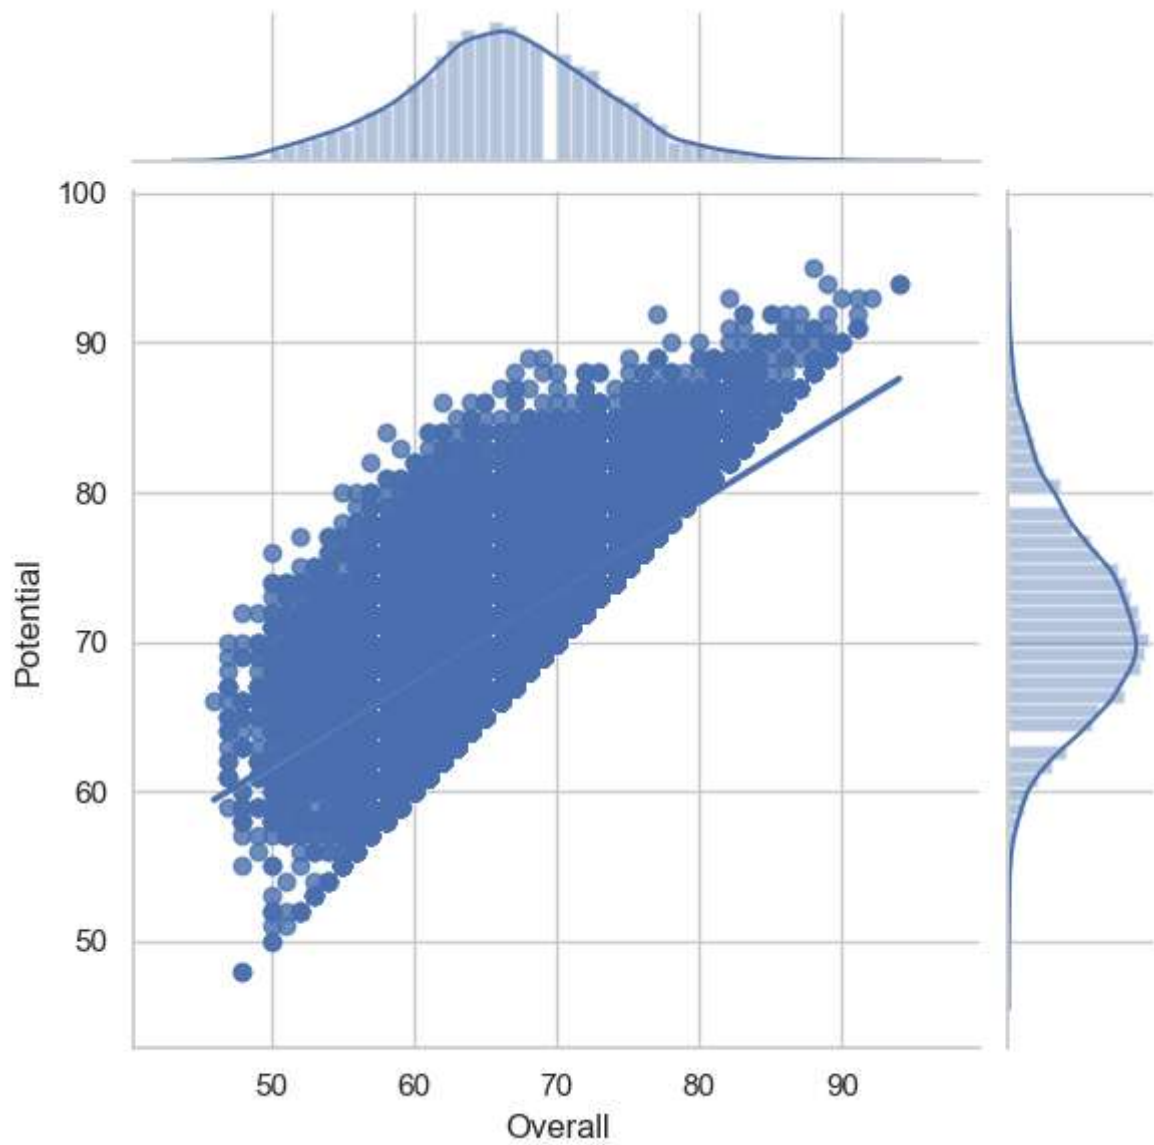


```
In [110...] import matplotlib.pyplot as plt
```


```
In [113...] g = sns.JointGrid(x="Overall", y="Potential", data=fifa19)
g = g.plot_joint(plt.scatter, color=".5", edgecolor="white")
g = g.plot_marginals(sns.distplot, kde=False, color=".5")
plt.show()
```

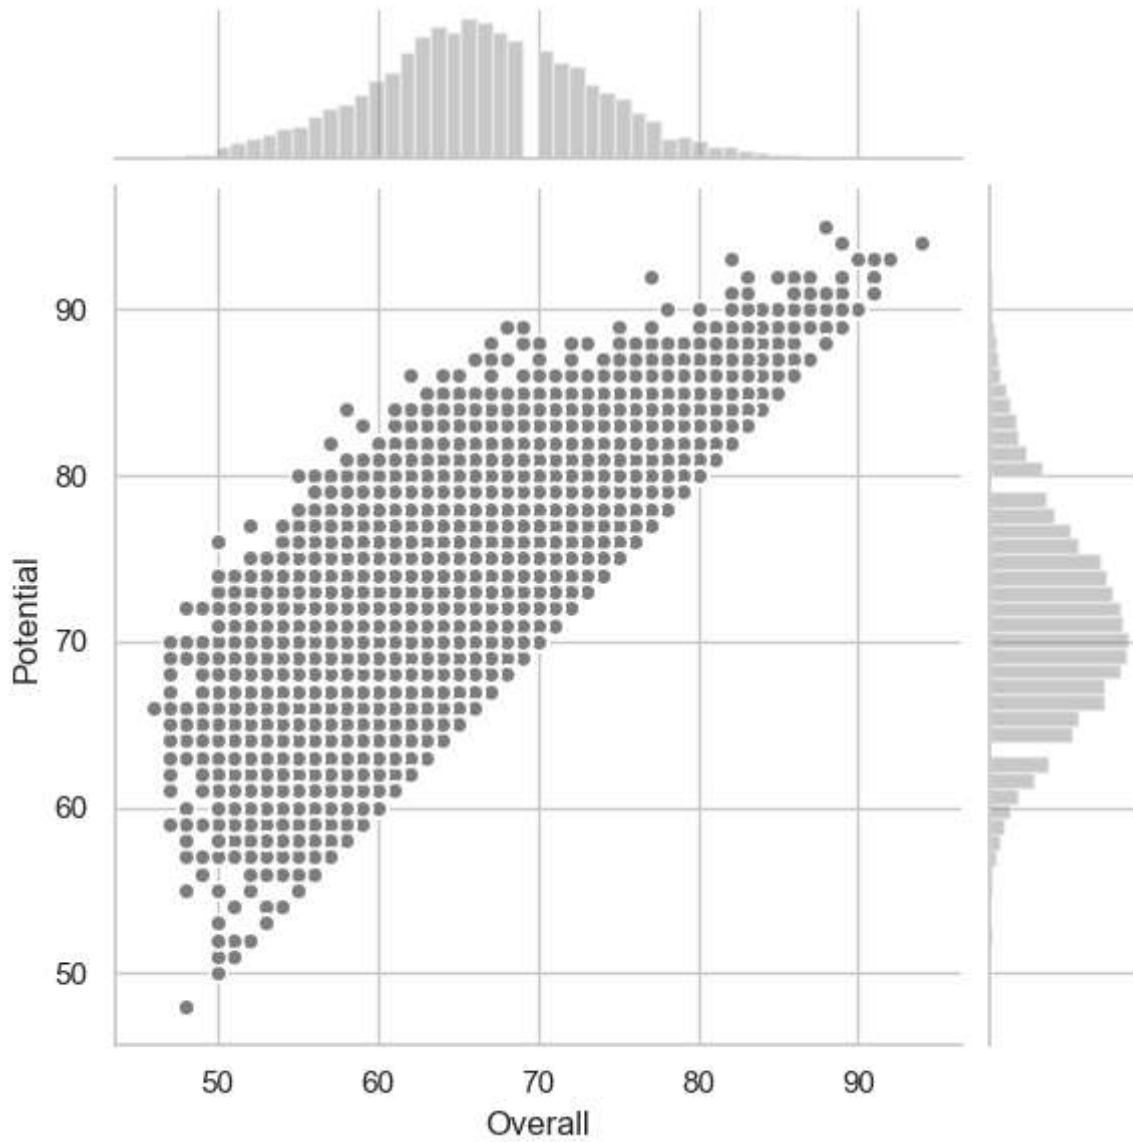

```
In [116... g = sns.JointGrid(x="Overall", y="Potential", data=fifa19, space=0)
g = g.plot_joint(sns.kdeplot, cmap="Blues_d")
g = g.plot_marginals(sns.kdeplot, shade=True)
plt.show()
```

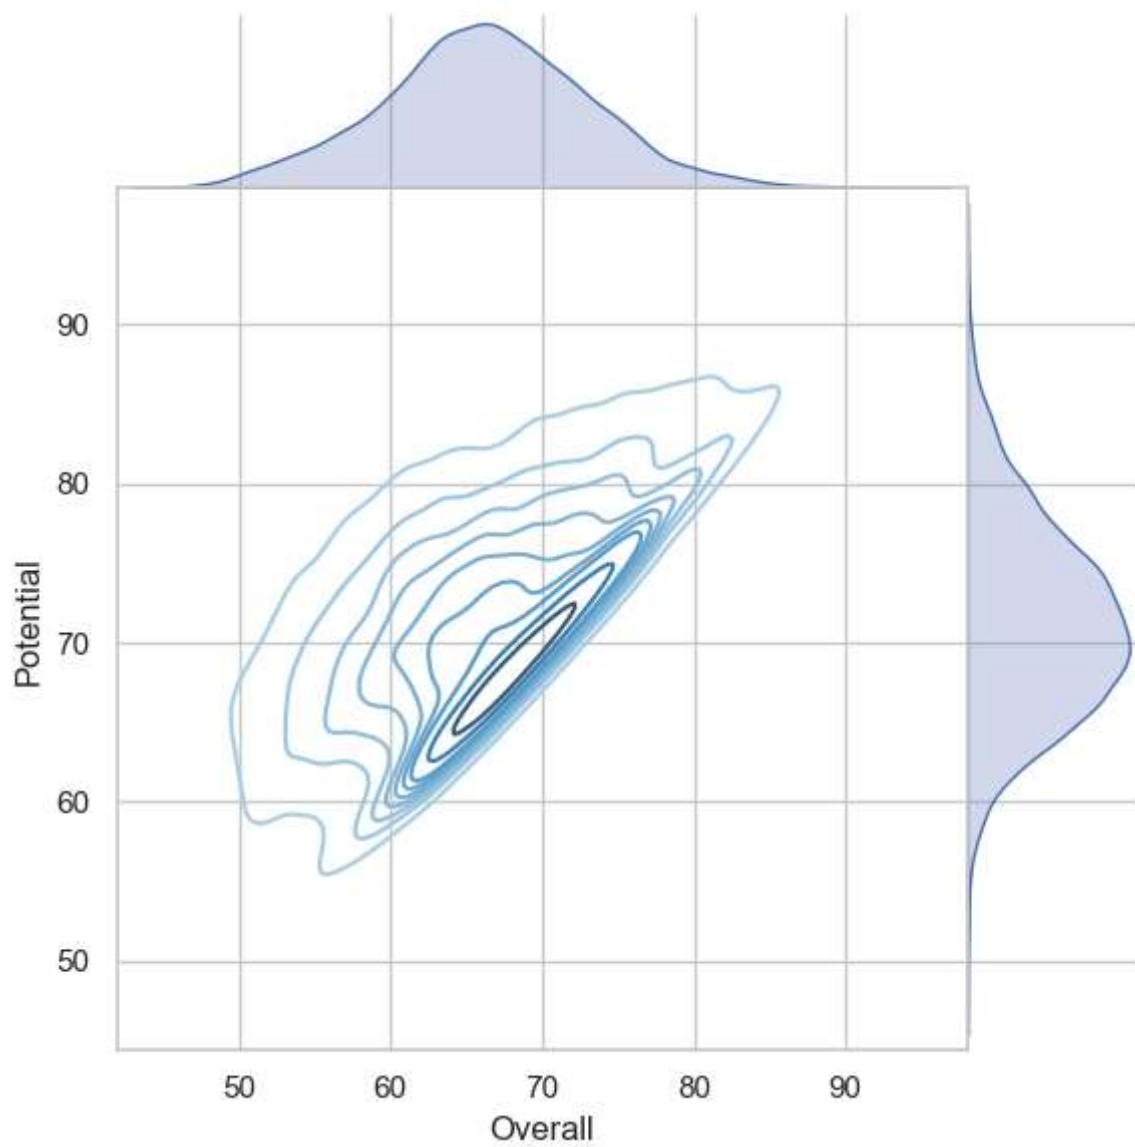


```
In [118... g = sns.JointGrid(x="Overall", y="Potential", data=fifa19, height=5, ratio=2)
g = g.plot_joint(sns.kdeplot, cmap="Reds_d")
g = g.plot_marginals(sns.kdeplot, color="r", shade=True)
plt.show()
```

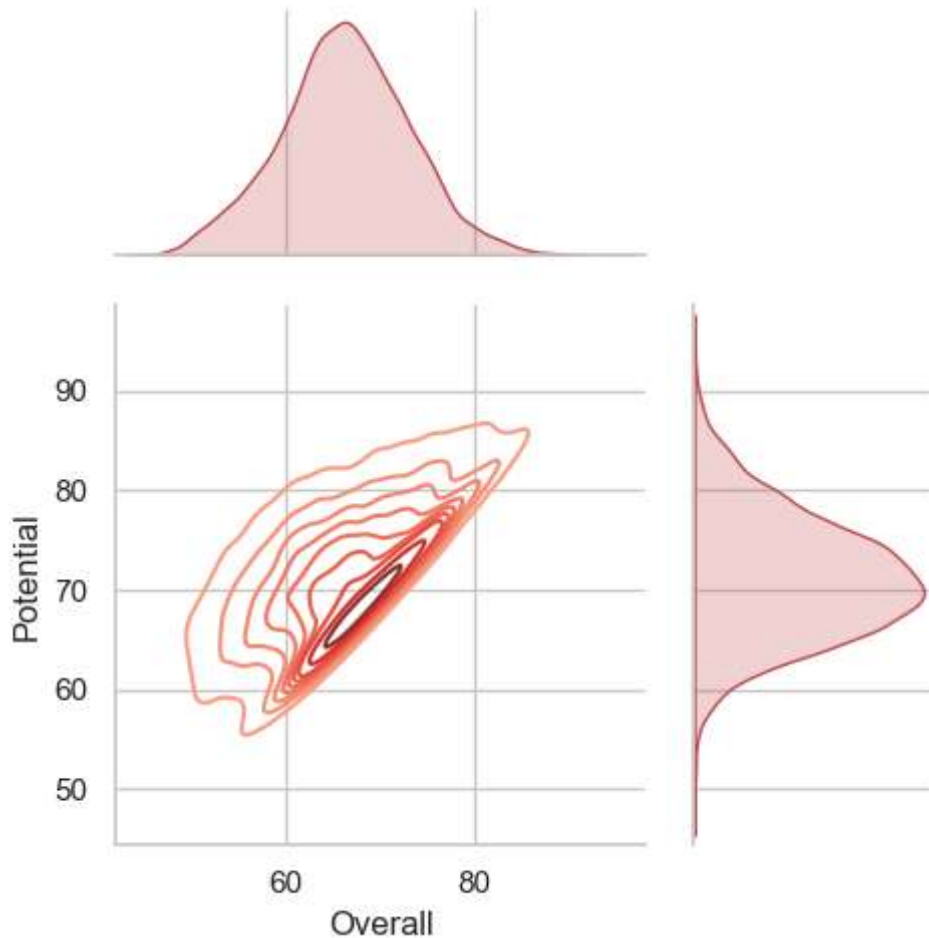

Controlling the size and shape of the plot


- The default plots made by `regplot()` and `lmpplot()` look the same but on axes that have a different size and shape.
- This is because `regplot()` is an "axes-level" function draws onto a specific axes.
- This means that you can make multi-panel figures yourself and control exactly where the regression plot goes.
- If no axes object is explicitly provided, it simply uses the "currently active" axes, which is why the default plot has the same size and shape as most other matplotlib functions.
- To control the size, we need to create a figure object ourself as follows-

```
In [121... f, ax = plt.subplots(figsize=(8, 6))
ax = sns.regplot(x="Overall", y="Potential", data=fifa19);
plt.show()
```

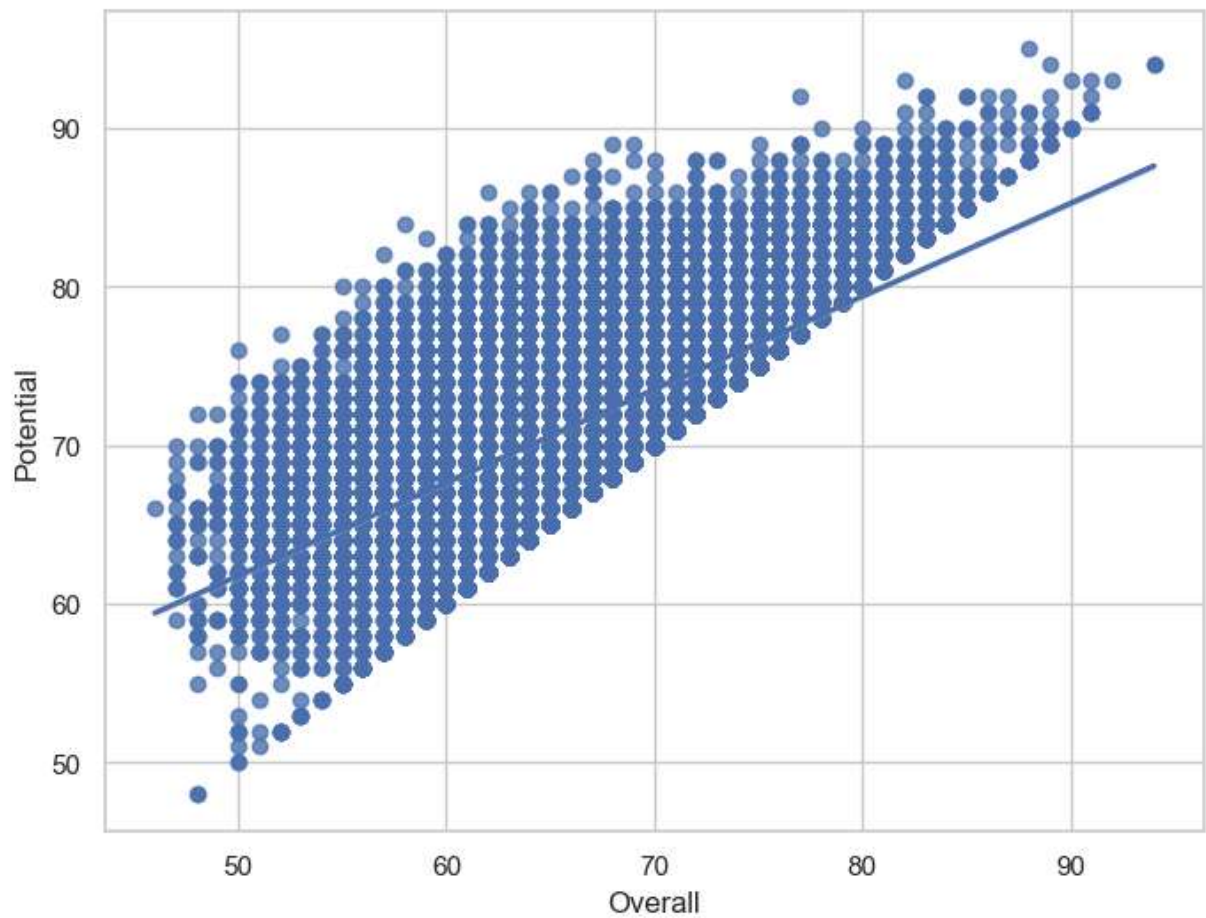

In [124...

```
sns.lmplot(x="Overall", y="Potential", col="Preferred Foot", data=fifa19, col_wrap=
plt.show()
```

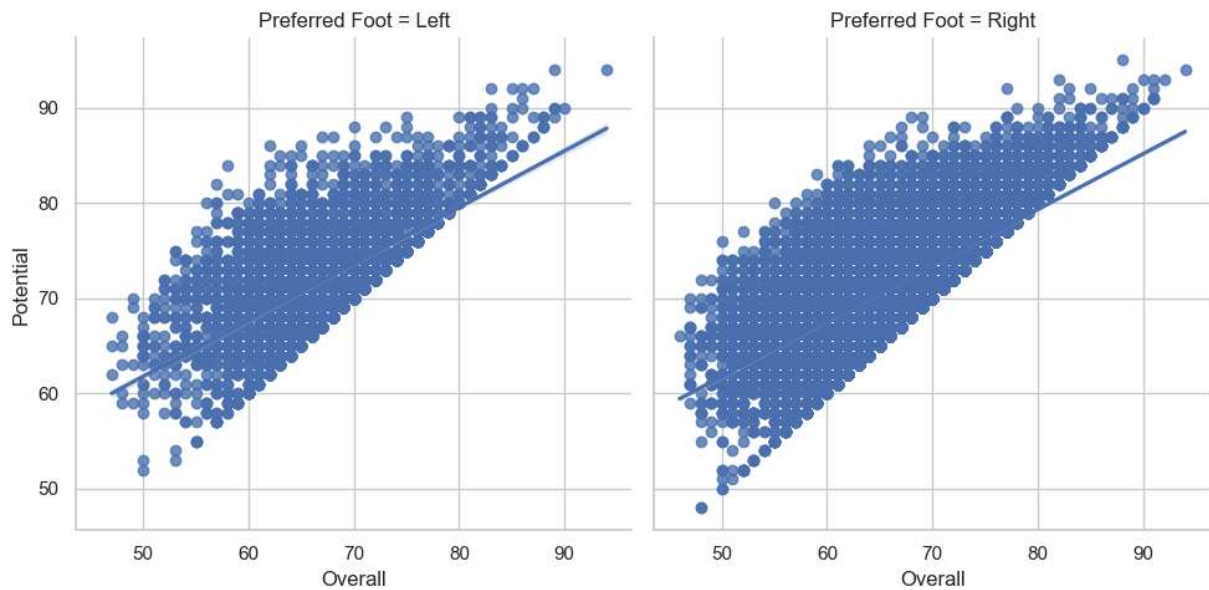


Seaborn figure styles

- There are five preset seaborn themes: `darkgrid`, `whitegrid`, `dark`, `white` and `ticks`.


- They are each suited to different applications and personal preferences.
- The default theme is darkgrid.
- The grid helps the plot serve as a lookup table for quantitative information, and the white-on grey helps to keep the grid from competing with lines that represent data.
- The whitegrid theme is similar, but it is better suited to plots with heavy data elements:

```
In [125... def sinplot(flip=1):
x = np.linspace(0, 14, 100)
for i in range(1, 7):
    plt.plot(x, np.sin(x + i * .5) * (7 - i) * flip)
```


```
In [127... sinplot()
plt.show()
```

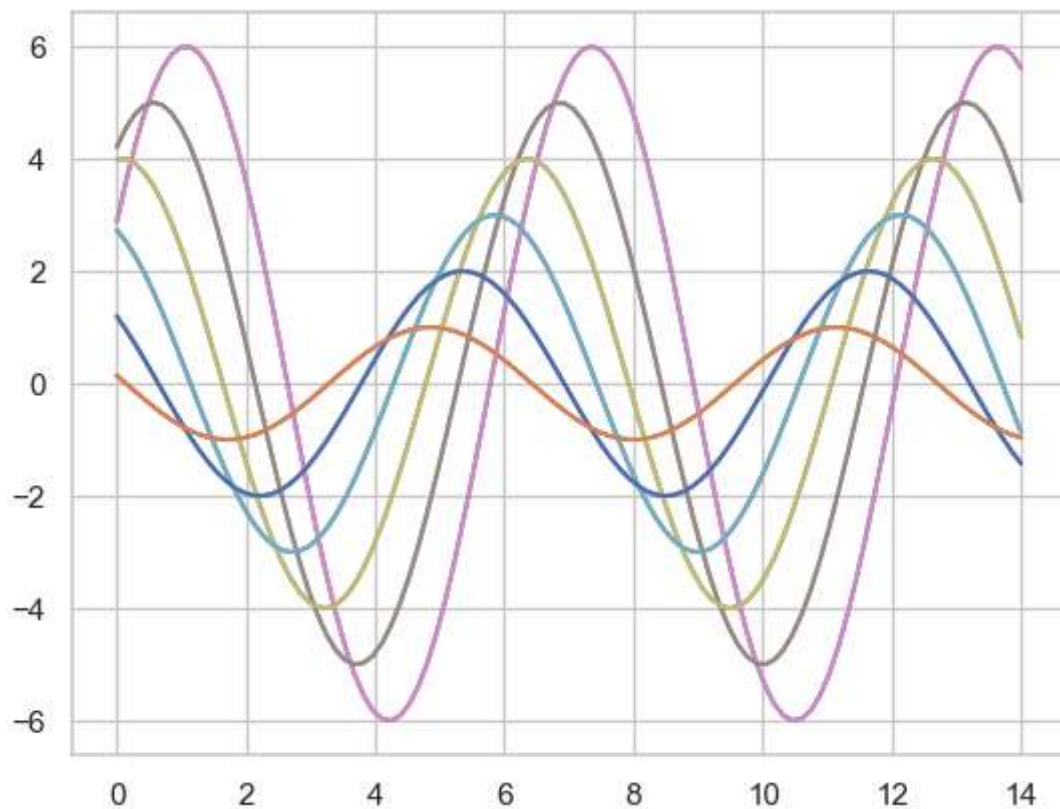


```
In [129... sns.set()
sinplot()
plt.show()
```

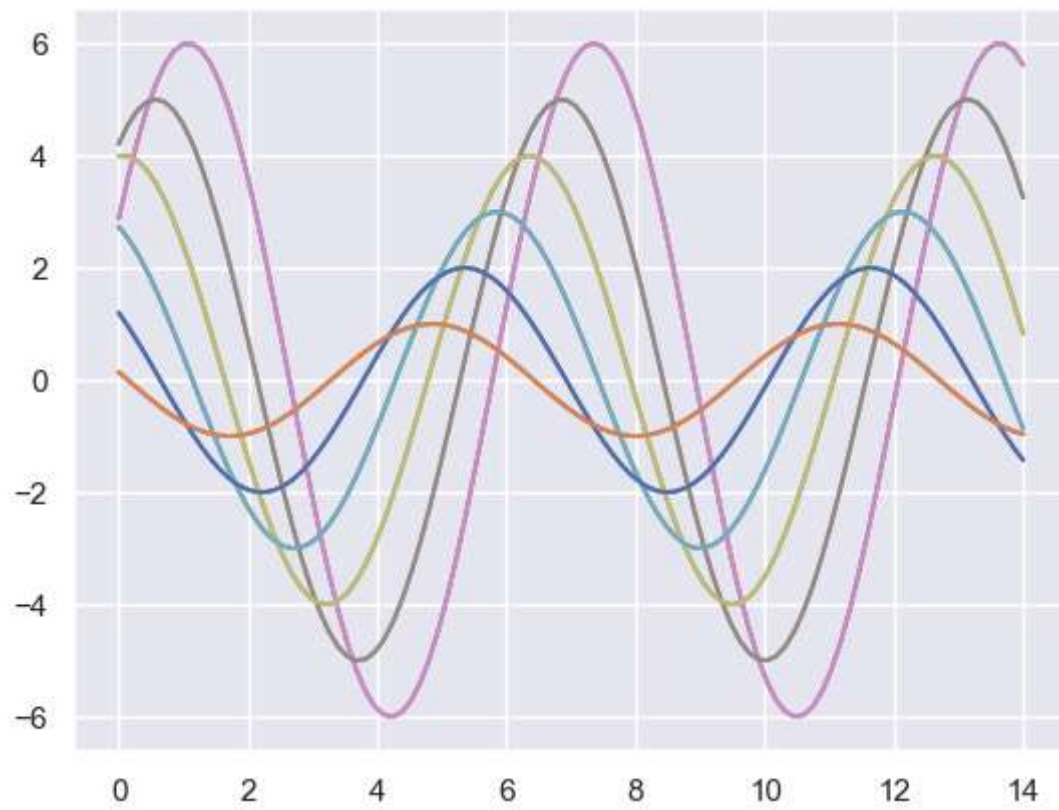


```
In [130... sns.set_style("whitegrid")
sinplot()
plt.show()
```

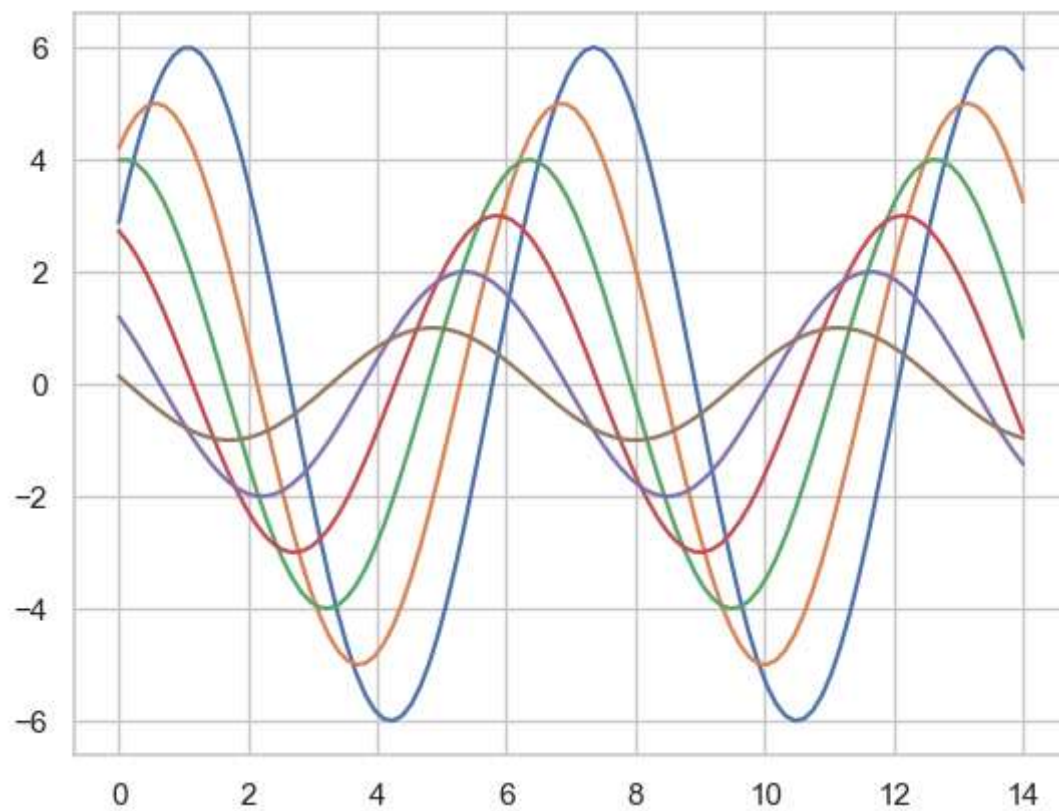

```
In [131... sns.set_style("dark")  
sinplot()  
plt.show()
```

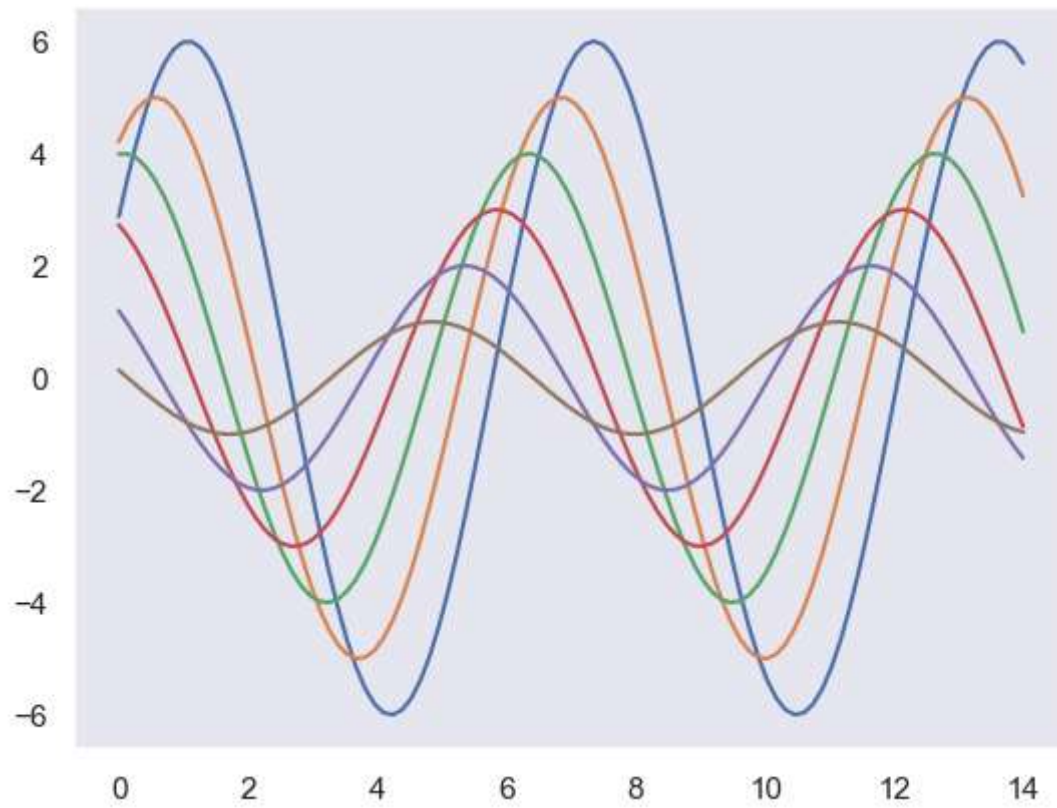

```
In [132... sns.set_style("white")  
sinplot()  
plt.show()
```

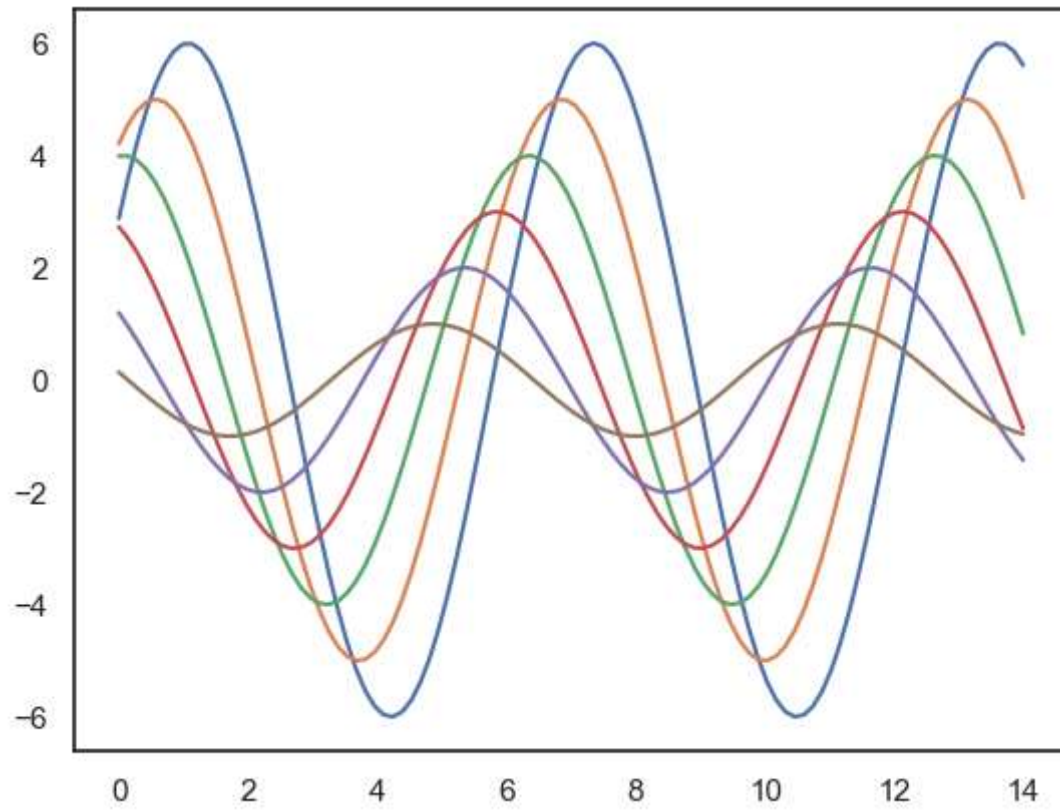

```
In [133... sns.set_style("ticks")  
sinplot()  
plt.show()
```

