

In [24]:

```
1 import numpy as np
2 import pandas as pd
3 import seaborn as sns
4 import matplotlib.pyplot as plt
5
```

In [25]:

```
1 test_df=pd.read_csv(r"C:\Users\HP\Downloads\Mobile_Price_Classification_test.csv")
2 test_df
```

Out[25]:

	id	battery_power	blue	clock_speed	dual_sim	fc	four_g	int_memory	m_dep	mobile_wt	...	p
0	1	1043	1	1.8	1	14	0	5	0.1	193	...	1
1	2	841	1	0.5	1	4	1	61	0.8	191	...	1
2	3	1807	1	2.8	0	1	0	27	0.9	186	...	
3	4	1546	0	0.5	1	18	1	25	0.5	96	...	2
4	5	1434	0	1.4	0	11	1	49	0.5	108	...	1
...	
995	996	1700	1	1.9	0	0	1	54	0.5	170	...	1
996	997	609	0	1.8	1	0	0	13	0.9	186	...	
997	998	1185	0	1.4	0	1	1	8	0.5	80	...	1
998	999	1533	1	0.5	1	0	0	50	0.4	171	...	1
999	1000	1270	1	0.5	0	4	1	35	0.1	140	...	1

1000 rows × 21 columns



In [26]:

```
1 train_df=pd.read_csv(r"C:\Users\HP\Downloads\Mobile_Price_Classification_train.csv")
2 train_df
```

Out[26]:

	battery_power	blue	clock_speed	dual_sim	fc	four_g	int_memory	m_dep	mobile_wt	n_cores
0	842	0	2.2	0	1	0	7	0.6	188	2
1	1021	1	0.5	1	0	1	53	0.7	136	3
2	563	1	0.5	1	2	1	41	0.9	145	5
3	615	1	2.5	0	0	0	10	0.8	131	6
4	1821	1	1.2	0	13	1	44	0.6	141	2
...
1995	794	1	0.5	1	0	1	2	0.8	106	6
1996	1965	1	2.6	1	0	0	39	0.2	187	4
1997	1911	0	0.9	1	1	1	36	0.7	108	8
1998	1512	0	0.9	0	4	1	46	0.1	145	5
1999	510	1	2.0	1	5	1	45	0.9	168	6

2000 rows × 21 columns



In [27]:

```
1 train_df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 2000 entries, 0 to 1999
Data columns (total 21 columns):
#   Column              Non-Null Count  Dtype
---  -
0   battery_power        2000 non-null   int64
1   blue                 2000 non-null   int64
2   clock_speed          2000 non-null   float64
3   dual_sim             2000 non-null   int64
4   fc                   2000 non-null   int64
5   four_g               2000 non-null   int64
6   int_memory           2000 non-null   int64
7   m_dep                2000 non-null   float64
8   mobile_wt            2000 non-null   int64
9   n_cores              2000 non-null   int64
10  pc                   2000 non-null   int64
11  px_height            2000 non-null   int64
12  px_width             2000 non-null   int64
13  ram                  2000 non-null   int64
14  sc_h                 2000 non-null   int64
15  sc_w                 2000 non-null   int64
16  talk_time            2000 non-null   int64
17  three_g              2000 non-null   int64
18  touch_screen         2000 non-null   int64
19  wifi                 2000 non-null   int64
20  price_range          2000 non-null   int64
dtypes: float64(2), int64(19)
memory usage: 328.3 KB
```

In [28]:

```
1 test_df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 1000 entries, 0 to 999
Data columns (total 21 columns):
#   Column             Non-Null Count  Dtype
---  -
0   id                  1000 non-null   int64
1   battery_power       1000 non-null   int64
2   blue                 1000 non-null   int64
3   clock_speed         1000 non-null   float64
4   dual_sim            1000 non-null   int64
5   fc                  1000 non-null   int64
6   four_g              1000 non-null   int64
7   int_memory          1000 non-null   int64
8   m_dep               1000 non-null   float64
9   mobile_wt           1000 non-null   int64
10  n_cores             1000 non-null   int64
11  pc                  1000 non-null   int64
12  px_height           1000 non-null   int64
13  px_width            1000 non-null   int64
14  ram                 1000 non-null   int64
15  sc_h                1000 non-null   int64
16  sc_w                1000 non-null   int64
17  talk_time           1000 non-null   int64
18  three_g             1000 non-null   int64
19  touch_screen        1000 non-null   int64
20  wifi                1000 non-null   int64
dtypes: float64(2), int64(19)
memory usage: 164.2 KB
```

In [48]:

```
1 x=test_df.drop('wifi',axis=1)
2 y=test_df['wifi']
```

In [49]:

```
1 x=train_df.drop('wifi',axis=1)
2 y=train_df['wifi']
```

In [50]:

```
1 train_df['dual_sim'].value_counts()
```

Out[50]:

```
dual_sim
1    1019
0     981
Name: count, dtype: int64
```

In [32]:

```
1 test_df['dual_sim'].value_counts()
```

Out[32]:

```
dual_sim
1     517
0     483
Name: count, dtype: int64
```

In [33]:

```
1 T={"three_g":{"Yes":1,'No':0}}
2 train_df=train_df.replace(T)
3 print(train_df)
```

	battery_power	blue	clock_speed	dual_sim	fc	four_g	int_memory			
0	842	0	2.2	0	1	0	7	\		
1	1021	1	0.5	1	0	1	53			
2	563	1	0.5	1	2	1	41			
3	615	1	2.5	0	0	0	10			
4	1821	1	1.2	0	13	1	44			
...			
1995	794	1	0.5	1	0	1	2			
1996	1965	1	2.6	1	0	0	39			
1997	1911	0	0.9	1	1	1	36			
1998	1512	0	0.9	0	4	1	46			
1999	510	1	2.0	1	5	1	45			

	m_dep	mobile_wt	n_cores	...	px_height	px_width	ram	sc_h	sc_w	
0	0.6	188	2	...	20	756	2549	9	7	\
1	0.7	136	3	...	905	1988	2631	17	3	
2	0.9	145	5	...	1263	1716	2603	11	2	
3	0.8	131	6	...	1216	1786	2769	16	8	
4	0.6	141	2	...	1208	1212	1411	8	2	
...	
1995	0.8	106	6	...	1222	1890	668	13	4	
1996	0.2	187	4	...	915	1965	2032	11	10	
1997	0.7	108	8	...	868	1632	3057	9	1	
1998	0.1	145	5	...	336	670	869	18	10	
1999	0.9	168	6	...	483	754	3919	19	4	

	talk_time	three_g	touch_screen	wifi	price_range	
0	19	0	0	1	1	
1	7	1	1	0	2	
2	9	1	1	0	2	
3	11	1	0	0	2	
4	15	1	1	0	1	
...	
1995	19	1	1	0	0	
1996	16	1	1	1	2	
1997	5	1	1	0	3	
1998	19	1	1	1	0	
1999	2	1	1	1	3	

[2000 rows x 21 columns]

In [34]:

```

1 T={"three_g":{"Yes":1,'No':0}}
2 test_df=test_df.replace(T)
3 print(test_df)

```

	id	battery_power	blue	clock_speed	dual_sim	fc	four_g	int_memory
0	1	1043	1	1.8	1	14	0	5 \
1	2	841	1	0.5	1	4	1	61
2	3	1807	1	2.8	0	1	0	27
3	4	1546	0	0.5	1	18	1	25
4	5	1434	0	1.4	0	11	1	49
..
995	996	1700	1	1.9	0	0	1	54
996	997	609	0	1.8	1	0	0	13
997	998	1185	0	1.4	0	1	1	8
998	999	1533	1	0.5	1	0	0	50
999	1000	1270	1	0.5	0	4	1	35

	m_dep	mobile_wt	...	pc	px_height	px_width	ram	sc_h	sc_w
0	0.1	193	...	16	226	1412	3476	12	7 \
1	0.8	191	...	12	746	857	3895	6	0
2	0.9	186	...	4	1270	1366	2396	17	10
3	0.5	96	...	20	295	1752	3893	10	0
4	0.5	108	...	18	749	810	1773	15	8
..
995	0.5	170	...	17	644	913	2121	14	8
996	0.9	186	...	2	1152	1632	1933	8	1
997	0.5	80	...	12	477	825	1223	5	0
998	0.4	171	...	12	38	832	2509	15	11
999	0.1	140	...	19	457	608	2828	9	2

	talk_time	three_g	touch_screen	wifi
0	2	0	1	0
1	7	1	0	0
2	10	0	1	1
3	7	1	1	0
4	7	1	0	1
..
995	15	1	1	0
996	19	0	1	1
997	14	1	0	0
998	6	0	1	0
999	3	1	0	1

[1000 rows x 21 columns]

In [35]:

```

1 x=train_df.drop('wifi',axis=1)
2 y=train_df['wifi']

```

In [36]:

```

1 x=test_df.drop('wifi',axis=1)
2 y=test_df['wifi']

```

In [37]:

```
1 from sklearn.model_selection import train_test_split
2 x_train,x_test,y_train,y_test=train_test_split(x,y,train_size=0.7,random_state=42)
3 x_train.shape,x_test.shape
```

Out[37]:

```
((700, 20), (300, 20))
```

In [38]:

```
1 from sklearn.ensemble import RandomForestClassifier
2 rfc=RandomForestClassifier()
3 rfc.fit(x_train,y_train)
```

Out[38]:

```
▼ RandomForestClassifier
RandomForestClassifier()
```

In [39]:

```
1 rf=RandomForestClassifier()
```

In [40]:

```
1 params={'max_depth':[2,3,5,10,20],
2         'min_samples_leaf':[5,10,20,50,100,200],
3         'n_estimators':[10,25,30,50,100,200]}
```

In []:

```
1
```

In [41]:

```
1 from sklearn.model_selection import GridSearchCV
2 grid_search=GridSearchCV(estimator=rf,param_grid=params,cv=2,scoring='accuracy')
3 grid_search.fit(x_train,y_train)
```

Out[41]:

```
► GridSearchCV
► estimator: RandomForestClassifier
  ► RandomForestClassifier
```

In [42]:

```
1 grid_search.best_score_
```

Out[42]:

```
0.56
```

In [43]:

```
1 rf_best=grid_search.best_estimator_
2 print(rf_best)
```


```
RandomForestClassifier(max_depth=20, min_samples_leaf=100, n_estimators=200)
```

In [44]:

```

1 from sklearn.tree import plot_tree
2 plt.figure(figsize=(80,40))
3 plot_tree(rf_best.estimators_[5],feature_names=x.columns,class_names=['Yes','No'],filled=True)

```

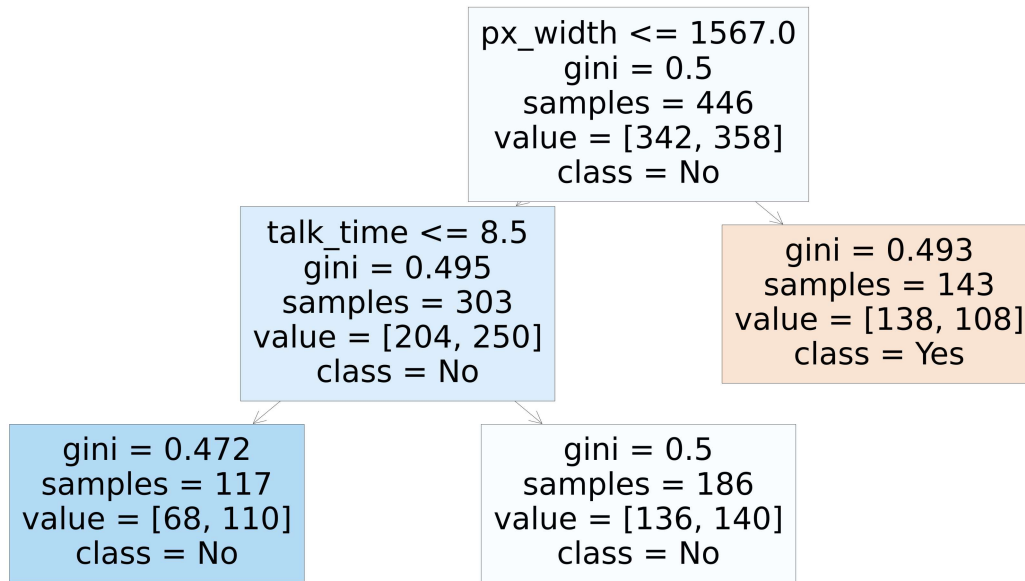


In [45]:

```

1 from sklearn.tree import plot_tree
2 plt.figure(figsize=(80,40))
3 plot_tree(rf_best.estimators_[7],feature_names=x.columns,class_names=['Yes','No'],filled=True)

```

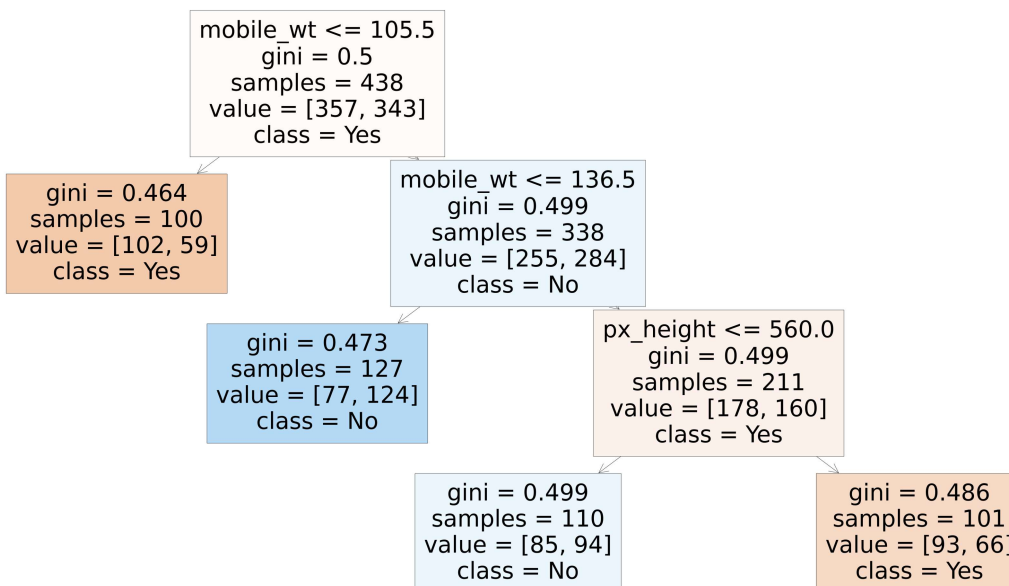

In [46]:

```
1 rf_best.feature_importances_
```

Out[46]:

```

array([0.0576482 , 0.06697553, 0.01149895, 0.06911267, 0.01736968,
       0.07720242, 0.04712642, 0.08724972, 0.06902267, 0.10800286,
       0.00828733, 0.03434547, 0.03979032, 0.12622998, 0.05013245,
       0.03632142, 0.04971256, 0.03555176, 0.00193011, 0.0064895 ])

```

In [47]:

```
1 imp_df=pd.DataFrame({'Varname':x_train.columns,"Imp":rf_best.feature_importances_})
2 imp_df.sort_values(by="Imp",ascending=False)
```

Out[47]:

	Varname	Imp
13	px_width	0.126230
9	mobile_wt	0.108003
7	int_memory	0.087250
5	fc	0.077202
3	clock_speed	0.069113
8	m_dep	0.069023
1	battery_power	0.066976
0	id	0.057648
14	ram	0.050132
16	sc_w	0.049713
6	four_g	0.047126
12	px_height	0.039790
15	sc_h	0.036321
17	talk_time	0.035552
11	pc	0.034345
4	dual_sim	0.017370
2	blue	0.011499
10	n_cores	0.008287
19	touch_screen	0.006490
18	three_g	0.001930

In []:

```
1
```