

# Cucumber Report

30-Jul-2023, 3:13:48 am

Start : Jul 30, 3:13:18.807 am

End : Jul 30, 3:13:47.299 am

Duration : 28.492 s

Features



Scenarios

Steps

PASSED - 0  
FAILED - 2  
SKIPPED - 0


PASSED - 0  
FAILED - 3  
SKIPPED - 0

PASSED - 0  
FAILED - 3  
SKIPPED - 11

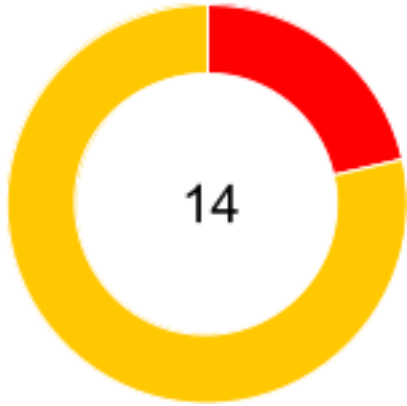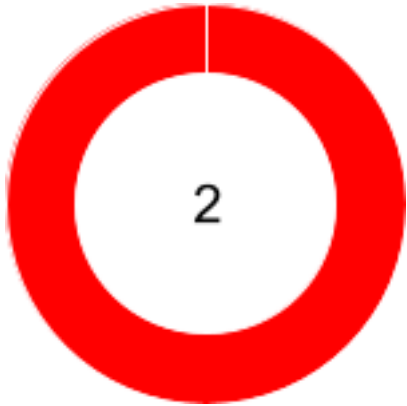


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Search product and place product</u>	28.492 s	2	0	2	0	8	0	2	6
<u>Search a product and place the order</u>	28.445 s	1	0	1	0	6	0	1	5

<b>Tag</b>	<b>Scenario</b>				<b>Feature</b>			
<b>Name</b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>
@SearchProduct	2	0	2	0	1	0	1	0
@Placeorder	1	0	1	0	1	0	1	0

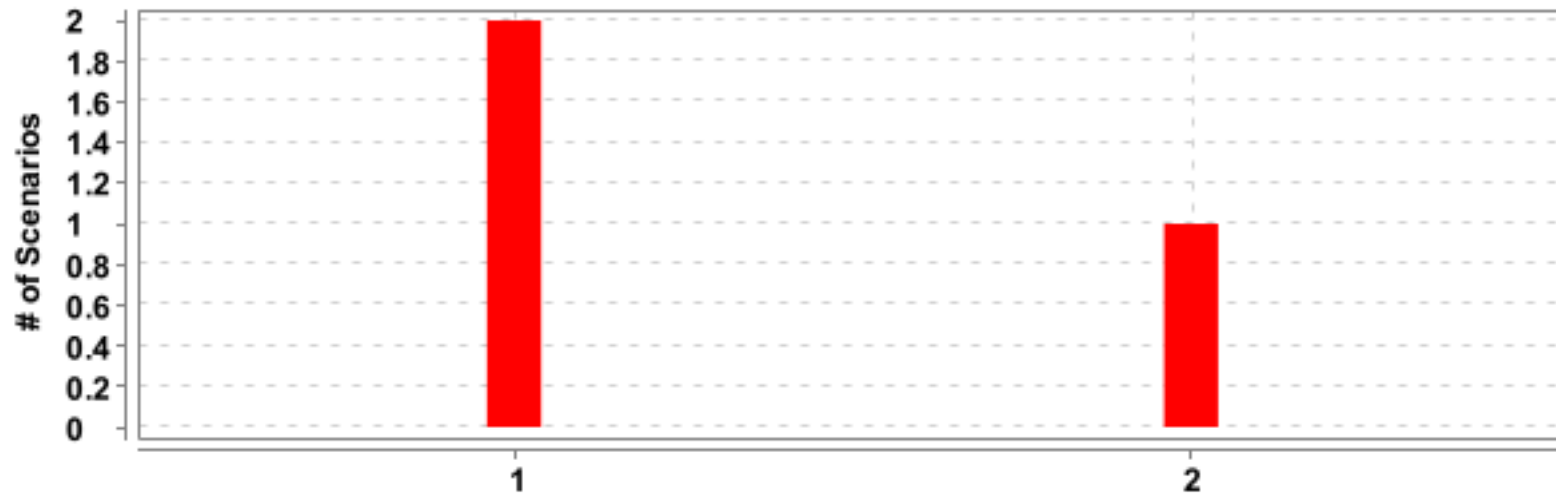

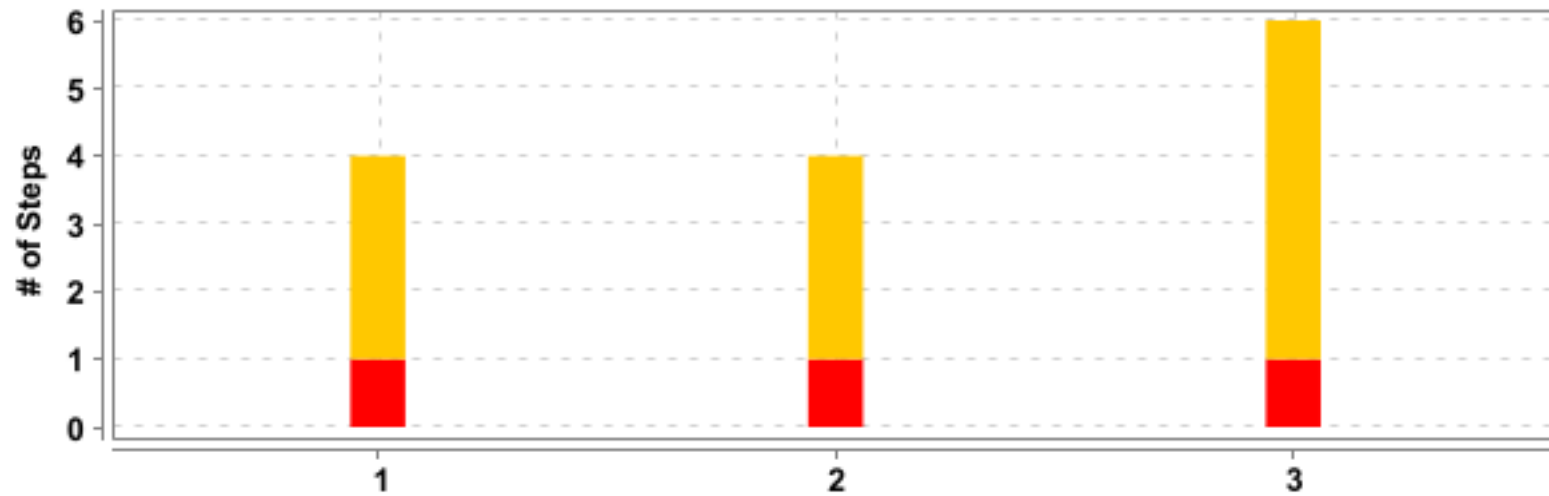

#	Feature Name	T	P	F	S	Duration
1	<u>Search product and place product</u>	2	0	2	0	28.492 s
2	<u>Search a product and place the order</u>	1	0	1	0	28.445 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Search product and place product</u>	<u>Search functionality checking on Home page and Deals page</u>	4	0	1	3	28.469 s
2	<u>Search product and place product</u>	<u>Search functionality checking on Home page and Deals page</u>	4	0	1	3	28.481 s
3	<u>Search a product and place the order</u>	<u>Product is searched and order is placed</u>	6	0	1	5	28.445 s

## Search product and place product

<b>FAILED</b>	<b>DURATION - 28.492 s</b>	Scenarios		Steps	
/ 3:13:18.807 am // 3:13:47.299 am /		Total - 2		Total - 8	
		Pass - 0		Pass - 0	
		Fail - 2		Fail - 2	
		Skip - 0		Skip - 6	

## Search functionality checking on Home page and Deals page
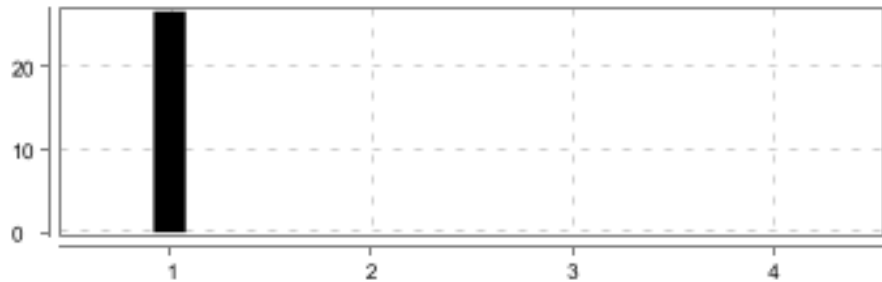
<div>FAILED</div> <div>DURATION - 28.469 s</div>			Steps	
/ 3:13:18.815 am // 3:13:47.284 am /				
Search product and place product				
@SearchProduct				

#	Step / Hook Details	Status	Duration
1	<p>Given user is on the Greenkart homepage</p> <pre>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Expected browser binary location, but unable to find binary in default location, no 'moz:firefoxOptions.binary' capability provided, and no binary flag set on the command line Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {args: [start-maximized, --incognito]}}}]]     at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140)     at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96)     at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68)     at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163)     at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)     at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)     at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531)     at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227)     at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:154)     at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:151)     at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:146)</pre>	<b>FAILED</b>	26.714 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:130) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:125) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at utilities.BaseTest.WebDriverManager(BaseTest.java:43) at utilities.TestContextSetup.<init>(TestContextSetup.java:21) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632) at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118) at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136) at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78) at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:578) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:80) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:17) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642) at java.base/java.lang.Thread.run(Thread.java:1623) </pre>		
	<p><b>AFTER_STEP - stepDefinations.Hooks.addScreenshot(io.cucumber.java.Scenario)</b></p> <pre> org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Expected browser binary location, but unable to find binary in default location, no 'moz:firefoxOptions.binary' capability provided, and no binary flag set on the command line Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {args: [start-maximized, --incognito]}}}]] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227) at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:154) at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:151) at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:146) at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:130) at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:125) </pre>	FAILED	0.899 s





#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at utilities.BaseTest.WebDriverManager(BaseTest.java:43) at utilities.TestContextSetup.<init>(TestContextSetup.java:21) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632) at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118) at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136) at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78) at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:578) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:80) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:17) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642) at java.base/java.lang.Thread.run(Thread.java:1623)		
2	When user searched for name Beet in the searchbar and extract actual product name	SKIPPED	0.001 s
3	Then user searched for the same name Beet in deals page	SKIPPED	0.000 s
4	And validate product name in Homepage and Deals page are same	SKIPPED	0.000 s
	AFTER - stepDefinations.Hooks.afterSecnario()  org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Expected browser binary location, but unable to find binary in default location, no 'moz:firefoxOptions.binary' capability provided, and no binary flag set on the command line Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {args: [start-maximized, --incognito]}}}]] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:154) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:151) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:146) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:130)	FAILED	0.817 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:125) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at utilities.BaseTest.WebDriverManager(BaseTest.java:43) at utilities.TestContextSetup.<init>(TestContextSetup.java:21) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632) at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118) at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136) at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78) at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:578) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:80) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:17) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642) at java.base/java.lang.Thread.run(Thread.java:1623) </pre>		

### Search functionality checking on Home page and Deals page
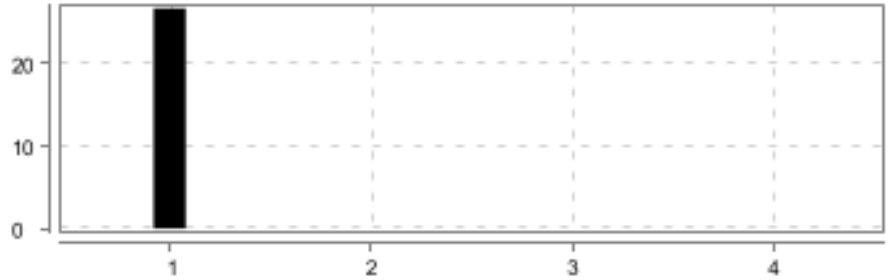
<b>FAILED</b>	<b>DURATION - 28.481 s</b>		<b>Steps</b> Total - 4 Pass - 0 Fail - 1 Skip - 3	
/ 3:13:18.818 am // 3:13:47.299 am /				
Search product and place product				
@SearchProduct				

#	Step / Hook Details	Status	Duration
1	<p>Given user is on the Greenkart homepage</p> <pre> org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Expected browser binary location, but unable to find binary in default location, no 'moz:firefoxOptions.binary' capability provided, and no binary flag set on the command line Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {args: [start-maximized, --incognito]}]]}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) </pre>	<b>FAILED</b>	26.708 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:154) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:151) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:146) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:130) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:125) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at utilities.BaseTest.WebDriverManager(BaseTest.java:43) at utilities.TestContextSetup.<init>(TestContextSetup.java:21) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632) at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118) at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136) at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78) at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678)		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:578) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:80) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:17) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642) at java.base/java.lang.Thread.run(Thread.java:1623) </pre>		
	<p><b>AFTER_STEP - stepDefinations.Hooks.addScreenshot(io.cucumber.java.Scenario)</b></p> <pre> org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Expected browser binary location, but unable to find binary in default location, no 'moz:firefoxOptions.binary' capability provided, and no binary flag set on the command line Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {args: [start-maximized, --incognito]}}}]] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) </pre>	FAILED	0.894 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:154) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:151) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:146) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:130) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:125) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at utilities.BaseTest.WebDriverManager(BaseTest.java:43) at utilities.TestContextSetup.<init>(TestContextSetup.java:21) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632) at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118) at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136) at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78) at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		





#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:578) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:80) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:17) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642) at java.base/java.lang.Thread.run(Thread.java:1623) </pre>		
2	When user searched for name Tom in the searchbar and extract actual product name	SKIPPED	0.003 s
3	Then user searched for the same name Tom in deals page	SKIPPED	0.001 s
4	And validate product name in Homepage and Deals page are same	SKIPPED	0.000 s
	<p>AFTER - stepDefinations.Hooks.afterSecnario()</p> <pre> org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Expected browser binary location, but unable to find binary in default location, no 'moz:firefoxOptions.binary' capability provided, and no binary flag set on the command line Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {args: [start-maximized, --incognito]}}}]]] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) </pre>	FAILED	0.830 s





#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:154) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:151) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:146) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:130) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:125) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at utilities.BaseTest.WebDriverManager(BaseTest.java:43) at utilities.TestContextSetup.<init>(TestContextSetup.java:21) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632) at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118) at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136) at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78) at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64)		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:578) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:80) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:17) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642) at java.base/java.lang.Thread.run(Thread.java:1623) </pre>		

## Search a product and place the order

<b>FAILED</b>	<b>DURATION - 28.445 s</b>	Scenarios		Steps	
/ 3:13:18.824 am // 3:13:47.269 am /		Total - 1	1	Total - 6	6
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 5	

**Product is searched and order is placed**
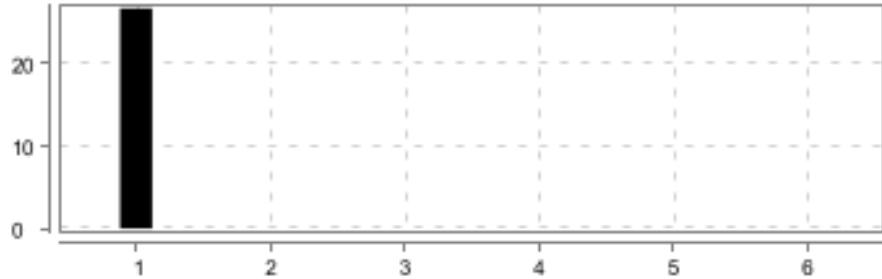
<div>FAILED</div> <div>DURATION - 28.445 s</div>			<div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 5</div>	
/ 3:13:18.824 am // 3:13:47.269 am /				
Search a product and place the order				
@Placeorder				

#	Step / Hook Details	Status	Duration
1	<p>Given user is on the Greenkart homepage</p> <pre>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Expected browser binary location, but unable to find binary in default location, no 'moz:firefoxOptions.binary' capability provided, and no binary flag set on the command line Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {args: [start-maximized, --incognito]}}}]]]     at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140)     at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96)     at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68)     at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163)     at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)     at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)     at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531)     at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227)     at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:154)     at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:151)     at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:146)     at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:130)     at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:125)     at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:110)     at utilities.BaseTest.WebDriverManager(BaseTest.java:43)     at utilities.TestContextSetup.&lt;init&gt;(TestContextSetup.java:21)     at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)     at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500)     at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484)     at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145)     at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342)     at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)     at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)</pre>	FAILED	26.702 s

#	Step / Hook Details	Status	Duration
	at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632) at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118) at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136) at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78) at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:578) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227)		

#	Step / Hook Details	Status	Duration
	<pre> at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:80) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:17) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642) at java.base/java.lang.Thread.run(Thread.java:1623) </pre>		
	<p><b>AFTER_STEP - stepDefinations.Hooks.addScreenshot(io.cucumber.java.Scenario)</b></p> <pre> org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Expected browser binary location, but unable to find binary in default location, no 'moz:firefoxOptions.binary' capability provided, and no binary flag set on the command line Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {args: [start-maximized, --incognito]}}}]] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227) at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:154) at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:151) at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:146) at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:130) at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:125) at org.openqa.selenium.firefox.FirefoxDriver.&lt;init&gt;(FirefoxDriver.java:110) at utilities.BaseTest.WebDriverManager(BaseTest.java:43) at utilities.TestContextSetup.&lt;init&gt;(TestContextSetup.java:21) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) </pre>	FAILED	0.895 s

#	Step / Hook Details	Status	Duration
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632) at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118) at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136) at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78) at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:578) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:80) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:17)		

#	Step / Hook Details	Status	Duration
	at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642) at java.base/java.lang.Thread.run(Thread.java:1623)		
2	When user searched for name Cucu in the searchbar and extract actual product name	SKIPPED	0.001 s
3	And User add the Product count to three products and Add to Cart	SKIPPED	0.001 s
4	Then User proceeds to checkout page and validate the ProductName	SKIPPED	0.001 s
5	And User validates the promocode and placeorderbutton and place the order	SKIPPED	0.001 s
6	And Validate the order is placed successfully	SKIPPED	0.001 s
	AFTER - stepDefinations.Hooks.afterSecnario()  org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Expected browser binary location, but unable to find binary in default location, no 'moz:firefoxOptions.binary' capability provided, and no binary flag set on the command line Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {args: [start-maximized, --incognito]}}}]] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:154) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:151) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:146) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:130) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:125) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at utilities.BaseTest.WebDriverManager(BaseTest.java:43) at utilities.TestContextSetup.<init>(TestContextSetup.java:21) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342)	FAILED	0.802 s



#	Step / Hook Details	Status	Duration
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632) at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118) at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136) at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78) at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:578) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664)		



#	Step / Hook Details	Status	Duration
	<pre>at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:80) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:17) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642) at java.base/java.lang.Thread.run(Thread.java:1623)</pre>		