

Cucumber Report

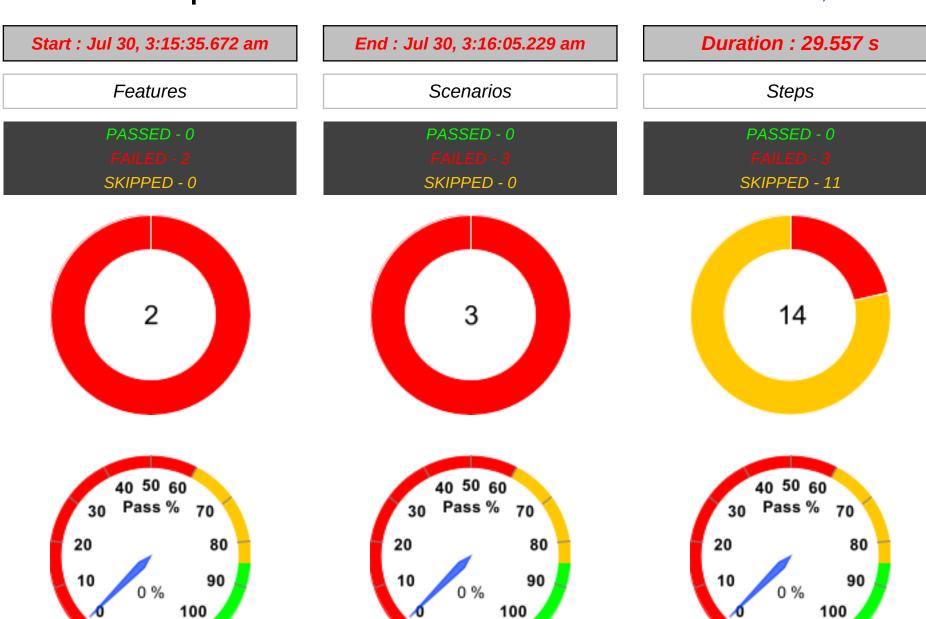


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Search product and place product	27.953 s	2	0	2	0	8	0	2	6
Search a product and place the order	29.532 s	1	0	1	0	6	0	1	5

Tag	Scenario			Feature				
Name	T	P	F	S	T	P	F	S
@SearchProduct	2	0	2	0	1	0	1	0
@Placeorder	1	0	1	0	1	0	1	0

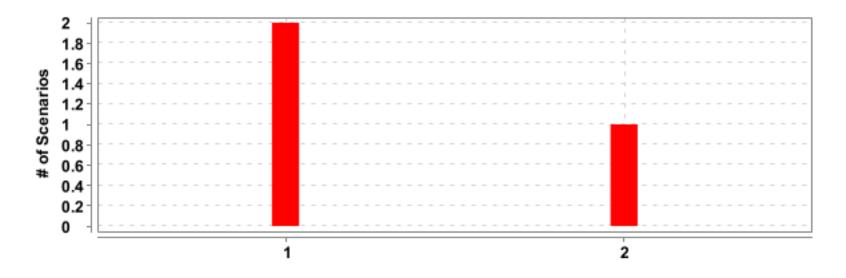

#	Feature Name	T	P	F	S	Duration
1	Search product and place product	2	0	2	0	27.953 s
2	Search a product and place the order	1	0	1	0	29.532 s

SCENARIOS SUMMARY -- 5 --

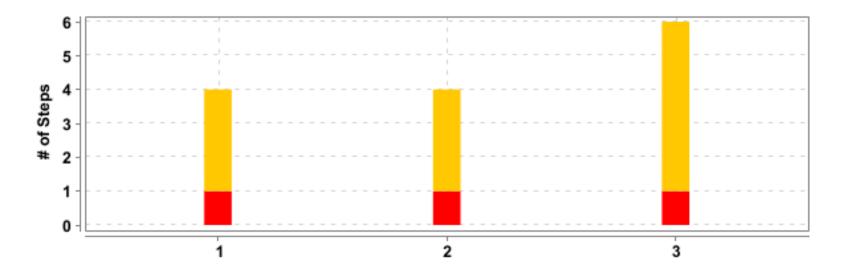


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Search product and place product	Search functionality checking on Home page and Deals page	4	0	1	3	27.945 s
2	Search product and place product	Search functionality checking on Home page and Deals page	4	0	1	3	27.219 s
3	Search a product and place the order	Product is searched and order is placed	6	0	1	5	29.532 s

DETAILED SECTION -- 6 --

Search product and place product

FAILED	DURATION - 27.953 s	Scenarios		Steps	
		Total - 2		Total - 8	
/ 3:15:35.672 am //	/ 3:16:03.625 am /	Pass - 0	2	Pass - 0	🦰 g 📜
		Fall - 2		Fail - 2	
		Skip - 0		Skip - 6	

Search functionality checking on Home page and Deals page

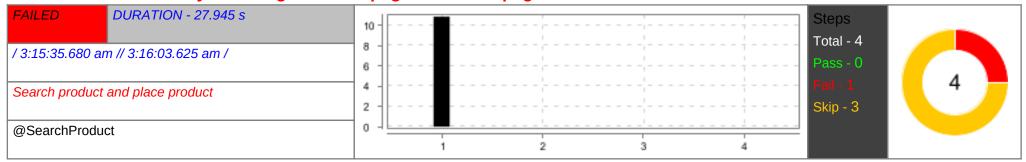

#	Step / Hook Details	Status	Duration
1	Given user is on the Greenkart homepage	FAILED	10.843 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Error: NS_ERROR_UNKNOWN_HOST Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox. FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {args: [start-maximized,incognito]}}}]] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:227) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:154) at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:156) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:146) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:146) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:146) at org.openqa.selenium.firefox.FirefoxDriver.</init></init></init></init>		10.040 3

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:125)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:110)</init>		
	at utilities.BaseTest.WebDriverManager(BaseTest.java:43)		
	at utilities.TestContextSetup. <init>(TestContextSetup.java:21)</init>		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484)		
	at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
	at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632)		
	at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118)		
	at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136)		
	at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78)		
	at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
	at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678)		
	at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:578)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227)		
	at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:80)		
	at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:17)		
	at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317)		
	at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577)		
	at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317)		
	at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144)		
	at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642)		
	at java.base/java.lang.Thread.run(Thread.java:1623)		
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Error: NS_ERROR_UNKNOWN_HOST Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox. FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress:		
	true, moz:firefoxOptions: {args: [start-maximized,incognito]}}}]] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227) at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:154)</init>		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227) at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:154) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:151)</init></init>		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:227) at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:154) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:151) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:146)</init></init></init>		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227) at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:154) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:146) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:130)</init></init></init>		


#	Step / Hook Details	Status	Duration
	at utilities.TestContextSetup. <init>(TestContextSetup.java:21)</init>		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484)		
	at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
	at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632)		
	at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118)		
	at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136)		
	at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78)		
	at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
	at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678)		
	at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:56)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:578) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:317) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144) at java.base/java.util.concurrent.ThreadPoolExecutors\worker.run(ThreadPoolExecutor.java:642) at java.base/java.lang.Thread.run(Thread.java:1623)		
2	When user searched for name Beet in the searchbar and extract actual product name	SKIPPED	0.001 s
3	Then user searched for the same name Beet in deals page	SKIPPED	0.001 s
4	And validate product name in Homepage and Deals page are same	SKIPPED	0.000 s
	AFTER - stepDefinations.Hooks.afterSecnario() org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Error: NS ERROR UNKNOWN HOST Host info: host: 'INBOOK X2 PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899'	FAILED	8.311 s
	System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox. FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {args: [start-maximized,incognito]}}]]]		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68)		
	at org.openqa.selenium.remote.ProtocoiHandsnake.createSession(ProtocoiHandsnake.java.o8) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531)		
	at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227)		
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:154)</init>		
	at org.openga.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:151)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:146) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:130)</init></init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:125) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110)</init></init>		

#	Step / Hook Details	Status	Duration
	at utilities.TestContextSetup. <init>(TestContextSetup.java:21)</init>		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484)		
	at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
	at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632)		
	at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118)		
	at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136)		
	at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78)		
	at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
	at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678)		
	at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:90)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:578)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227)		
	$at\ org. testng. internal. invokers. TestMethodWithDataProviderMethodWorker. call (TestMethodWithDataProviderMethodWorker. java: 80)$		
	at org. testng. in ternal. invokers. TestMethod With Data Provider Method Worker. call (TestMethod With Data Provider Method Worker. java: 17)		
	at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317)		
	at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577)		
	at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317)		
	at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144)		
	at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642)		
	at java.base/java.lang.Thread.run(Thread.java:1623)		

Search functionality checking on Home page and Deals page

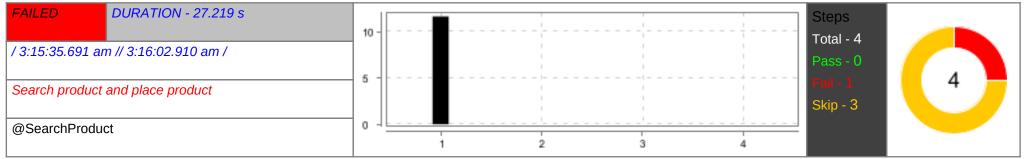

#	Step / Hook Details	Status	Duration
1	Given user is on the Greenkart homepage	FAILED	11.635 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Error: NS_ERROR_UNKNOWN_HOST Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox. FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {args: [start-maximized,incognito]}}]] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)		

at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531)		
	I	
1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -		
at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227)		
at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:154)</init>		
at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:151)</init>		
at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:146)</init>		
at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:130)</init>		
at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:125)</init>		
at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:110)</init>		
at utilities.BaseTest.WebDriverManager(BaseTest.java:43)		
at utilities.TestContextSetup. <init>(TestContextSetup.java:21)</init>		
at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)		
at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500)		
at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484)		
at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145)		
at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342)		
at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632)		
at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118)		
at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136)		
at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78)		
at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309)		
at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335)		
at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678)		
at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64)		
at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:578)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227)		
	at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:80)		
	at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:17)		
	at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317)		
	at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577)		
	at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317)		
	at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144)		
	at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642)		
	at java.base/java.lang.Thread.run(Thread.java:1623)		
	AFTER_STEP - stepDefinations.Hooks.addScreenshot(io.cucumber.java.Scenario)	FAILED	8.061 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Error: NS_ERROR_UNKNOWN_HOST Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox.		
	FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress:		
	true, moz:firefoxOptions: {args: [start-maximized,incognito]}}}]		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:150)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java.331) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java.227)		
\Box	at org.openga.selemann.remote.remotevvebbnver.stansession(remotevvebbnver.java.221)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:154)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:151)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:146)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:130)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:125)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:110)</init>		
	at utilities.BaseTest.WebDriverManager(BaseTest.java:43)		
	at utilities.TestContextSetup. <init>(TestContextSetup.java:21)</init>		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484)		
	at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
	at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632)		
	$at\ or g. picocontainer. parameters. Basic Component Parameter \$1. resolve Instance (Basic Component Parameter. java: 118)$		
	at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136)		
	at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78)		
	at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
	$at\ or g. picocontainer. injectors. Abstract Injection Factory \$Life cycle Adapter. get Component Instance (Abstract Injection Factory. java: 56)$		
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678)		
	at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		


#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:56) at io.cucumber.core.runner.TestCase.java:84) at io.cucumber.core.runner.Runner.nupickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase\$(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase\$(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberExecutionContext.runScenario(TestNGCucumberExecutionContext.java:137) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jak.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:578) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:227) at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:317) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.TreadPoolExecutor.runWorker(ThreadPoolExecutor.java:642) at java.base/java.lalag.Thread.run(Thread)eolExecutor.java:1642)		
2	When user searched for name Tom in the searchbar and extract actual product name	SKIPPED	0.001 s
3	Then user searched for the same name Tom in deals page	SKIPPED	0.002 s
4	And validate product name in Homepage and Deals page are same	SKIPPED	0.003 s
	AFTER - stepDefinations.Hooks.afterSecnario() org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Error: NS_ERROR_UNKNOWN_HOST Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox. FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {args: [start-maximized,incognito]]}}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:227)	FAILED	7.504 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:154)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:151)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:146)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:130)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:125)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:110)</init>		
	at utilities.BaseTest.WebDriverManager(BaseTest.java:43)		
	at utilities.TestContextSetup. <init>(TestContextSetup.java:21)</init>		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484)		
	at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
	at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632)		
	at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118)		
	at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136)		
	at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78)		
	at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
	at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678)		
	at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		

DETAILED SECTION -- 18 --


#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:90)	1	
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)	1	
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)	1	
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)	1	
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)	1	
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)	1	
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)	1	
	at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104)	1	
	at java.base/java.lang.reflect.Method.invoke(Method.java:578)	1	
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)	1	
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664)	1	
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227)	1	
	at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:80)	1	
	at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:17)	1	
	at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317)		
	at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577)		
	at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317)	1	
	at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144)	1	
	at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642)	1	
	at java.base/java.lang.Thread.run(Thread.java:1623)		

Search a product and place the order



Product is searched and order is placed

DETAILED SECTION -- 19 --

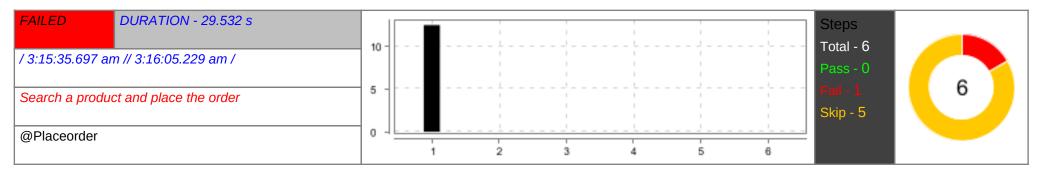

#	Step / Hook Details	Status	Duration
1	Given user is on the Greenkart homepage	FAILED	12.461 s
1	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Error: NS_ERROR_UNKNOWN_HOST Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox. FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {args: [start-maximized,incognito]}}]] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)	FAILED	
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531)		
	at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227)		
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:154)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:151)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:146)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:130)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:125)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:110)</init>		
	at utilities.BaseTest.WebDriverManager(BaseTest.java:43)		
	at utilities.TestContextSetup. <init>(TestContextSetup.java:21)</init>		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484)		
	at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
	at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		

#	Step / Hook Details	Status	Duration
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632)		
	at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118)		
	at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136)		
	at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78)		
	at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
	at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678)		
	at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:578)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227)		
	at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:80)		

#	Step / Hook Details	Status	Duration
	at org. testng. internal. invokers. TestMethodWithDataProviderMethodWorker. call (TestMethodWithDataProviderMethodWorker. java: 17)		
	at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317)		
	at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577)		
	at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317)		
	at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144)		
	at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642)		
	at java.base/java.lang.Thread.run(Thread.java:1623)		
	AFTER_STEP - stepDefinations.Hooks.addScreenshot(io.cucumber.java.Scenario)	FAILED	9.197 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Error:		
	NS_ERROR_UNKNOWN_HOST Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899'		
	System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox.		
	FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress:		
	true, moz:firefoxOptions: {args: [start-maximized,incognito]}}]]] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96)		
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68)		
	at org.openqa.selenium.remote.Protocoinanusnake.createSession(Protocoinanusnake.java.os) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227)		
	at org.openqa.selenium.remote.RemoteWebDriver.startsession(RemoteWebDriver.java.227) at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java.154)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:151) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:146)</init></init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:140)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:125)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:120)</init>		
	at utilities.BaseTest.WebDriverManager(BaseTest.java:43)		
	at utilities.TestContextSetup. <init>(TestContextSetup.java:21)</init>		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484)		
	at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java.270)		
	at org.picocontainer.injectors.AbstractInjector.Betcory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.proceontainer.peraultricocontainer.getinstance(peraultricocontainer.java.033)		

#	Step / Hook Details	Status	Duration
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632)		
	at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118)		
	at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136)		
	at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78)		
	at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
	at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678)		
	at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:56)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:578)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testing.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664)		
	at org.testing.internal.invokers.Testinvoker.invokemethod(Testinvoker.java.004) at org.testng.internal.invokers.Testinvoker.invokeTestMethod(TestInvoker.java.227)		
	at org.testing.internal.invokers.Testinvoker.invokerestivetriod(restinvoker.java.227) at org.testing.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java.80)		
	at org.testing.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java.30) at org.testing.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java.317)		
	at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317)		
	at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577)		

DETAILED SECTION -- 23 --

#	Step / Hook Details	Status	Duration
	at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642) at java.base/java.lang.Thread.run(Thread.java:1623)		
2	When user searched for name Cucu in the searchbar and extract actual product name	SKIPPED	0.000 s
3	And User add the Product count to three products and Add to Cart	SKIPPED	0.001 s
4	Then User proceeds to checkout page and validate the ProductName	SKIPPED	0.000 s
5	And User validates the promocode and placeorderbutton and place the order	SKIPPED	0.000 s
6	And Validate the order is placed successfully	SKIPPED	0.001 s
	AFTER - stepDefinations.Hooks.afterSecnario()	FAILED	7.862 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Error: NS_ERROR_UNKNOWN_HOST Host info: host: 'INBOOK_X2_PLUS', ip: '192.168.1.8' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.2' Driver info: org.openqa.selenium.firefox. FirefoxDriver Command: [null, newSession (capabilities={Capabilities		

#	Step / Hook Details	Status	Duration
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:632)		
	at org.picocontainer.parameters.BasicComponentParameter\$1.resolveInstance(BasicComponentParameter.java:118)		
	at org.picocontainer.parameters.ComponentParameter\$1.resolveInstance(ComponentParameter.java:136)		
	at org.picocontainer.injectors.SingleMemberInjector.getParameter(SingleMemberInjector.java:78)		
	at org.picocontainer.injectors.ConstructorInjector\$CtorAndAdapters.getParameterArguments(ConstructorInjector.java:309)		
	at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:335)		
	at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270)		
	at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364)		
	at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56)		
	at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64)		
	at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91)		
	at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647)		
	at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678)		
	at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:90)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:578)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227)		
	at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:80)		
	at org.testng.internal.invokers.TestMethodWithDataProviderMethodWorker.call(TestMethodWithDataProviderMethodWorker.java:17)		

DETAILED SECTION -- 25 --

#	Step / Hook Details	Status	Duration
	at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317)		
	at java.base/java.util.concurrent.Executors\$RunnableAdapter.call(Executors.java:577)		
	at java.base/java.util.concurrent.FutureTask.run(FutureTask.java:317)		
	at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144)		
	at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642)		
	at java.base/java.lang.Thread.run(Thread.java:1623)		