Linux Shell & Python Fundamentals

Week 1 Assignment

Student Name: Saneha Raees
Course: AI/Ml
Submission Date: 01-03-2026

Python Version Verification

The `python --version` command is used to check the installed version of Python on the system.

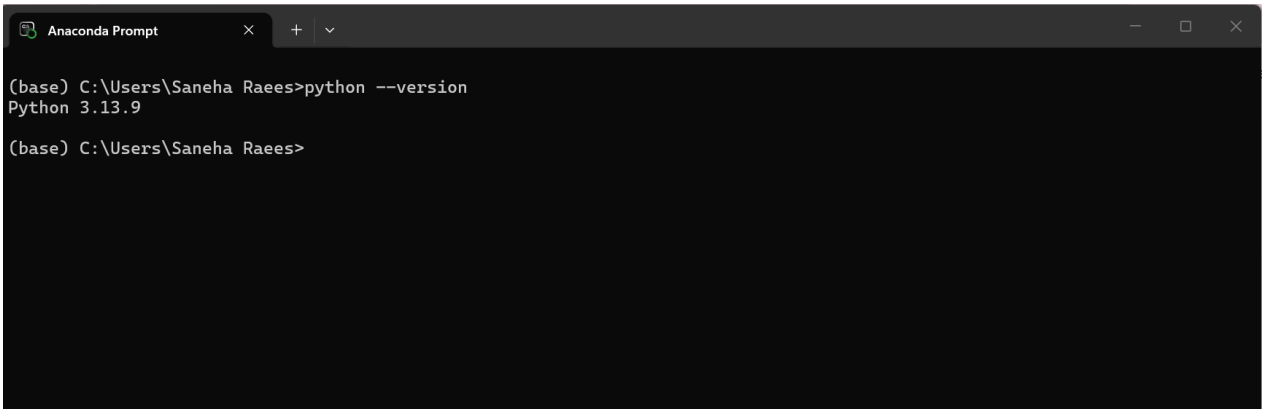

Conda Version Verification

The `conda --version` command displays the installed version of Anaconda package manager.

VS Code Running

Visual Studio Code is successfully installed and running on the system.

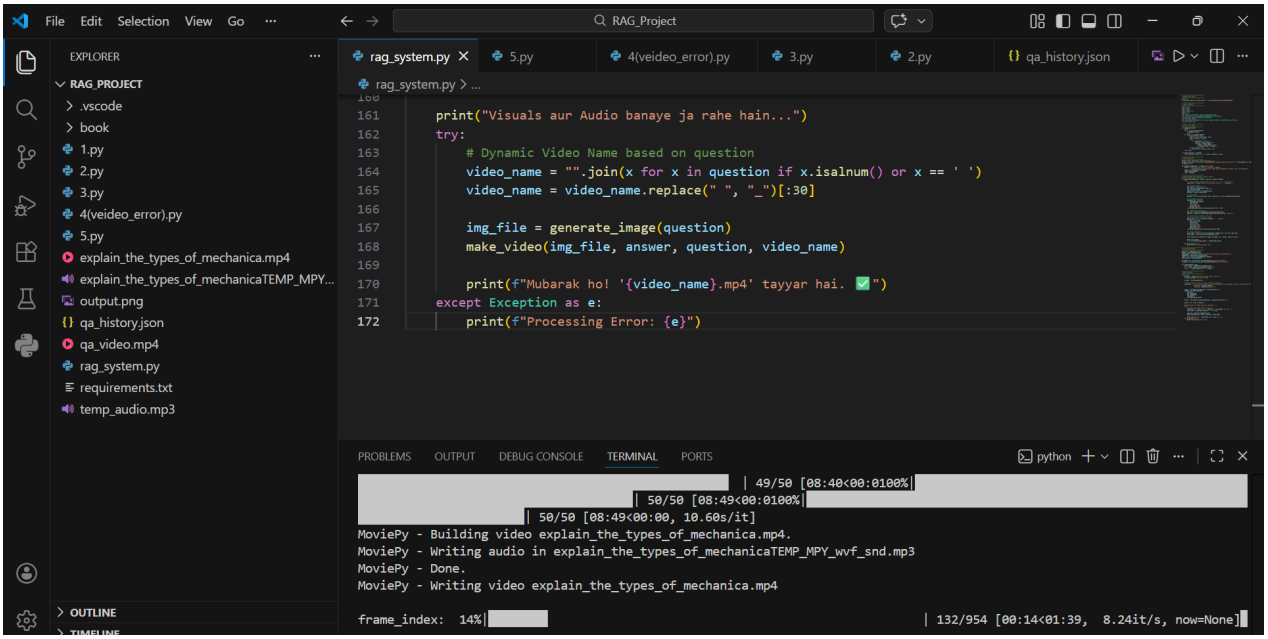

PyCharm Running

PyCharm IDE is installed successfully and ready for Python development.

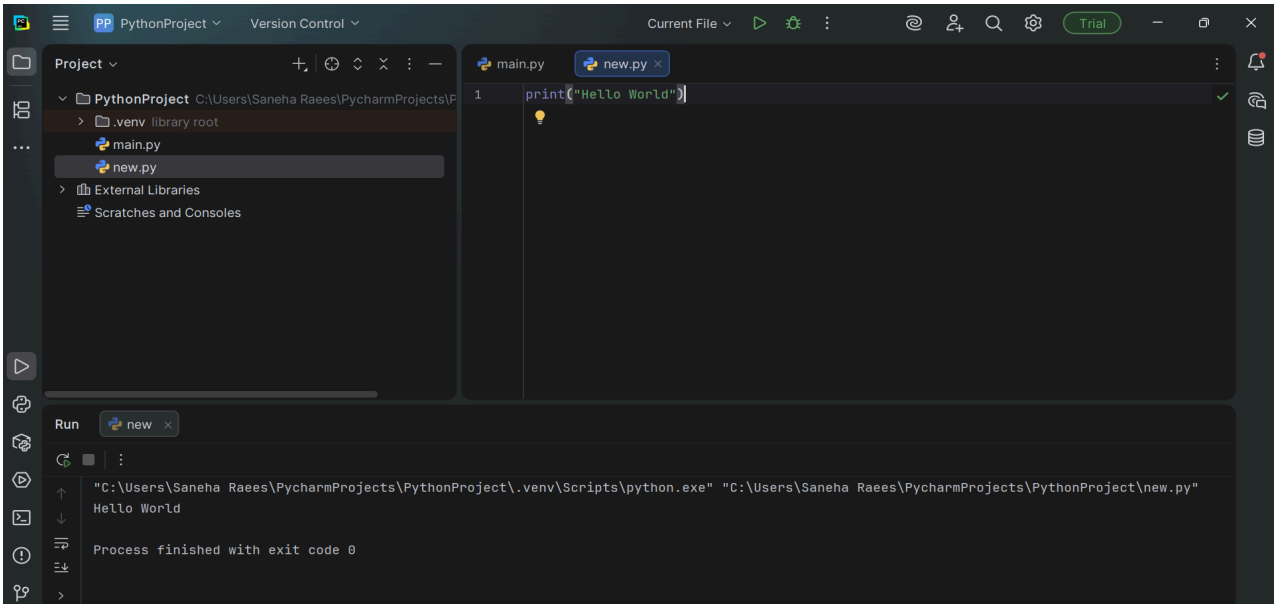

Creating Working Directory

The `mkdir` command creates a directory, `cd` changes directory, and `pwd` displays the current working directory.

```
saneha@WIN-1P8OBBGU6F3:
Installing, this may take a few minutes...
Please create a default UNIX user account. The username does not need to match your Windows username.
For more information visit: https://aka.ms/wslusers
Enter new UNIX username: saneha
New password:
Retype new password:
passwd: password updated successfully
usermod: no changes
Installation successful!
User account already exists, skipping creation
saneha@WIN-1P8OBBGU6F3:~$ mkdir week1
saneha@WIN-1P8OBBGU6F3:~$ cd week1
saneha@WIN-1P8OBBGU6F3:~/week1$ pwd
/home/saneha/week1
saneha@WIN-1P8OBBGU6F3:~/week1$
```

Creating Directory Structure

The `mkdir` command creates multiple directories and `ls` lists directory contents.

```
saneha@WIN-1P8OBBGU6F3:~/week1$ mkdir dir1 dir2 dir3
saneha@WIN-1P8OBBGU6F3:~/week1$ ls
dir1  dir2  dir3
saneha@WIN-1P8OBBGU6F3:~/week1$
```

Creating Files Using touch

The `touch` command creates empty files and `ls -l` displays detailed file information.

```
saneha@WIN-1P8OBBGU6F3:~/week1$ cd dir1
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$ touch file1.txt file2.txt file3.txt
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$ ls -l
total 0
-rw-r--r-- 1 saneha saneha 0 Feb 28 12:52 file1.txt
-rw-r--r-- 1 saneha saneha 0 Feb 28 12:52 file2.txt
-rw-r--r-- 1 saneha saneha 0 Feb 28 12:52 file3.txt
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$
```

Commands Demonstration

1.pwd Command

The pwd command displays the current working directory.

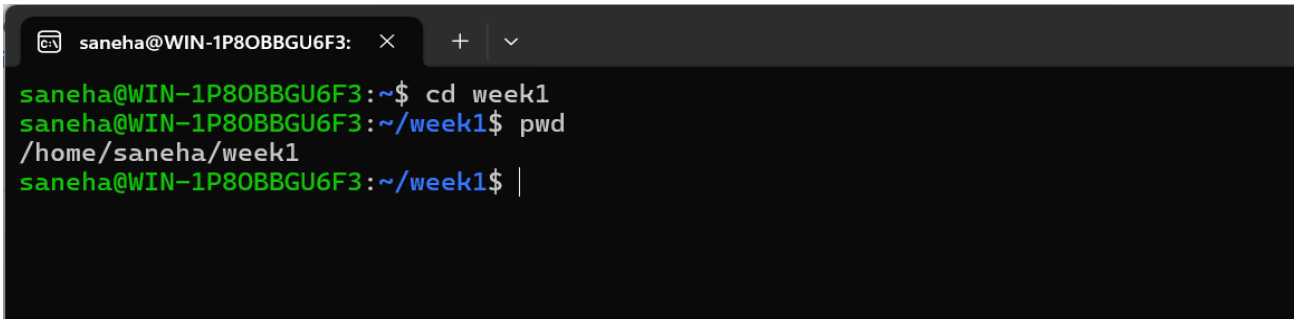

2.cd Command

The cd command is used to change directories.

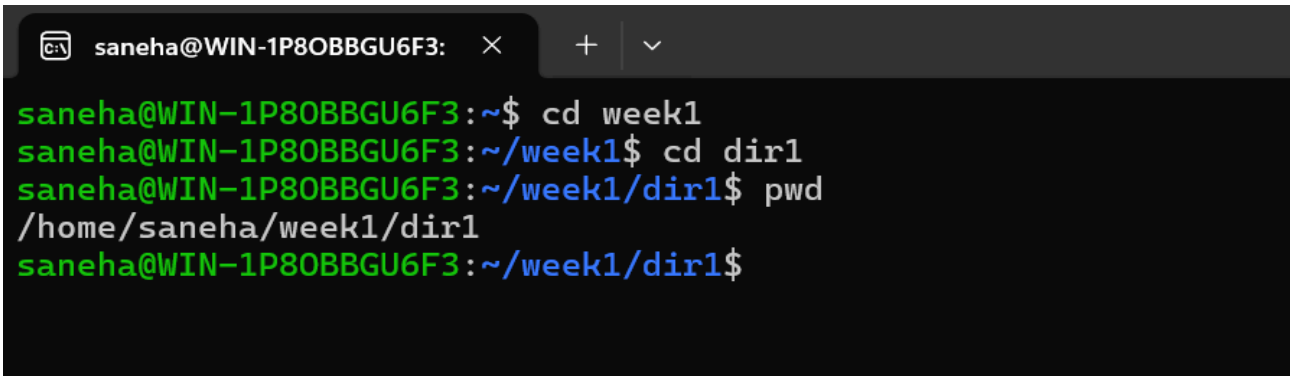

3. ls Command (-l and -a)

The `ls` command lists files and directories, while `-l` shows details and `-a` shows hidden files.

```
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$ ls -l
total 0
-rw-r--r-- 1 saneha saneha 0 Feb 28 12:52 file1.txt
-rw-r--r-- 1 saneha saneha 0 Feb 28 12:52 file2.txt
-rw-r--r-- 1 saneha saneha 0 Feb 28 12:52 file3.txt
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$ ls -a
.  ..  file1.txt  file2.txt  file3.txt
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$
```

4. cat Command

The `cat` command displays file contents.

```
saneha@WIN-1P8OBBGU6F3:
saneha@WIN-1P8OBBGU6F3:~$ cd week1
saneha@WIN-1P8OBBGU6F3:~/week1$ cat dir1/file1.txt
saneha@WIN-1P8OBBGU6F3:~/week1$
```

5. sudo Command (Safe)

The `sudo` command executes commands with administrative privileges.

```
saneha@WIN-1P8OBBGU6F3:~$ cd week1
saneha@WIN-1P8OBBGU6F3:~/week1$ cat dir1/file1.txt
saneha@WIN-1P8OBBGU6F3:~/week1$ sudo ls
[sudo] password for saneha:
dir1  dir2  dir3
saneha@WIN-1P8OBBGU6F3:~/week1$
```

6. man Command

The `man` command displays the manual page of a command.

```
LS(1)                                User Commands                                LS(1)

NAME
       ls - list directory contents

SYNOPSIS
       ls [OPTION]... [FILE]...

DESCRIPTION
       List  information  about  the FILEs (the current directory by default).  Sort entries alphabetically if none of -cftuvSUX nor
       --sort is specified.

       Mandatory arguments to long options are mandatory for short options too.

       -a, --all
              do not ignore entries starting with .

       -A, --almost-all
              do not list implied . and ..

       --author
              with -l, print the author of each file

       -b, --escape
              print C-style escapes for nongraphic characters

       --block-size=SIZE
              with -l, scale sizes by SIZE when printing them; e.g., '--block-size=M'; see SIZE format below

       -B, --ignore-backups
              do not list implied entries ending with ~

 Manual page ls(1) line 1 (press h for help or q to quit)
```

7. mkdir Command

The `mkdir` command creates a new directory.

```
saneha@WIN-1P8OBBGU6F3:~$ mkdir testdir
saneha@WIN-1P8OBBGU6F3:~$ ls
testdir  week1
saneha@WIN-1P8OBBGU6F3:~$
```

8. rmdir Command

The `rmdir` command removes an empty directory.

```
saneha@WIN-1P8OBBGU6F3:~$ mkdir testdir
saneha@WIN-1P8OBBGU6F3:~$ ls
testdir  week1
saneha@WIN-1P8OBBGU6F3:~$ rmdir testdir
saneha@WIN-1P8OBBGU6F3:~$ ls
week1
saneha@WIN-1P8OBBGU6F3:~$
```

9. rm Command

The `rm` command deletes files.

```
saneha@WIN-1P8OBBGU6F3:~$ cd week1
saneha@WIN-1P8OBBGU6F3:~/week1$ rm dir1/file3.txt
saneha@WIN-1P8OBBGU6F3:~/week1$ ls
dir1  dir2  dir3
saneha@WIN-1P8OBBGU6F3:~/week1$ cd dir1
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$ ls -a
.  ..  file1.txt  file2.txt
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$
```

10. cp Command

The cp command copies files.

```
saneha@WIN-1P8OBBGU6F3:
saneha@WIN-1P8OBBGU6F3:~$ cd week1
saneha@WIN-1P8OBBGU6F3:~/week1$ cp dir1/file1.txt copy.txt
saneha@WIN-1P8OBBGU6F3:~/week1$ ls
copy.txt  dir1  dir2  dir3
saneha@WIN-1P8OBBGU6F3:~/week1$
```

11. mv Command

The mv command moves or renames files.

```
saneha@WIN-1P8OBBGU6F3:~/week1$ ls
copy.txt  dir1  dir2  dir3
saneha@WIN-1P8OBBGU6F3:~/week1$ mv copy.txt newfile.txt
saneha@WIN-1P8OBBGU6F3:~/week1$ ls
dir1  dir2  dir3  newfile.txt
saneha@WIN-1P8OBBGU6F3:~/week1$
```

12. Redirection (>)

The > operator writes output to a file and overwrites existing content.

```
saneha@WIN-1P8OBBGU6F3:~/week1$ cd dir1
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$ echo "Hello" > file1.txt
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$ cat file1.txt
Hello
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$
```

13. Append (>>)

The `>>` operator appends data to an existing file.

```
saneha@WIN-1P8OBBGU6F3:~/week1$ cd dir1
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$ echo "Hello" > file1.txt
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$ cat file1.txt
Hello
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$ echo "World" >> file1.txt
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$ cat file1.txt
Hello
World
saneha@WIN-1P8OBBGU6F3:~/week1/dir1$
```

TASK 3

Create sample.txt

The `touch` command creates a new file.

```
saneha@WIN-1P8OBBGU6F3:
saneha@WIN-1P8OBBGU6F3:~$ touch sample.txt
saneha@WIN-1P8OBBGU6F3:~$ ls
sample.txt  week1
saneha@WIN-1P8OBBGU6F3:~$
```

Add 20 Lines

```
saneha@WIN-1P8OBBGU6F3:~$ nano sample.txt
saneha@WIN-1P8OBBGU6F3:~$ cat sample.txt
hello
hy
kesi ho

saneha@WIN-1P8OBBGU6F3:~$
```

Viewing Commands

file Command

The `file` command determines the type of a file.

```
saneha@WIN-1P8OBBGU6F3:
saneha@WIN-1P8OBBGU6F3:~$ cd week1
saneha@WIN-1P8OBBGU6F3:~/week1$ ls
dir1  dir2  dir3  newfile.txt
saneha@WIN-1P8OBBGU6F3:~/week1$ touch sample.txt
saneha@WIN-1P8OBBGU6F3:~/week1$ ls
dir1  dir2  dir3  newfile.txt  sample.txt
saneha@WIN-1P8OBBGU6F3:~/week1$ nano sample.txt
saneha@WIN-1P8OBBGU6F3:~/week1$ file sample.txt
-bash: file: command not found
saneha@WIN-1P8OBBGU6F3:~/week1$ sudo apt update
[sudo] password for saneha:
Hit:1 http://deb.debian.org/debian trixie InRelease
Get:2 http://security.debian.org/debian-security trixie-security InRelease [43.4 kB]
Get:3 http://ftp.debian.org/debian trixie-backports InRelease [54.0 kB]
Hit:4 http://deb.debian.org/debian trixie-updates InRelease
Get:5 http://ftp.debian.org/debian trixie-backports/main amd64 Packages [160 kB]
Get:6 http://ftp.debian.org/debian trixie-backports/main Translation-en [126 kB]
Fetched 383 kB in 6s (59.2 kB/s)
17 packages can be upgraded. Run 'apt list --upgradable' to see them.
saneha@WIN-1P8OBBGU6F3:~/week1$ sudo apt install file
Installing:
  file

Installing dependencies:
  libmagic-mgc  libmagic1t64

Summary:
  Upgrading: 0, Installing: 3, Removing: 0, Not Upgrading: 17
  Download size: 491 kB
  Space needed: 10.7 MB / 1,026 GB available
```

```
Summary:
  Upgrading: 0, Installing: 3, Removing: 0, Not Upgrading: 17
  Download size: 491 kB
  Space needed: 10.7 MB / 1,026 GB available

Continue? [Y/n] y
Get:1 http://deb.debian.org/debian trixie/main amd64 libmagic-mgc amd64 1:5.46-5 [338 kB]
Get:2 http://deb.debian.org/debian trixie/main amd64 libmagic1t64 amd64 1:5.46-5 [109 kB]
Get:3 http://deb.debian.org/debian trixie/main amd64 file amd64 1:5.46-5 [43.6 kB]
Fetched 491 kB in 5s (94.9 kB/s)
Selecting previously unselected package libmagic-mgc.
(Reading database ... 9302 files and directories currently installed.)
Preparing to unpack .../libmagic-mgc_1%3a5.46-5_amd64.deb ...
Unpacking libmagic-mgc (1:5.46-5) ...
Selecting previously unselected package libmagic1t64:amd64.
Preparing to unpack .../libmagic1t64_1%3a5.46-5_amd64.deb ...
Unpacking libmagic1t64:amd64 (1:5.46-5) ...
Selecting previously unselected package file.
Preparing to unpack .../file_1%3a5.46-5_amd64.deb ...
Unpacking file (1:5.46-5) ...
Setting up libmagic-mgc (1:5.46-5) ...
Setting up libmagic1t64:amd64 (1:5.46-5) ...
Setting up file (1:5.46-5) ...
Processing triggers for libc-bin (2.41-12) ...
Processing triggers for man-db (2.13.1-1) ...
saneha@WIN-1P8OBBGU6F3:~/week1$ file sample.txt
sample.txt: ASCII text
saneha@WIN-1P8OBBGU6F3:~/week1$
```

```
saneha@WIN-1P8OBBGU6F3:
saneha@WIN-1P8OBBGU6F3:~$ cd week1
saneha@WIN-1P8OBBGU6F3:~/week1$ ls
dir1  dir2  dir3  newfile.txt  sample.txt
saneha@WIN-1P8OBBGU6F3:~/week1$ file sample.txt
sample.txt: ASCII text
saneha@WIN-1P8OBBGU6F3:~/week1$ cat sample.txt
this is line 1
this is line 2
this is line 3
this is line 4
this is line 5
this is line 6
this is line 7
this is line 8
this is line 9
this is line 10
this is line 11
this is line 12
this is line 13
this is line 14
this is line 15
this is line 16
this is line 17
this is line 18
this is line 19
this is line 20
saneha@WIN-1P8OBBGU6F3:~/week1$ more sample.txt
this is line 1
this is line 2
this is line 3
```

```
saneha@WIN-1P8OBBGU6F3:
this is line 10
this is line 11
this is line 12
this is line 13
this is line 14
this is line 15
this is line 16
this is line 17
this is line 18
this is line 19
this is line 20
saneha@WIN-1P8OBBGU6F3:~/week1$ less sample.txt
saneha@WIN-1P8OBBGU6F3:~/week1$ head sample.txt
this is line 1
this is line 2
this is line 3
this is line 4
this is line 5
this is line 6
this is line 7
this is line 8
this is line 9
this is line 10
saneha@WIN-1P8OBBGU6F3:~/week1$ head -5 sample.txt
this is line 1
this is line 2
this is line 3
this is line 4
this is line 5
saneha@WIN-1P8OBBGU6F3:~/week1$
```

Alias Command

The `alias` command creates a shortcut for an existing command.

```
saneha@WIN-1P8OBBGU6F3:~/week1$ alias showfile="cat sample.txt"
saneha@WIN-1P8OBBGU6F3:~/week1$ showfile
this is line 1
this is line 2
this is line 3
this is line 4
this is line 5
this is line 6
this is line 7
this is line 8
this is line 9
this is line 10
this is line 11
this is line 12
this is line 13
this is line 14
this is line 15
this is line 16
this is line 17
this is line 18
this is line 19
this is line 20
saneha@WIN-1P8OBBGU6F3:~/week1$
```

TASK 4

System & Process Commands

1. shutdown Command

The `shutdown` command is used to safely power off the system.

```
saneha@WIN-1P8OBBGU6F3:
saneha@WIN-1P8OBBGU6F3:~$ cd week1
saneha@WIN-1P8OBBGU6F3:~/week1$ shutdown --help
shutdown [OPTIONS...] [TIME] [WALL...]

Shut down the system.

Options:
     --help      Show this help
  -H --halt      Halt the machine
  -P --poweroff  Power-off the machine
  -r --reboot    Reboot the machine
  -h             Equivalent to --poweroff, overridden by --halt
  -k             Don't halt/power-off/reboot, just send warnings
     --no-wall   Don't send wall message before halt/power-off/reboot
  -c             Cancel a pending shutdown
     --show      Show pending shutdown

This is a compatibility interface, please use the more powerful 'systemctl halt',
'systemctl poweroff', 'systemctl reboot' commands instead.

See the shutdown(8) man page for details.
saneha@WIN-1P8OBBGU6F3:~/week1$
```

2. restart Command

The `reboot` command restarts the system.

```
saneha@WIN-1P8OBBGU6F3:~/week1$ reboot --help
reboot [OPTIONS...] [ARG]

Reboot the system.

Options:
     --help      Show this help
     --halt      Halt the machine
  -p --poweroff  Switch off the machine
     --reboot    Reboot the machine
  -f --force     Force immediate halt/power-off/reboot
  -w --wtmp-only Don't halt/power-off/reboot, just write wtmp record
  -d --no-wtmp   Don't write wtmp record
     --no-wall   Don't send wall message before halt/power-off/reboot

This is a compatibility interface, please use the more powerful 'systemctl reboot' command instead.

See the halt(8) man page for details.
saneha@WIN-1P8OBBGU6F3:~/week1$
```

3. touch Command

The `touch` command creates an empty file.

```
saneha@WIN-1P8OBBGU6F3:~/week1$ touch test.txt
saneha@WIN-1P8OBBGU6F3:~/week1$ ls
dir1  dir2  dir3  newfile.txt  sample.txt  test.txt
saneha@WIN-1P8OBBGU6F3:~/week1$
```

4. nano Command

The `nano` command opens a file in a text editor.

```
saneha@WIN-1P8OBBGU6F3:~/week1$ nano test.txt
saneha@WIN-1P8OBBGU6F3:~/week1$ nano test.txt
saneha@WIN-1P8OBBGU6F3:~/week1$ cat test.txt
Linus Task4 Testing

saneha@WIN-1P8OBBGU6F3:~/week1$
```

5. bash Command

The `bash` command starts a new Bash shell session.

```
saneha@WIN-1P8OBBGU6F3:~/week1$ bash
saneha@WIN-1P8OBBGU6F3:~/week1$ exit
exit
saneha@WIN-1P8OBBGU6F3:~/week1$
```

6. sh Command

The `sh` command starts a shell interpreter session.

```
saneha@WIN-1P8OBBGU6F3:~/week1$ sh
$ exit
saneha@WIN-1P8OBBGU6F3:~/week1$
```

7. chmod Command

The `chmod` command changes file permissions.

Before Permission Change

```
saneha@WIN-1P8OBBGU6F3:~/week1$ ls -l test.txt
-rw-r--r-- 1 saneha saneha 21 Feb 28 21:24 test.txt
saneha@WIN-1P8OBBGU6F3:~/week1$
```

Change Permission

```
saneha@WIN-1P8OBBGU6F3:~/week1$ ls -l test.txt
-rw-r--r-- 1 saneha saneha 21 Feb 28 21:24 test.txt
saneha@WIN-1P8OBBGU6F3:~/week1$ chmod 777 test.txt
saneha@WIN-1P8OBBGU6F3:~/week1$ ls -l test.txt
-rwxrwxrwx 1 saneha saneha 21 Feb 28 21:24 test.txt
saneha@WIN-1P8OBBGU6F3:~/week1$
```

8. ps Command

The ps command displays running processes.

```
saneha@WIN-1P8OBBGU6F3:~/week1$ ps
    PID TTY          TIME CMD
    286 pts/0    00:00:00 bash
    386 pts/0    00:00:00 ps
saneha@WIN-1P8OBBGU6F3:~/week1$
```

9. kill Command

Background Process Start

Last number = Process ID (PID)

```
saneha@WIN-1P8OBBGU6F3:~/week1$ sleep 1000 &
[1] 391
saneha@WIN-1P8OBBGU6F3:~/week1$
```

Process Check

```
saneha@WIN-1P8OBBGU6F3:~/week1$ ps
    PID TTY          TIME CMD
    286 pts/0    00:00:00 bash
    391 pts/0    00:00:00 sleep
    394 pts/0    00:00:00 ps
saneha@WIN-1P8OBBGU6F3:~/week1$
```

Kill Process

The `kill` command terminates a running process using its process ID.

```
saneha@WIN-1P8OBBGU6F3:~/week1$ kill 391
saneha@WIN-1P8OBBGU6F3:~/week1$ ps
    PID TTY          TIME CMD
    286 pts/0    00:00:00 bash
    401 pts/0    00:00:00 ps
[1]+  Terminated              sleep 1000
saneha@WIN-1P8OBBGU6F3:~/week1$
```

TASK 5

Package Management

1. Installed Packages

Displays installed packages.

```
saneha@WIN-1P8OBBGU6F3:~/week1$ dpkg -l
Desired=Unknown/Install/Remove/Purge/Hold
| Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name                          Version                      Architecture Description
+++-==============================-============================-============-==============================================>
ii  adduser                       3.152                        all          add and remove users and groups
ii  apt                           3.0.3                        amd64        commandline package manager
ii  apt-utils                     3.0.3                        amd64        package management related utility programs
ii  base-files                    13.8+deb13u2                 amd64        Debian base system miscellaneous files
ii  base-passwd                   3.6.7                        amd64        Debian base system master password and group >
ii  bash                          5.2.37-2+b5                  amd64        GNU Bourne Again SHell
ii  bsdextrautils                 2.41-5                       amd64        extra utilities from 4.4BSD-Lite
ii  bsdutils                      1:2.41-5                     amd64        basic utilities from 4.4BSD-Lite
ii  coreutils                     9.7-3                        amd64        GNU core utilities
ii  cpio                          2.15+dfsg-2                  amd64        GNU cpio -- a program to manage archives of f>
ii  cron                          3.0pl1-197                   amd64        process scheduling daemon
ii  cron-daemon-common            3.0pl1-197                   all          process scheduling daemon's configuration fil>
ii  dash                          0.5.12-12                    amd64        POSIX-compliant shell
ii  dbus                          1.16.2-2                     amd64        simple interprocess messaging system (system >
ii  dbus-bin                      1.16.2-2                     amd64        simple interprocess messaging system (command>
ii  dbus-daemon                   1.16.2-2                     amd64        simple interprocess messaging system (referen>
ii  dbus-session-bus-common       1.16.2-2                     all          simple interprocess messaging system (session>
ii  dbus-system-bus-common        1.16.2-2                     all          simple interprocess messaging system (system >
ii  debconf                       1.5.91                       all          Debian configuration management system
ii  debconf-i18n                  1.5.91                       all          full internationalization support for debconf
ii  debian-archive-keyring        2025.1                       all          OpenPGP archive certificates of the Debian ar>
ii  debianutils                   5.23.2                       amd64        Miscellaneous utilities specific to Debian
ii  dhcpcd-base                   1:10.1.0-11+deb13u1          amd64        DHCPv4 and DHCPv6 dual-stack client (binaries>
```

2. Update Packages

Updates package list.

```
saneha@WIN-1P8OBBGU6F3:~/week1$ sudo apt upgrade
[sudo] password for saneha:
Upgrading:
  base-files  dhcpcd-base  libc-bin   libc6    libcap2-bin  libext2fs2t64  libssl3t64  logsave                  sqv
  bash        e2fsprogs    libc-l10n  libcap2  libcom-err2  libss2         locales     openssl-provider-legacy

Summary:
  Upgrading: 17, Installing: 0, Removing: 0, Not Upgrading: 0
  Download size: 14.3 MB
  Freed space: 5,120 B

Continue? [Y/n] y
Get:1 http://deb.debian.org/debian trixie/main amd64 libc6 amd64 2.41-12+deb13u1 [2,851 kB]
Get:2 http://security.debian.org/debian-security trixie-security/main amd64 openssl-provider-legacy amd64 3.5.4-1~deb13u
2 [308 kB]
Get:3 http://security.debian.org/debian-security trixie-security/main amd64 libssl3t64 amd64 3.5.4-1~deb13u2 [2,442 kB]
Get:4 http://deb.debian.org/debian trixie/main amd64 base-files amd64 13.8+deb13u3 [73.3 kB]
Get:5 http://deb.debian.org/debian trixie/main amd64 bash amd64 5.2.37-2+b7 [1,501 kB]
Get:6 http://deb.debian.org/debian trixie/main amd64 libc-bin amd64 2.41-12+deb13u1 [637 kB]
Get:7 http://deb.debian.org/debian trixie/main amd64 logsave amd64 1.47.2-3+b7 [24.9 kB]
Get:8 http://deb.debian.org/debian trixie/main amd64 libext2fs2t64 amd64 1.47.2-3+b7 [213 kB]
Get:9 http://deb.debian.org/debian trixie/main amd64 e2fsprogs amd64 1.47.2-3+b7 [591 kB]
Get:10 http://deb.debian.org/debian trixie/main amd64 libcap2 amd64 1:2.75-10+b3 [28.8 kB]
Get:11 http://deb.debian.org/debian trixie/main amd64 sqv amd64 1.3.0-3+b2 [661 kB]
Get:12 http://deb.debian.org/debian trixie/main amd64 dhcpcd-base amd64 1:10.1.0-11+deb13u2 [201 kB]
Get:13 http://deb.debian.org/debian trixie/main amd64 libc-l10n all 2.41-12+deb13u1 [738 kB]
Get:14 http://deb.debian.org/debian trixie/main amd64 locales all 2.41-12+deb13u1 [3,925 kB]
Get:15 http://deb.debian.org/debian trixie/main amd64 libcap2-bin amd64 1:2.75-10+b3 [36.4 kB]
Get:16 http://deb.debian.org/debian trixie/main amd64 libcom-err2 amd64 1.47.2-3+b7 [25.0 kB]
```

```
Preparing to unpack .../0-dhcpcd-base_1%3a10.1.0-11+deb13u2_amd64.deb ...
Unpacking dhcpcd-base (1:10.1.0-11+deb13u2) over (1:10.1.0-11+deb13u1) ...
Preparing to unpack .../1-libc-l10n_2.41-12+deb13u1_all.deb ...
Unpacking libc-l10n (2.41-12+deb13u1) over (2.41-12) ...
Preparing to unpack .../2-locales_2.41-12+deb13u1_all.deb ...
Unpacking locales (2.41-12+deb13u1) over (2.41-12) ...
Preparing to unpack .../3-libcap2-bin_1%3a2.75-10+b3_amd64.deb ...
Unpacking libcap2-bin (1:2.75-10+b3) over (1:2.75-10+b1) ...
Preparing to unpack .../4-libcom-err2_1.47.2-3+b7_amd64.deb ...
Unpacking libcom-err2:amd64 (1.47.2-3+b7) over (1.47.2-3+b3) ...
Preparing to unpack .../5-libss2_1.47.2-3+b7_amd64.deb ...
Unpacking libss2:amd64 (1.47.2-3+b7) over (1.47.2-3+b3) ...
Setting up libc-l10n (2.41-12+deb13u1) ...
Setting up libcom-err2:amd64 (1.47.2-3+b7) ...
Setting up locales (2.41-12+deb13u1) ...
Generating locales (this might take a while)...
  en_US.UTF-8... done
Generation complete.
Setting up libcap2-bin (1:2.75-10+b3) ...
Setting up libss2:amd64 (1.47.2-3+b7) ...
Setting up dhcpcd-base (1:10.1.0-11+deb13u2) ...
Installing new version of config file /etc/dhcpcd.conf ...
Setting up logsave (1.47.2-3+b7) ...
Setting up e2fsprogs (1.47.2-3+b7) ...
Processing triggers for man-db (2.13.1-1) ...
Processing triggers for debianutils (5.23.2) ...
Processing triggers for libc-bin (2.41-12+deb13u1) ...
Processing triggers for systemd (257.9-1~deb13u1) ...
saneha@WIN-1P8OBBGU6F3:~/week1$
```