


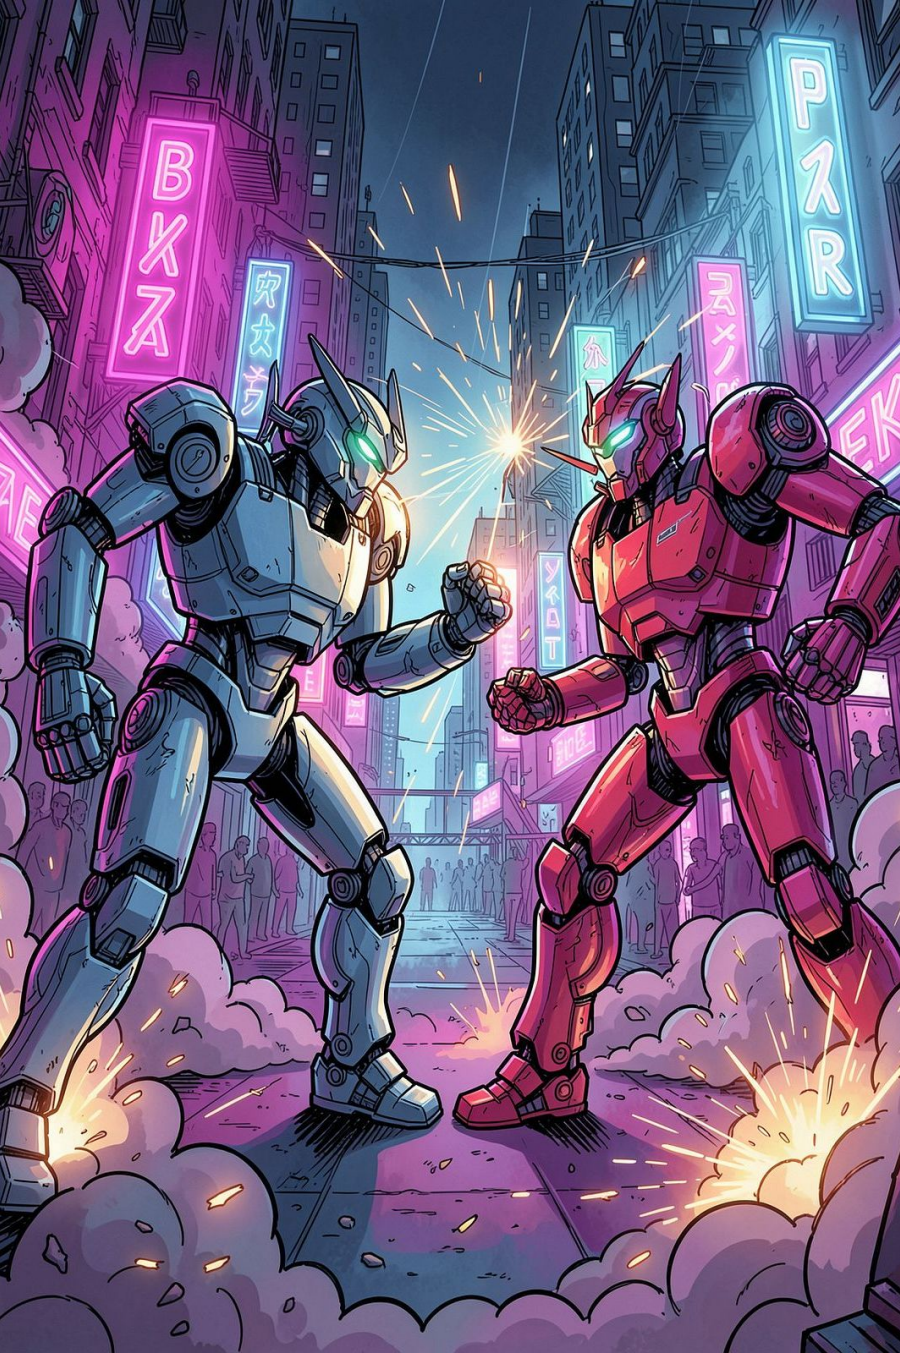


BattleArena

Agents Battle It Out

Street fight meets AI benchmarking. Every punch is a failed stress test. Every knockout is a benchmark result.

AI INFRA HACKATHON

Made with **GAMMA**

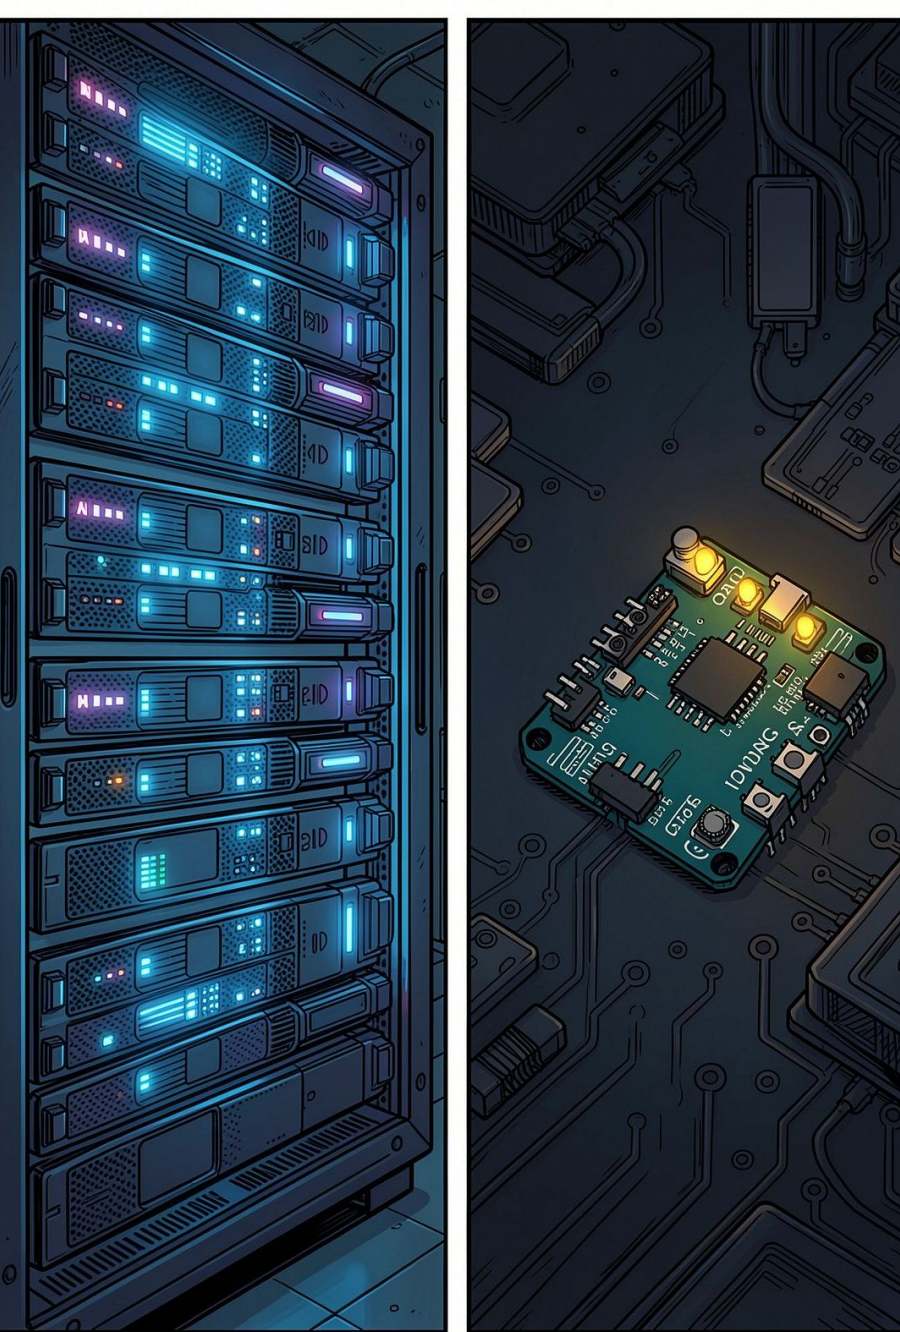

Two Fighters. One Arena.



AI PC Agent


Full-power inference. Runs heavyweight models with maximum compute.



Arduino Uno Q Agent

Edge-constrained inference. Tiny hardware, real stakes.

How It Works

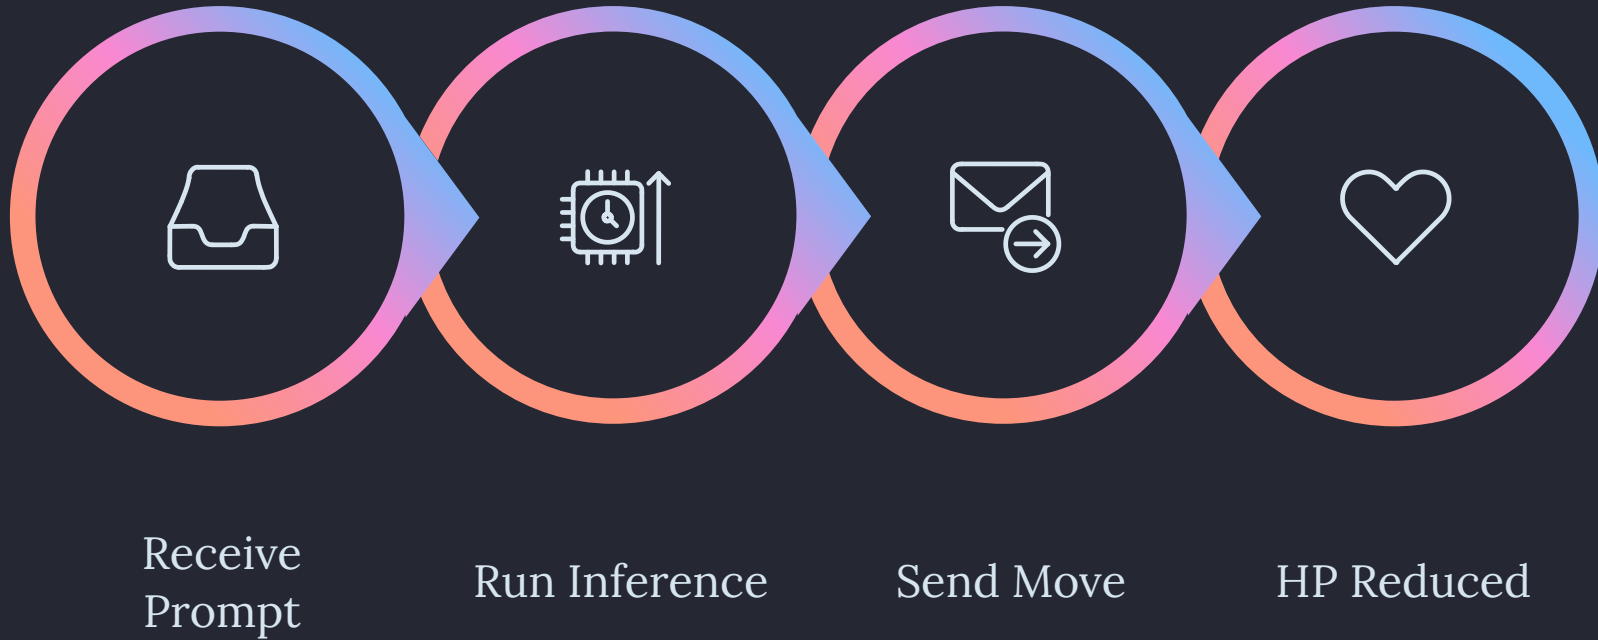

Each exchange is a real benchmark. Each hit is a measurable failure. The last agent standing wins.

HP = Benchmark Score

Punch

Latency threshold exceeded

Kick

Accuracy benchmark failed

Knockout

Critical stress test collapse



Custom Benchmarks — Your Rules




Build Your Own Stress Tests

Define custom prompts, thresholds, and scoring criteria. Plug in your own evals.


- Edit benchmark definitions
- Map failures to damage types
- Visualize results in real time

Model vs. Model — Visually

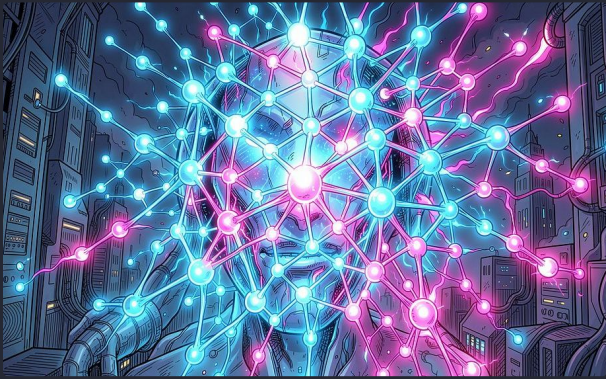


Previously Released Models

Historical baselines loaded into the arena as opponents.

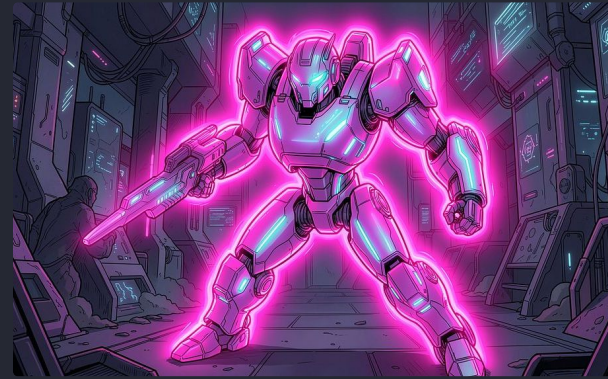

Your New Model

Drop in your model and watch it fight the leaderboard live.

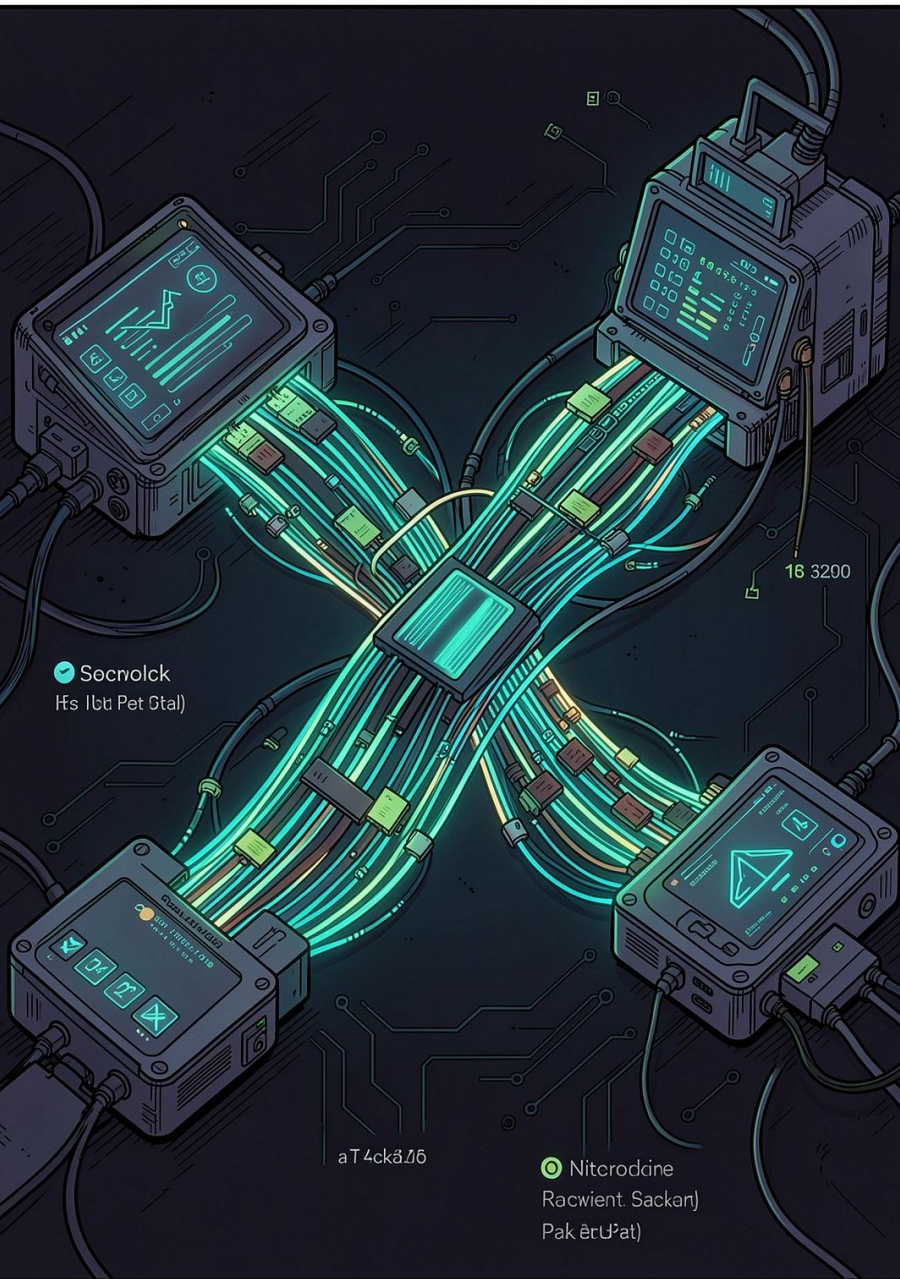

The Arena Is a Network Telemetry Lab

The fight environment doubles as a **real-time infrastructure stress test** — measuring how the network behaves under competitive agent load.

May the Best Agent Win



Battle

Agents fight in real time



Benchmark

Every hit is data



Stress-Test

Infrastructure under fire



DEMO