ADVANCED DBMS LAB

Name: Sanio Luke Sebastian

Roll No: 35

Batch: B

Date: 08-04-2022

Experiment No.: 3

Aim

To familiarize DDL Commands - Alter, Drop, Truncate, Rename.

Questions:

1. Create a table emp with attributes empno number (4) as primary key, ename char (10), hiredate, salary, commission. And insert the given 5 rows of data.

2. Modifying the structure of tables
    a. Add new columns: sal number(7,2)
    b. Dropping a column from a table: sal
    c. Modifying existing column: ename varchar2(15)
    d. Renaming the tables: emp to emp1
    e. Truncating the tables:emp1
    f. Destroying tables:emp

3. Create a table stud with sname varchar2(20) primary key , rollno number(10) not null,dob date not null

4. Create a table student as regno number (6), mark number (3) check constraint (mark >=0 and mark <=100));

5. Create a table cust with(custid number(6) constraint unique, name char(10)

Procedure & Outputs

```
create database lab_cycle_three;
use lab_cycle_three;
```

1.

```
CREATE TABLE emp (
   empno int(5),
   ename varchar(10),
   hiredate date,
   salary bigint,
   commission bigint,
   PRIMARY KEY (empno)
);
```

```
INSERT INTO emp VALUES
(101,'Ramesh','1980-01-17',5000,null),
(102,'Ajay','1985-07-05',5000,500),
(103,'Ravi','1981-08-12',1500,null),
(104,'Nikesh','1983-03-03',3000,700),
(105,'Ravi','1985-07-05',3000,null);

select * from emp1;
```

Result Grid | Filter Rows: | Edit:

empno	ename	hiredate	salary	commission
101	Ramesh	1980-01-17	5000	NULL
102	Ajay	1985-07-05	5000	500
103	Ravi	1981-08-12	1500	NULL
104	Nikesh	1983-03-03	3000	700
105	Ravi	1985-07-05	3000	NULL
NULL	NULL	NULL	NULL	NULL

Info | Columns | Indexes | Triggers | Foreign keys | Partitions | Grants | DDL

Column	Type	Default Value	Nullable	Character Set	Collation	Privileges
empno	int		NO			select,insert,update,references
ename	varchar(10)		YES	utf8mb4	utf8mb4_0900_...	select,insert,update,references
hiredate	date		YES			select,insert,update,references
salary	bigint		YES			select,insert,update,references
commission	bigint		YES			select,insert,update,references

2.

a. alter table emp add sal numeric(7,2);

Result Grid | Filter Rows: | Edit:

empno	ename	hiredate	salary	commission	sal
101	Ramesh	1980-01-17	5000	NULL	NULL
102	Ajay	1985-07-05	5000	500	NULL
103	Ravi	1981-08-12	1500	NULL	NULL
104	Nikesh	1983-03-03	3000	700	NULL
105	Ravi	1985-07-05	3000	NULL	NULL
NULL	NULL	NULL	NULL	NULL	NULL

b. alter table emp drop sal;

Result Grid | Filter Rows: | Edit:

empno	ename	hiredate	salary	commission
101	Ramesh	1980-01-17	5000	NULL
102	Ajay	1985-07-05	5000	500
103	Ravi	1981-08-12	1500	NULL
104	Nikesh	1983-03-03	3000	700
105	Ravi	1985-07-05	3000	NULL
NULL	NULL	NULL	NULL	NULL

c. alter table emp modify column ename varchar(15);

ifo | Columns | Indexes | Triggers | Foreign keys | Partitions | Grants | DDL

Column	Type	Default Value	Nullable	Character Set	Collation	Privileges
empno	int		NO			select,insert,update,references
ename	varchar(15)		YES	utf8mb4	utf8mb4_0900_...	select,insert,update,references
hiredate	date		YES			select,insert,update,references
salary	bigint		YES			select,insert,update,references
commission	bigint		YES			select,insert,update,references

d. alter table emp rename emp1;

- lab_cycle_three
  - Tables
    - emp1
  - Views
  - Stored Procedures
  - Functions

e. truncate table emp1;

Result Grid | Filter Rows: | Edit:

empno	ename	hiredate	salary	commission
NULL	NULL	NULL	NULL	NULL

f. drop table emp1;

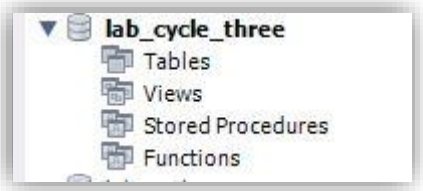

3.

```
CREATE TABLE stud (
   sname varchar(20),
          rollno numeric(10) not null,
   dob date not null,
   PRIMARY KEY (sname)
);
```

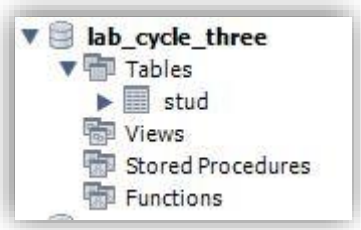

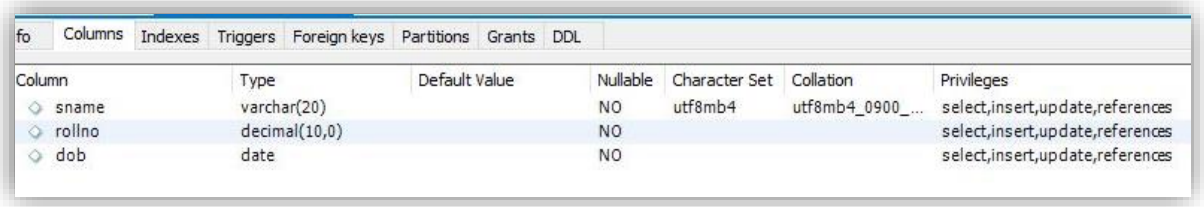

fo | Columns | Indexes | Triggers | Foreign keys | Partitions | Grants | DDL

Column	Type	Default Value	Nullable	Character Set	Collation	Privileges
sname	varchar(20)		NO	utf8mb4	utf8mb4_0900_...	select,insert,update,references
rollno	decimal(10,0)		NO			select,insert,update,references
dob	date		NO			select,insert,update,references

4.

```
CREATE TABLE student (
          regno numeric(6),
   mark numeric(3),
   check(mark >= 0 and mark <= 100)
);
```

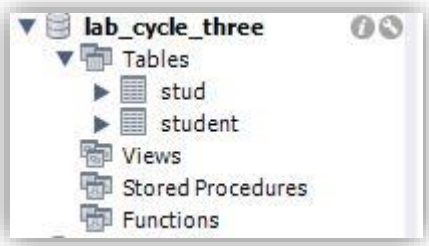

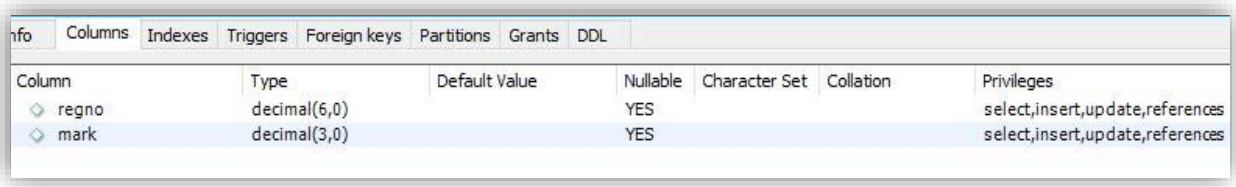

Column	Type	Default Value	Nullable	Character Set	Collation	Privileges
regno	decimal(6,0)		YES			select,insert,update,references
mark	decimal(3,0)		YES			select,insert,update,references

5.

```
CREATE TABLE cust (
        custid numeric(6) unique,
  name varchar(10));
```

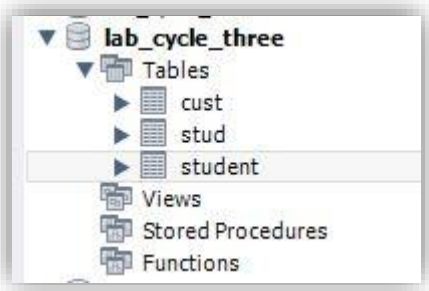

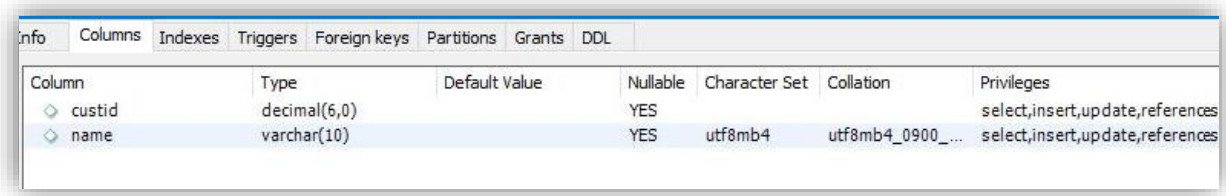

Column	Type	Default Value	Nullable	Character Set	Collation	Privileges
custid	decimal(6,0)		YES			select,insert,update,references
name	varchar(10)		YES	utf8mb4	utf8mb4_0900_...	select,insert,update,references